

LABORATORY TEST REPORT

RADIO PERFORMANCE MEASUREMENTS

for the

TBCH0D Base Station Transceiver

Tested in accordance with:

FCC 47 CFR Parts 22, 74 & 90

RSS-119 Issue 12
RSS-Gen Issue 4

Report Revision: 1
Issue Date: 27 January 2016

PREPARED BY: Mike James

Test Engineer

CHECKED & APPROVED BY: Marcus Ludwig

Signatory



OATS FCC LISTING REGISTRATION: 837095
OATS IC LISTING REGISTRATION: SITE# 737A-1

All tests reported herein have been performed in accordance with the laboratory's scope of accreditation.

This document must not be reproduced except in full, without the written permission of the Compliance Laboratory Manager

TELTEST Laboratories (A Division of Tait Communications)
PO Box 1645, 558 Wairakei Road, Christchurch, New Zealand.

Telephone: 64 3 358 3399
FAX: 64 3 359 4632

FCC ID: CASTBCH0D
IC : 737A-TBCH0D

Page 1 of 17
Issue Date: 27 January 2016

Report Revision: 1

TABLE OF CONTENTS

REVISION	3
INTRODUCTION	4
STATEMENT OF COMPLIANCE	6
MODULATION TYPES, NECESSARY BANDWIDTH & EMISSION DESIGNATORS	7
TEST RESULTS.....	8
TRANSMITTER AUDIO FREQUENCY RESPONSE - PRE-EMPHASIS.....	8
TRANSMITTER MODULATION LIMITING	10
TRANSMITTER OCCUPIED BANDWIDTH AND SPECTRUM MASKS	12
TEST EQUIPMENT LIST.....	16
ANNEX A – TEST SETUP DETAILS.....	17

REVISION

Date	Revision	Comments
27 January 2016	1	Initial test report

INTRODUCTION

Type approval testing of the TBCH0D, 50 Watt, Base Station transceiver in order to demonstrate compliance with FCC 47 Parts 22, 74 & 90, and RSS-119 Issue 11 & RSS-Gen Issue 4. This Class-2 Permissive Change report adds Analogue FM to the list of modulations supported. The original test report is TARF 3532. This report only applies to frequencies covered by the TBCH2Y reciter (440MHz to 480MHz)

REPORT PREPARED FOR
Tait Ltd
245 Wooldridge Road
Harewood
Christchurch 8051
New Zealand

DESCRIPTION OF SAMPLE

Manufacturer Tait Limited
Equipment: Base Station Transceiver
Type: TBCH0D
Frequency range 440 → 480 MHz
Transmit Power 50W

Modulation	Channel Spacing	Speech Channels	Symbol Rate (symbols/sec)	Data Rate (bps)
Analogue FM	12.5 kHz	1	~	~

HARDWARE & SOFTWARE – Analogue Modulation Testing

Quantity: 1 of each

Description	Product Code	Serial Number	Firmware Version	Hardware Version
Reciter	T01-01105-LAAA	18226784	DMR-2.10.00.0002	01.00
Power Amplifier	TBA80H0000	18201462	0314	01.00
PMU	TBA30A0-0100	18203618	0316	01.00
Front Panel	T01-01110-CAAA	18203120	1.07.00.0002	00.04

TEST CONDITIONS

All testing was performed between 26th January → 27th January 2016, and under the following conditions:

Ambient temperature: 15°C → 30°C
Relative Humidity: 20% → 75%
Standard Test Voltage 120 V_{AC}

Analogue modulation is provided via an Ethernet UDP connection and is encoded according to ITU-T G.711 (μ-law).

STATEMENT OF COMPLIANCE

We, TELTEST LABORATORIES of 558 Wairakei Road, Christchurch, New Zealand, declare under our sole responsibility that the product:

Equipment: Base Station Transceiver
Type: TBCH0D
With reciter: TBCH2Y (440 to 480 MHz)
Quantity: 1 of each

Consisting Of:

HARDWARE & SOFTWARE – Analogue Modulation Testing

Description	Product Code	Serial Number	Firmware Version	Hardware Version
Reciter	T01-01105-LAAA	18226784	DMR-2.10.00.0002	01.00
Power Amplifier	TBA80H0000	18201462	0314	01.00
PMU	TBA30A0-0100	18203618	0316	01.00
Front Panel	T01-01110-CAAA	18203120	1.07.00.0002	00.04

to which this declaration relates, is in conformity with the following standards:

FCC 47 CFR Parts 22, 74 & 90

RSS-119 Issue 12 & RSS-Gen Issue 4

Signature: _____

M. C. James
Laboratory Technical Manager

Date: _____

MODULATION TYPES, NECESSARY BANDWIDTH & EMISSION DESIGNATORS

MODULATION TYPES:

F3E Analogue Frequency Modulation (FM)

EMISSION DESIGNATORS:

Channel Spacing 12.5 kHz	
FM	11K0F3E

CALCULATIONS

FM

Equation: $B_n = 2M + 2Dk$

(M is highest modulating frequency; D is peak allowable deviation; k is a constant of 1 for FM)

Analogue Voice 12.5 kHz Bandwidth

Necessary bandwidth

M = 3.0 kHz

D = 2.5 kHz

$$B_n = (2 \times 3.0) + (2 \times 2.5) \times 1 \\ = 11.0 \text{ kHz}$$

Emission Designator

11K0F3E

F3E represents an FM voice transmission

TEST RESULTS

TRANSMITTER AUDIO FREQUENCY RESPONSE - PRE-EMPHASIS

SPECIFICATION: FCC 47 CFR 2.1047 (a)

GUIDE: TIA/EIA-603D 2.2.6

MEASUREMENT PROCEDURE:

1. Refer Annex A for Equipment set up.
2. An audio input tone of 1000 Hz was applied with the level set to obtain 20% of maximum deviation. This was used as the 0 dB reference point.
3. The AF was varied while the audio level was held constant.
4. The response in dB relative to 1000 Hz was measured.

MEASUREMENT RESULTS:


See the plots on the following pages for 12.5 kHz channel spacing tested at 50W transmit power.

NOTE: The upper audio frequency tested was 3800 Hz due to the 8000 Hz sample rate of the modulating signal.

LIMIT CLAUSE: TIA/EIA-603D 3.2.6

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 450.100 MHz 12.5 kHz Channel Spacing

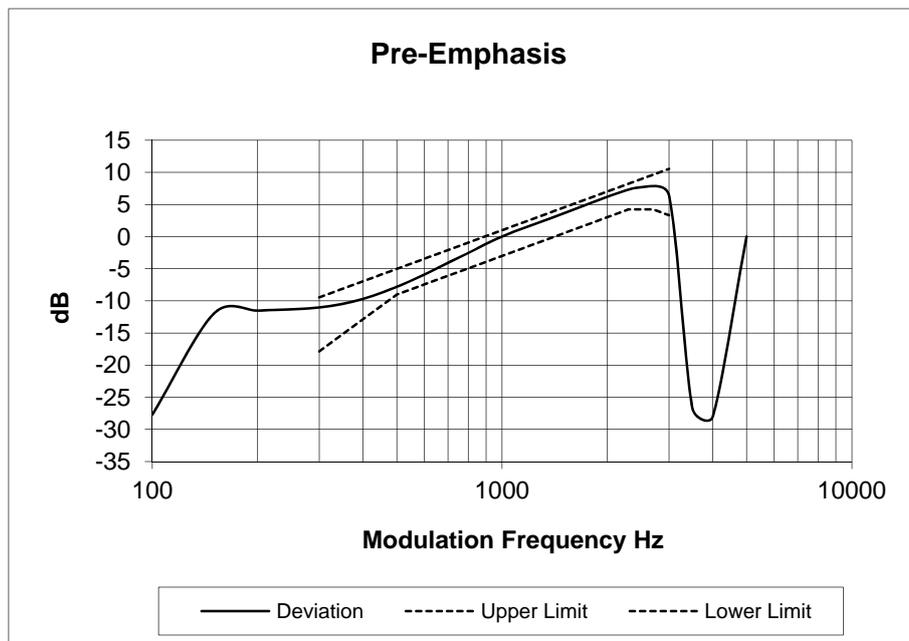


Transmitter Audio Frequency Response – Pre-emphasis

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 459.900 MHz


12.5 kHz Channel Spacing

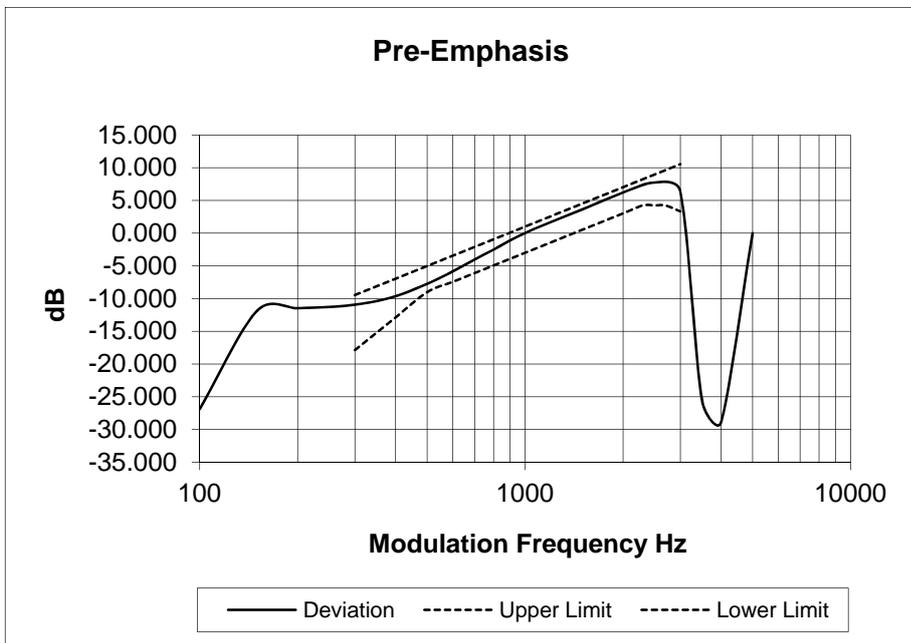

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 469.900 MHz

12.5 kHz Channel Spacing

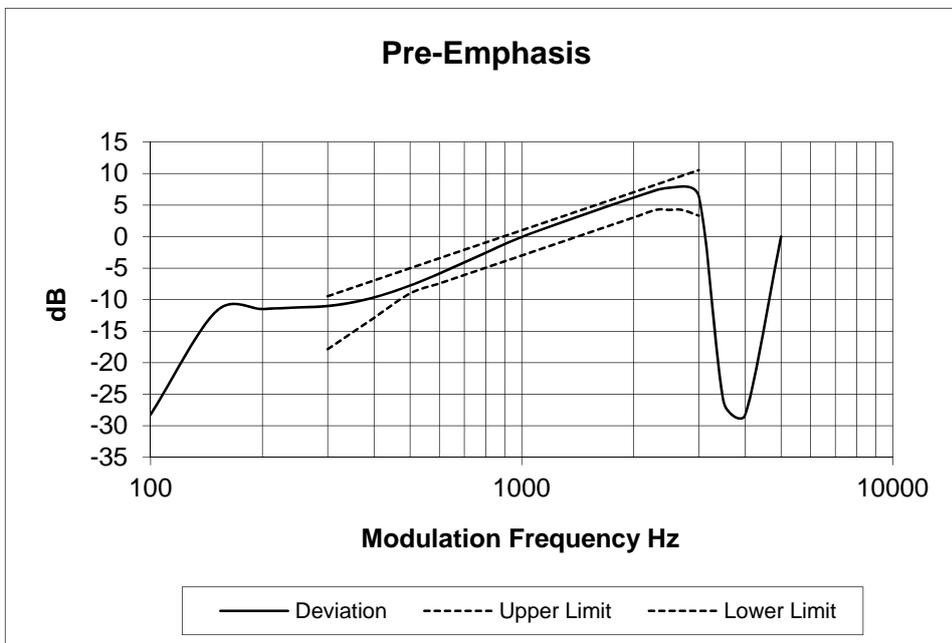

TRANSMITTER MODULATION LIMITING

SPECIFICATION: FCC 47 CFR 2.1047 (b)

GUIDE: TIA/EIA-603D 2.2.3

MEASUREMENT PROCEDURE:

1. Refer Annex A for Equipment set up.
2. The modulation response was measured at three audio frequencies while varying the input level.
3. Measurements were made for both Positive and Negative Deviation.


MEASUREMENT RESULTS:

See the plots on the following pages for 12.5 kHz channel spacing.

LIMIT CLAUSE: TIA/EIA-603D 1.3.4.4


Tx FREQUENCY: 450.100 MHz

12.5 kHz Channel Spacing

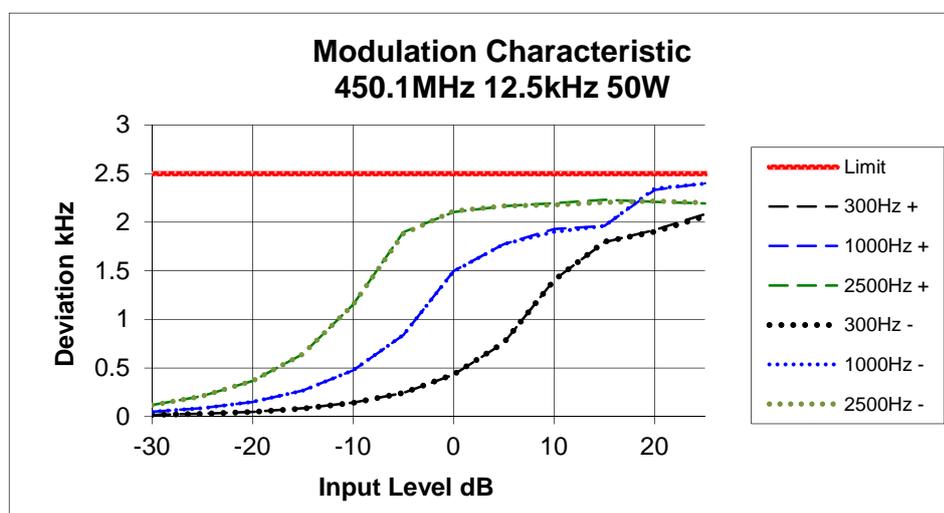

Tx FREQUENCY: 459.900 MHz

12.5 kHz Channel Spacing

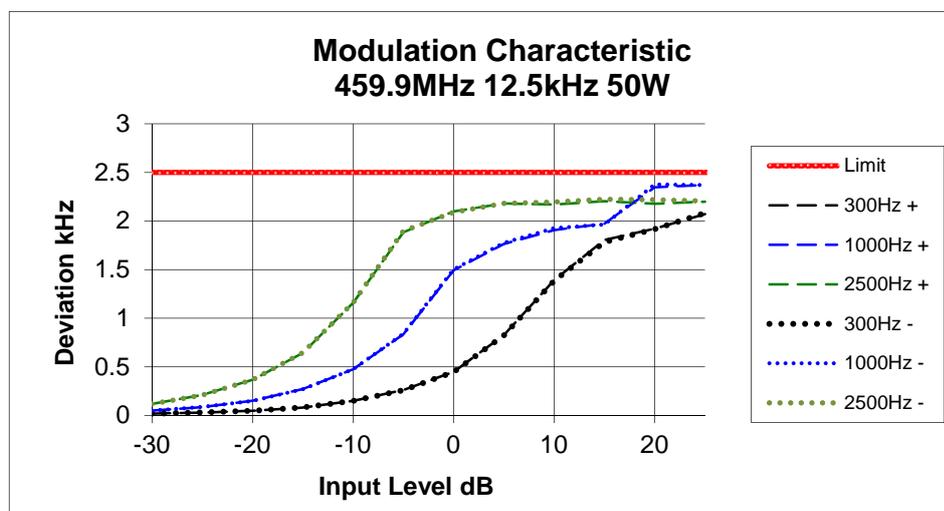


Transmitter Modulation Limiting

SPECIFICATION: FCC CFR 2.1047 (b)

Tx FREQUENCY: 469.900 MHz

12.5 kHz Channel Spacing

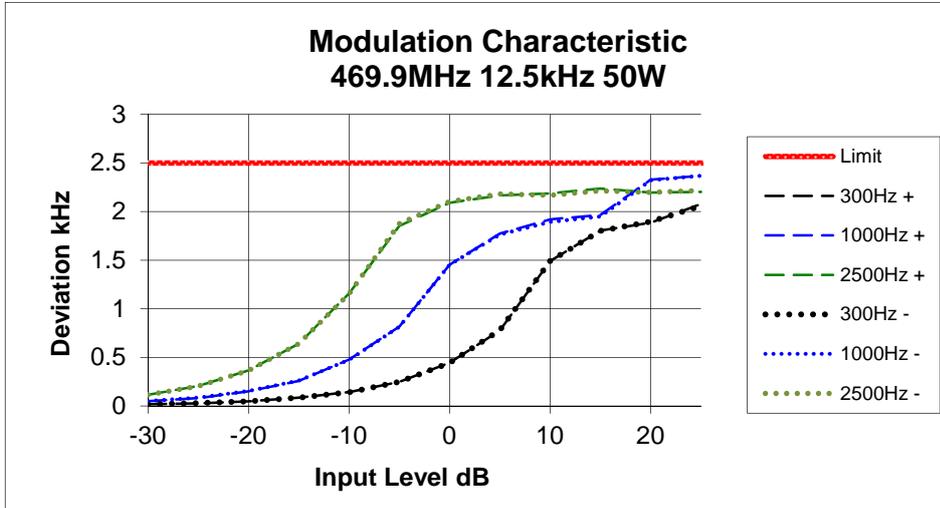

TRANSMITTER OCCUPIED BANDWIDTH AND SPECTRUM MASKS

SPECIFICATION: FCC 47 CFR 2.1049 (c) RSS-119 5.5

GUIDE: TIA/EIA-603D 2.2.11

MEASUREMENT PROCEDURE:

1. Refer Annex A for Equipment Set up.
2. For analogue measurements: The EUT was modulated by a 2500 Hz tone at an input level 16 dB above a level that produced 50% deviation. The input level was established at the frequency of maximum response of the audio modulating circuit.
3. The Occupied Bandwidth was measured on the Spectrum Analyser, with bandwidth settings as follows.

Emission Mask D – Resolution Bandwidth = 100 Hz, Video Bandwidth = 1 kHz

MEASUREMENT RESULTS:

See the plots on the following pages for 12.5 kHz channel spacing.

LIMIT CLAUSE: FCC 47 CFR 90.210 RSS-119 5.5

EMISSION MASKS

Emission Mask D 12.5 kHz Channel Spacing Analogue

Occupied Bandwidth and Spectrum Masks

Analogue


SPECIFICATION: FCC CFR 2.1049 (c) Mask- D

RSS-119 5.5 Mask-D


Tx FREQUENCY: 450.10000 MHz

50W & 5W

12.5 kHz Channel Spacing

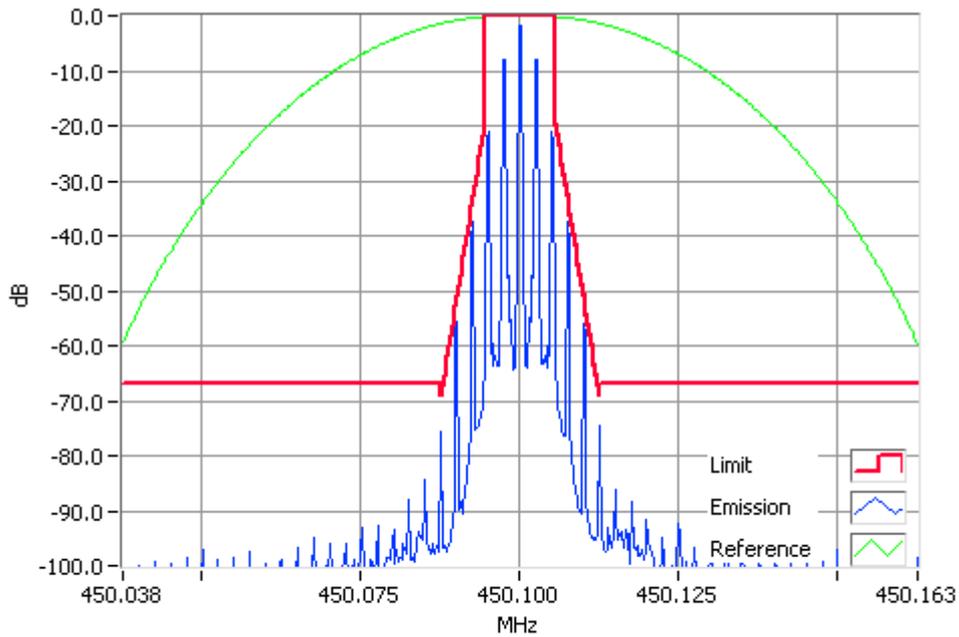


Analogue Modulation 450.1000MHz Mask D 50W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

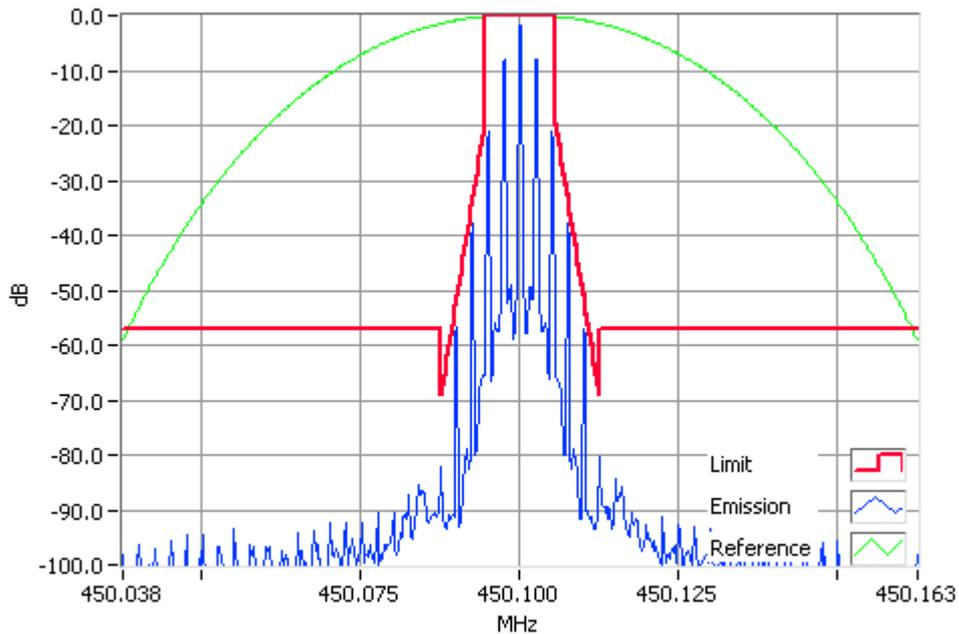


Analogue Modulation 450.1000MHz Mask D 5W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

Tx FREQUENCY: 459.900 MHz 50W & 5W 12.5 kHz Channel Spacing

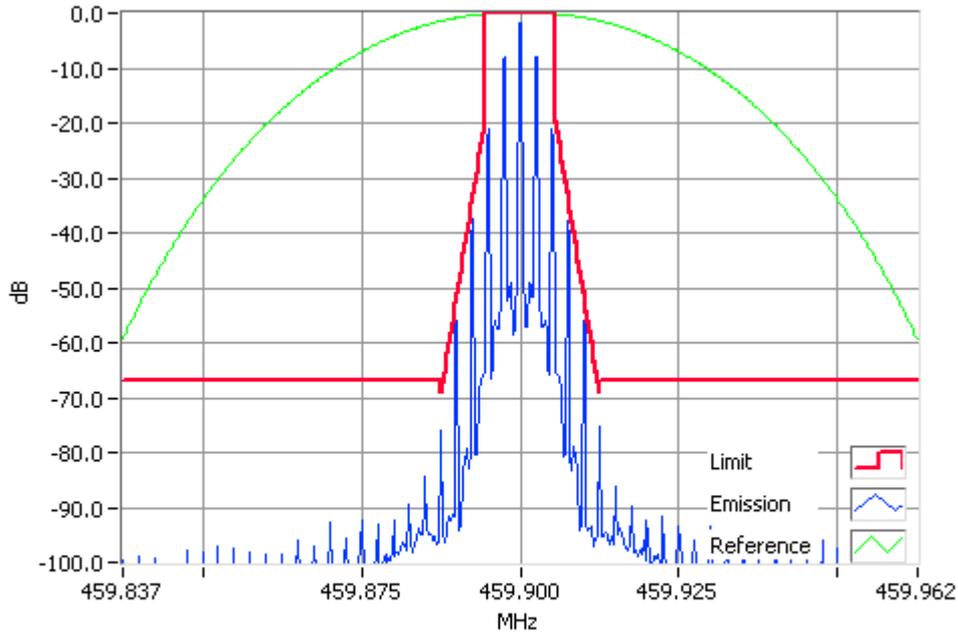


Analogue Modulation 459.9000MHz Mask D 50W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

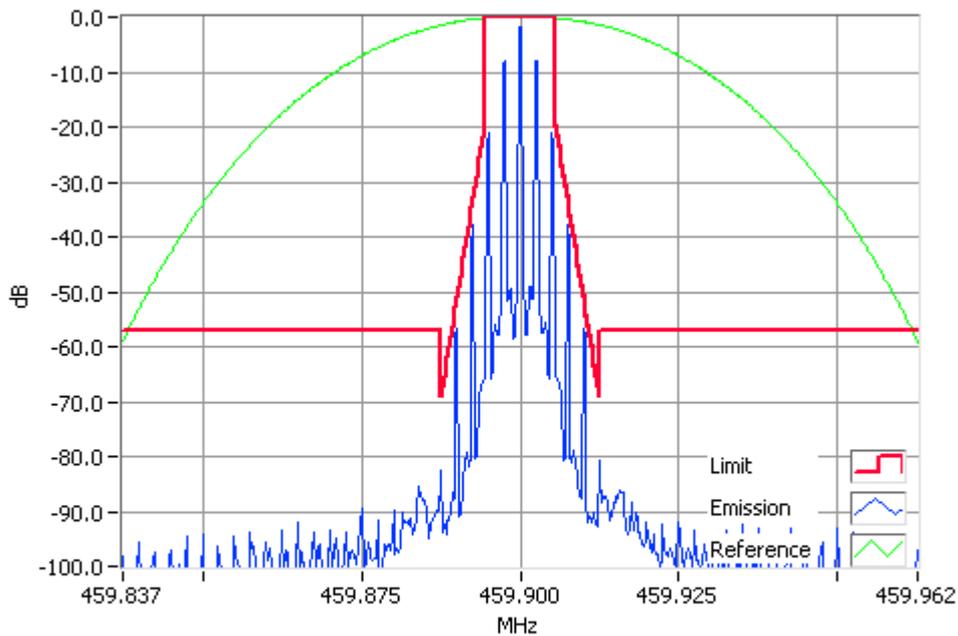


Analogue Modulation 459.9000MHz Mask D 5W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

Tx FREQUENCY: 469.900 MHz 50W & 5W 12.5 kHz Channel Spacing

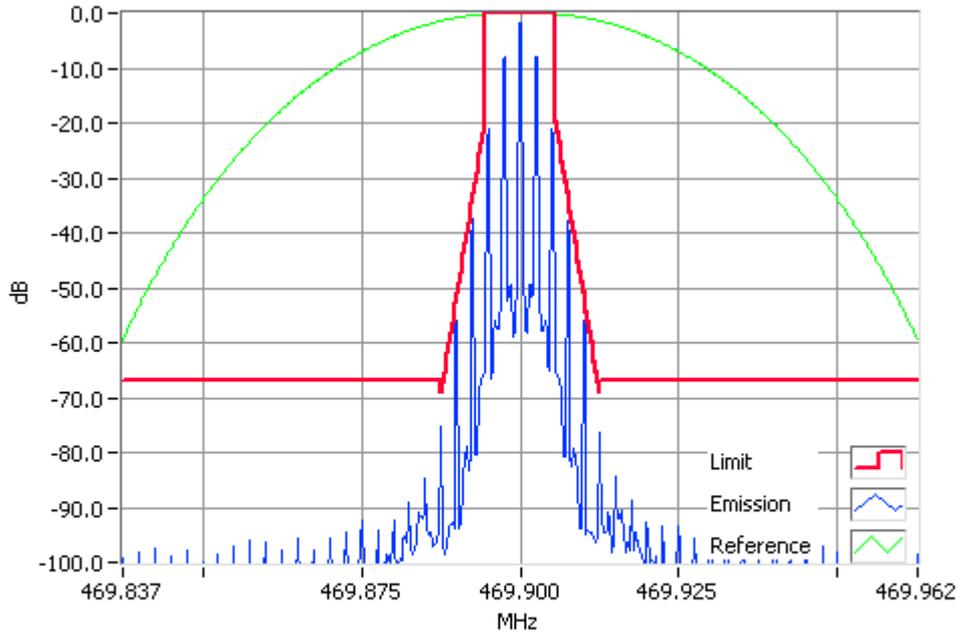

Analogue Modulation 469.9000MHz Mask D 50W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

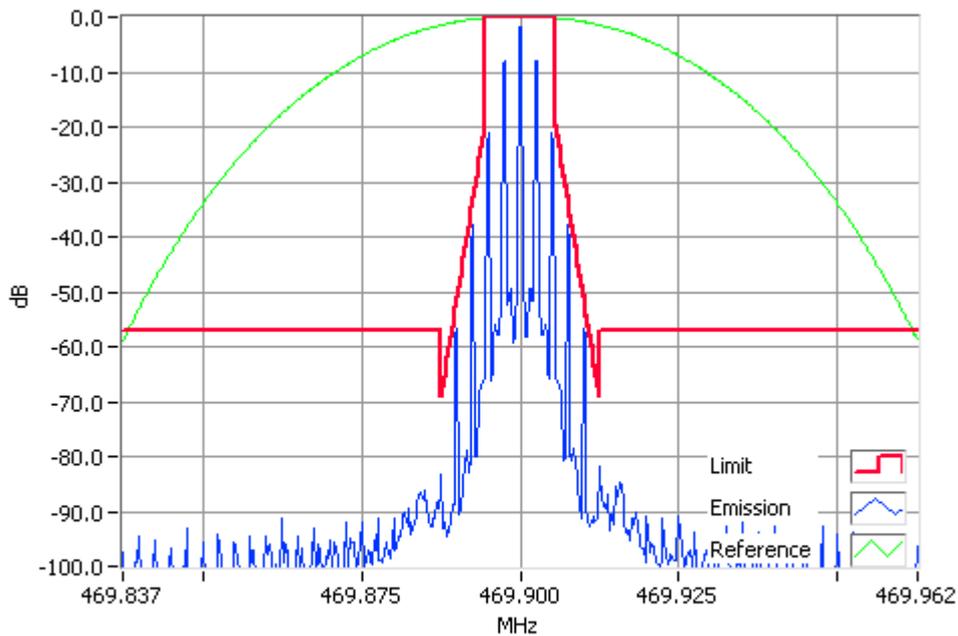

Analogue Modulation 469.9000MHz Mask D 5W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

TEST EQUIPMENT LIST

Equipment Type	Information	Manufacturer	Model No	Serial No#	Tait ID	Cal Due
Power Supply	AC Variac	Yamabishi	S-260-5	TX-533	E1737	
RF Attenuator	TREVA2 20dB 150W	Weinschel	40-20-33	CJ405	E3733	20-Oct-16
Coax Cable	2m Black	Suhner	RG214HF/Nm/Nm/2000	TeltestBlack3	E4624	18-Oct-16
Coax Cable	2m Black	Suhner	RG214HF/Nm/Nm/2000	TeltestBlack4	E4653	16-Oct-16
Audio Analyser	TREVA2	Hewlett Packard	HP8903B	2818A04275	E3710	20-Oct-16
Modulation Analyser	TREVA2	Hewlett Packard	HP8901B (Opt 002)	3704A05837	E3786	20-Oct-16
RF Attenuator	TREVA2 3dB	Weinschel	Model 1	BL9950	E4080	
RF Combiner	TREVA2	Minicircuits	ZFSC-4-1	-	E4084	
Spectrum Analyser	13.2GHz	Agilent	E4445A	MY42510072	E4139	22-Oct-16
RF Attenuator	30dB 350W	Weinschel	67-30-33	BR0531	E4280	18-Oct-16
Power Meter	TREVA2 Power Head for HP8901	Hewlett Packard	HP11722A	2716A02037	1575	20-Oct-16
TREVA 2		Teltest	-	2	-	5-May-16

* NOTE: Items without calibration dates are calibrated immediately before use, or set using calibrated instruments.

ANNEX A – TEST SETUP DETAILS

All testing is performed using the Teltest Radio **EVA**luation system (TREVA), which is configured as shown below. The Spectrum Analyser is connected to the EUT via the attenuator network for Conducted Emissions testing, and Occupied Bandwidth.

