


### Occupied Bandwidth and Spectrum Masks

DMR

SPECIFICATION: FCC CFR 2.1049 (c)


RSS-119 5.5

Tx FREQUENCY: 418.0 MHz 50 W 12.5 kHz Channel Spacing

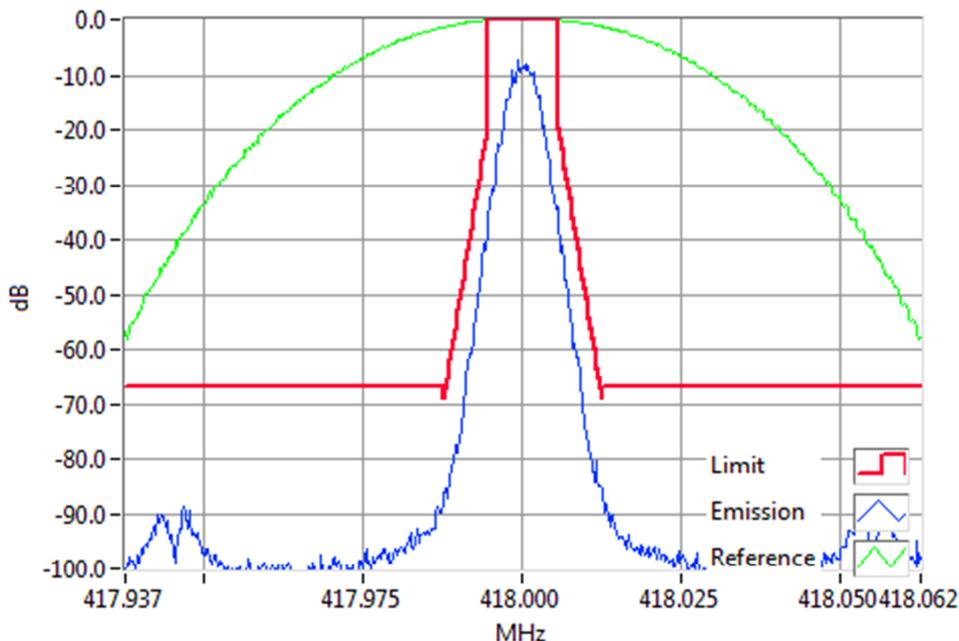

**DMR 418.0000MHz Mask D 50W**  
**RBW=100Hz, VBW=1000Hz, Detector Mode=Peak**  
**Result=Pass**

Tx FREQUENCY: 418.0 MHz 5 W 12.5 kHz Channel Spacing

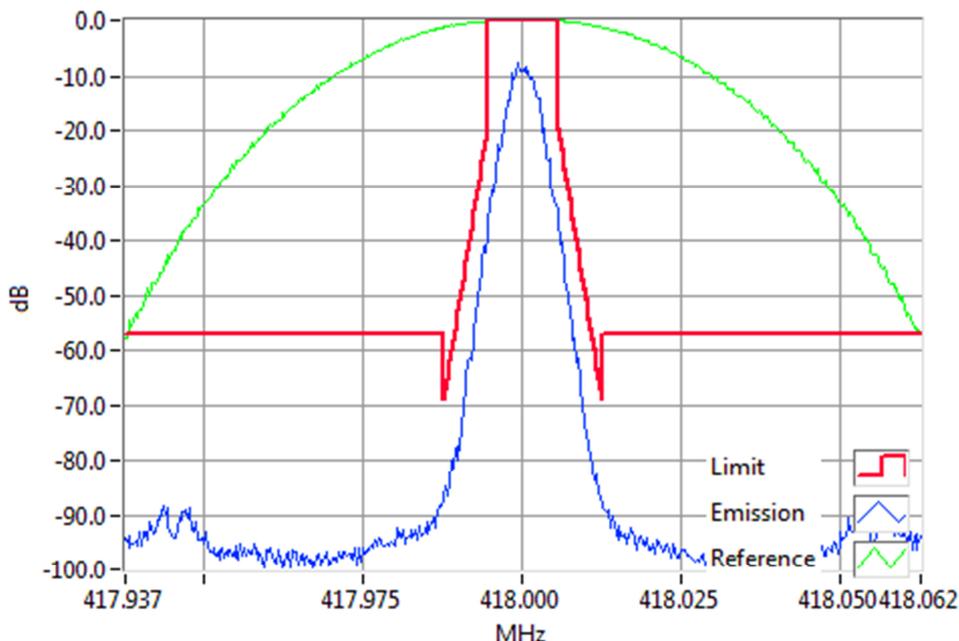

**DMR 418.0000MHz Mask D 5W**  
**RBW=100Hz, VBW=1000Hz, Detector Mode=Peak**  
**Result=Pass**


### Occupied Bandwidth and Spectrum Masks

DMR

SPECIFICATION: FCC CFR 2.1049 (c)


RSS-119 5.5

Tx FREQUENCY: 420.0 MHz 50 W 12.5 kHz Channel Spacing

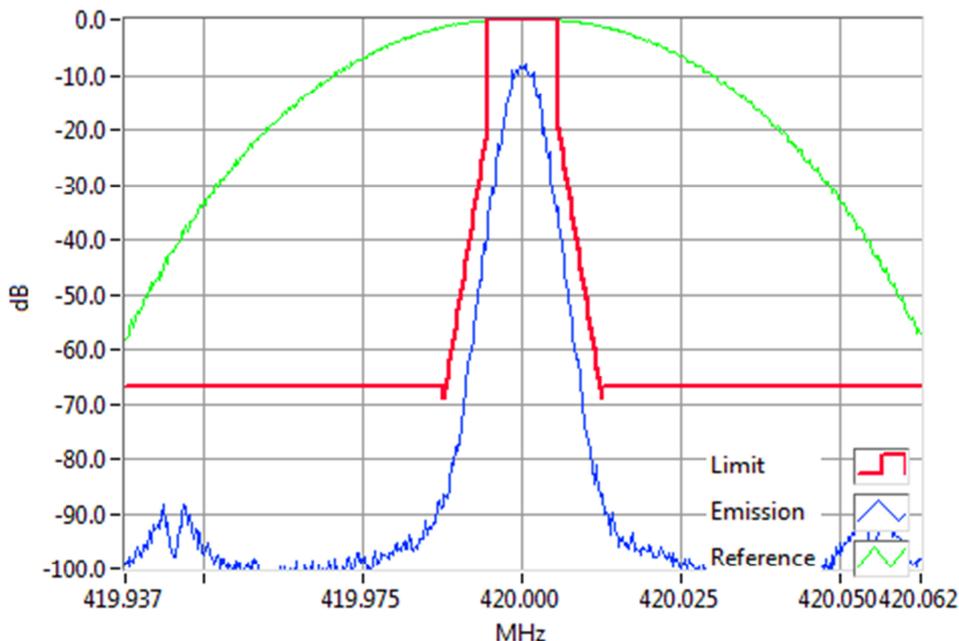

**DMR 420.0000MHz Mask D 50W**  
**RBW=100Hz, VBW=1000Hz, Detector Mode=Peak**  
**Result=Pass**

Tx FREQUENCY: 420.0 MHz 5 W 12.5 kHz Channel Spacing

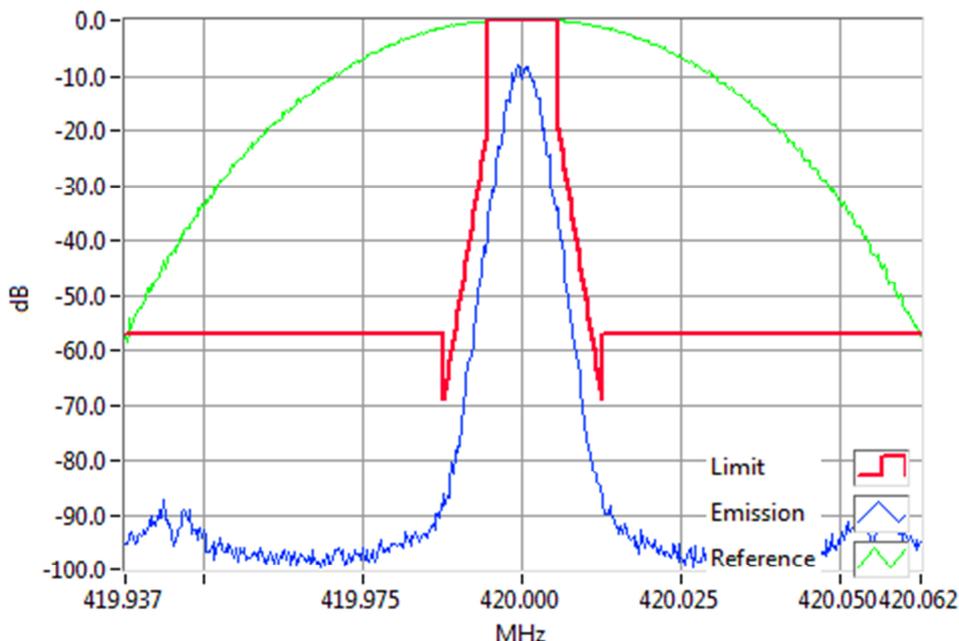

**DMR 420.0000MHz Mask D 5W**  
**RBW=100Hz, VBW=1000Hz, Detector Mode=Peak**  
**Result=Pass**