


Occupied Bandwidth and Spectrum Masks

DMR


SPECIFICATION: FCC CFR 2.1049 (c)

RSS-119 5.5

Tx FREQUENCY: 450.1 MHz 50 W 12.5 kHz Channel Spacing

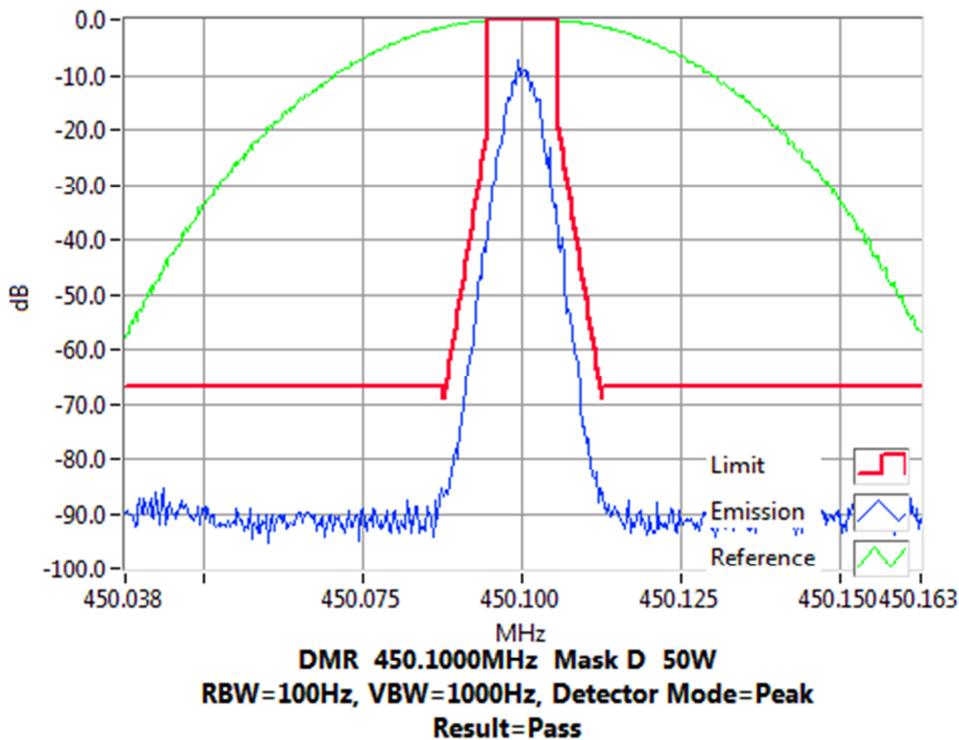

Tx FREQUENCY: 450.1 MHz 5 W 12.5 kHz Channel Spacing

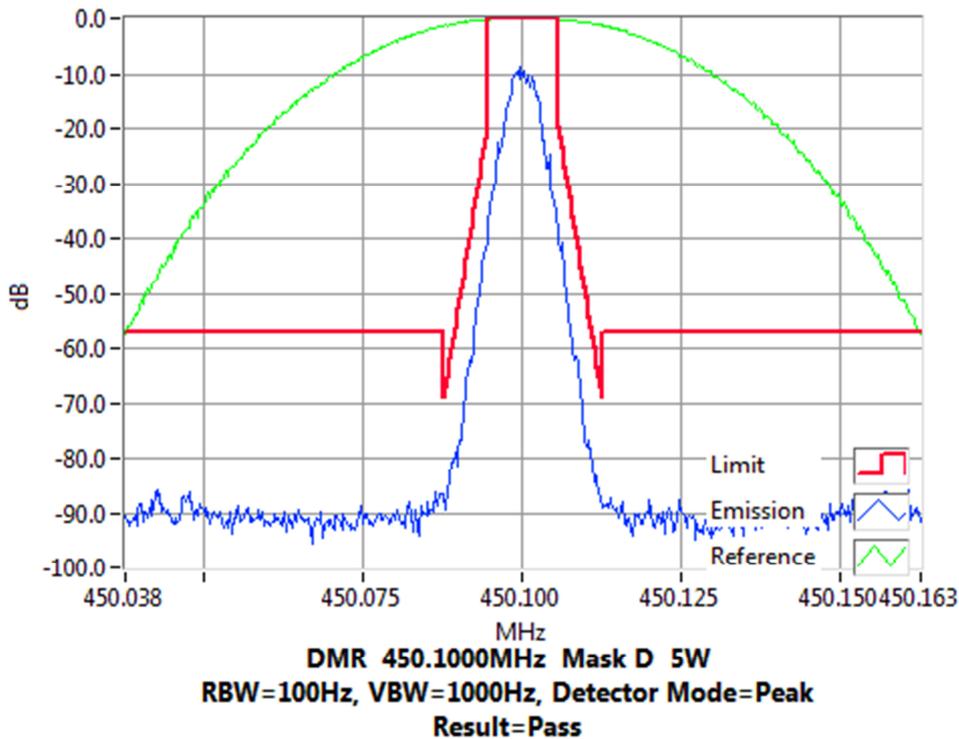


Occupied Bandwidth and Spectrum Masks

DMR

SPECIFICATION: FCC CFR 2.1049 (c)


RSS-119 5.5

Tx FREQUENCY: 454.9 MHz 50 W 12.5 kHz Channel Spacing

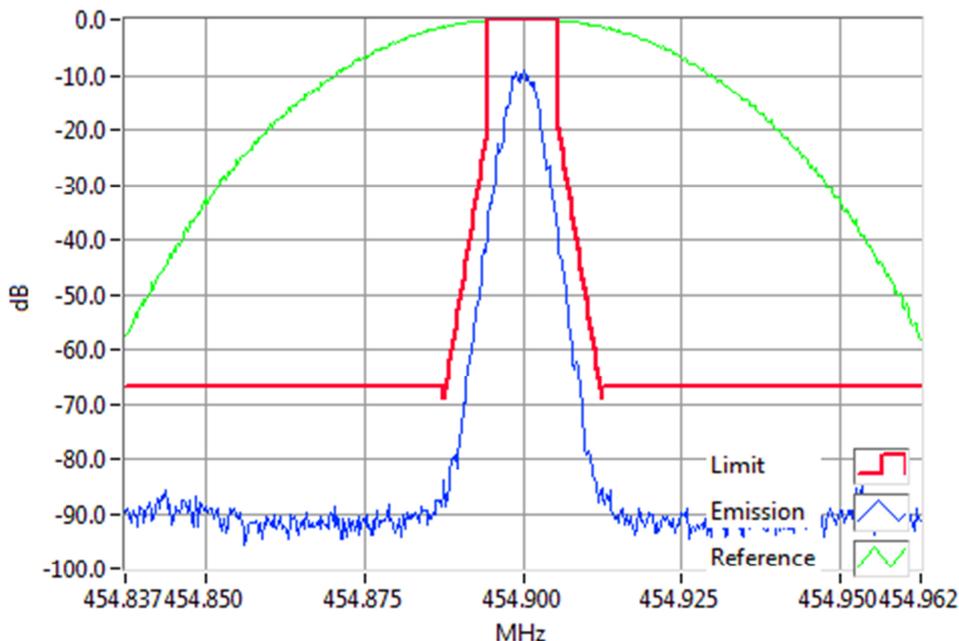

DMR 454.9000MHz Mask D 50W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 454.9 MHz 5 W 12.5 kHz Channel Spacing

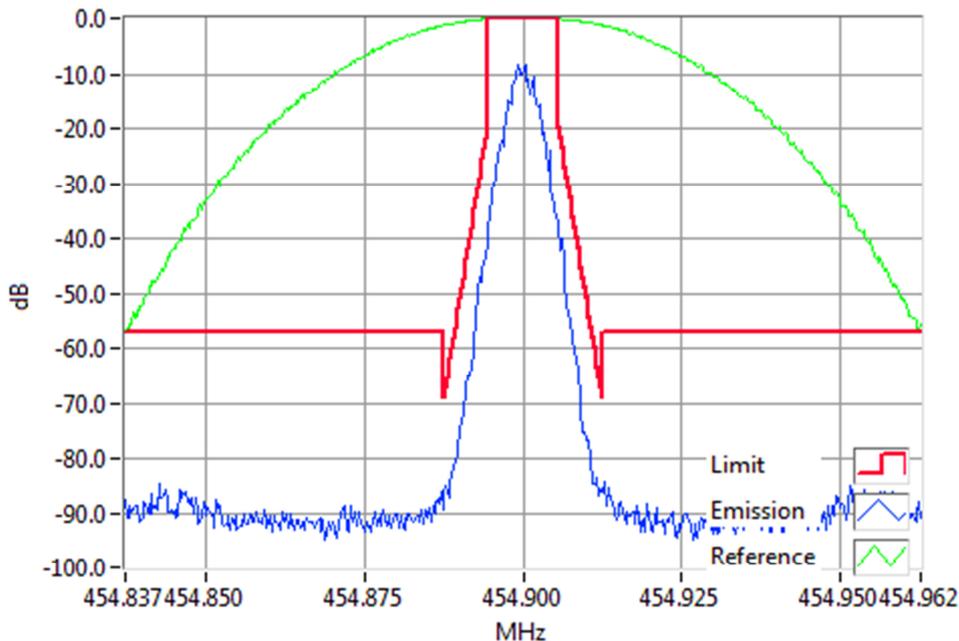

DMR 454.9000MHz Mask D 5W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass