

TRANSMITTER OCCUPIED BANDWIDTH AND SPECTRUM MASKS

SPECIFICATION: FCC 47 CFR 2.1049 (c) RSS-119 5.5

GUIDE: TIA/EIA-603E 2.2.11 (Analog)
TIA-102.CAAA-C 2.2.5 (Digital)

MEASUREMENT PROCEDURE:

- Refer Annex A for Equipment Set up.
The EUT was modulated with an internally generated pseudo random bit sequence at the appropriate Baud rates.
- The Occupied Bandwidth was measured on the Spectrum Analyser, with bandwidth settings as follows.
Emission Mask D – Resolution Bandwidth = 100 Hz, Video Bandwidth = 1 kHz

MEASUREMENT RESULTS:

See the plots on the following pages for 12.5 kHz channel spacing.

MEASUREMENT UNCERTAINTY 95% $\pm 0.65\text{dB}$

LIMIT CLAUSE: FCC 47 CFR 90.210 RSS-119 5.5

EMISSION MASKS

Emission Mask D 12.5 kHz Channel Spacing Analog, FFSK, Digital Voice/Data

DATA SPEED

FFSK 12.5 kHz Channel Spacing 1200 bps

Digital Voice/Data 12.5 kHz Channel Spacing 9600 bps

Photo: Measurement Setup




Occupied Bandwidth and Spectrum Masks

ANALOGUE VOICE

SPECIFICATION: FCC CFR 2.1049 (c)

RSS-119 5.5

Tx FREQUENCY: 440.1 MHz 100 W 12.5 kHz Channel Spacing

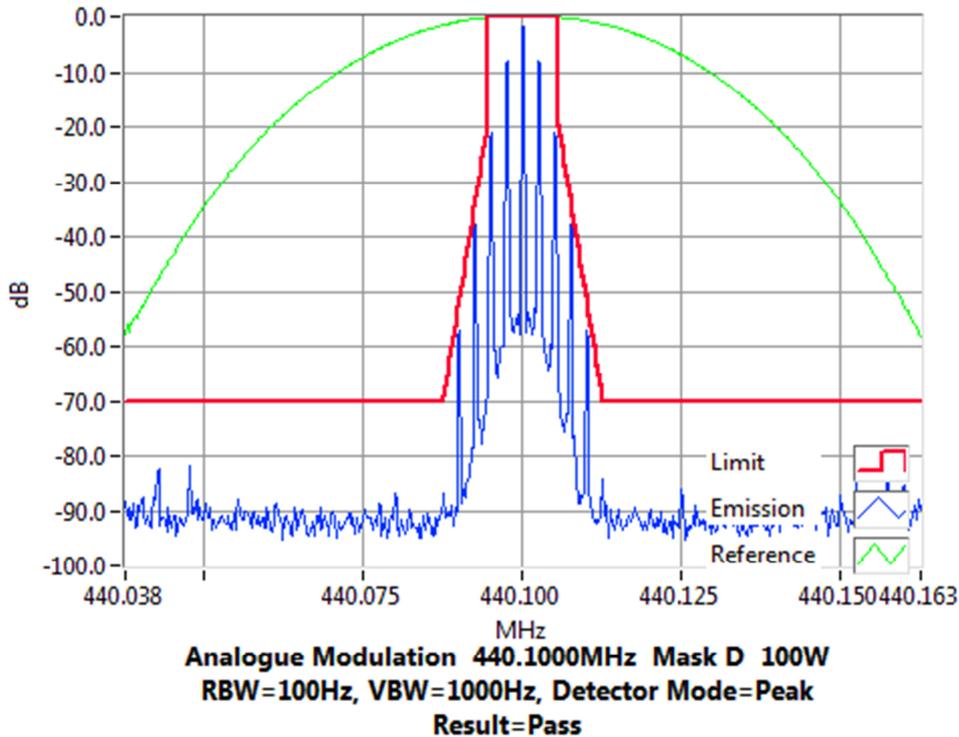

Tx FREQUENCY: 440.1 MHz 10 W 12.5 kHz Channel Spacing

