Occupied Bandwidth and Spectrum Masks

ANALOGUE VOICE

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 450.1 MHz 100 W 12.5 kHz Channel Spacing

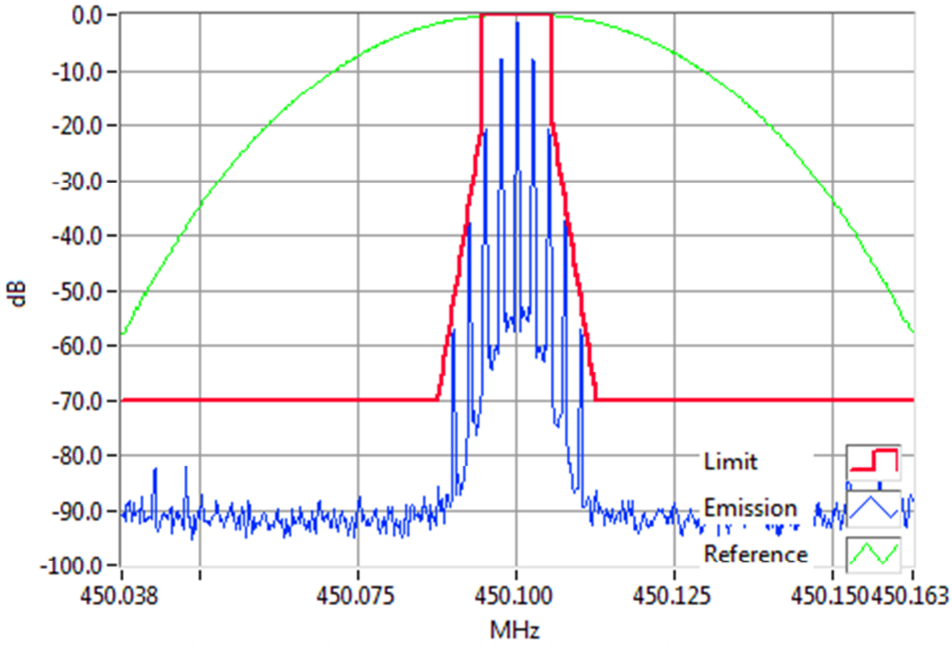

Analogue Modulation 450.1000MHz Mask D 100W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 450.1 MHz 10 W 12.5 kHz Channel Spacing

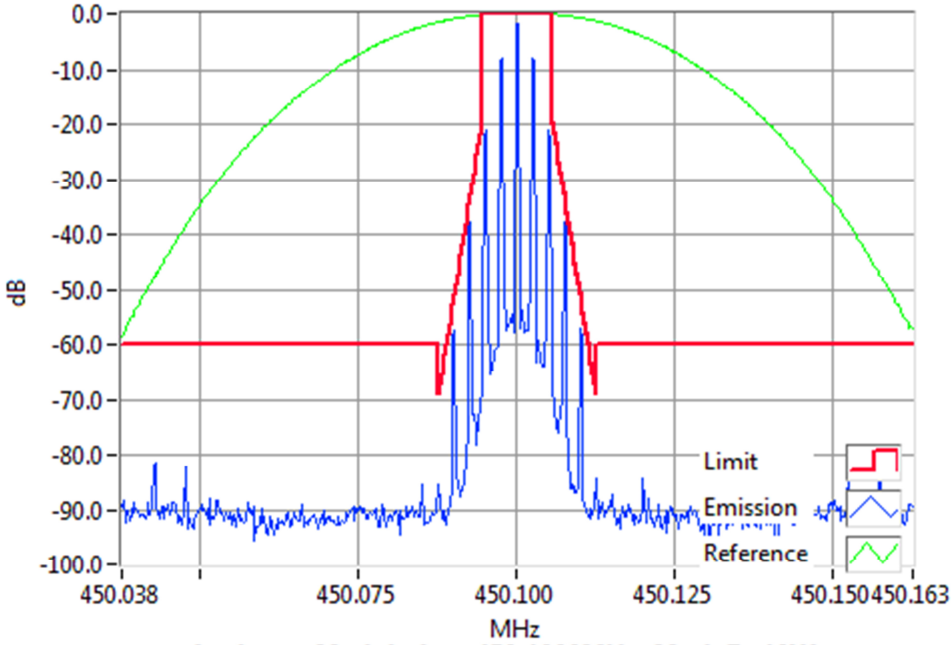

Analogue Modulation 450.1000MHz Mask D 10W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

ANALOGUE VOICE

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 454.9 MHz 100 W 12.5 kHz Channel Spacing

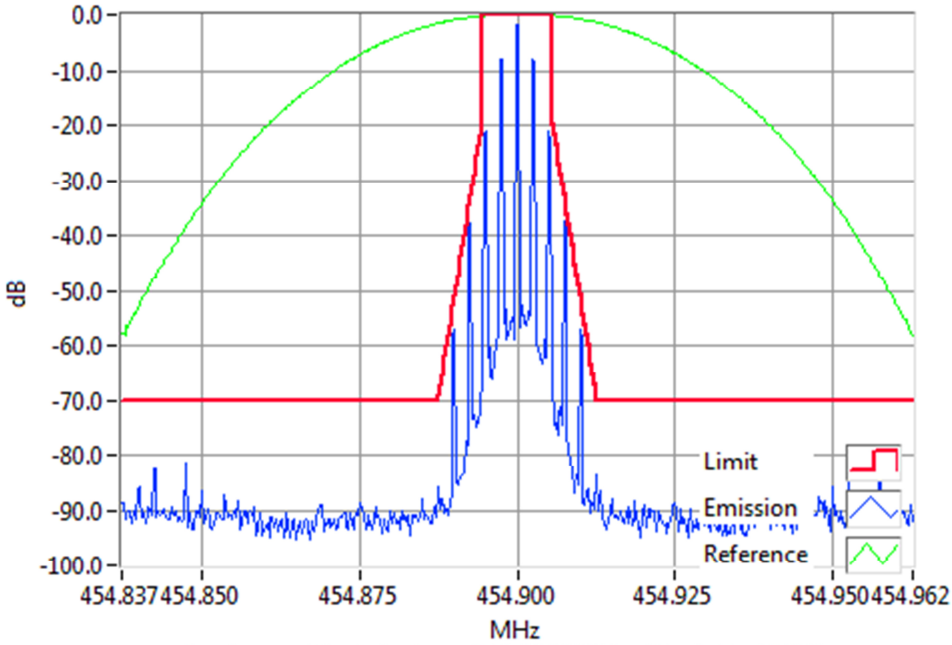

Analogue Modulation 454.9000MHz Mask D 100W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 454.9 MHz 10 W 12.5 kHz Channel Spacing

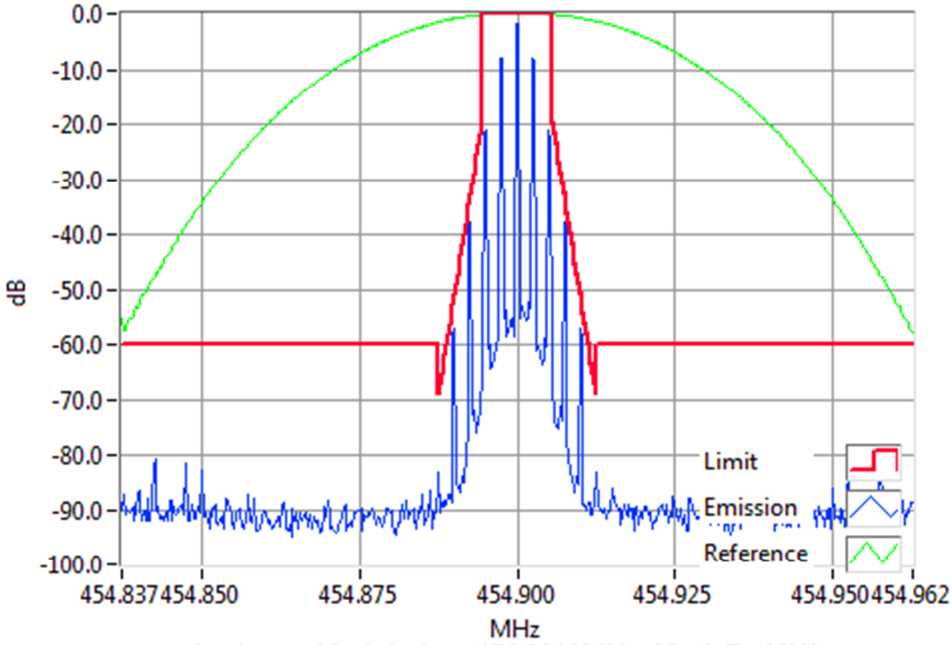

Analogue Modulation 454.9000MHz Mask D 10W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass