


Occupied Bandwidth and Spectrum Masks

DMR

SPECIFICATION: FCC CFR 2.1049 (c)


RSS-119 5.5

Tx FREQUENCY: 468.0 MHz 100 W 12.5 kHz Channel Spacing

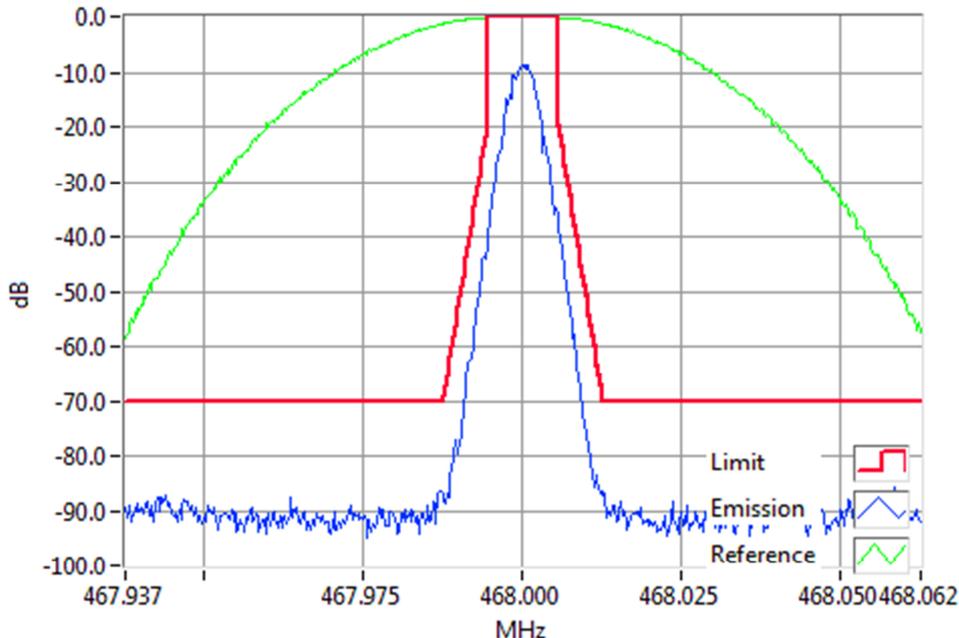

DMR 468.0000MHz Mask D 100W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 468.0 MHz 10 W 12.5 kHz Channel Spacing

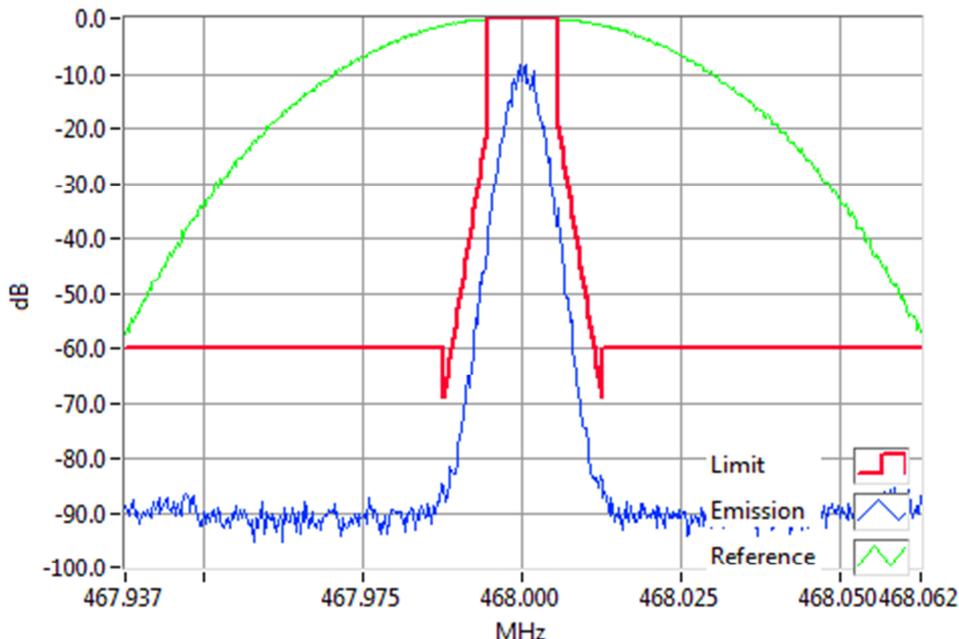

DMR 468.0000MHz Mask D 10W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass


Occupied Bandwidth and Spectrum Masks

DMR

SPECIFICATION: FCC CFR 2.1049 (c)


RSS-119 5.5

Tx FREQUENCY: 469.9 MHz 100 W 12.5 kHz Channel Spacing

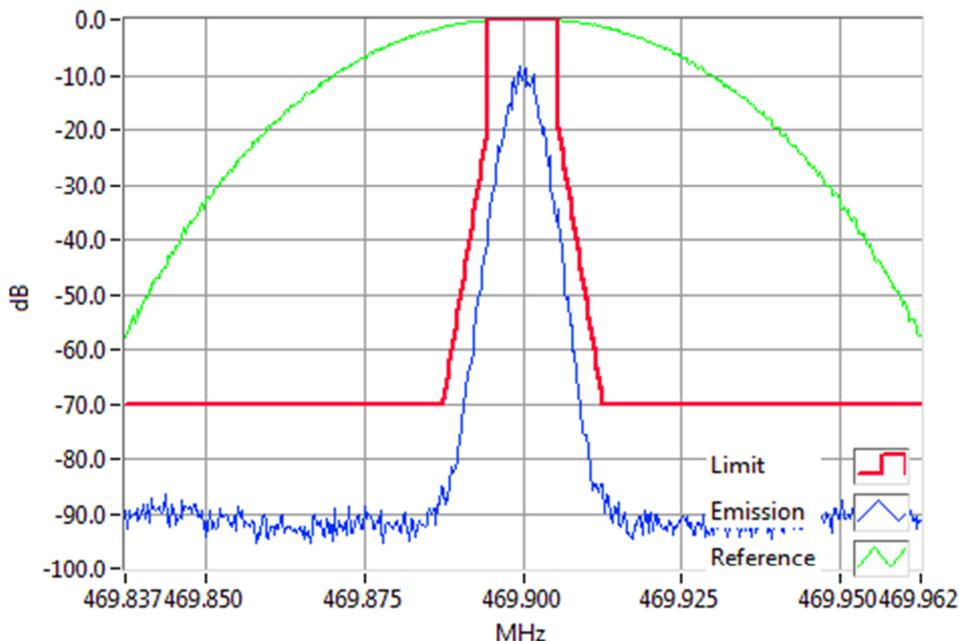

DMR 469.9000MHz Mask D 100W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 469.9 MHz 10 W 12.5 kHz Channel Spacing

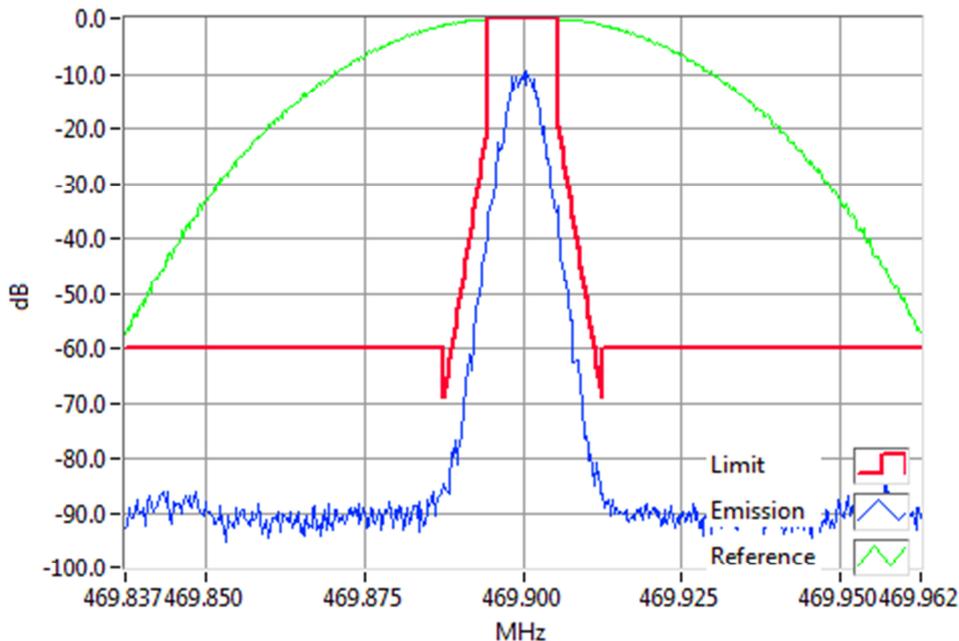

DMR 469.9000MHz Mask D 10W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass