

REPORT NUMBER 1542

AUGUST 2000

RADIO PERFORMANCE MEASUREMENTS

On the T839-20-1020 Telepaging Transmitter
With T837-26-1021 Exciter
(25 kHz Channel spacing)

FCC ID: CASTEL0040

S/N 703030

in accordance with

FCC 47 CFR Parts 22 and 90

PREPARED BY:

SIVA

Test Technician

CHECKED & APPROVED BY:

S.A. Crompton

Laboratory Manager

TELTEST Laboratories

Tait Electronics Limited

PO Box 1645

558 Wairakei Road

Christchurch 5

New Zealand

Phone: +64 3 358 3399

Fax: +64 3 358 0432

TABLE OF CONTENTS

TEST	PAGE
TRANSMITTER OUTPUT POWER (CONDUCTED)	3
MODULATION LIMITING (STEADY STATE)	4
OCCUPIED BANDWIDTH	6
SPURIOUS EMISSIONS (CONDUCTED)	8
SPURIOUS EMISSIONS (RADIATED)	10
TRANSMITTER FREQUENCY STABILITY (TEMPERATURE)	12
TRANSMITTER FREQUENCY STABILITY (VOLTAGE)	14
TRANSIENT FREQUENCY BEHAVIOUR	16
LIST OF TEST EQUIPMENT	19

FCC ID: CASTEL0040

NAME OF TEST: TRANSMITTER OUTPUT POWER (CONDUCTED)

TEST CONDITIONS: Ambient temperature 20 °C
Relative humidity 60 %
Standard Voltage 120VAC

SPECIFICATION: FCC 47 CFR 2.1046

GUIDE: TIA/EIA-603 2.2.1

MEASUREMENT PROCEDURE:

1. The Equipment Under Test (EUT) was set up as shown on the following diagram.
2. The coaxial attenuator used has an impedance of 50Ω.
3. The unmodulated output power was measured by means of an RF Power meter.

MEASUREMENT RESULTS:

Manufacturers rated output power: 100W


	158.10MHz
Power (W)	107.3
Variation from nom (%)	+7.3
Measurement uncertainty (dB)	+0.63 -0.68

LIMIT CLAUSE: FCC 47 CFR 90.205

Radio Type: Base Station
Frequency Band: 150MHz - 174MHz

(n) The output power shall not exceed by more than 20% the manufacturers rated output power for the particular transmitter.

TEST SETUP: See page 19 for test equipment information.

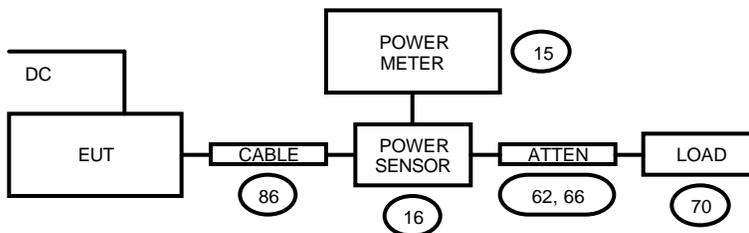

NAME OF TEST: TRANSMITTER MODULATION LIMITING
STEADY STATE

TEST CONDITIONS: Ambient temperature 18 °C
Relative humidity 65%
Standard Voltage 120V AC

SPECIFICATION: FCC 47 CFR 2.1047 (b)

GUIDE: TIA/EIA-603 2.2.3

MEASUREMENT PROCEDURE:


1. The Equipment Under Test (EUT) was set up as shown on the following diagram.
2. The modulation was measured with a 2.4kHz square wave signal applied to the data input of the transmitter at standard TTL level.
3. Measurements were made for both positive and negative deviation.

MEASUREMENT RESULTS:

See the plots on following page for 25kHz channel spacing.

LIMIT CLAUSE: FCC 47 CFR 90.211(b)

TEST SETUP: See page 19 for test equipment information.

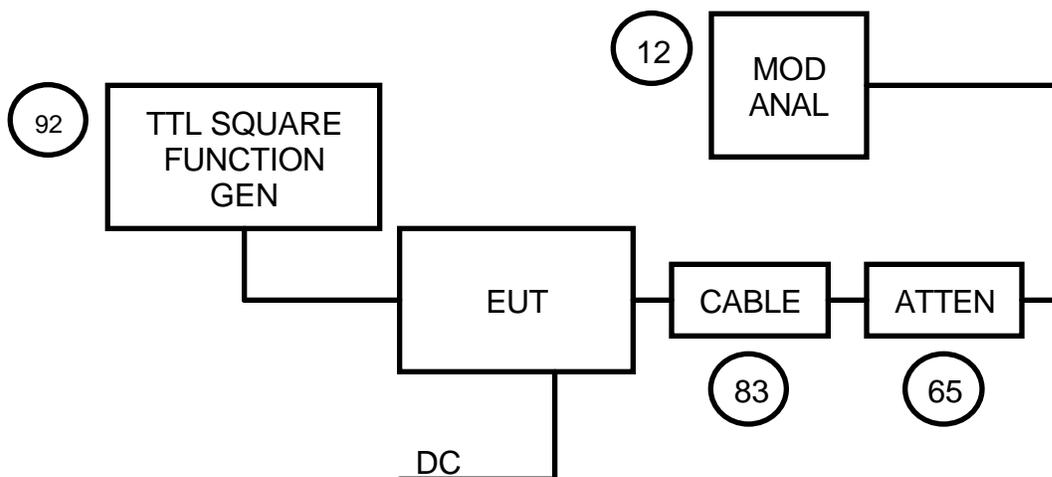

Deviation Limit 5kHz

	Positive Deviation (kHz)	Negative Deviation (kHz)	Average Deviation (kHz)
T837-26-1021 exciter	4.44	4.47	4.45

Necessary Bandwidth

FCC 47 CFR 90.202

$$BW=2M+2DK$$

Where: M = baud-rate/2

D = average deviation

K=1.2

$$BW=2 \times 2.4/2 + 2 \times 4.45 \times 1.2$$

$$=13.1\text{kHz}$$

Emission Designation

FCC 47 CFR 90.201

13K1F1D

NAME OF TEST: OCCUPIED BANDWIDTH

TEST CONDITIONS: Ambient temperature 18 °C
 Relative humidity 65 %
 Standard Voltage 120VAC

SPECIFICATION: FCC 47 CFR 2.1049 (c)

GUIDE: TIA/EIA-603 2.2.11

MEASUREMENT PROCEDURE:


1. The Equipment Under Test (EUT) was set up as shown on the following diagram.
2. The EUT was modulated by a 2500Hz tone at an input level 16dB above a level that produced 50% deviation.
3. The Occupied Bandwidth was measured on the Spectrum Analyser with the controls set as shown on the following plots.

MEASUREMENT RESULTS: See the plots on following page 25kHz channel spacing.

LIMIT CLAUSE: FCC 47 CFR 90.210


EMISSION MASK “ C “	ATTENUATION (dBc)
	100 W
$F_c \pm 5.0 \text{ kHz to } \pm 10.0 \text{ kHz}$	$83\log(fd/5)$
$F_c \pm 10.0 \text{ kHz to } \pm 50.0 \text{ kHz}$	The lesser of $29\log(fd^2/11)$ or 50
$F_c > \pm 50.0 \text{ kHz}$	63

TEST SETUP: See page 19 for test equipment information.

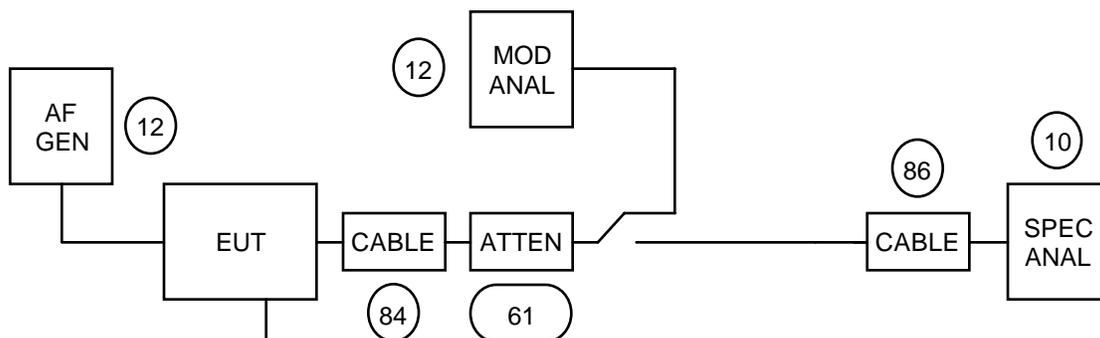


NAME OF TEST: OCCUPIED BANDWIDTH

SPECIFICATION: FCC 47 CFR 2.1049 (c)
MASK "C"

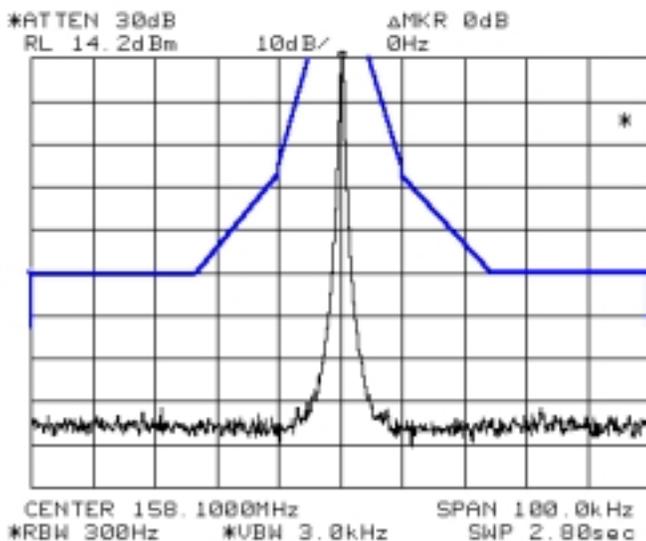

100W UNMODULATED 158.1MHz T837-26-1021 Exciter

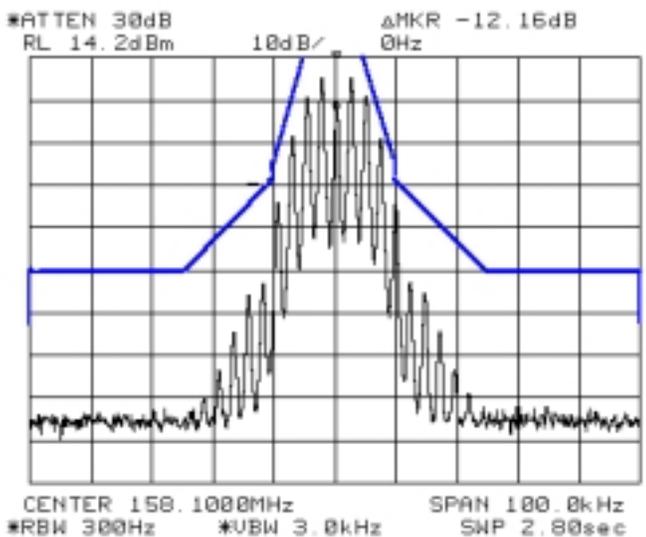

100W MODULATED 158.10 MHz T837-26-1021 Exciter

TELTEST REPORT 1542 T839-20-1020 TELEPAGING TRANSMITTER S/N 703030

NAME OF TEST: SPURIOUS EMISSIONS (CONDUCTED)

TEST CONDITIONS: Ambient temperature 19 °C
Relative humidity 75 %
Standard Voltage 120VAC

SPECIFICATION: FCC 47 CFR 2.1051

GUIDE: TIA/EIA-603 2.2.13

MEASUREMENT PROCEDURE:

1. The Equipment Under Test (EUT) was set up as shown on the following diagram.
2. The frequency range examined was from the lowest frequency generated within the EUT to a frequency higher than the 10th harmonic: 100KHz to Fc-BW
Fc+BW to 1.6GHz
3. Spurious emissions which were attenuated more than 20dB below the limit were not recorded


MEASUREMENT RESULTS:

See the tables on following pages for 25kHz channel spacing.

LIMIT CLAUSE: FCC 47 CFR 90.210

See the tables on following pages.

TEST SETUP: See page 19 for test equipment information.

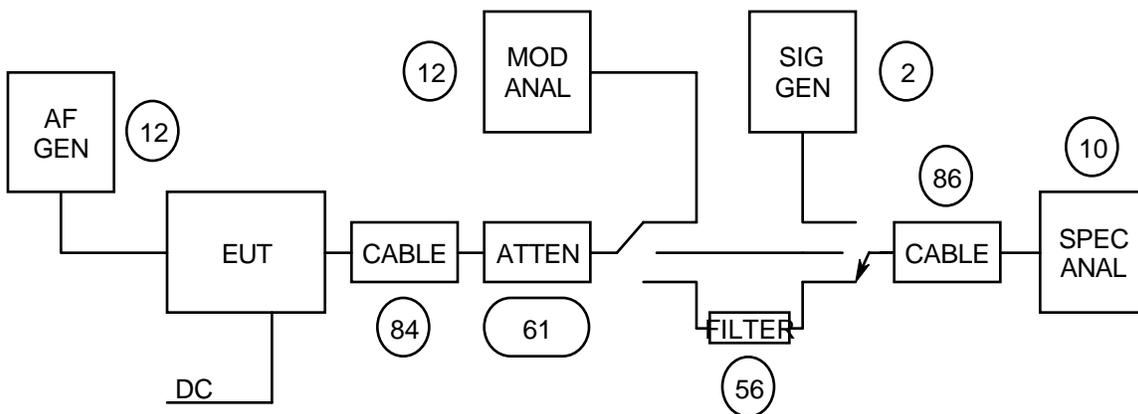

FCC ID: CASTEL0040

NAME OF TEST: SPURIOUS EMISSIONS (CONDUCTED)

SPECIFICATION: FCC 47 CFR 2.1051

EXCITER T837-26-1021

25kHz channel spacing	158.10MHz @ 100W	Emission Mask C
Emission Freq MHz	Level dBm	Level dBc
138.10	-24.6	-74.6
178.1	-22.3	-72.3
No other emissions were detected at a level greater than 20 dB below the limit		

LIMITS:

Carrier Output Power Watts	Emission Mask "C" $43 + 10\log_{10}(P_{Watts})$	
100W	63dBc	-13 dBm

NAME OF TEST: SPURIOUS EMISSIONS (RADIATED)

TEST CONDITIONS: Ambient temperature 18 °C
 Relative humidity 65 %
 Standard Voltage 120VAC

SPECIFICATION: FCC 47 CFR 2.1053

GUIDE: TIA/EIA-603 2.2.12

MEASUREMENT PROCEDURE:

1. The Equipment Under Test (EUT) was set up as shown on the following diagram.
2. The EUT was placed on a wooden turntable at a distance of three metres from the test antenna. The output terminal was connected to an RF dummy load.
3. The turntable was rotated through 360° to obtain the maximum response of each spurious emission. Valid emissions were determined by switching the EUT on and off.
4. The EUT was replaced by a signal generator and substitution antenna to make measurements by the substitution method.


MEASUREMENT RESULTS:

See the tables on following page for 25kHz channel spacing.

LIMIT CLAUSE: FCC 47 CFR 90.210

See the tables on following pages

TEST SETUP: See page 19 for test equipment information.

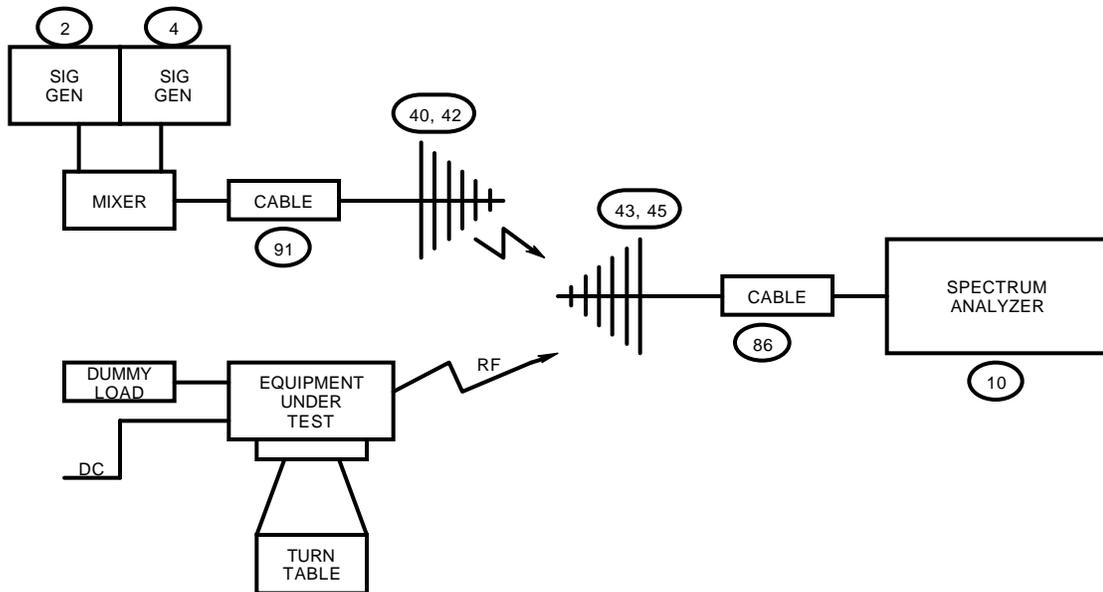

NAME OF TEST: TRANSMITTER FREQUENCY STABILITY (TEMPERATURE)

TEST CONDITIONS: Ambient temperature 20 °C
 Relative humidity 60 %
 Standard Voltage 120VAC

SPECIFICATION: FCC 47 CFR 2.1055 (a) (1)

GUIDE: TIA/EIA-603 2.2.2

MEASUREMENT PROCEDURE:

1. The Equipment Under Test (EUT) was set up as shown on the following diagram.
2. The EUT was tested for frequency error from -30°C to +50°C in 10°C increments.
3. The frequency error was recorded in parts per million (PPM)

MEASUREMENT RESULTS:


See the plot on the following page.

LIMIT CLAUSE: FCC 47 CFR 90.213


Frequency 158.10MHz

Channel Spacing (kHz)	Frequency Error (PPM)
25	5

TEST SETUP: See page 19 for test equipment information.

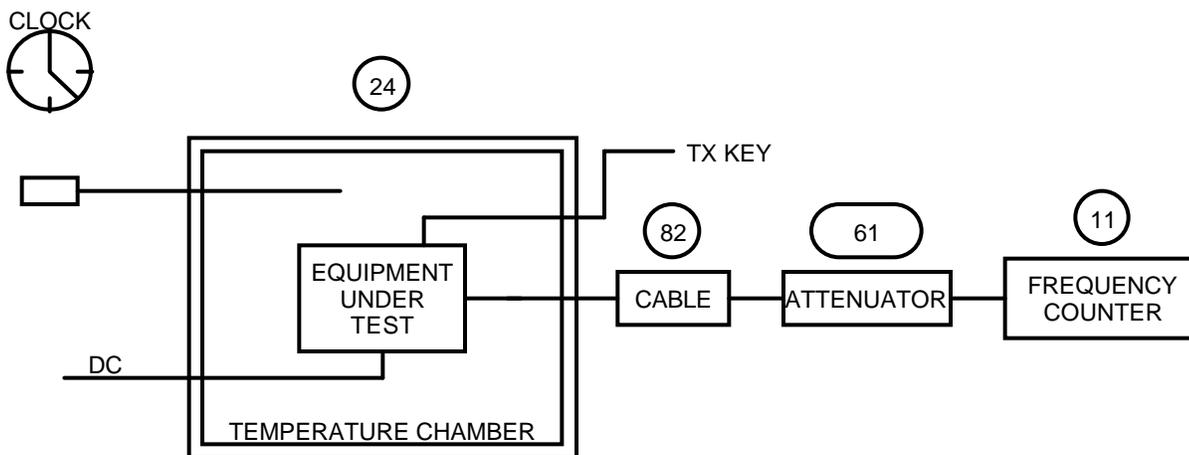

FCC ID: CASTEL0040
NAME OF TEST: TRANSMITTER FREQUENCY STABILITY
(TEMPERATURE)
SPECIFICATION: FCC 47 CFR 2.1055 (a) (1)

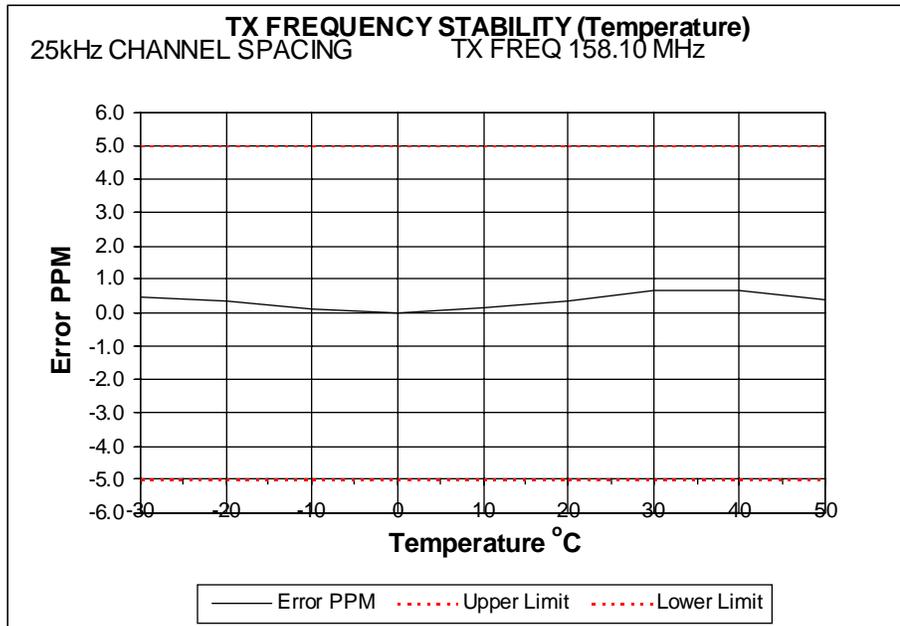

Exciter T837-26-1021

NAME OF TEST: TRANSMITTER FREQUENCY STABILITY (VOLTAGE)

TEST CONDITIONS : Ambient temperature 20 °C
 Relative humidity 65 %
 Standard Voltage 120VAC

SPECIFICATION: FCC 47 CFR 2.1055 (d) (1)

GUIDE: TIA/EIA-603 2.2.2

MEASUREMENT PROCEDURE:

1. The Equipment Under Test (EUT) was set up as shown on the following diagram.
2. The EUT was tested for frequency error at an input voltage to the power supply of 85% to 115%, by means of AC Power supply and variac
3. The frequency error was recorded in parts per million (PPM)

MEASUREMENT RESULTS:


See result table on next page.

LIMIT CLAUSE: FCC 47 CFR 90.213

Frequency Range 158.10MHz

Channel Spacing (kHz)	Frequency Error (PPM)
25	5

TEST SETUP: See page 19 for test equipment information.

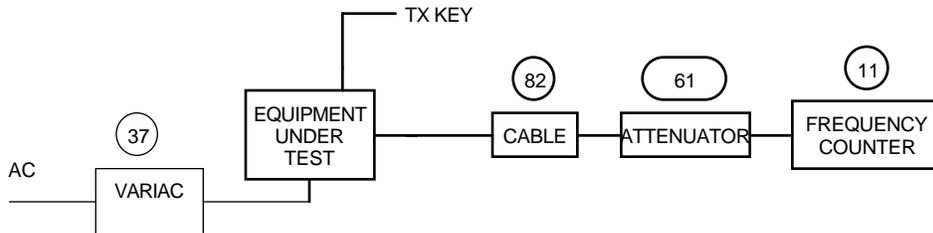

Channel Spacing (KHz) Supply Voltage	Frequency Error (PPM) @ 158.10MHz		
	102VAC	120VAC	138ADC
T837-26-1021 exciter using internal frequency reference	0.27	0.27	0.28
Limit	5	5	5

NAME OF TEST: TRANSIENT FREQUENCY BEHAVIOUR

TEST CONDITIONS: Ambient temperature 20 °C
 Relative humidity 60 %
 Standard Voltage 120VAC

SPECIFICATION: FCC 47 CFR 90.214

GUIDE: TIA/EIA-603 2.2.19

MEASUREMENT PROCEDURE:

1. The Equipment Under Test (EUT) was set up as shown on the following diagram.
2. Measurements and plots were made following the TIA/EIA procedure.


MEASUREMENT RESULTS:

See the tables and plots on the following pages.

LIMIT CLAUSE: FCC 47 CFR 90.214

See the tables on the following pages.

TEST SETUP: See page 19 for test equipment information.

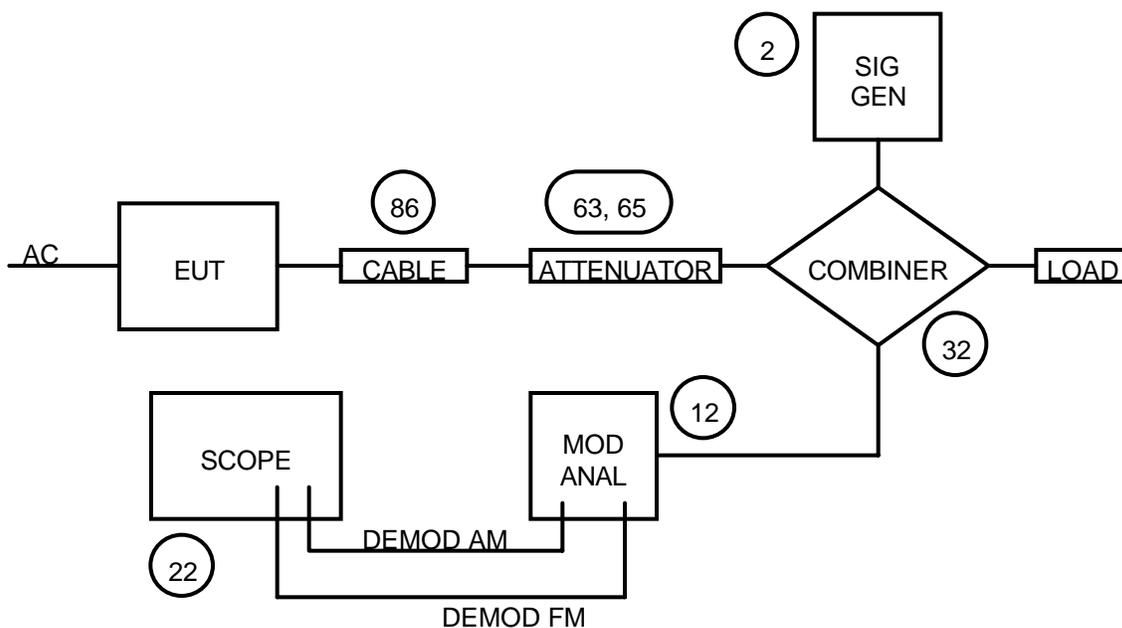

NAME OF TEST: TRANSIENT FREQUENCY BEHAVIOUR

SPECIFICATION: FCC 47 CFR 90.214

25.0 KHz CHANNEL SPACING

FREQUENCY	T837-26-1021 , 158.10 MHz @ 100W Tx	
TRANSIENT RESPONSE PERIOD	CARRIER PEAK VARIATION FROM NOMINAL	
	KEY ON (KHz)	KEY OFF (KHz)
t1	3.125	N/A
t2	0.625	N/A
t3	N/A	6.87
t2~t3	0.27	
ERROR LIMIT (t2~t3) @5PPM (KHz)	0.63	

Confirm that during periods t1 and t3 the frequency difference does not exceed the value of one channel separation.	YES	NO
	Y	
Confirm that during the period t2 the frequency difference does not exceed half a channel separation.	YES	NO
	Y	
Confirm that during the period t2 to t3 the frequency difference does not exceed the frequency error limit	YES	NO
	Y	


LIMITS: 25.0 KHz CHANNEL SPACING

TRANSIENT PERIODS	MAXIMUM FREQUENCY DIFFERENCE (KHz)	FREQUENCY RANGE 150-174 MHz
t1 (mS)	±25.0	5 mS
t2 (mS)	±12.5	20 mS
t3 (mS)	±25.0	5 mS


NAME OF TEST: TRANSIENT FREQUENCY BEHAVIOUR

SPECIFICATION: FCC 47 CFR 90.214

25.0 KHz CHANNEL SPACING 100W KEY-ON

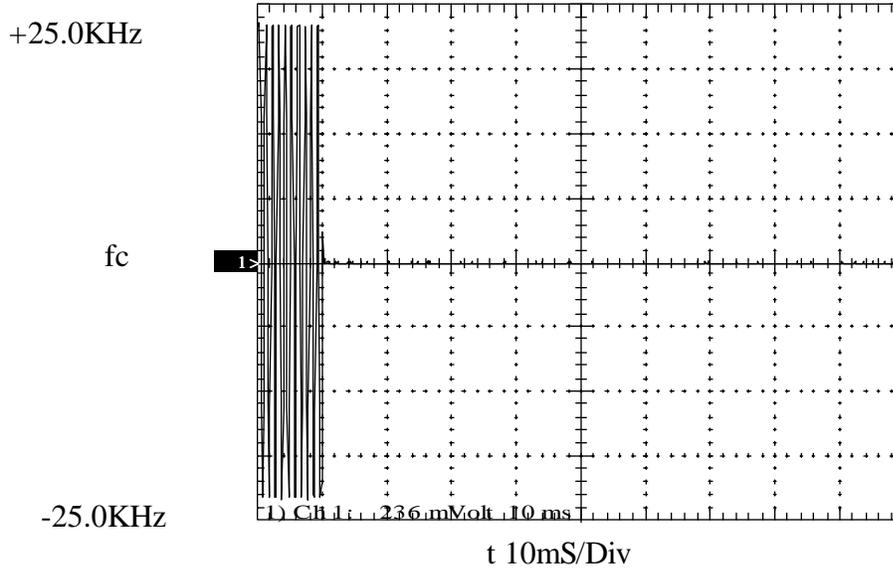

25.0 KHz CHANNEL SPACING 100W KEY-OFF

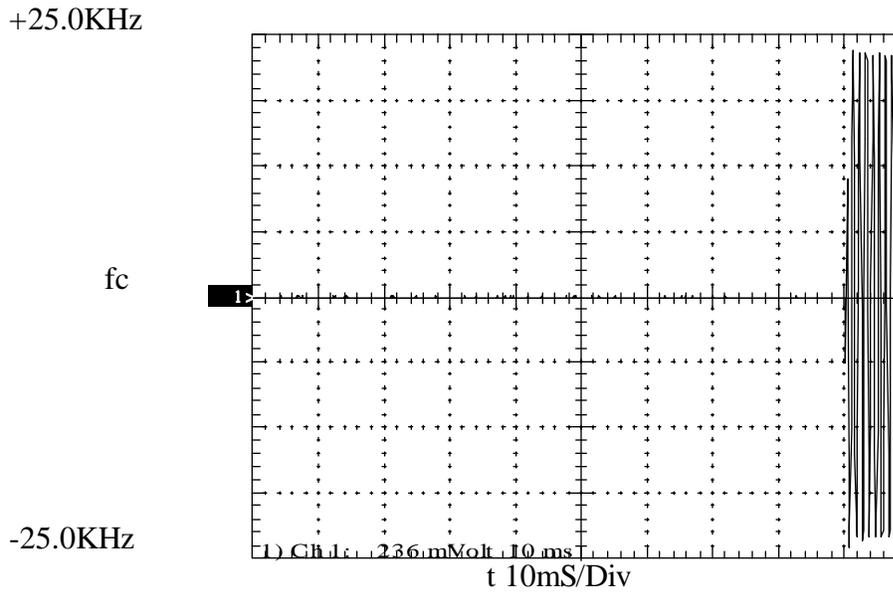

TEST EQUIPMENT LIST

To facilitate inclusion on each page, the test equipment used is identified (numbered) and listed against the related test in the report.

No	Equipment Type	Model number	Serial Number	Tait ID:
01	Signal Generator	HP 8642B (Opt 001)	2512A00176	E3064
02	Signal Generator	HP8648A	3430U00344	E3579
03	Signal Generator	HP8656A	2142A02103	E3063
04	Signal Generator	HP8648C	3443U00543	E3558
05	Signal Generator	SMY01 1062.5502.11	841736/019	E3553
10	Spectrum Analyser	HP8596E (Opt 140)	3346A00213	E3427
11	Modulation Analyser	HP8901B (Opt 002)	2441A00393	E3073
12	Modulation Analyser	FMA 0852.8500.52	842541/001	E3554
13	Audio Analyser	HP8903A	2308A02597	E3074
14	Power Head	HP11722A	2320A00688	E3307
15	Power Meter	NRVS 1020.1809.02	841954/005	E3555
16	Power Sensor	URV5-Z4 395.1619.55	841.498/003	E3557
20	Power Supply	HP6032A	2441A-0041	E3075
21	Power Supply	NGSM32/10 192.0810.31	Fnr 434	E3556
22	Oscilloscope	Tektronics TDS 340	B013611	E3585
23	Universal Counter	Goldstar FC-2015U	600801	E3550
24	Environmental Chamber	Contherm Spatial Cal	E3397	E3397
24	Environmental Chamber	Contherm Temp Control	E3397	E3397
25	Portable Hygrometer (ASL)	Rotronic A1	2070300/38	N/A
25	Whirling Hygrometer	Casella 3156 / 82	TA004	TA004
30	Directional Coupler	HP778D-012	1144 07392	E3292
31	4 Port Combiner (CAST)	DVU4, W 201.4018.03	300729/47	E3623
32	4 Port Combiner	DVU4, W 201.4018.03	300971/28	E3572
33	3 Port Combiner	Weinschel 1506A, 1W	LD858	E3672
34	Mixer Spurious Emission	Tait (3.2G ≤ Rfx ≤ 4.0G)	E3661	E3661
35	Mixer Transient ACP	Minicircuits ZAD-11	77031	E3394

TEST EQUIPMENT LIST (Cont.)

No	Equipment Type	Model number	Serial Number	Tait ID:	
36	Voltmeter	HP3478A	2545A25838	E1559	
37	Variac	Yamabishi S-260-5	TX-533	E1737	
38	RX and TX, RF Paths	Tait CAST Interface	E3067	E3067	
40	Reference Dipoles	Emco 3121C-DB1	9510-1164	E3559	
41	Antenna	Biconical	9307-1680	E3033	
42	Reference Horn Antenna	Emco DRG 3115	9512-4638	E3560	
43	Horn Antenna	Emco DRG 3115	2084	E3076	
44	Corner 175-420 MHz	Ailtech DM 105A-T2	J1417-103	E3031	
45	Corner 400-1000 MHz	Ailtech DM 105A-T3	J1418-108	E3036	
46	S-LINE TEM CELL	1089.9296.02	338232/003	E3636	
50	Amplifier AR 1M-1000M	25W1000A	20444	E3637	
51	Amplifier AR 10K-250M	25A250	16373	E3570	
52	Amplifier +21.7 dB	Tait ZFL-1000LN	E3660	E3360	
53	RF Filter 21.4M (CAST)	Tait NDK 21G-6DT	E3069	E3069	
54	RF Filter 21.4M (ACP)	Tait NDK 21G-6DT	RA-7'	E3249	
55	Filter Notch	Tait	N/A	?	
56	Filter High Pass	Tait	Mhz	N/A	?
57	Filter Low Pass	Tait	Mhz	N/A	?
60	RF Attenuator 250W	Weinschel 45-30-34	JW663	E3386	
61	RF Attenuator 150W	Weinschel 40-20-33	CJ404	E3387	
62	RF Attenuator 150W	Weinschel 57-10-34	LB590	E3674	
63	RF Attenuator 150W	Weinschel 40-06-34	KV457	E3561	
64	RF Attenuator 50W	Weinschel 24-10-34	AL0401	E3388	
65	RF Attenuator 50W	Weinschel 24-20-44	AW1266	E3562	

TEST EQUIPMENT LIST (Cont.)

No	Equipment Type	Model number	Serial Number	Tait ID:
66	RF Attenuator 25W	Weinschel 33-20-33	BD5871	E3673
67	RF Attenuator 150W(CAST)	Weinschel 40-20-33	CJ405	3366/82
70	RF Load 150W	Byrd 8166	524	E3625
71	RF Load 50 W	Weinschel F1426	BF0487	E3675
72	RF Load 50 W	Weinschel F1426	AE2490	E3624
73	RF Termination 20W	Deltec	118.001	E3626
74	RF Termination W	MCL NTRM-50	951215	E3574
75	RF Termination W	MCL NTRM-50	954214	E3575
76	RF Termination W	MCL NTRM-50	954214	E3576
80	20 M Coax Cable	RG214/U 50 (Ext Cal)	CBL01	E3659
81	2 M Coax Cable	RG213/U 50 (Ext Cal)	CBL02	E3658
82	3 M Coax Cable (BLUE)	Suhner Sucoflex 104A	25033 / 4A	E3694
83	1 M Coax Cable (BLUE)	Suhner Sucoflex 104A	25006 / 4A	E3693
84	1 M Coax Cable (BLUE)	Suhner Sucoflex 104A	25005 / 4A	E3692
85	1 M Coax Cable (BLUE)	Suhner Sucoflex 104A	25004 / 4A	E3691
86	1 M Coax Cable (BLUE)	Suhner Sucoflex 104A	25003 / 4A	E3690
87	Audio Analyser	HP8903B	2818A04275	E3710
88	Spectrum Analyser	HP8562E	3821A00799	E3715
89	Field Strength Meter	Holaday HI-422	95661	E3630
90	Power Supply	HP6012B	2524A00616	E3712
91	20 M Coax Cable	RG214/U 50 (Ext Cal)	3404	24/08/99
92	LISN	EMCO 3825/2	9204-1961	E3040
93	Function Generator	TRIO FG-270	459121	E3187