

REPORT NUMBER 2081

September 2004

RADIO PERFORMANCE MEASUREMENTS

On the TMAB32-H600 Mobile Transceiver

FCC ID: CASTMAH6E

SN: 19017325

In accordance with

FCC 47 CFR Parts 22 and 90

PREPARED BY:	Elizabeth Comery	_____
		Test Technician
CHECKED & APPROVED BY:	Hamish Newton	_____
		Senior Technician



TELTEST Laboratories

Tait Electronics Limited

PO Box 1645

558 Wairakei Road

Christchurch

New Zealand

Phone : (64) (3) 3583399

Fax: (64) (3) 3580432

REPORT ON :

Type Approval Testing of the TMAB32-H600 (Serial No 19017325)
in accordance with:

FCC CFR 47 Parts 22 & 90

FCC ID: CASTMAH6E

PREPARED FOR :

Tait Electronics Ltd
PO Box 1645
558 Wairakei Rd
Christchurch
New Zealand

DISTRIBUTION :

TELTest Laboratory	Mr S Crompton	Copy No 1
Tait Electronics Ltd	Mr. Des Fox	Copy No 2
Tait Electronics Ltd	Mr. Trevor Michel-Smith	Copy No 3

APPROVED :

Hamish Newton

Senior Technician

Date :

All tests reported herein have been performed in accordance with the
laboratory's scope of accreditation

This document must not be reproduced except in full, without the written
permission of the Compliance Laboratory Manager.

Copy No:

TABLE OF CONTENTS

DECLARATION OF CONFORMITY.....	4
TEST CONDITIONS	5
NECESSARY BANDWIDTH AND EMISSION DESIGNATORS	5
TEST RESULTS.....	9
TRANSMITTER OUTPUT POWER (CONDUCTED)	9
TRANSMITTER AUDIO FREQUENCY RESPONSE - PRE-EMPHASIS	10
TRANSMITTER MODULATION LIMITING	12
OCCUPIED BANDWIDTH	15
<i>ANALOGUE VOICE</i>	16
<i>FFSK</i>	20
<i>THSD</i>	24
<i>DIGITAL - 4 Level FSK</i>	28
SPURIOUS EMISSIONS (CONDUCTED).....	32
SPURIOUS EMISSIONS (RADIATED).....	35
TRANSMITTER FREQUENCY STABILITY (TEMPERATURE)	38
TRANSMITTER FREQUENCY STABILITY (VOLTAGE)	40
TRANSIENT FREQUENCY BEHAVIOR	41
TEST EQUIPMENT USED.....	46
APPENDIX A	47
TEST SETUP DETAILS.....	47

DECLARATION OF CONFORMITY

We, TELTEST LABORATORIES of 558 Wairakei Road,
Christchurch New Zealand, declare under our sole
responsibility that the product:

Equipment: Mobile Transceiver

Type: TMAH6E

Product code: TMAB32-H600

Serial Numbers: 19017325

Quantity: 1

To which this declaration relates is in conformity with the
following standards:

FCC CFR 47 Parts 22 & 90

Signature:_____

S. A. Crompton
Compliance Laboratory Manager.

Date:_____

Test Conditions

All testing was performed at the following conditions.

Ambient Temperature	15°C to 30°C
Relative Humidity	20% to 75%
Standard Test Voltage	13.8Vdc

Necessary Bandwidth and Emission Designators

SPECIFICATION: FCC 47 CFR 2.202

The Necessary Bandwidth is the minimum value of the occupied bandwidth sufficient to ensure the transmission of information at the rate and with the quality required for the system employed.

This is calculated using the following formula.

$B_n = 2M + 2DK$ Where: B_n = Necessary Bandwidth
 M = Maximum modulation frequency
 For Data transmission
 $M = B/2$
 Where: B = Modulation rate in Baud
 D = Peak deviation
 K = Constant
 For Analogue transmission this is 1
 For Data transmission this is typically 1.2

1. Analogue Voice 12.5kHz Bandwidth

Necessary bandwidth

Emission Designator

$M = 3\text{kHz}$
 $D = 2.5\text{kHz}$

11K0F3E

F3E represents an analogue FM voice transmission

$B_n = 6 + 5 \times 1$
 $= 11\text{kHz}$

2. Analogue Voice 25kHz Bandwidth

Necessary bandwidth

Emission Designator

$M = 3\text{kHz}$
 $D = 5\text{kHz}$

16K0F3E

F3E represents an analogue FM voice transmission

$B_n = 6 + 10 \times 1$
 $= 16\text{kHz}$

3. Fast Frequency Shift Keying (FFSK) 12.5kHz Bandwidth

Necessary bandwidth

Emission Designator

$M = 0.6$ (Baud rate = 1200)
 $D = 1.5\text{kHz}$ (60% of peak deviation)

4K80F2D

F2D represents a FM data transmission with the use of a modulating sub carrier

$B_n = 1.2 + 3 \times 1.2$
 $= 4.8\text{kHz}$

4. Fast Frequency Shift Keying (FFSK) 25kHz Bandwidth

Necessary bandwidth

Emission Designator

M = 0.6 (Baud rate = 1200)

D = 3kHz (60% of peak deviation)

8K40F2D

F2D represents a FM data transmission with the use of a modulating sub carrier

Bn = 1.2 + 6 x 1.2
=8.4kHz

5. Tait High Speed Data (THSD)

THSD uses a 4 level gaussian frequency shift keying (CP-4GFSK) modulation scheme. It can be used when transferring data between two radios. Data is transmitted at a rate of 12000bps for narrow band channels, and 19200bps for wide-band channels.

Due to the difficulties in determining the value of k, the necessary bandwidth has been measured using the 99% energy rule.

12.5kHz Bandwidth

99% bandwidth

Emission Designator

7.8 kHz

7K80F1D

F1D represents a FM data transmission without the use of a modulating sub carrier

25kHz Bandwidth

99% bandwidth

Emission Designator

12.3 kHz

12K3F1D

F1D represents a FM data transmission without the use of a modulating sub carrier

6. Digital Voice /Data (4 – Level FSK) – CFR 47 90.212 (b)

Digital Voice/data transmissions use a 4 level frequency shift keying modulation scheme. The necessary bandwidth as been measured using the 99% energy rule, and in accordance with TIA/EIA 102 CAAB 2.2.5.2

a) Operating in a 12.5 kHz Bandwidth

Digital voice

99% bandwidth

Emission Designator

8.1 kHz

8K10F1E

F1E represents a digital FM voice transmission

8K10F7E

F7E represents two or more channels containing quantized or digital voice information

Digital Data

99% bandwidth

Emission Designator

8.1 kHz

8K10F1D

F1D represents a digital FM data transmission

8K10F7D

F7D represents two or more channels containing quantized or digital information

b) Operating in a 25 kHz Bandwidth

Digital voice

99% bandwidth

Emission Designator

10.0 kHz

10K0F1E

F1E represents a digital FM voice transmission

10K0F7E

F7E represents two or more channels containing quantized or digital voice information

Digital Data

99% bandwidth

Emission Designator

10.0 kHz

10K0F1D

F1D represents a digital FM data transmission

10K0F7D

F7D represents two or more channels containing quantized or digital information

7. Digital Voice Encryption (4 – Level FSK) – CFR 47 90.212 (b)

Digital Voice Encryption transmissions use a 4 level frequency shift keying modulation scheme.

The necessary bandwidth as been measured using the 99% energy rule, and in accordance with TIA/EIA 102 CAAB 2.2.5.2

b) Operating in a 12.5 kHz Bandwidth

Digital voice

99% bandwidth

Emission Designator

8.1 kHz

8K10F1E

F1E represents a digital FM voice transmission

c) Operating in a 25 kHz Bandwidth

Digital voice

99% bandwidth

Emission Designator

10.0 kHz

10K0F1E

F1E represents a digital FM voice transmission

Test Results

TRANSMITTER OUTPUT POWER (CONDUCTED)

SPECIFICATION: FCC 47 CFR 2.1046

GUIDE: TIA/EIA-603B 2.2.1

MEASUREMENT PROCEDURE:

1. Refer Appendix A for Equipment set up.
2. The coaxial attenuator has an impedance of 50 Ohms.
3. The unmodulated output power was measured with an RF Power meter.

MEASUREMENT RESULTS:

Manufacturer's Rated Output Power: Switchable: 1 W and 25 W

460.1 MHz	1 W nominal	25 W nominal
POWER (W)	1.0	25.4
Variation from Nominal (%)	0	1.6
Measurement Uncertainty (dB)	+0.63 -0.68	

LIMIT CLAUSE: FCC 47 CFR 90.205

Radio Type: Mobile Transceiver

Frequency Band: 421 MHz ~ 512 MHz

- (o) The output power shall not exceed by more than 20% the manufacturer's rated output power for the particular transmitter.

TRANSMITTER AUDIO FREQUENCY RESPONSE - PRE-EMPHASIS

SPECIFICATION: FCC 47 CFR 2.1047 (a)

GUIDE: TIA/EIA-603B 2.2.6

MEASUREMENT PROCEDURE:

1. Refer Appendix A for Equipment set up.
2. An audio input tone of 1000Hz was applied with the level set to obtain 20% of maximum deviation. This was used as the 0dB reference point.
3. The AF was varied while the audio level was held constant.
4. The response in dB relative to 1000Hz was measured.

MEASUREMENT RESULTS:

See the plots on the following pages for 12.5 kHz & 25.0 kHz channel spacings.


.

LIMIT CLAUSE: TIA/EIA-603B 3.2.6


TRANSMITTER AUDIO FREQUENCY RESPONSE - PRE-EMPHASIS

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 460.1MHz 12.5 kHz Channel Spacing

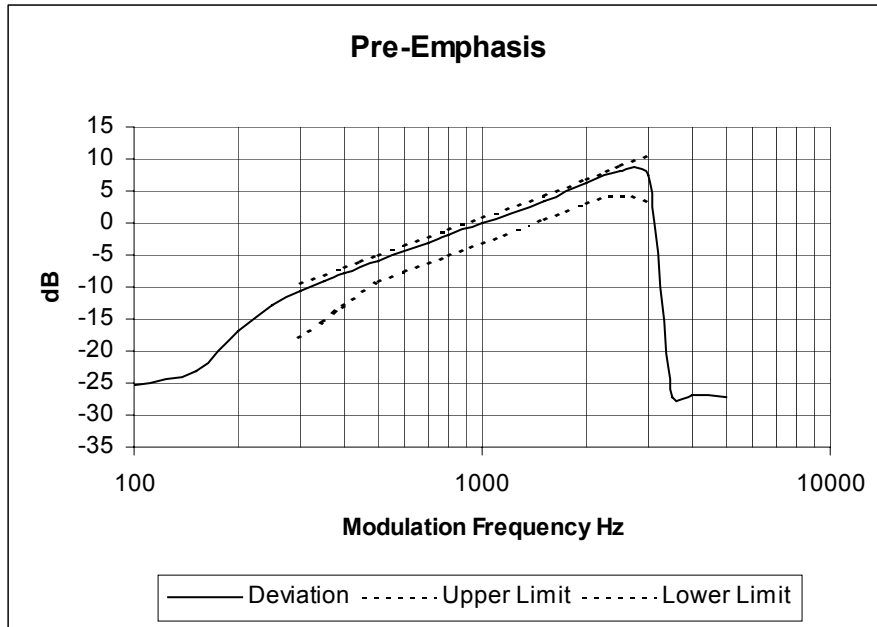

Tx FREQUENCY: 460.1MHz 25 kHz Channel Spacing

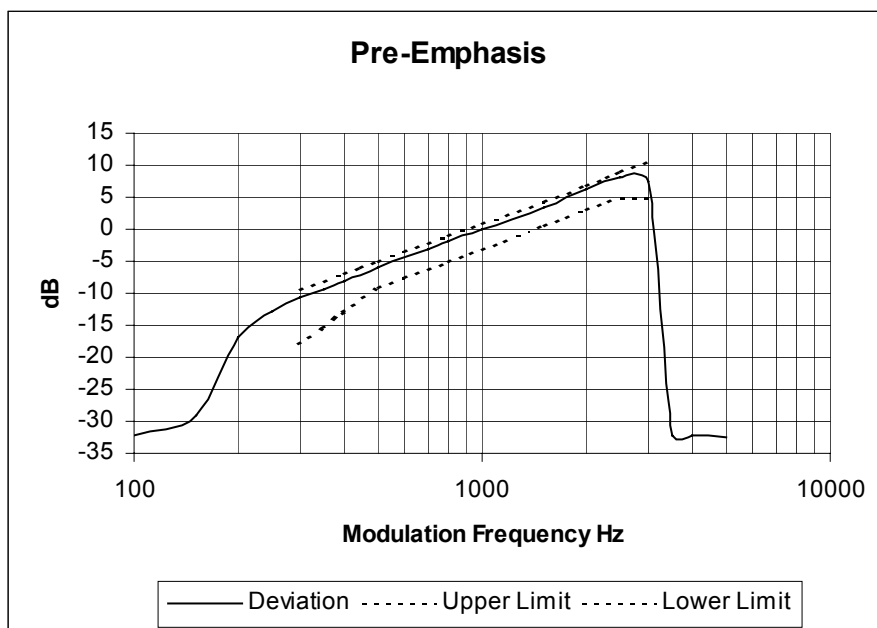

TRANSMITTER MODULATION LIMITING

SPECIFICATION: FCC 47 CFR 2.1047 (b)

MEASUREMENT PROCEDURE:

1. Refer Appendix A for Equipment set up.
2. The modulation response was measured at three audio frequencies while varying the input level.
3. Measurements were made for both Positive and Negative Deviation.

MEASUREMENT RESULTS:



See the plots on the following pages for 12.5 kHz & 25.0 kHz channel spacings.

LIMIT CLAUSE: TIA/EIA-603B 1.3.4.4

TRANSMITTER MODULATION LIMITING

SPECIFICATION: FCC CFR 2.1047 (b)



Tx FREQUENCY: 460.1 MHz 12.5 kHz Channel Spacing

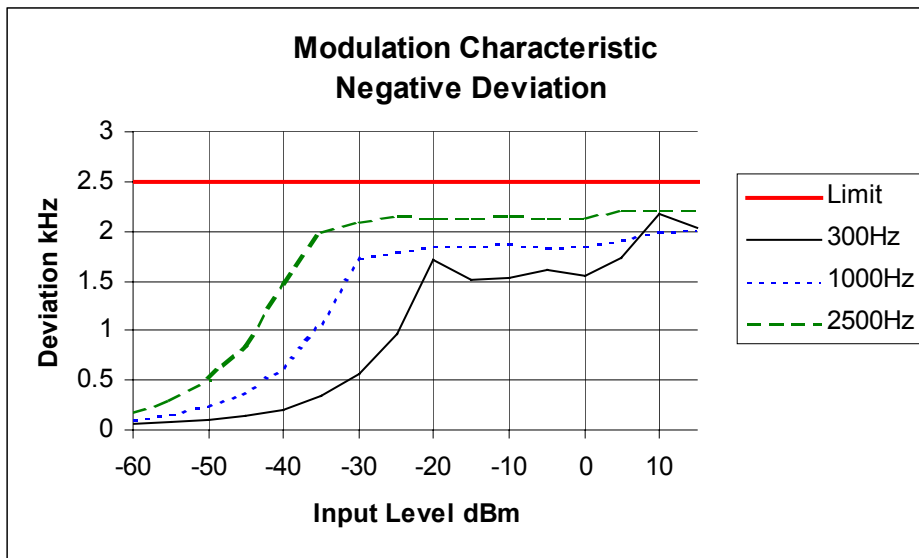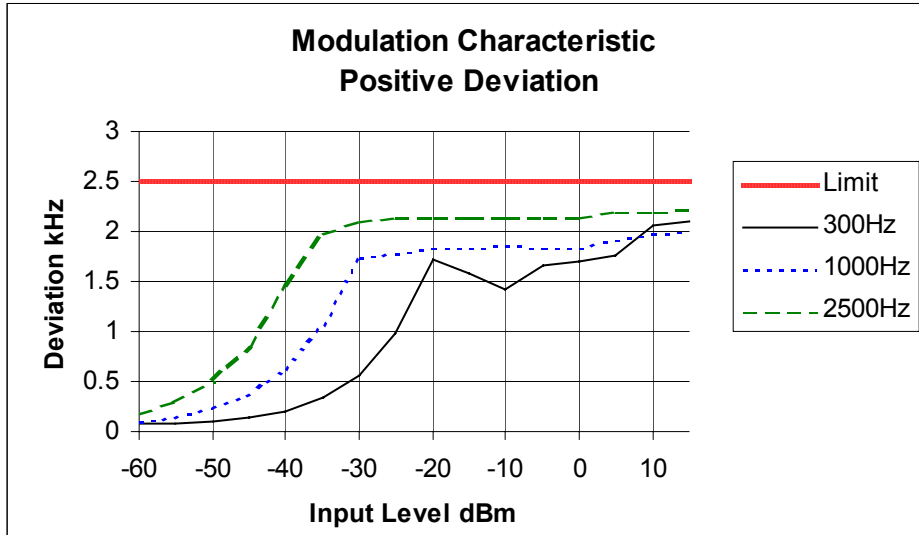

TRANSMITTER MODULATION LIMITING

SPECIFICATION: FCC CFR 2.1047 (b)

Tx FREQUENCY: 460.1 MHz 25.0 kHz Channel Spacing

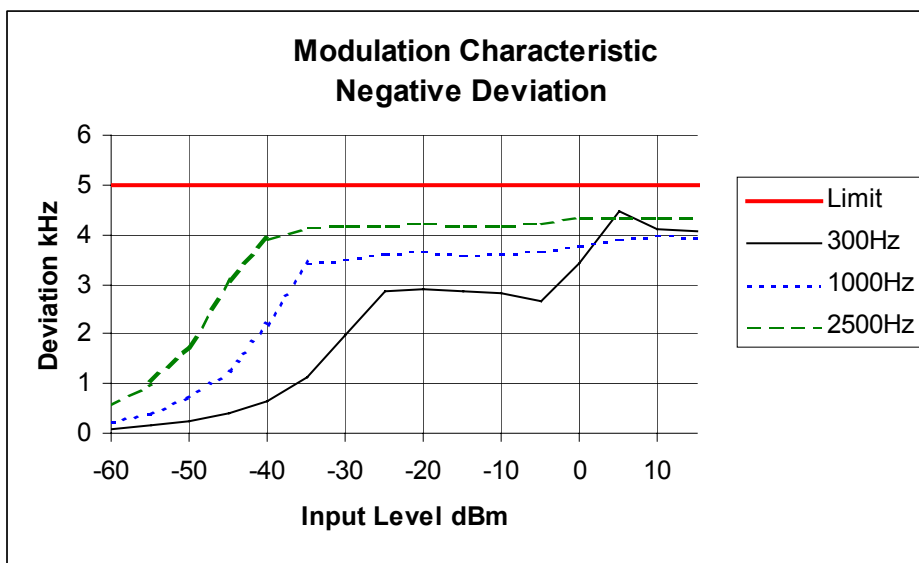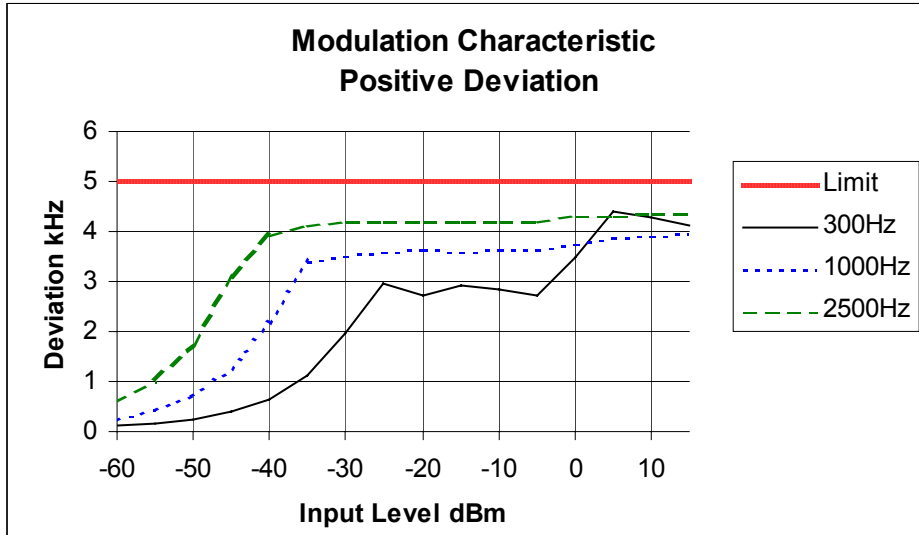

OCCUPIED BANDWIDTH

SPECIFICATION: FCC 47 CFR 2.1049 (c)

GUIDE: TIA/EIA-603B 2.2.11
TIA/EIA-102CAAA-A 2.2.5

MEASUREMENT PROCEDURE:

1. Refer Appendix A for Equipment Set up.
2. For analogue measurements: The EUT was modulated by a 2500Hz tone at an input level 16dB above a level that produced 50% deviation. The input level was established at the frequency of maximum response of the audio modulating circuit .
For Digital measurements: The EUT was modulated with an internally generated pseudo random bit sequence at the appropriate Baud rates.
3. The Occupied Bandwidth was measured on the Spectrum Analyser, with bandwidth settings as follows.

Emission Mask D – Resolution Bandwidth = 100Hz, Video Bandwidth = 1 kHz

Emission Mask B, and C – Resolution bandwidth = 300Hz, Video Bandwidth = 3 kHz

MEASUREMENT RESULTS:

See the plots on the following pages for 12.5 kHz & 25.0 kHz channel spacings.

LIMIT CLAUSE: FCC 47 CFR 90.210

EMISSION MASKS

Emission Mask D	12.5 kHz Channel Spacing	Analog; Digital; FFSK; THSD
Emission Mask B	25.0 kHz Channel Spacing	Analog;
Emission Mask C	25.0 kHz Channel Spacing	Digital; FFSK; THSD

DATA SPEED


Digital 9600 bps	12.5 kHz Channel Spacing
Digital 9600 bps	25.0 kHz Channel Spacing
FFSK 1200 bps	12.5 kHz Channel Spacing
FFSK 1200 bps	25.0 kHz Channel Spacing
THSD 12000 bps	12.5 kHz Channel Spacing
THSD 19200 bps	25.0 kHz Channel Spacing

OCCUPIED BANDWIDTH


ANALOGUE VOICE

SPECIFICATION: FCC CFR 2.1049 (c)

Tx FREQUENCY: 460.1MHz 25W 12.5 kHz Channel Spacing

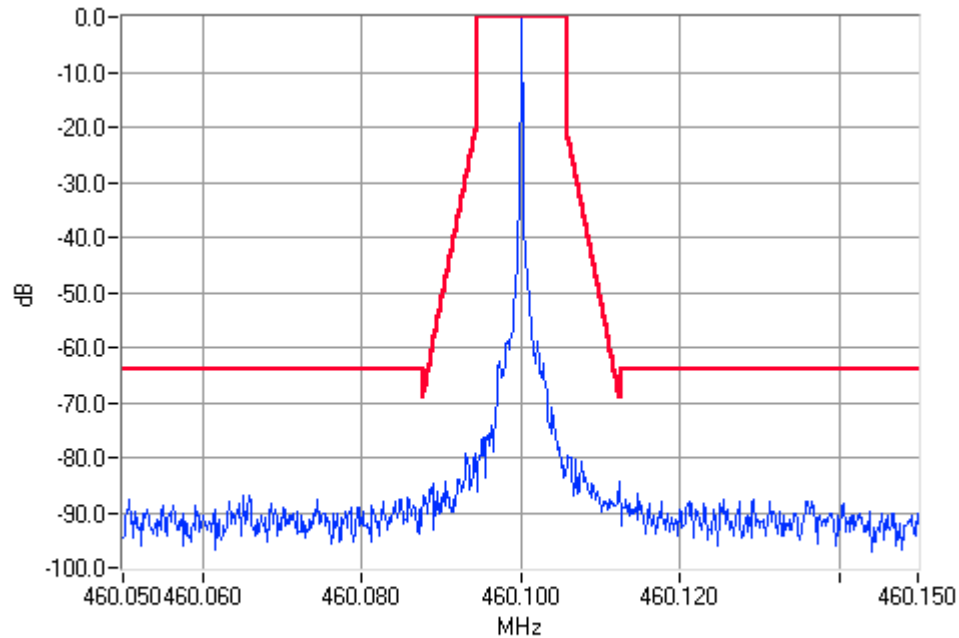

Unmodulated 460.1000MHz Mask D 25W Pass
RBW=100Hz VBW=1000Hz

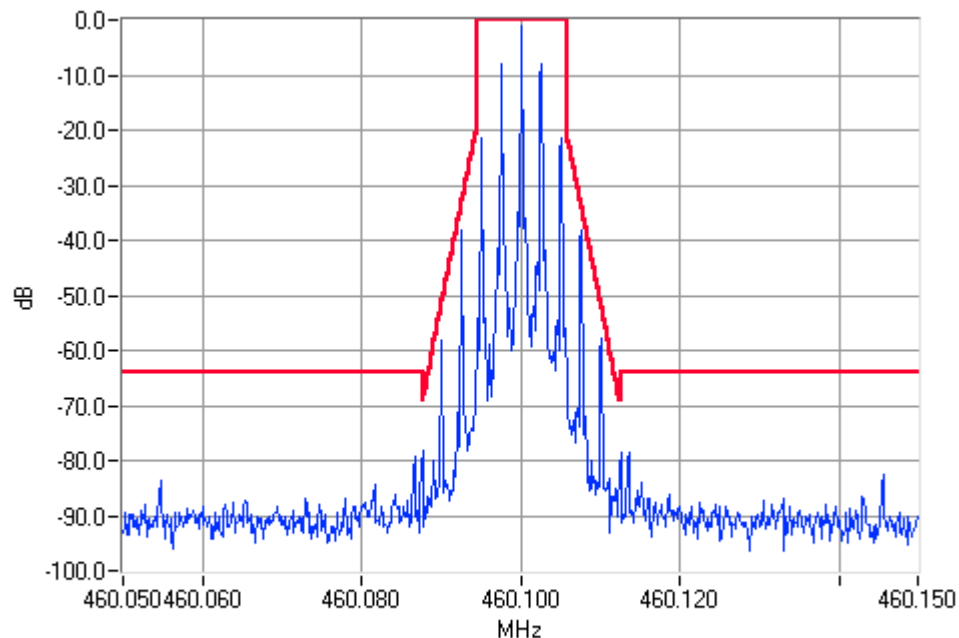


Analogue Modulation 460.1000MHz Mask D 25W Pass
RBW=100Hz VBW=1000Hz

OCCUPIED BANDWIDTH


ANALOGUE VOICE

SPECIFICATION: FCC CFR 2.1049 (c)

Tx FREQUENCY: 460.1MHz 1W 12.5 kHz Channel Spacing

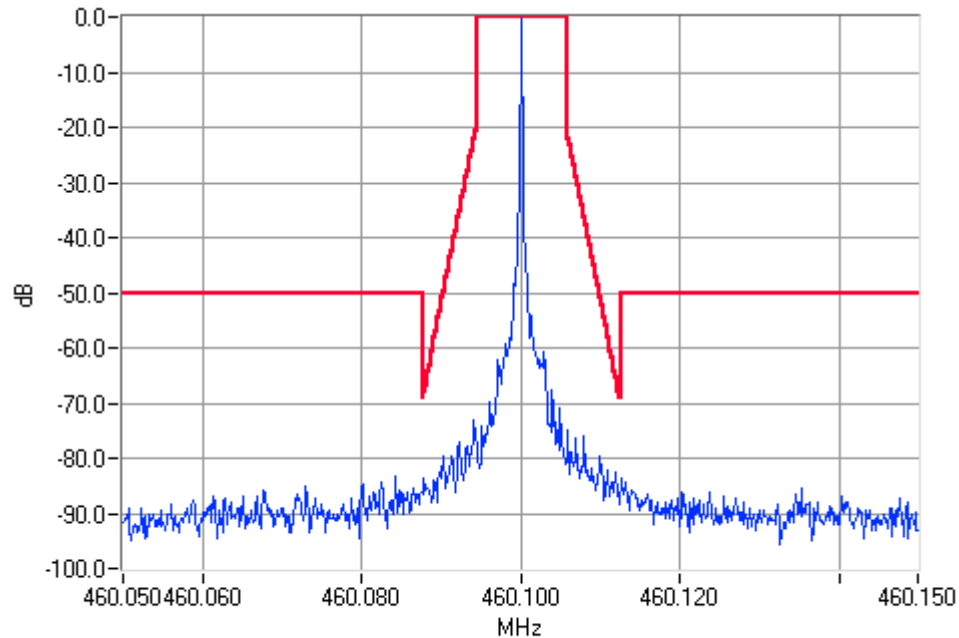

Unmodulated 460.1000MHz Mask D 1W Pass
RBW=100Hz VBW=1000Hz

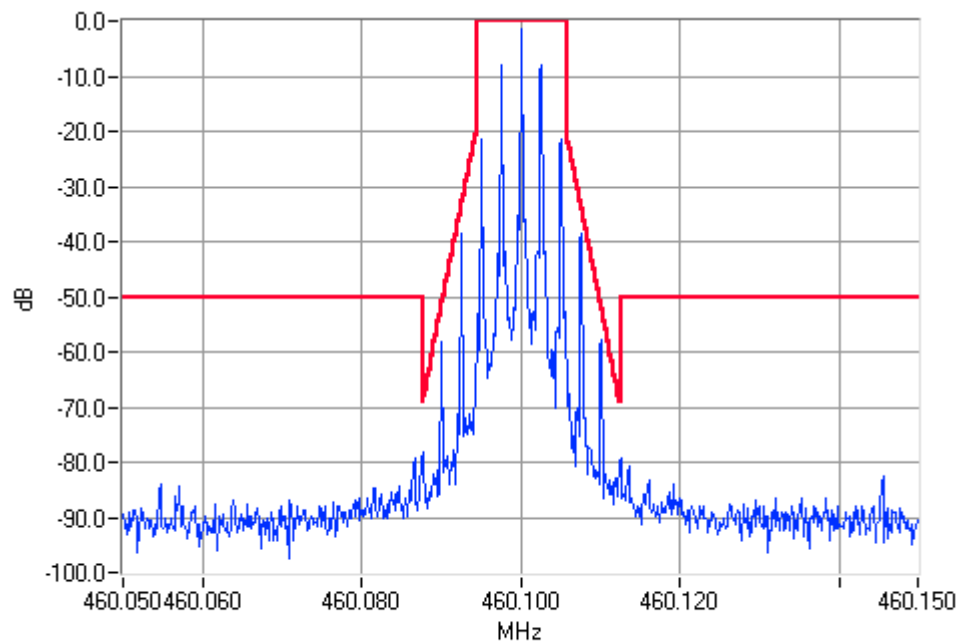


Analogue Modulation 460.1000MHz Mask D 1W Pass
RBW=100Hz VBW=1000Hz

OCCUPIED BANDWIDTH


ANALOGUE VOICE

SPECIFICATION: FCC CFR 2.1049 (c)

Tx FREQUENCY: 460.1MHz 25W 25 kHz Channel Spacing

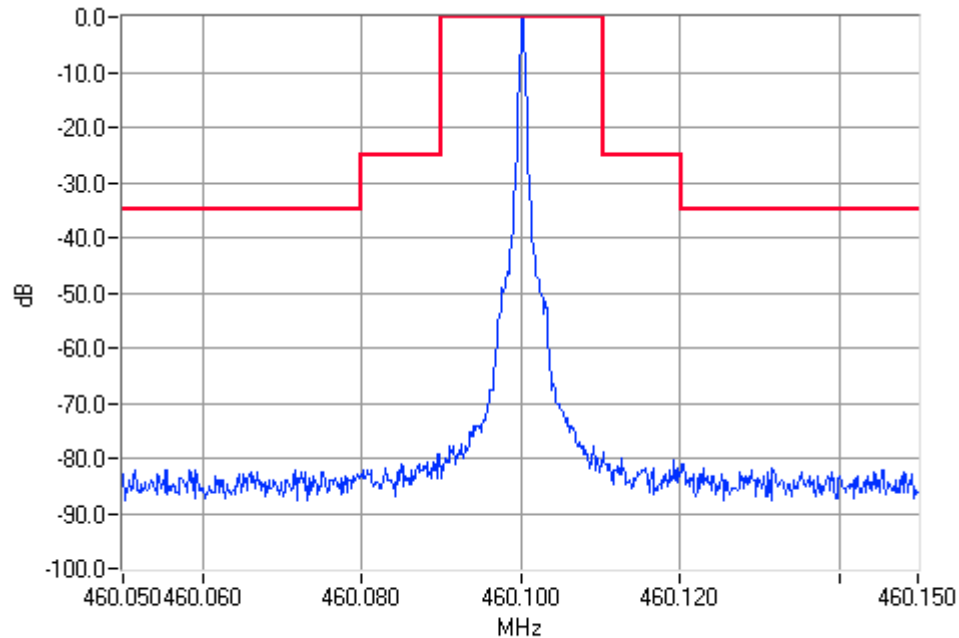

Unmodulated 460.1000MHz Mask B 25W Pass
RBW=300Hz VBW=3000Hz

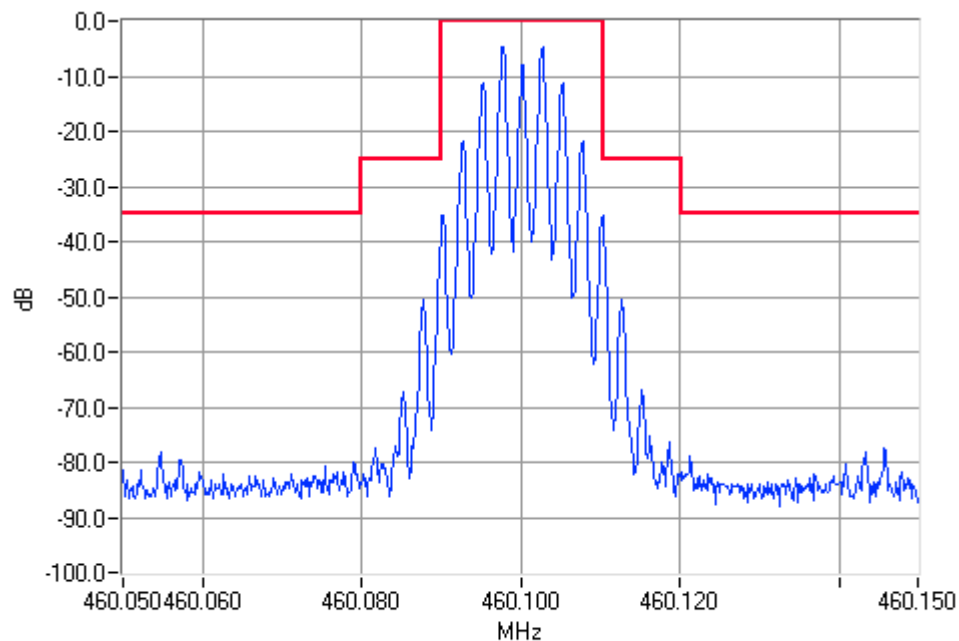


Analogue Modulation 460.1000MHz Mask B 25W Pass
RBW=300Hz VBW=3000Hz

OCCUPIED BANDWIDTH


ANALOGUE VOICE

SPECIFICATION: FCC CFR 2.1049 (c)

Tx FREQUENCY: 460.1MHz 1W 25 kHz Channel Spacing

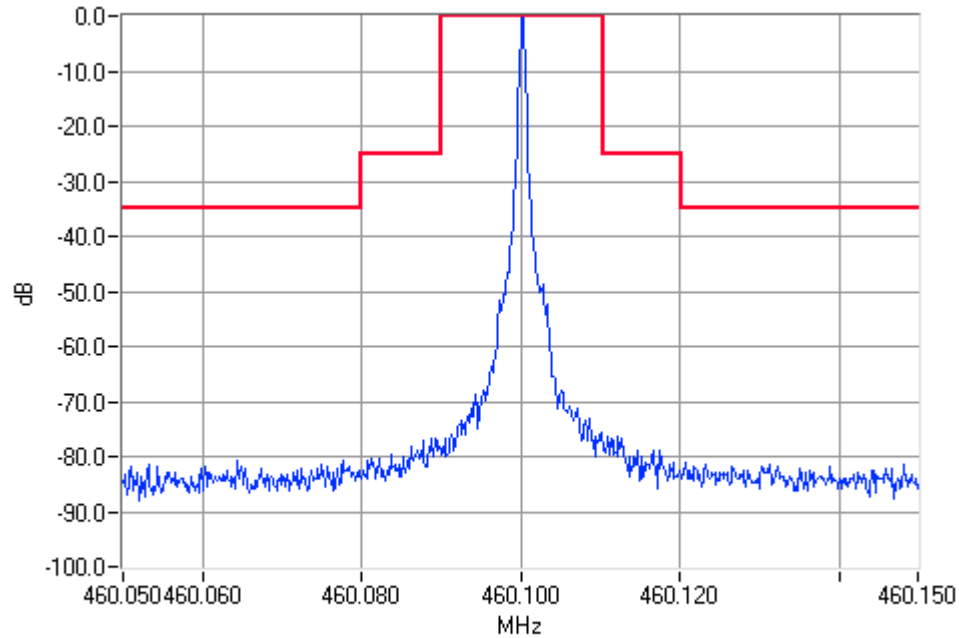

Unmodulated 460.1000MHz Mask B 1W Pass
RBW=300Hz VBW=3000Hz

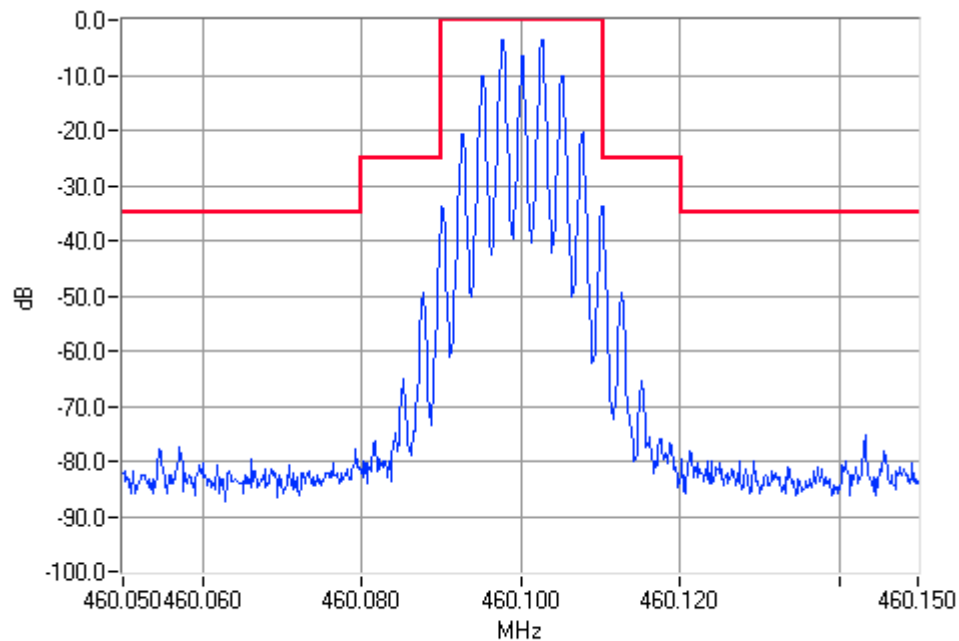


Analogue Modulation 460.1000MHz Mask B 1W Pass
RBW=300Hz VBW=3000Hz

OCCUPIED BANDWIDTH


FFSK

SPECIFICATION: FCC CFR 2.1049 (c)

Tx FREQUENCY: 460.1MHz 25W 12.5 kHz Channel Spacing

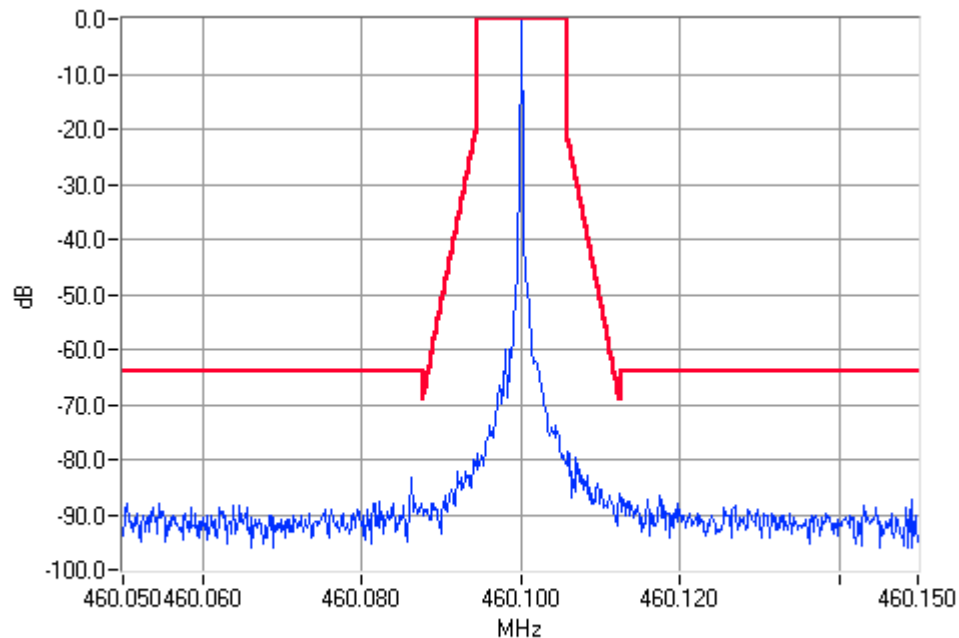

Unmodulated 460.1000MHz Mask D 25W Pass
RBW=100Hz VBW=1000Hz

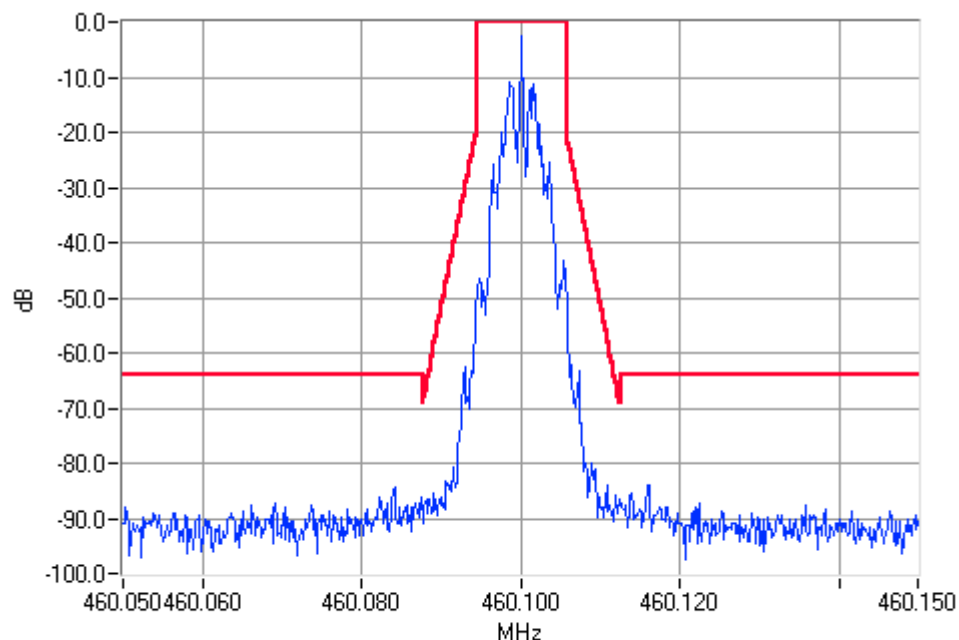


Digital Modulation 460.1000MHz Mask D 25W Pass
RBW=100Hz VBW=1000Hz

OCCUPIED BANDWIDTH


FFSK

SPECIFICATION: FCC CFR 2.1049 (c)

Tx FREQUENCY: 460.1MHz 1W 12.5 kHz Channel Spacing

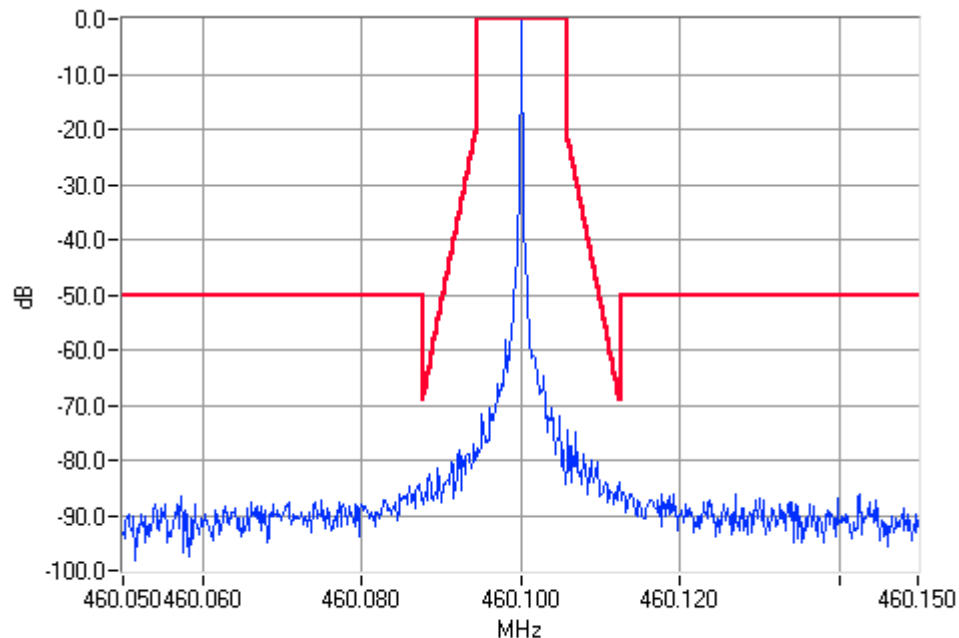

Unmodulated 460.1000MHz Mask D 1W Pass
RBW=100Hz VBW=1000Hz

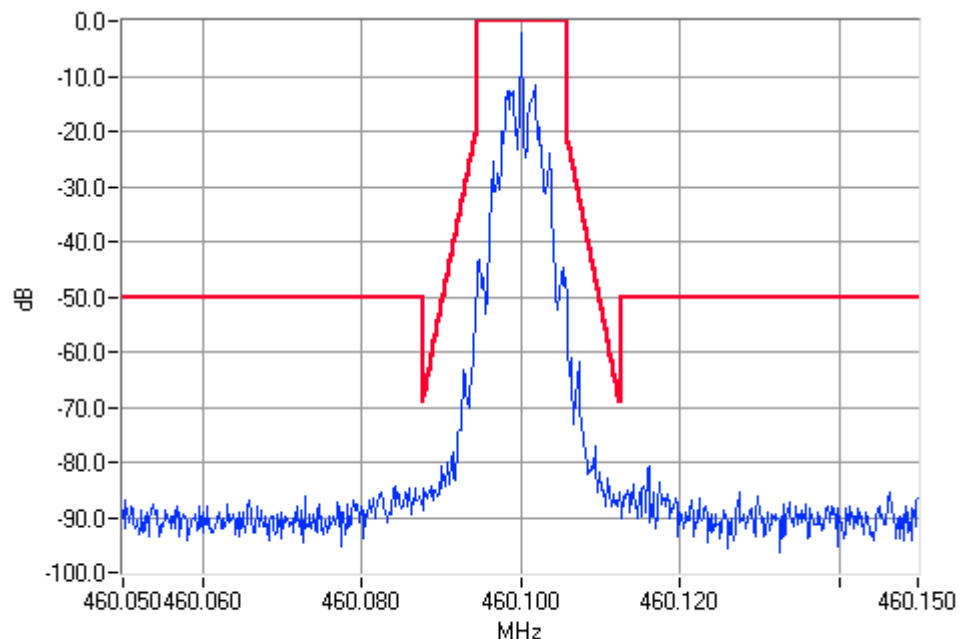


Digital Modulation 460.1000MHz Mask D 1W Pass
RBW=100Hz VBW=1000Hz

OCCUPIED BANDWIDTH


FFSK

SPECIFICATION: FCC CFR 2.1049 (c)

Tx FREQUENCY: 460.1MHz 25W 25 kHz Channel Spacing

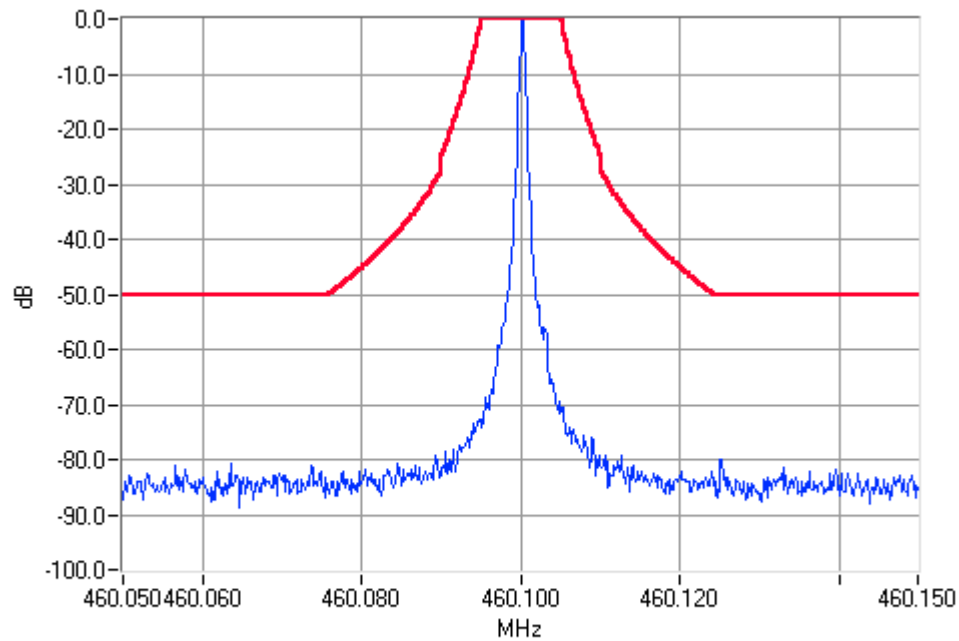

Unmodulated 460.1000MHz Mask C 25W Pass
RBW=300Hz VBW=3000Hz

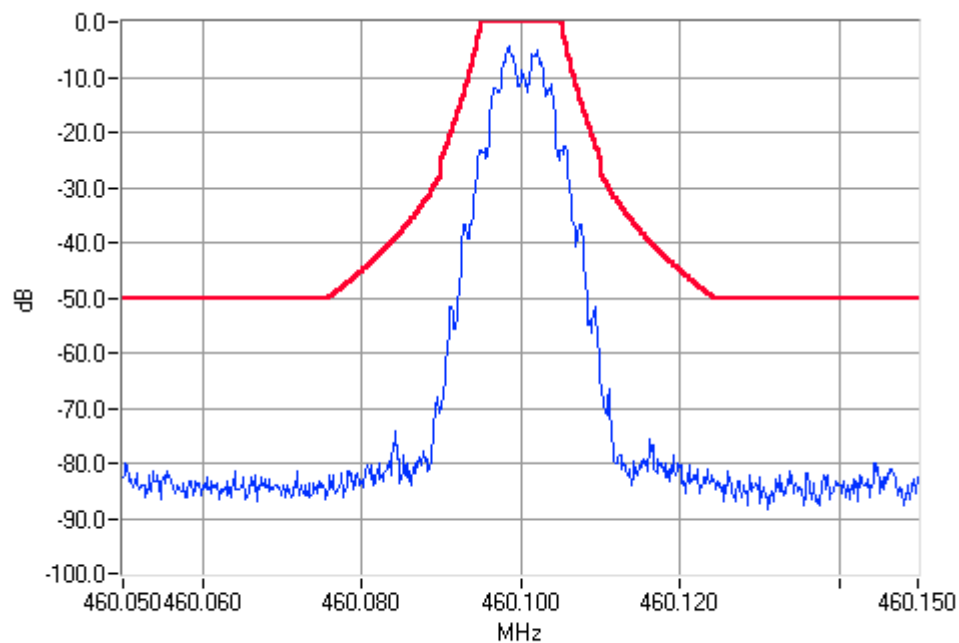


Digital Modulation 460.1000MHz Mask C 25W Pass
RBW=300Hz VBW=3000Hz

OCCUPIED BANDWIDTH


FFSK

SPECIFICATION: FCC CFR 2.1049 (c)

Tx FREQUENCY: 460.1MHz 1W 25 kHz Channel Spacing

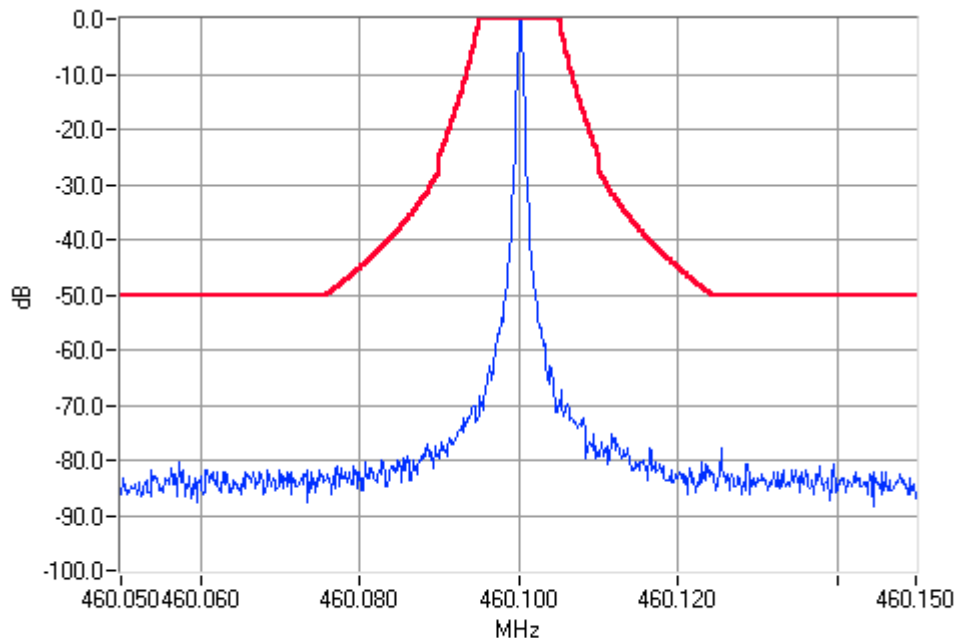

Unmodulated 460.1000MHz Mask C 1W Pass
RBW=300Hz VBW=3000Hz

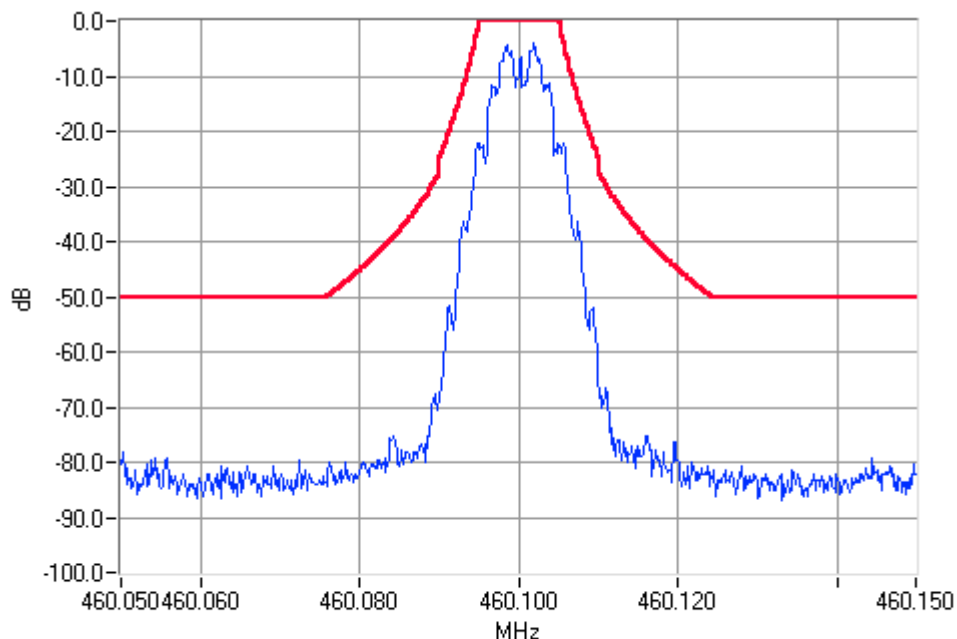


Digital Modulation 460.1000MHz Mask C 1W Pass
RBW=300Hz VBW=3000Hz

OCCUPIED BANDWIDTH


THSD

SPECIFICATION: FCC CFR 2.1049 (c)

Tx FREQUENCY: 460.1MHz 25W 12.5 kHz Channel Spacing

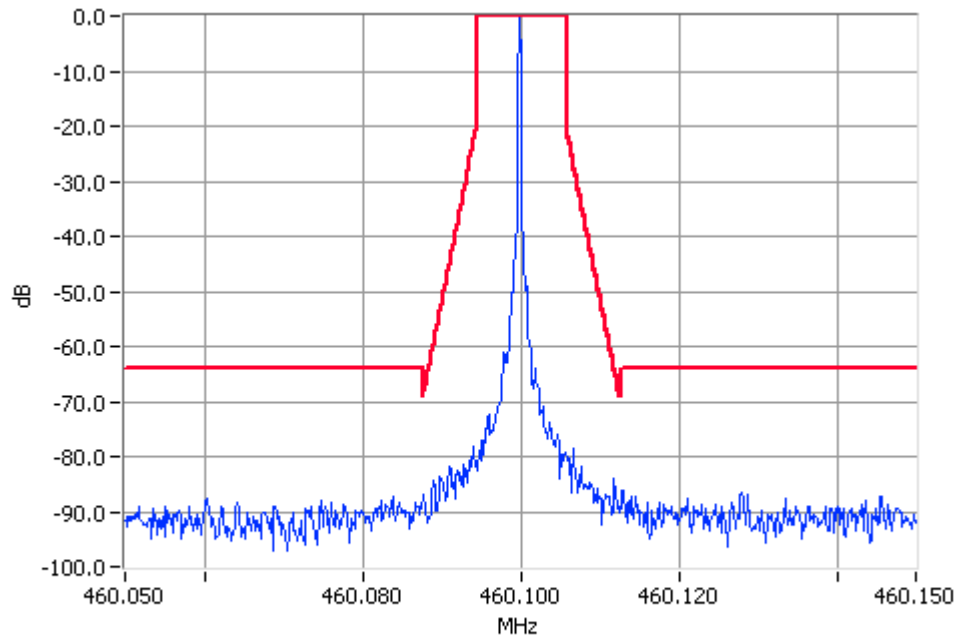

Unmodulated 460.1000MHz Mask D 25W Pass
RBW=100Hz VBW=1000Hz

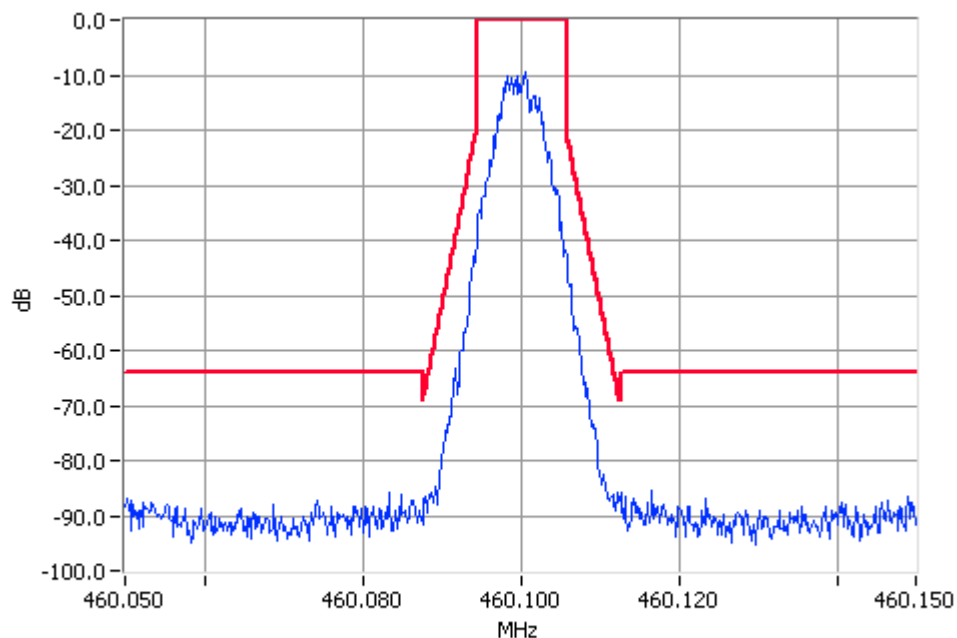


Digital Modulation 460.1000MHz Mask D 25W Pass
RBW=100Hz VBW=1000Hz

OCCUPIED BANDWIDTH


THSD

SPECIFICATION: FCC CFR 2.1049 (c)

Tx FREQUENCY: 460.1MHz 1W 12.5 kHz Channel Spacing

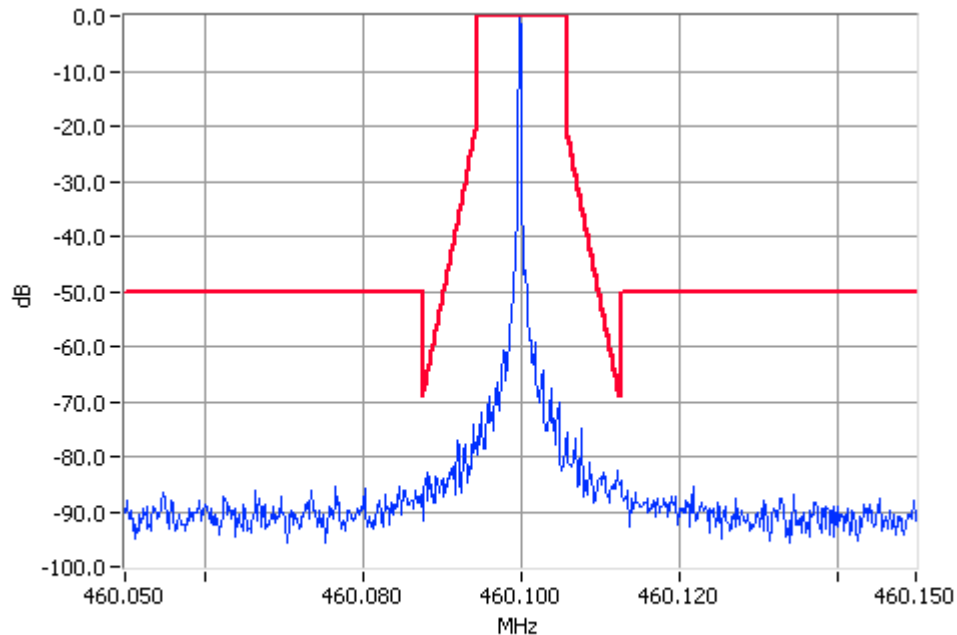

Unmodulated 460.1000MHz Mask D 1W Pass
RBW=100Hz VBW=1000Hz

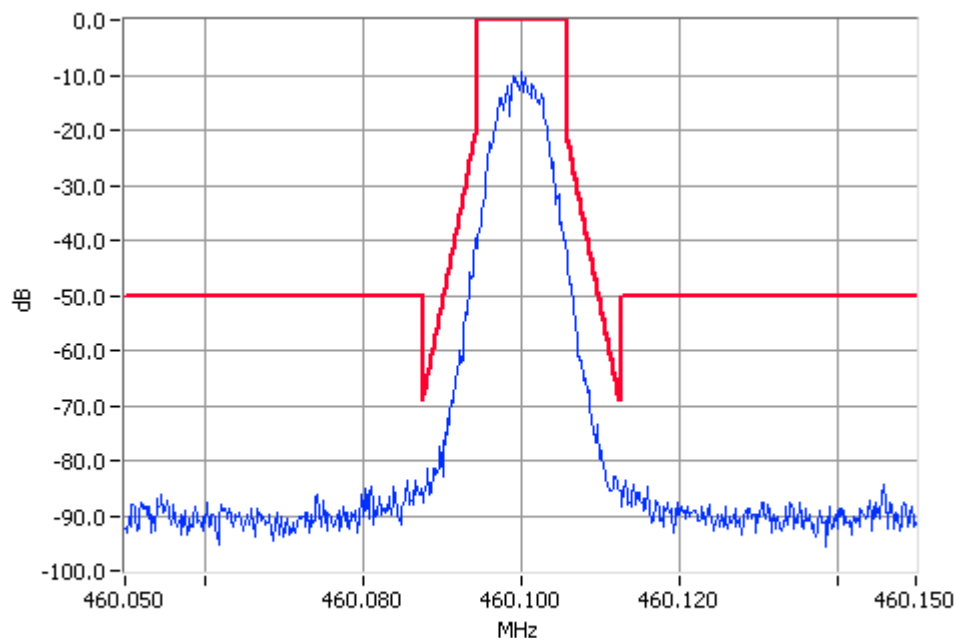


Digital Modulation 460.1000MHz Mask D 1W Pass
RBW=100Hz VBW=1000Hz

OCCUPIED BANDWIDTH


THSD

SPECIFICATION: FCC CFR 2.1049 (c)

Tx FREQUENCY: 460.1MHz 25W 25 kHz Channel Spacing

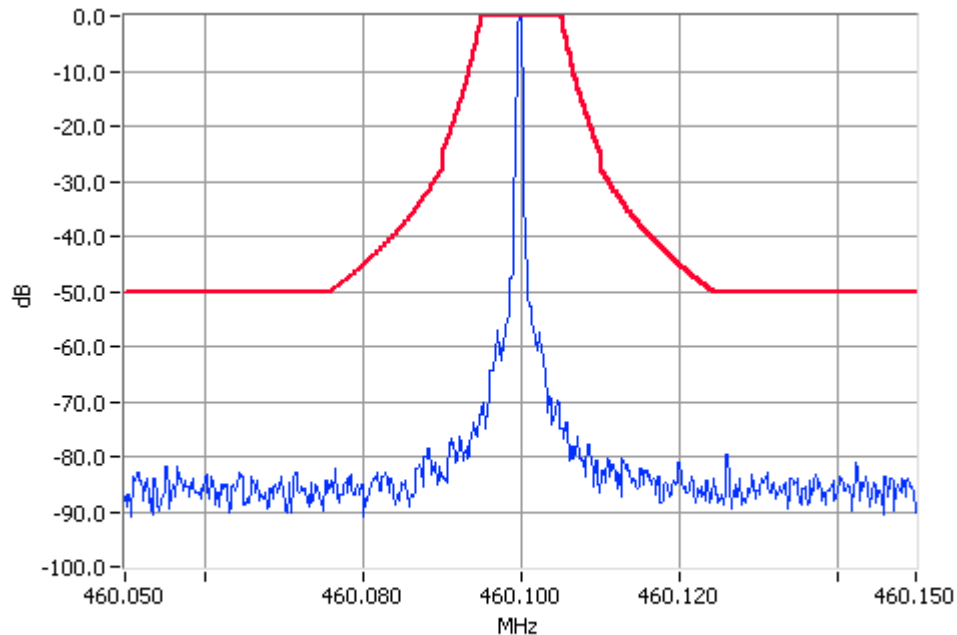

Unmodulated 460.1000MHz Mask C 25W Pass
RBW=300Hz VBW=3000Hz

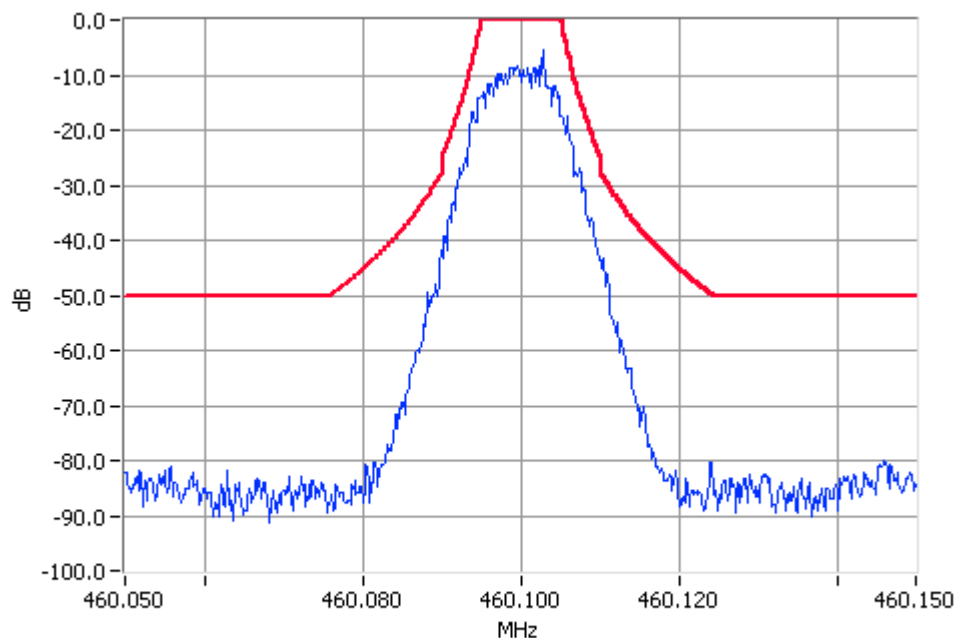


Digital Modulation 460.1000MHz Mask C 25W Pass
RBW=300Hz VBW=3000Hz

OCCUPIED BANDWIDTH


THSD

SPECIFICATION: FCC CFR 2.1049 (c)

Tx FREQUENCY: 460.1MHz 1W 25 kHz Channel Spacing

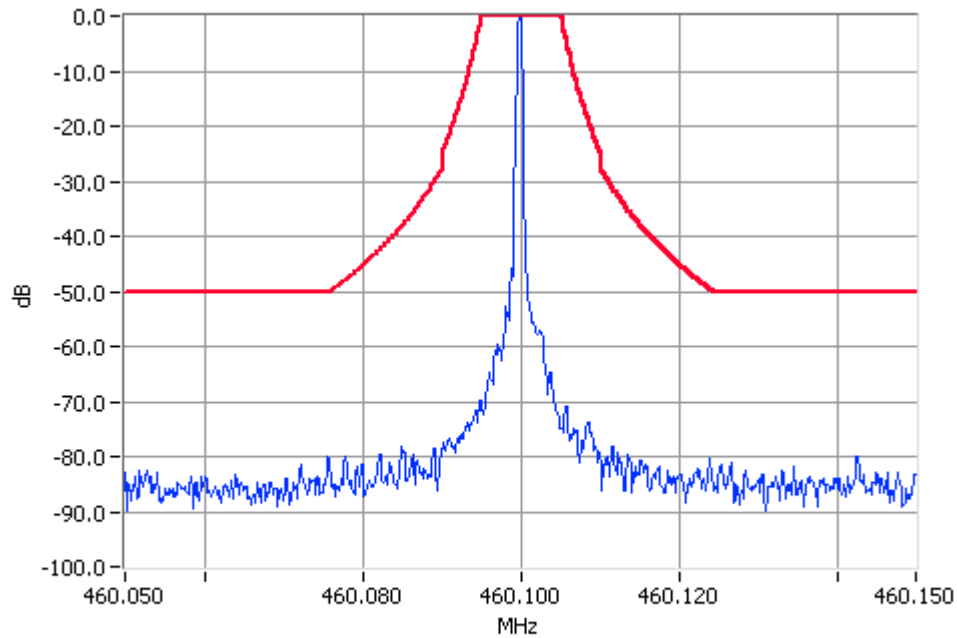

Unmodulated 460.1000MHz Mask C 1W Pass
RBW=300Hz VBW=3000Hz

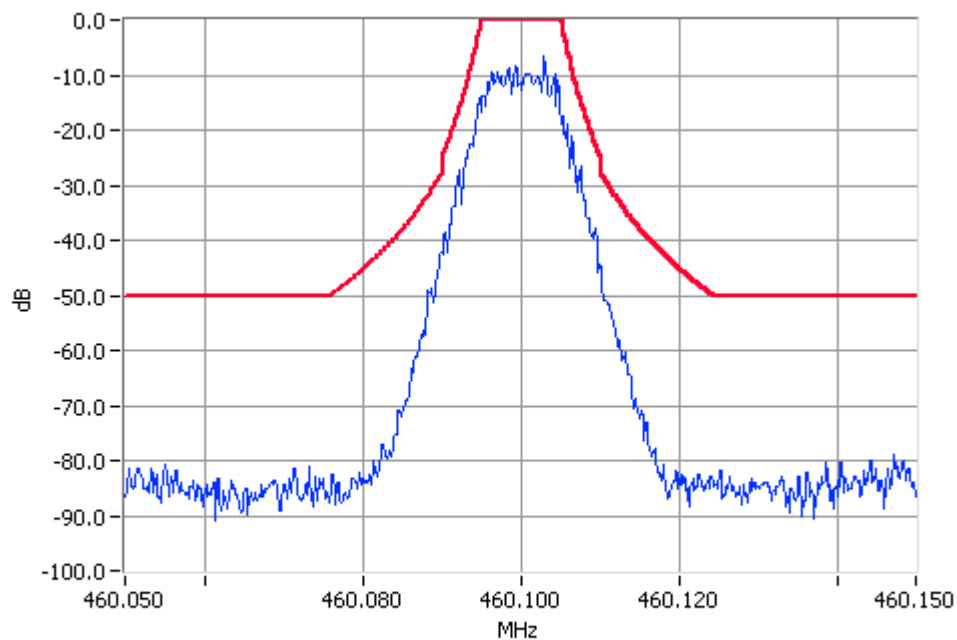


Digital Modulation 460.1000MHz Mask C 1W Pass
RBW=300Hz VBW=3000Hz

OCCUPIED BANDWIDTH


DIGITAL - 4 Level FSK

SPECIFICATION: FCC CFR 2.1049 (c)

Tx FREQUENCY: 460.1MHz 25W 12.5 kHz Channel Spacing

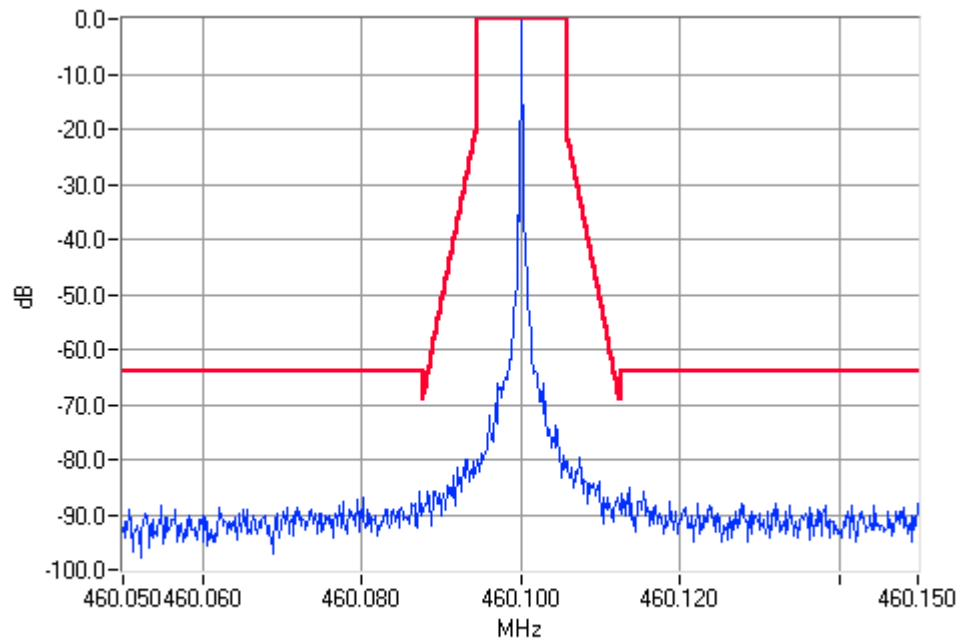

Unmodulated 460.1000MHz Mask D 25W Pass
RBW=100Hz VBW=1000Hz

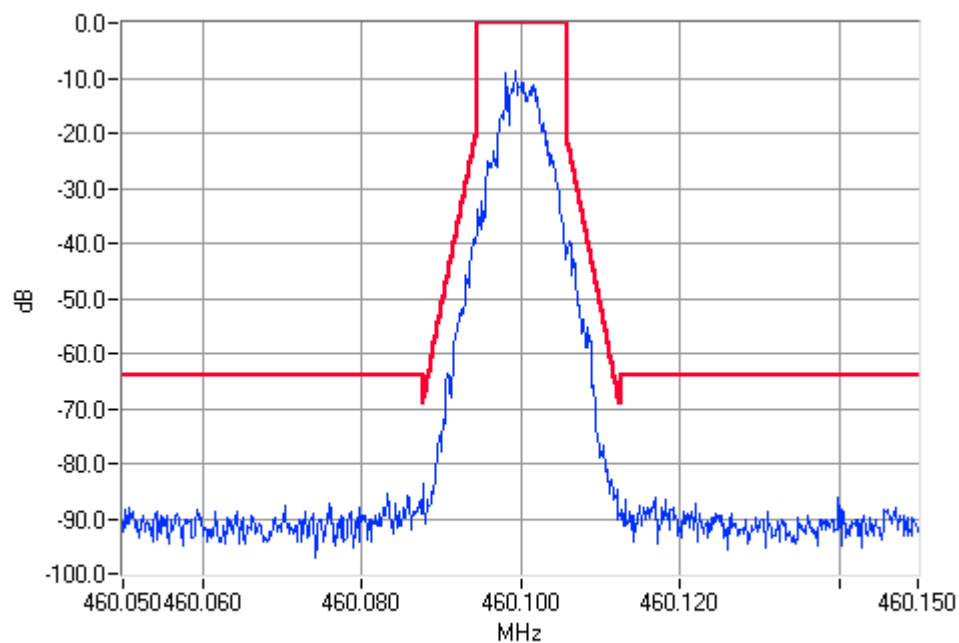


Digital Modulation 460.1000MHz Mask D 25W Pass
RBW=100Hz VBW=1000Hz

OCCUPIED BANDWIDTH


DIGITAL - 4 Level FSK

SPECIFICATION: FCC CFR 2.1049 (c)

Tx FREQUENCY: 460.1MHz 1W 12.5 kHz Channel Spacing

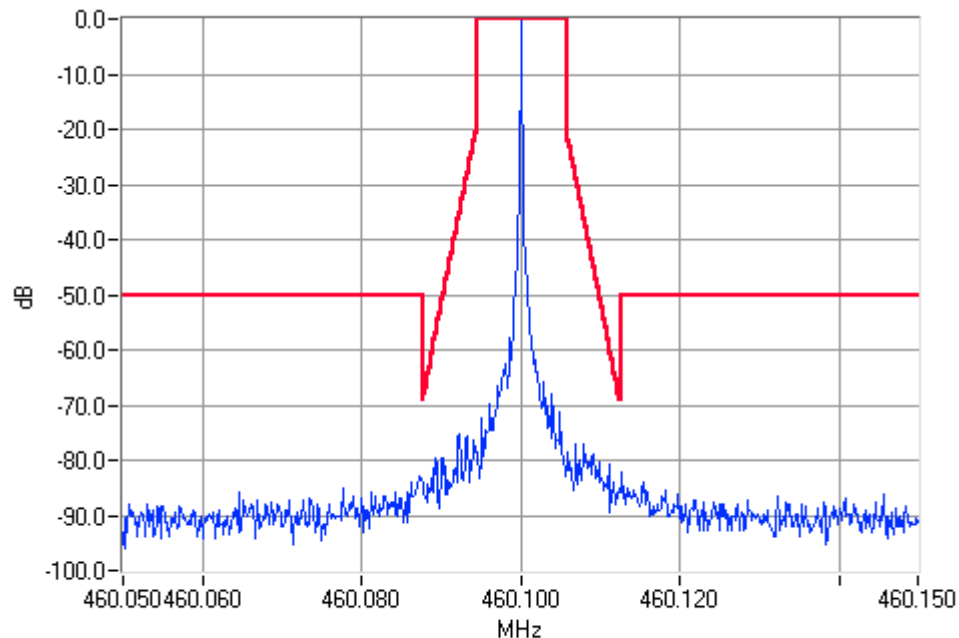

Unmodulated 460.1000MHz Mask D 1W Pass
RBW=100Hz VBW=1000Hz

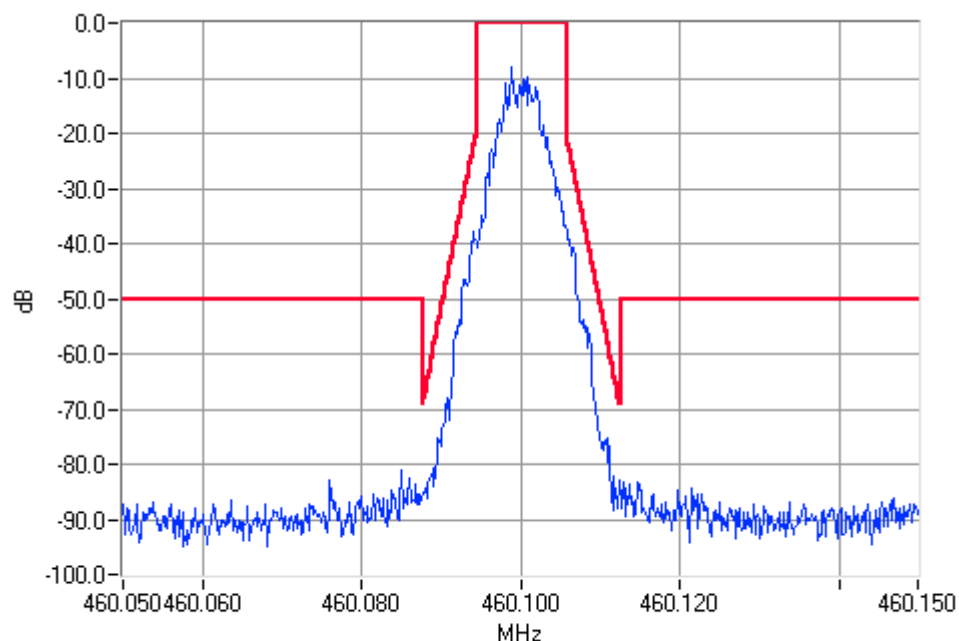


Digital Modulation 460.1000MHz Mask D 1W Pass
RBW=100Hz VBW=1000Hz

OCCUPIED BANDWIDTH


DIGITAL - 4 Level FSK

SPECIFICATION: FCC CFR 2.1049 (c)

Tx FREQUENCY: 460.1MHz 25W 25 kHz Channel Spacing

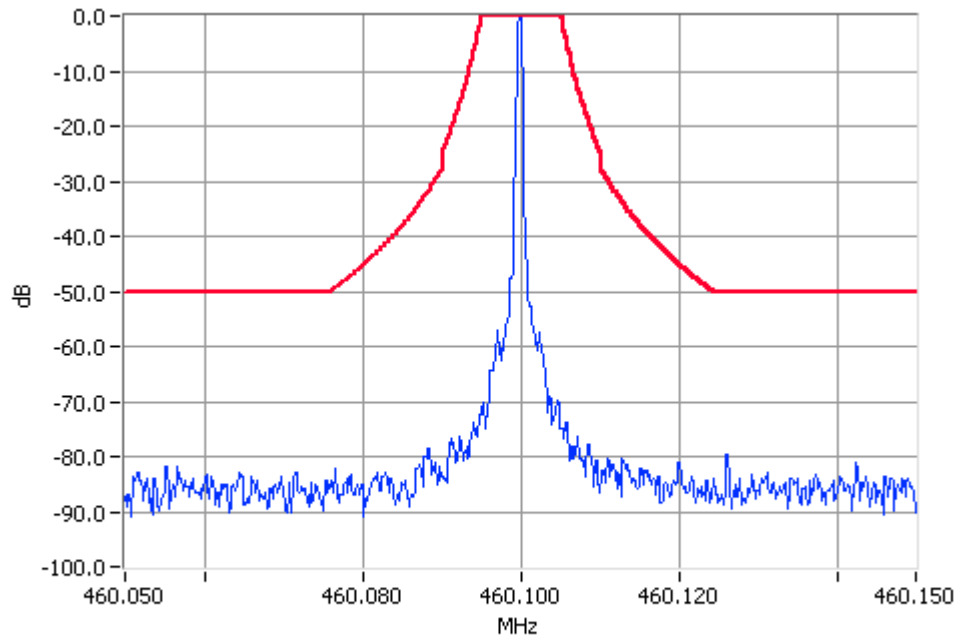

Unmodulated 460.1000MHz Mask C 25W Pass
RBW=300Hz VBW=3000Hz

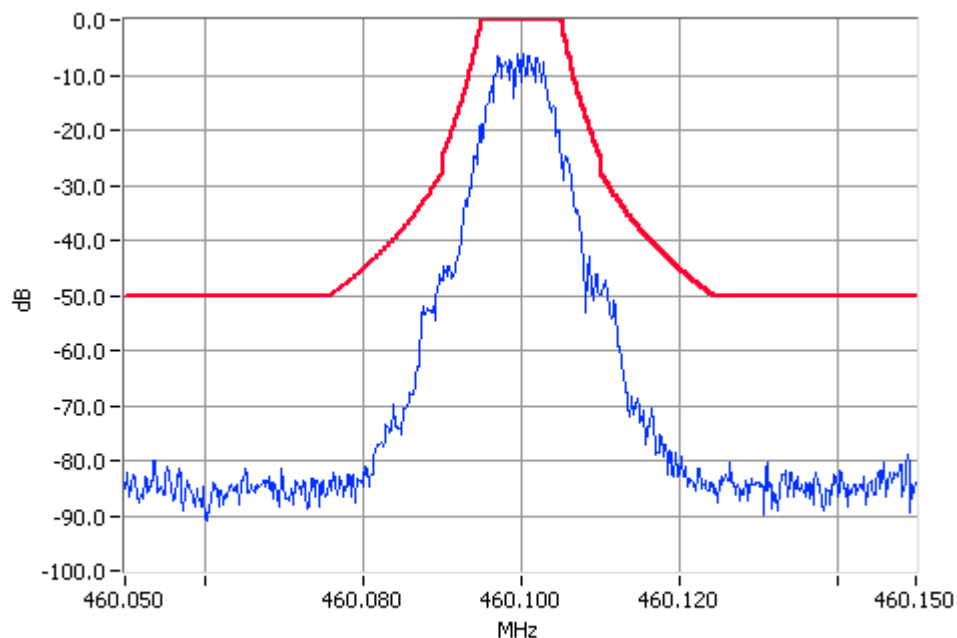


Digital Modulation 460.1000MHz Mask C 25W Pass
RBW=300Hz VBW=3000Hz

OCCUPIED BANDWIDTH


DIGITAL - 4 Level FSK

SPECIFICATION: FCC CFR 2.1049 (c)

Tx FREQUENCY: 460.1MHz 1W 25 kHz Channel Spacing

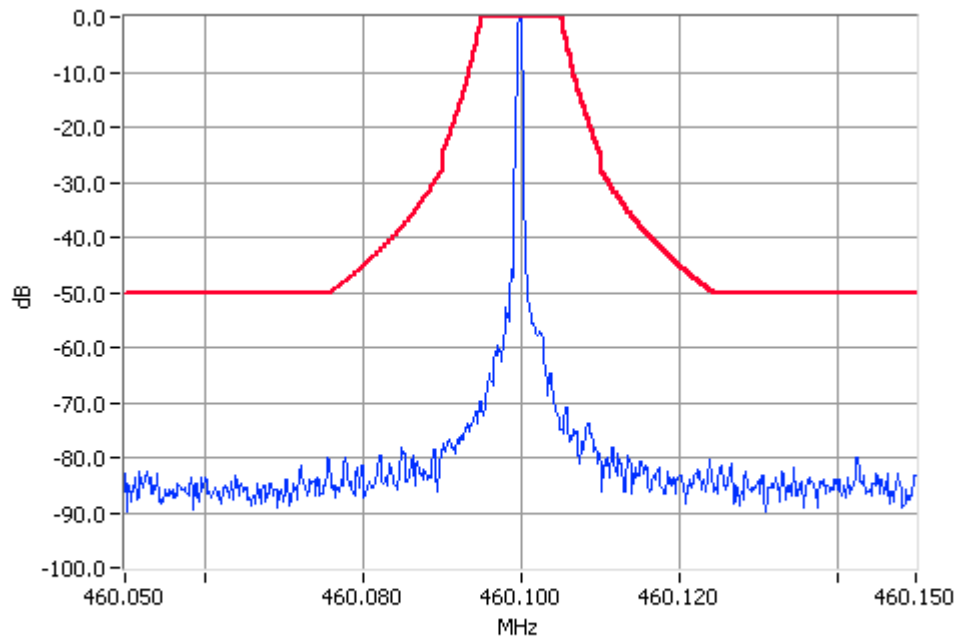

Unmodulated 460.1000MHz Mask C 1W Pass
RBW=300Hz VBW=3000Hz

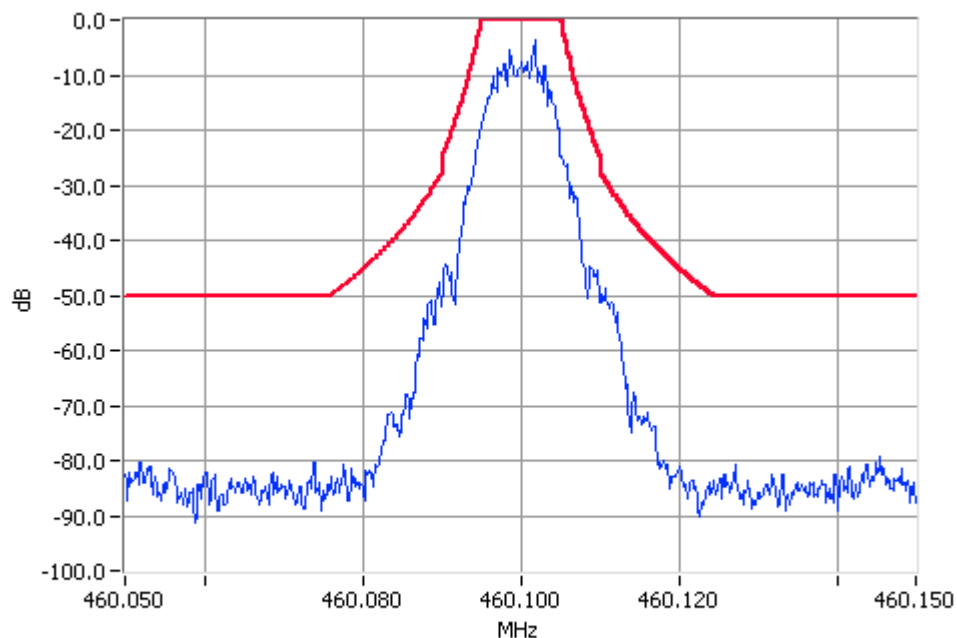

Digital Modulation 460.1000MHz Mask C 1W Pass
RBW=300Hz VBW=3000Hz

SPURIOUS EMISSIONS (CONDUCTED)

SPECIFICATION: FCC 47 CFR 2.1051

GUIDE: TIA/EIA-603B 2.2.13

MEASUREMENT PROCEDURE:

1. Refer Appendix A for equipment set up.
2. The frequency range examined was from the lowest frequency generated within the EUT, to a frequency higher than the 10th Harmonic: 100kHz to Fc-BW
Fc+BW to 4.7 GHz
3. A Pre-scan is performed with a resolution bandwidth of 1 kHz, and a video bandwidth of 3 kHz. If any emissions are found to be within 20dB of the limit a second measurement is made with the carrier modulated, and a resolution bandwidth of 10 kHz, and a video bandwidth of 30kHz.
4. Spurious emissions which were attenuated more than 20dB below the limit were not recorded.

MEASUREMENT RESULTS:

See the tables on the following pages for 12.5 kHz & 25.0 kHz channel spacings.

LIMIT CLAUSE: FCC 47 CFR 90.210

SPURIOUS EMISSIONS (CONDUCTED)

SPECIFICATION: FCC CFR 2.1051

Tx FREQUENCY: 460.1MHz

460.1MHz @ 25 W		Emission Mask D
Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
No emissions were detected at a level greater than 20 dB below the limit.		

LIMITS:

Carrier Output Power Watts	Emission Mask D 12.5 kHz Channel Spacing $50 + 10 \log_{10}(P_{\text{Watts}})$	
1 W	-20 dBm	50 dBc
25 W	-20 dBm	64 dBc

SPURIOUS EMISSIONS (CONDUCTED)

SPECIFICATION: FCC CFR 2.1051

Tx FREQUENCY: 460.1MHz

460.1MHz @ 1 W		Emission Mask D
Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
No emissions were detected at a level greater than 20 dB below the limit.		

LIMITS:

Carrier Output Power Watts	Emission Mask D 12.5 kHz Channel Spacing $50 + 10 \log_{10}(P_{\text{Watts}})$	
1 W	-20 dBm	50 dBc
25 W	-20 dBm	64 dBc

SPURIOUS EMISSIONS (RADIATED)

SPECIFICATION: FCC 47 CFR 2.1053

GUIDE: TIA/EIA-603B 2.2.12

MEASUREMENT PROCEDURE:

1. Refer Appendix A for equipment set up.
2. The EUT was placed on a wooden turntable at a distance of three metres from the test antenna. The output terminal was connected to an RF dummy load.
3. The turntable was rotated through 360° to obtain the maximum response of each spurious emission. Valid emissions were determined by switching the EUT on and off.
4. The EUT was replaced by a signal generator and substitution antenna to make measurements by the substitution method.

MEASUREMENT RESULTS:

See the tables on the following pages

LIMIT CLAUSE: FCC 47 CFR 90.210

SPURIOUS EMISSIONS (RADIATED)

SPECIFICATION: FCC CFR 2.1053

Tx FREQUENCY: 460.1MHz

460.1MHz @ 25 W		Emission Mask D
Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
No emissions were detected at a level greater than 20 dB below the limit.		

LIMITS:

Carrier Output Power Watts	Emission Mask D 12.5 kHz Channel Spacing $50 + 10 \log_{10}(P_{\text{Watts}})$	
1 W	-20 dBm	50 dBc
25 W	-20 dBm	64 dBc

SPURIOUS EMISSIONS (RADIATED)

SPECIFICATION: FCC CFR 2.1053

Tx FREQUENCY: 460.1MHz

460.1MHz @ 1 W		Emission Mask D
Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
No emissions were detected at a level greater than 20 dB below the limit.		

LIMITS:

Carrier Output Power Watts	Emission Mask D 12.5 kHz Channel Spacing $50 + 10 \log_{10}(P_{\text{Watts}})$	
1 W	-20 dBm	50 dBc
25 W	-20 dBm	64 dBc

TRANSMITTER FREQUENCY STABILITY (TEMPERATURE)

SPECIFICATION: FCC 47 CFR 2.1055 (a) (1)

GUIDE: TIA/EIA-603B 2.2.2

MEASUREMENT PROCEDURE:

1. Refer Appendix A for equipment set up.
2. The EUT was tested for frequency error from -30°C to $+50^{\circ}\text{C}$ in 10°C increments
3. The frequency error was recorded in parts per million (ppm).

MEASUREMENT RESULTS:

See the plots on the following pages for 12.5 kHz & 25.0 kHz channel spacings.

LIMIT CLAUSE: FCC 47 CFR 90.213


Frequency Range: 421 MHz to 512 MHz

Channel Spacing (kHz)	Frequency Error (ppm)
12.5	2.5
25.0	5.0


TRANSMITTER FREQUENCY STABILITY (TEMPERATURE)

SPECIFICATION: FCC 47 CFR 2.1055 (a) (1)

Tx FREQUENCY: 460.1MHz 25W 12.5 kHz channel Spacing

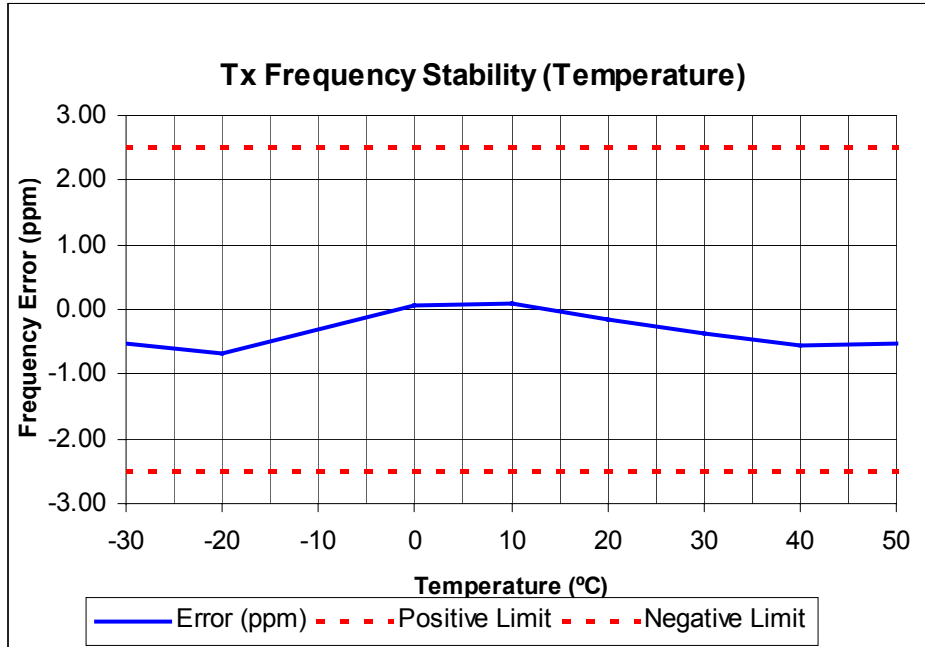

Tx FREQUENCY: 460.1MHz 25W 25.0 kHz channel Spacing

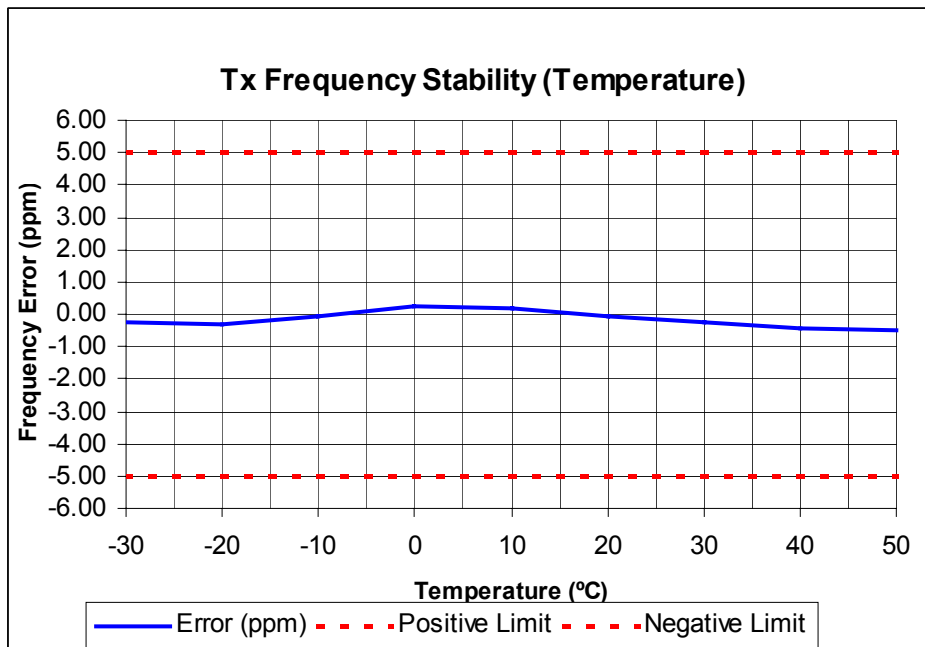

TRANSMITTER FREQUENCY STABILITY (VOLTAGE)

SPECIFICATION: FCC 47 CFR 2.1055 (d) (1)

GUIDE: TIA/EIA-603B 2.2.2

MEASUREMENT PROCEDURE:

1. Refer Appendix A for equipment set up.
2. The EUT was tested for frequency error at an input voltage to the radio of 85% to 115%.
3. The frequency error was recorded in parts per million (ppm).

MEASUREMENT RESULTS: Frequency Range: 421MHz to 512MHz

Channel Spacing (kHz)	FREQUENCY ERROR (ppm) @ 460.1MHz		
	11.7 V DC	13.8 V DC	15.9 V DC
12.5	-0.50	-0.48	-0.51
25.0	-0.51	-0.50	-0.53

LIMIT CLAUSE: FCC 47 CFR 90.213

Channel Spacing (kHz)	Frequency Error (ppm)
12.5	2.5
25.0	5.0

TRANSIENT FREQUENCY BEHAVIOR

SPECIFICATION: FCC 47 CFR 90.214

GUIDE: TIA/EIA-603B 2.2.19

MEASUREMENT PROCEDURE:

1. Refer Appendix A for equipment set up.
2. Measurements and plots were made following the TIA/EIA procedure.

MEASUREMENT RESULTS:

See the tables and plots on the following pages for 12.5 kHz & 25.0 kHz channel spacings.

LIMIT CLAUSE: FCC 47 CFR 90.214

TRANSIENT FREQUENCY BEHAVIOUR

SPECIFICATION: FCC 47 CFR 90.214

Tx FREQUENCY: 460.1MHz 25 W 12.5 kHz Channel Spacing

FREQUENCY	460.1MHz @ 25 W Tx	
TRANSIENT RESPONSE PERIOD	CARRIER PEAK VARIATION FROM NORMAL	
	Key ON (kHz)	Key OFF (kHz)
t ₁	-0.4	N/A
t ₂	-0.5	N/A
t ₃	N/A	-0.5
t ₂ → t ₃ ppm	-1.1	
ERROR LIMIT (t ₂ → t ₃) ppm	2.5	

Confirm that during periods t ₁ and t ₃ the frequency difference does not exceed the value of one channel separation.	YES	NO
	Y	
Confirm that during the period t ₂ the frequency difference does not exceed half a channel separation.	YES	NO
	Y	
Confirm that during the period t ₂ to t ₃ the frequency difference does not exceed the frequency error limit.	YES	NO
	Y	



LIMIT:

TRANSIENT PERIODS	FREQUENCY RANGE 150MHz – 174 MHz	FREQUENCY RANGE 421MHz – 512 MHz
t ₁ (ms)	5 ms	10 ms
t ₂ (ms)	20 ms	25 ms
t ₃ (ms)	5 ms	10 ms

TRANSIENT FREQUENCY BEHAVIOUR

SPECIFICATION: FCC 47 CFR 90.214

Tx FREQUENCY: 460.1MHz 25 W 12.5 kHz Channel Spacing

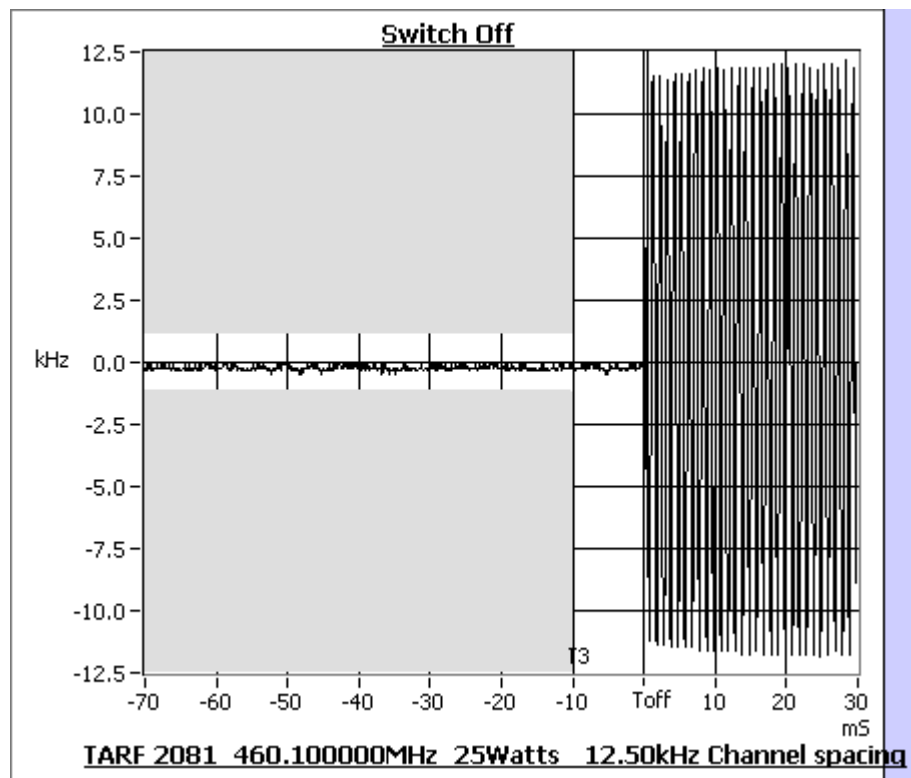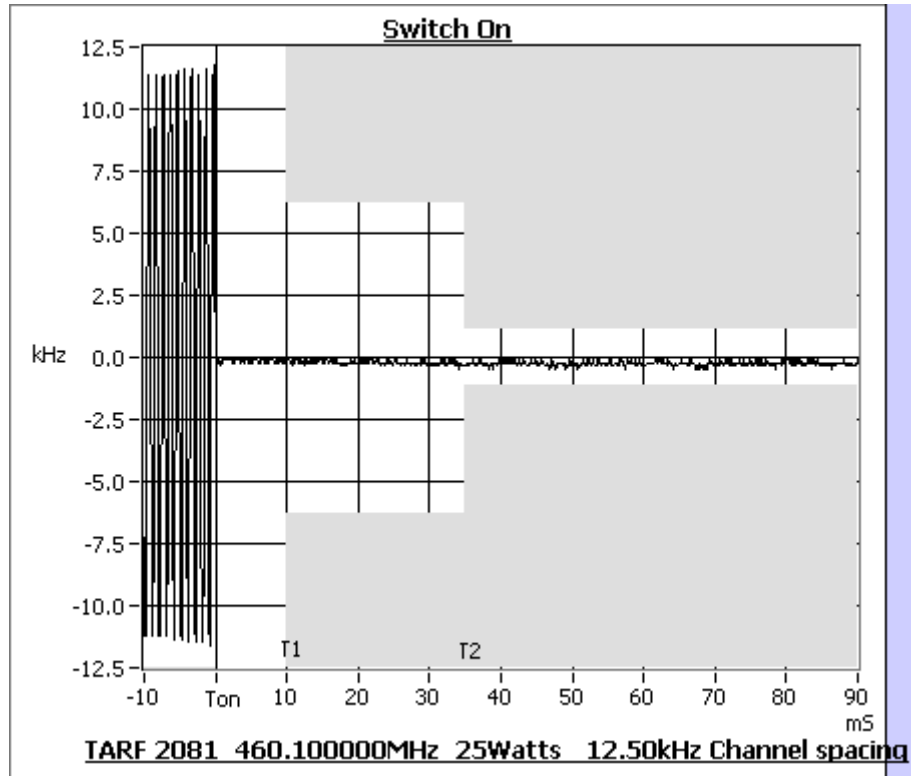

TRANSIENT FREQUENCY BEHAVIOUR

SPECIFICATION: FCC 47 CFR 90.214

Tx FREQUENCY: 460.1MHz 25 W 25.0 kHz Channel Spacing

FREQUENCY	460.1MHz @ 25 W Tx	
TRANSIENT RESPONSE PERIOD	CARRIER PEAK VARIATION FROM NORMAL	
	Key ON (kHz)	Key OFF (kHz)
t ₁	-0.4	N/A
t ₂	-0.7	N/A
t ₃	N/A	-0.4
t ₂ → t ₃ ppm	-1.4	
ERROR LIMIT (t ₂ → t ₃) ppm	5.0	

Confirm that during periods t ₁ and t ₃ the frequency difference does not exceed the value of one channel separation.	YES	NO
	Y	
Confirm that during the period t ₂ the frequency difference does not exceed half a channel separation.	YES	NO
	Y	
Confirm that during the period t ₂ to t ₃ the frequency difference does not exceed the frequency error limit.	YES	NO
	Y	



LIMIT:

TRANSIENT PERIODS	FREQUENCY RANGE 150MHz – 174 MHz	FREQUENCY RANGE 421MHz – 512 MHz
t ₁ (ms)	5 ms	10 ms
t ₂ (ms)	20 ms	25 ms
t ₃ (ms)	5 ms	10 ms

TRANSIENT FREQUENCY BEHAVIOUR

SPECIFICATION: FCC 47 CFR 90.214

Tx FREQUENCY: 460.1MHz 25 W 25.0 kHz Channel Spacing

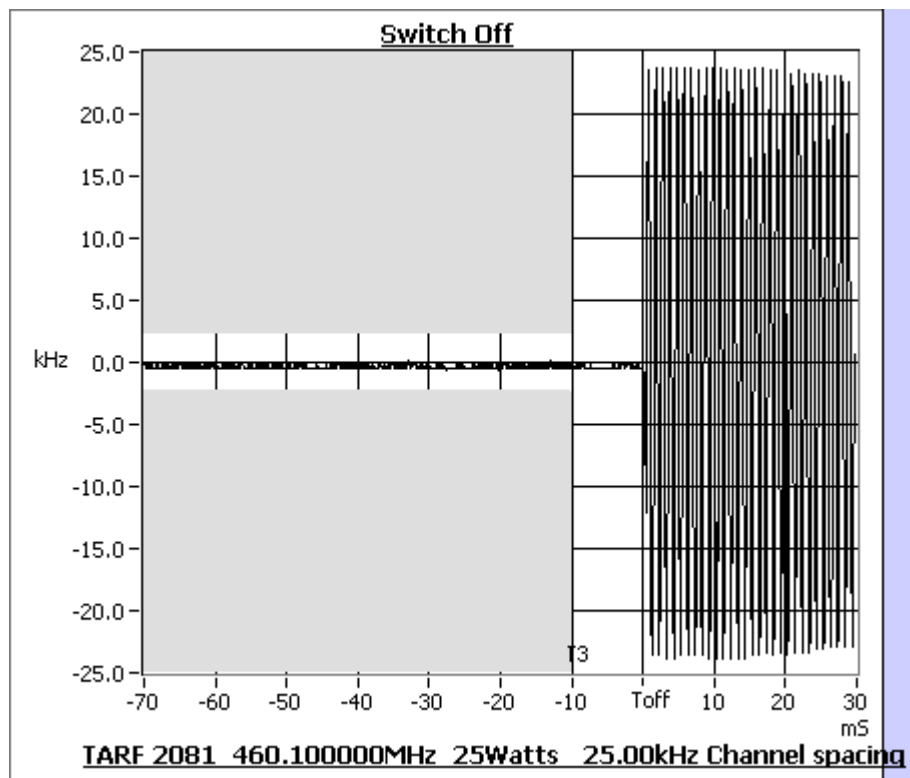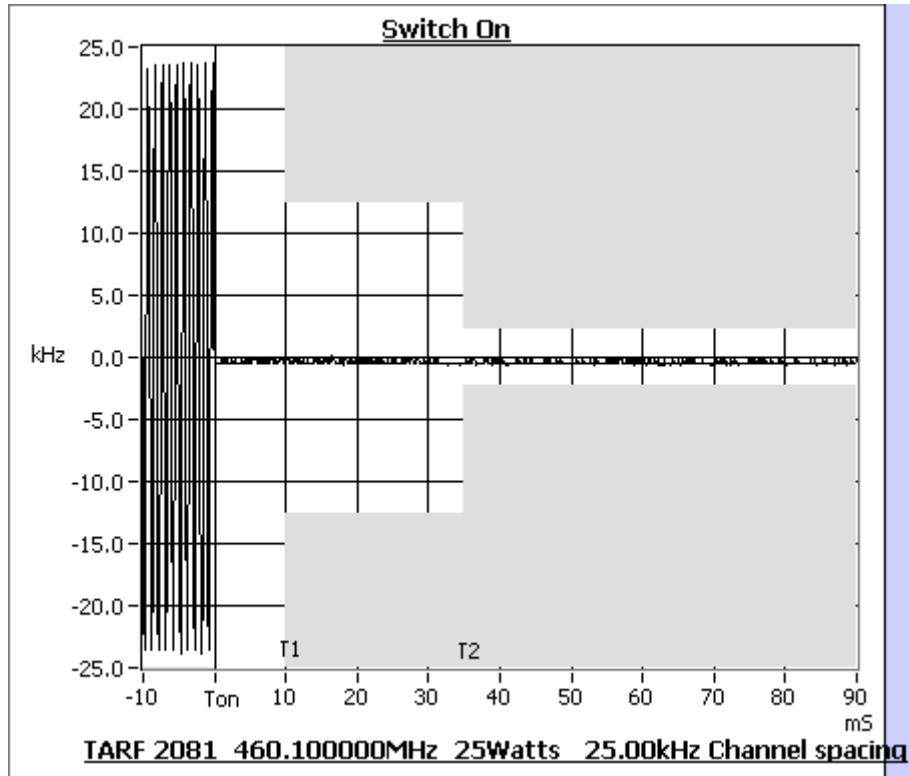

TEST EQUIPMENT USED

No#	Equipment	Manufacturer	Model No	Serial No#	Tait ID	Cal Due
1	Signal Generator	Hewlett Packard	HP8642B (Opt 001)	2512A00176	E3064	18-Feb-05
2	Signal Generator	Hewlett Packard	HP8648A	3430U00344	E3579	15-Oct-04
3	Signal Generator	Agilent	E4422B	GB40050320	E3788	22-Oct-04
5	Signal Generator	Rohde & Schwarz	SMY01 1062.5502.11	841736/019	E3553	29-Oct-04
21	Power Supply	Rohde & Schwarz	NGS M32/10 192.0810.31	Fnr 434	E3556	14-Jun-05
22	Oscilloscope	Tektronics	TDS340	B013611	E3585	25-Nov-04
24	Environ. Chamber	Contherm	Temp Control	E3397	E3397	04-Mar-05
42	Reference Horn Antenna	Emco	DRG3115	9512-4638	E3560	27-Sep-06
43	Horn Antenna	Emco	DRG3115		E3076	27-Sep-06
66	RF Attenuator 25W	Weinschel	33-20-33	BD5871	E3673	14-Jul-05
82	3m Coax Cable BLUE)	Suhner	Sucoflex 104A	25033/4A	E3694	30-Oct-04
83	1m Coax Cable (BLUE)	Suhner	Sucoflex 104A	25006/4A	E3693	30-Oct-04
84	1m Coax Cable (BLUE)	Suhner	Sucoflex 104A	25005/4A	E3692	15-Jul-05
85	1m Coax Cable (BLUE)	Suhner	Sucoflex 104A	25004/4A	E3691	15-Jul-05
86	1m Coax Cable (BLUE)	Suhner	Sucoflex 104A	25003/4A	E3690	13-Aug-05
87	Audio Analyser	Hewlett Packard	HP8903B	2818A04275	E3710	25-Nov-04
88	Spectrum Analyser	Hewlett Packard	HP8562E	3821A00779	E3715	06-Jan-05
111	Modulation Analyser	Hewlett Packard	HP8901B (Opt 002)	3704A05837	E3786	15-Oct-04
114	Signal Generator	Rohde & Schwarz	SML03 1090.3000.13		E4050	28-Nov-04
117	RF Attenuator	Weinschel	Model 1	BL9950	E4080	17-May-05
119	RF Attenuator 150W Treva	Weinschel	40-20-23	MF817	E4082	17-May-05
123	Spectrum Analyser	Agilent	E4445A	MY42510072	E4139	23-Apr-05
135	Attenuator	Weinschel	67-30-33	BR0531		09-Aug-05

APPENDIX A

TEST SETUP DETAILS

Test set up for Radiated Emissions

