

LABORATORY TEST REPORT

RADIO PERFORMANCE MEASUREMENTS

for the

TMBH7A Mobile Transceiver

Tested in accordance with:

FCC 47 CFR Parts 22, 74 and 90

RSS-119 Issue 11
RSS-Gen Issue 3

Report Revision: 1

Issue Date: 29-August-2014

PREPARED BY: L. M. White

Test Technician

CHECKED & APPROVED BY: M. C. James

Laboratory Technical Manager



OATS FCC LISTING REGISTRATION: 837095
OATS IC LISTING REGISTRATION: SITE# 737A-1

All tests reported herein have been performed in accordance with the laboratory's scope of accreditation.

This document must not be reproduced except in full, without the written permission of the Compliance Laboratory Manager

TELTEST Laboratories (A Division of Tait Communications)
PO Box 1645, 558 Wairakei Road, Christchurch, New Zealand.

Telephone: 64 3 358 3399
FAX: 64 3 359 4632

TABLE OF CONTENTS

REVISION	3
INTRODUCTION	4
Statement of Compliance	6
MODULATION TYPES, NECESSARY BANDWIDTH & EMISSION DESIGNATORS	7
TEST RESULTS.....	9
TRANSMITTER OUTPUT POWER (CONDUCTED)	9
TRANSMITTER AUDIO FREQUENCY RESPONSE - PRE-EMPHASIS.....	10
TRANSMITTER MODULATION LIMITING	15
TRANSMITTER SIDEBAND SPECTRUM	24
TRANSMITTER SPURIOUS EMISSIONS (CONDUCTED).....	61
TRANSMITTER SPURIOUS EMISSIONS (RADIATED).....	71
TRANSIENT FREQUENCY BEHAVIOR.....	75
TRANSMITTER FREQUENCY STABILITY - TEMPERATURE	92
TRANSMITTER FREQUENCY STABILITY - VOLTAGE	95
RECEIVER SPURIOUS EMISSIONS (CONDUCTED)	96
TEST EQUIPMENT LIST.....	97
ANNEX A – TEST SETUP DETAILS.....	99

REVISION

Date	Revision	Comments
29-August-2014	1	Initial test report

INTRODUCTION

REASON FOR REPORT					
This report demonstrates that the TMBH7A mobile transceiver complies with FCC 47 Parts 22, 74 & 90, and RSS-119 Issue 11 & RSS-Gen Issue 3. This radio supports analog, digital FFSK, P25 phase-1, P25 phase-2, and Digital Mobile Radio modulations:					
Modulation		Channel Spacing	Speech Channels	Symbol Rate (symbols/sec)	Data Rate (bps)
Analogue FM		12.5 kHz 25.0 kHz	1	-	-
FFSK	Fast Frequency Shift Keying	12.5 kHz 25.0 kHz	-	1200	1200
		12.5 kHz 25.0 kHz	-	2400	2400
Digital Mobile Radio (DMR)	4 Level FSK (2 slot TDMA) (ETSI TS102 361-1)	12.5 kHz	2	4800	9600
APCO P25 Phase 1	C4FM (TIA 102)	12.5 kHz	1	4800	9600
APCO P25 Phase 2	H-CPM (2 slot TDMA) (TIA 102)	12.5 kHz	2	6000	12000

in accordance with:

FCC 47 CFR Parts 22, 74 and 90
RSS-119 Issue 11 & RSS-Gen Issue 3

REPORT PREPARED FOR

Tait Communications
PO Box 1645
558 Wairakei Road
Christchurch
New Zealand

DESCRIPTION OF SAMPLE

Manufacturer: Tait Limited
Equipment: Mobile Transceiver
Type: TMBH7A
Product Code: T02-00014-HBAA
Serial Number(s): 20203336
Frequency Range: 450 – 520 MHz
Quantity: 1

HARDWARE & SOFTWARE

Analog & DMR

Type

Code and Version

Hardware ID	TMBB12-H700_0006
Boot Code	QMB1B_S00_3.00.03.0001
DSP	QMB1A_E00_1.08.00.0017
Radio Application	QMB1F_E00_1.08.00.0017
FPGA Image	QMB1G_S00_1.06.00.0001

P25 Phase I & Phase II

Type

Code and Version

Hardware ID	TMBB12-H700_0006
Boot Code	QMB1B_S00_3.00.03.0001
DSP	QMB1A_A02ML_2.01.00.4567
Radio Application	QMB1F_A00ML_2.01.00.4567
FPGA Image	QMB1G_S00_1.07.00.0002

TEST CONDITIONS

All testing was performed between 12 → 26 August 2014, and under the following conditions:

Ambient temperature: 15°C → 30°C

Relative Humidity: 20% → 75%

Standard Test Voltage 13.8 V_{DC}

STATEMENT OF COMPLIANCE

We, TELTEST LABORATORIES of 558 Wairakei Road, Christchurch, New Zealand, declare under our sole responsibility that the product:

Equipment: Mobile Transceiver
Type: TMBH7A
Product Code: T02-00014-HBAA
Serial Number(s): 20203336
Quantity: 1

to which this declaration relates, is in conformity with the following standards:

FCC 47 CFR Parts 22, 74 and 90

RSS-119 Issue 11 & RSS-Gen Issue 3

Signature: _____

M. C. James
Laboratory Technical Manager

Date: _____

MODULATION TYPES, NECESSARY BANDWIDTH & EMISSION DESIGNATORS

MODULATION TYPES:

F3E	Analogue Frequency Modulation (FM)	
F2D	FFSK	1200 bps and 2400 bps
FXW	DMR Digital Voice	9600 bps
FXD	DMR Digital Data	9600 bps
F1E, F7E	P25 phase 1 Digital Voice	9600 bps
F1D, F7D	P25 phase 1 Digital Data	9600 bps
F1W	P25 phase 2 Digital Voice / Data	12000 bps

CHANNEL SPACINGS: 12.5 kHz 25.0 kHz

EMISSION DESIGNATORS:

	12.5 kHz	25.0 kHz
Analog FM	11K0F3E	16K0F3E
FFSK Data 1200 bps	6K60F2D	9K60F2D
FFSK Data 2400 bps	7K80F2D	10K8F2D
Digital Voice DMR	7K60FXW	
Digital Data DMR	7K60FXD	
Digital Voice P25 phase 1	8K10F1E	
	8K10F7E	
Digital Data P25 phase 1	8K10F1D	
	8K10F7D	
Digital Voice P25 phase 2	8K10F1W	
Digital Data P25 phase 2	8K10F1W	

CALCULATIONS

Equation: $B_n = 2M + 2Dk$

(M is highest modulating frequency; D is peak allowable deviation; k is a constant of 1 for FM)

Analog Voice 12.5 kHz Bandwidth

Necessary bandwidth

M = 3.0 kHz

D = 2.5 kHz

$$B_n = (2 \times 3.0) + (2 \times 2.5) \times 1 \\ = 11.0 \text{ kHz}$$

Emission Designator

11K0F3E

F3E represents an FM voice transmission

Analog Voice 25.0 kHz Bandwidth

Necessary bandwidth

M = 3.0 kHz

D = 5.0 kHz

$$B_n = (2 \times 3.0) + (2 \times 5.0) \times 1 \\ = 16.0 \text{ kHz}$$

Emission Designator

16K0F3E

F3E represents an FM voice transmission

Fast Frequency Shift Keying (FFSK – 1200 bps) 12.5 kHz Bandwidth

Necessary bandwidth

M = 1.8 kHz

D = 1.5 kHz (60% of peak deviation)

$$B_n = (2 \times 1.8) + (2 \times 1.5) \times 1 \\ = 6.6 \text{ kHz}$$

Emission Designator

6K60F2D

F2D represents a FM data transmission with the use of a modulating sub carrier

Fast Frequency Shift Keying (FFSK – 1200 bps) 25.0 kHz Bandwidth

Necessary bandwidth

M = 1.8 kHz

D = 3.0 kHz (60% of peak deviation)

$$B_n = (2 \times 1.8) + (2 \times 3.0) \times 1 \\ = 9.6 \text{ kHz}$$

Emission Designator

9K60F2D

F2D represents a FM data transmission with the use of a modulating sub carrier

Emission Designators – Continued

Fast Frequency Shift Keying (FFSK – 2400 bps) 12.5 kHz Bandwidth

Necessary bandwidth

M = 2.4 kHz

D = 1.5 kHz (60% of peak deviation)

$$B_n = (2 \times 2.4) + (2 \times 1.5) \times 1$$

$$= 7.8 \text{ kHz}$$

Emission Designator

7K80F2D

F2D represents a FM data transmission with the use of a modulating sub carrier

Fast Frequency Shift Keying (FFSK – 2400 bps) 25.0 kHz Bandwidth

Necessary bandwidth

M = 2.4 kHz

D = 3.0 kHz (60% of peak deviation)

$$B_n = (2 \times 2.4) + (2 \times 3.0) \times 1$$

$$= 10.8 \text{ kHz}$$

Emission Designator

10K80F2D

F2D represents a FM data transmission with the use of a modulating sub carrier

Digital Voice / Data C4FM 4800 bps

Digital Voice/data transmissions use a 4 level frequency shift keying modulation scheme.

The necessary bandwidth has been measured using the 99% energy rule, and in accordance with TIA/EIA 102 CAAB 2.2.5.2

Digital Voice 12.5 kHz Bandwidth P25 phase 1

99% bandwidth

= 8.1 kHz

Emission Designator

8K10F1E

F1E represents a digital FM voice transmission

8K10F7E

F7E represents two or more channels containing quantized or digital voice information

Digital Voice 12.5 kHz Bandwidth P25 phase 2

99% bandwidth

= 8.1 kHz

Emission Designator

8K10F1W

F1W represents a single FM telephony channel

Digital Voice 12.5 kHz Bandwidth DMR

99% bandwidth

= 7.6 kHz

Emission Designator

7K60FXW

FXW represents a FM Time Division Multiple Access (TDMA) combination of data and telephony

Digital Data 12.5 kHz Bandwidth P25 phase 1

99% bandwidth

= 8.1 kHz

Emission Designator

8K10F1D

F1D represents an digital FM data transmission

8K10F7D

F7D represents two or more channels containing quantized or digital information

Digital Data 12.5 kHz Bandwidth P25 phase 2

99% bandwidth

= 8.1 kHz

Emission Designator

8K10F1W

F1W represents digital FM data transmission

Digital Data 12.5 kHz Bandwidth DMR

99% bandwidth

= 7.6 kHz

Emission Designator

7K60FXD

FXD represents FM Time Division Multiple Access (TDMA) data only

TEST RESULTS

TRANSMITTER OUTPUT POWER (CONDUCTED)

SPECIFICATION: FCC 47 CFR 2.1046
RSS-119 5.4

GUIDE: TIA/EIA-603D 2.2.1

MEASUREMENT PROCEDURE:

1. Refer Annex A for Equipment set up.
2. The coaxial attenuator has an impedance of 50 Ohms.
3. The unmodulated output power was measured with an RF Power meter.

MEASUREMENT RESULTS:

Manufacturer's Rated Output Power:

Switchable: 25 W and 1 W

Nominal 25 W	450.1 MHz	459.9 MHz	469.9 MHz	511.9 MHz
Measured	22.7	24.1	24.4	21.3
Variation (%)	-9.4	-3.4	-2.5	-15.0
Variation (dB)	-0.4	-0.2	-0.1	-0.7
Nominal 1 W	450.1 MHz	459.9 MHz	469.9 MHz	511.9 MHz
Measured	1.1	1.1	1.1	0.9
Variation (%)	13.1	13.7	9.4	-5.5
Variation (dB)	0.5	0.6	0.4	-0.2
Measurement Uncertainty	± 0.6 dB			

LIMIT CLAUSES:

FCC 47 CFR 90.205 (s)

The output power shall not exceed by more than 20%... the manufacturer's rated output power for the particular transmitter specifically listed on the authorization.

RSS-119 5.4

The output power shall be within ± 1.0 dB of the manufacturer's rated power.

TRANSMITTER AUDIO FREQUENCY RESPONSE - PRE-EMPHASIS

SPECIFICATION: FCC 47 CFR 2.1047 (a)

GUIDE: TIA/EIA-603D 2.2.6

MEASUREMENT PROCEDURE:

1. Refer Annex A for Equipment set up.
2. An audio input tone of 1000 Hz was applied with the level set to obtain 20% of maximum deviation. This was used as the 0 dB reference point.
3. The AF was varied while the audio level was held constant.
4. The response in dB relative to 1000 Hz was measured.

MEASUREMENT RESULTS:


See the plots on the following pages for 12.5 kHz & 25.0 kHz channel spacings, tested at 25 W transmit power.

LIMIT CLAUSE: TIA/EIA-603D 3.2.6

SPECIFICATION: FCC CFR 2.1047 (a)


Tx FREQUENCY: 450.1 MHz

12.5 kHz Channel Spacing

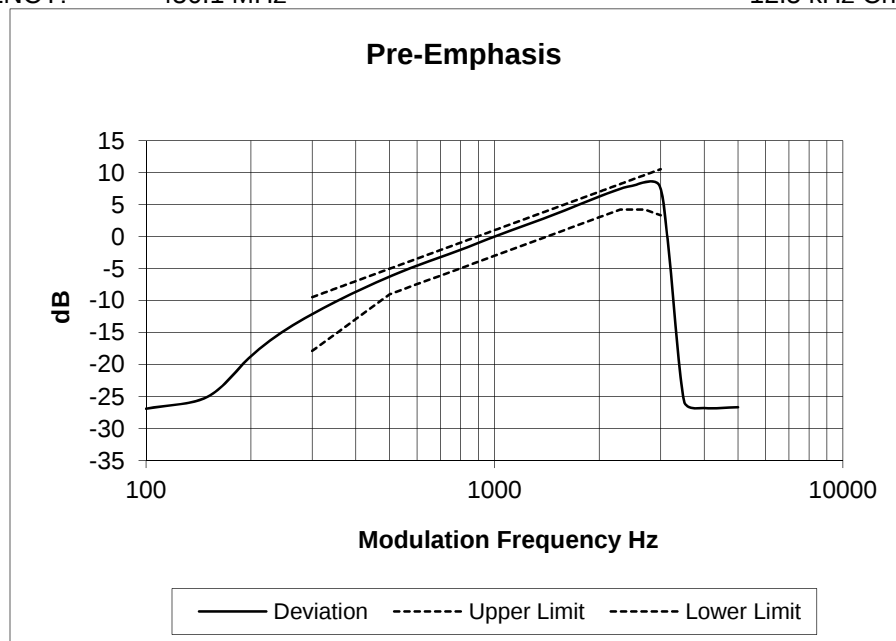


Transmitter Audio Frequency Response – Pre-emphasis

Tx FREQUENCY: 459.9 MHz 12.5 kHz Channel Spacing

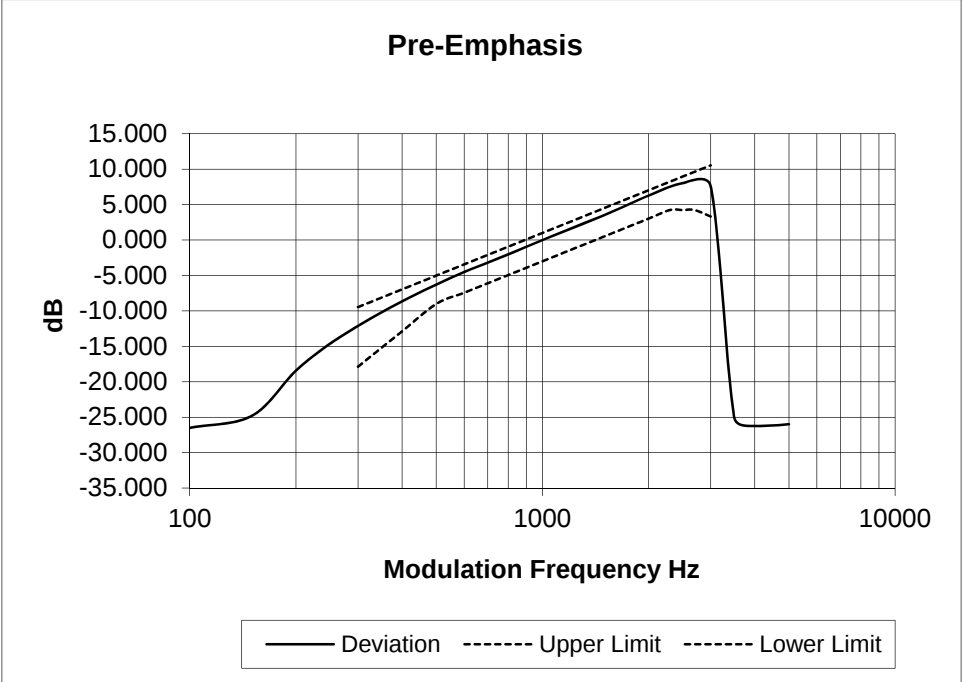


Tx FREQUENCY: 469.9 MHz 12.5 kHz Channel Spacing

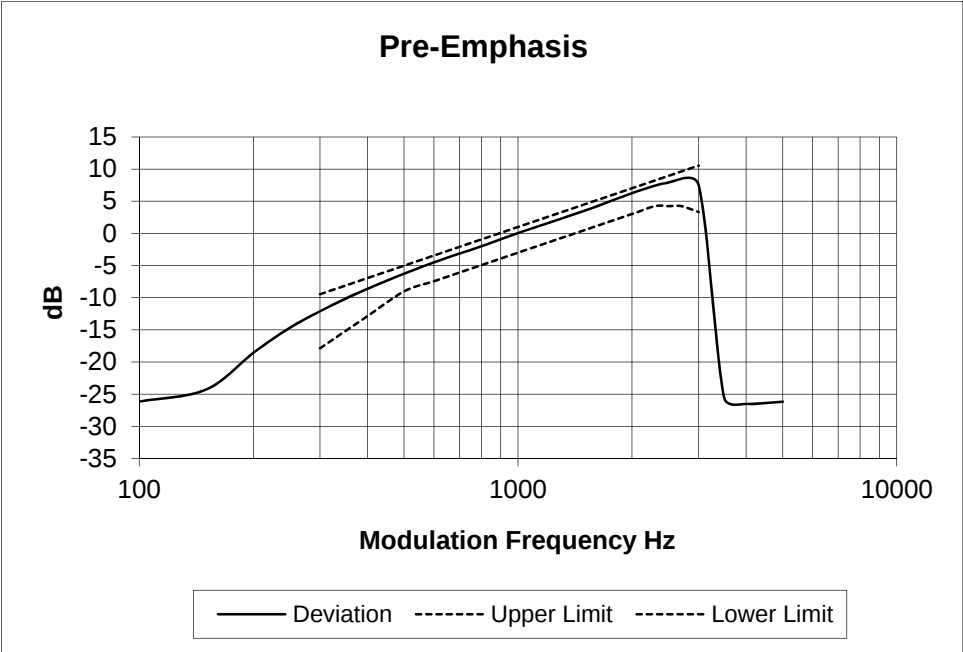

Transmitter Audio Frequency Response – Pre-emphasis


Tx FREQUENCY: 511.9 MHz

12.5 kHz Channel Spacing

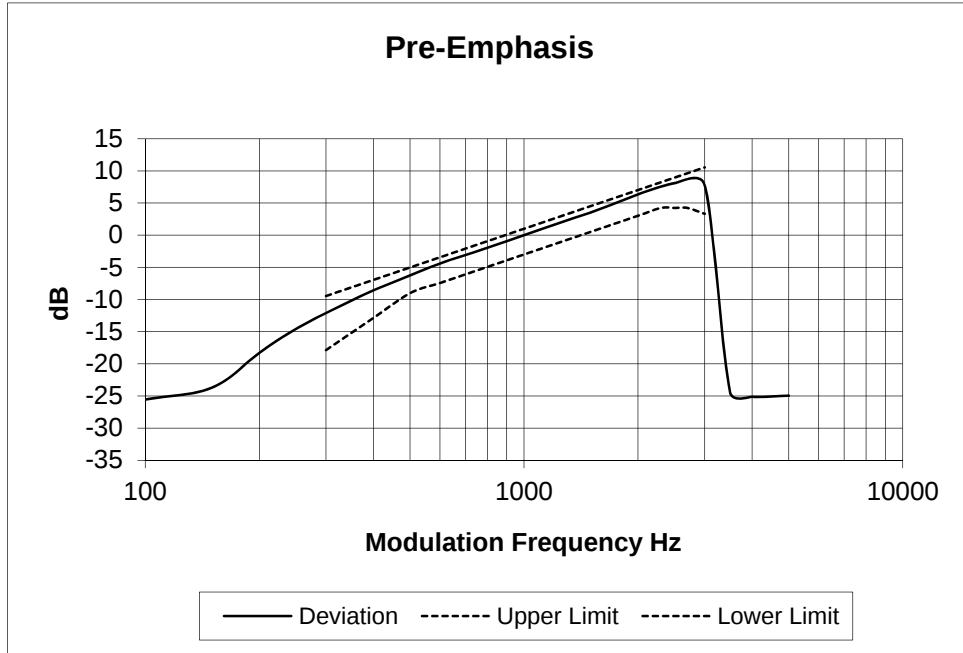


Tx FREQUENCY: 450.1 MHz

25.0 kHz Channel Spacing

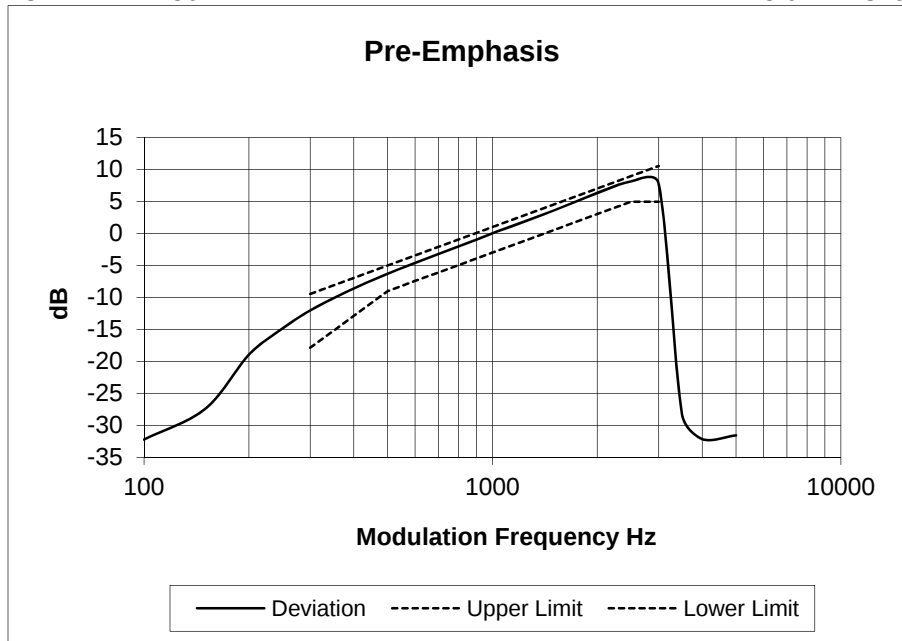


Transmitter Audio Frequency Response – Pre-emphasis

Tx FREQUENCY: 459.9 MHz 25.0 kHz Channel Spacing

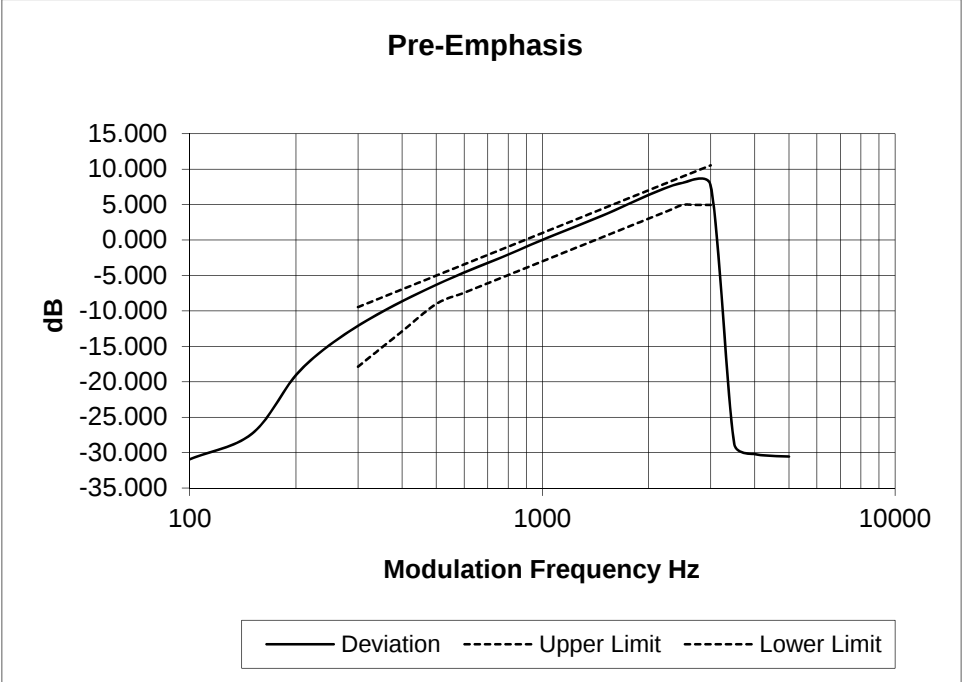


Tx FREQUENCY: 469.9 MHz 25.0 kHz Channel Spacing

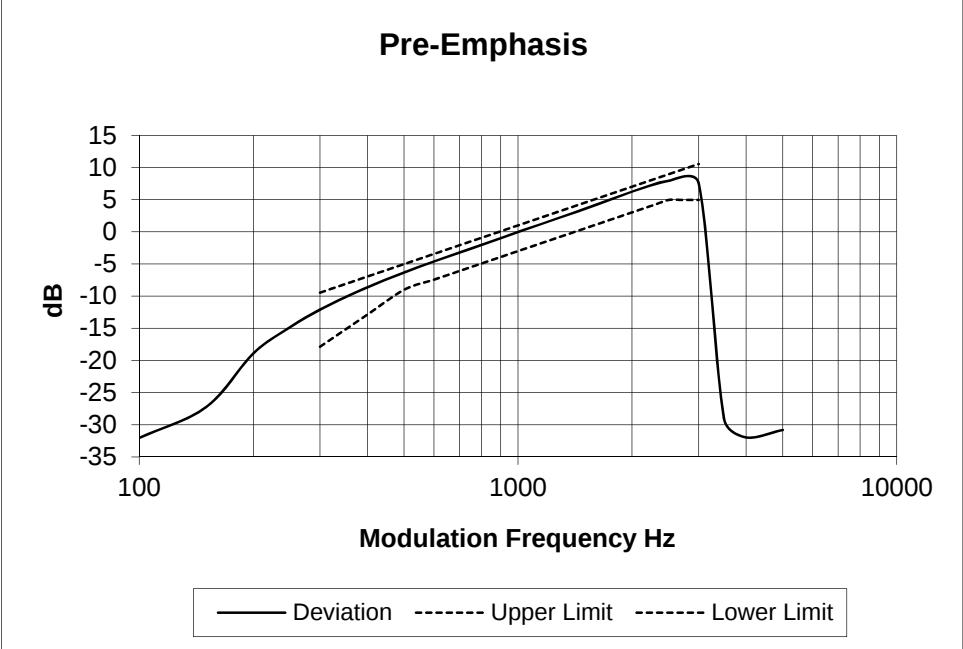

Transmitter Audio Frequency Response – Pre-emphasis

Tx FREQUENCY: 511.9 MHz 25.0 kHz Channel Spacing

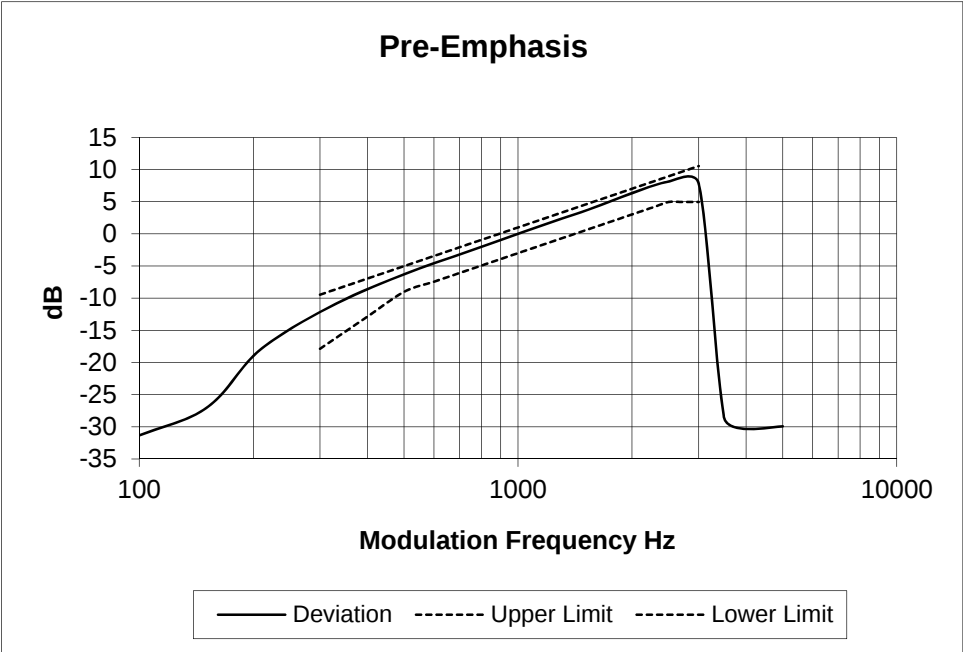

TRANSMITTER MODULATION LIMITING

SPECIFICATION: FCC 47 CFR 2.1047 (b)

GUIDE: TIA/EIA-603D 2.2.3

MEASUREMENT PROCEDURE:

1. Refer Annex A for Equipment set up.
2. The modulation response was measured at three audio frequencies while varying the input level.
3. Measurements were made for both Positive and Negative Deviation.

MEASUREMENT RESULTS:

See the plots on the following pages for 12.5 kHz & 25.0 kHz channel spacings.



LIMIT CLAUSE: TIA/EIA-603D 1.3.4.4

Transmitter Modulation Limiting

SPECIFICATION: FCC CFR 2.1047 (b)

Tx FREQUENCY: 450.1 MHz

12.5 kHz Channel Spacing

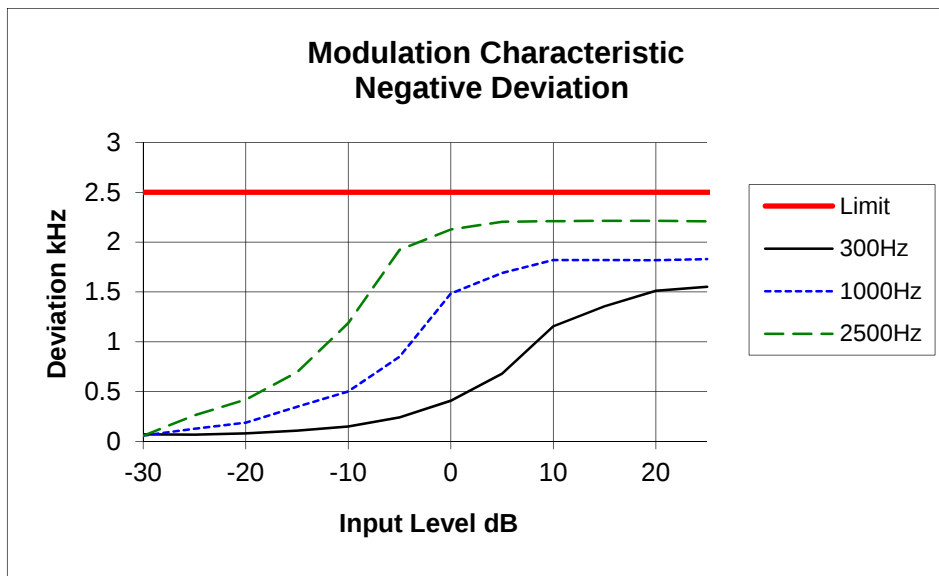
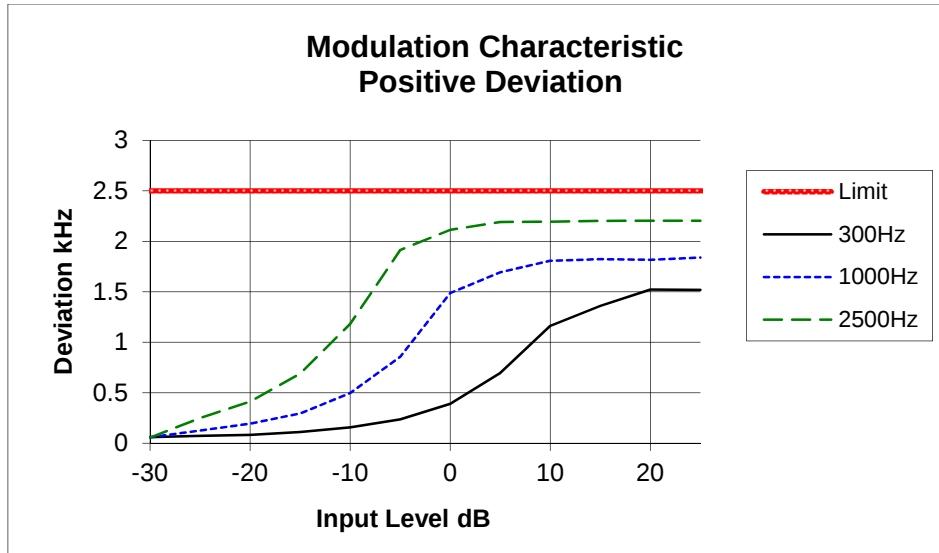


Transmitter Modulation Limiting

SPECIFICATION: FCC CFR 2.1047 (b)

Tx FREQUENCY: 459.9 MHz

12.5 kHz Channel Spacing

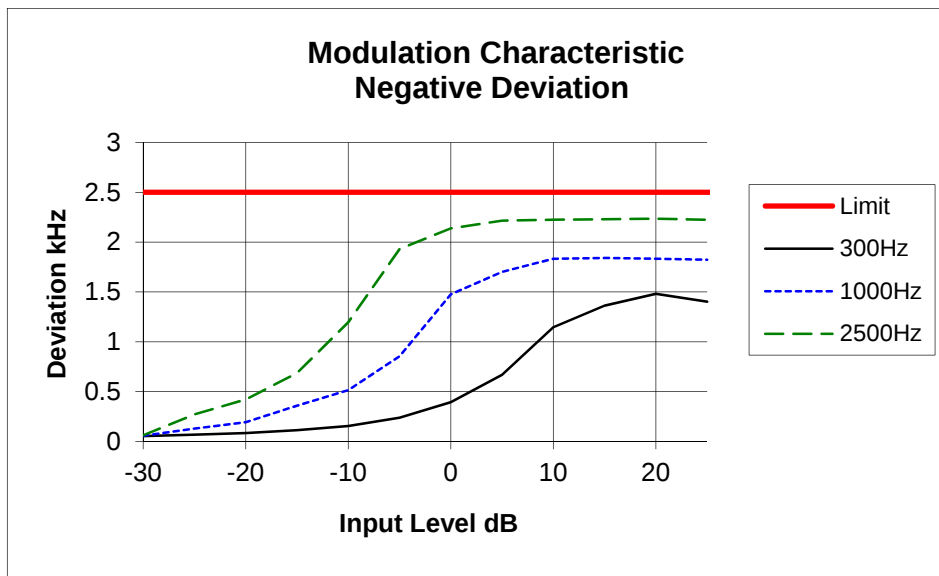
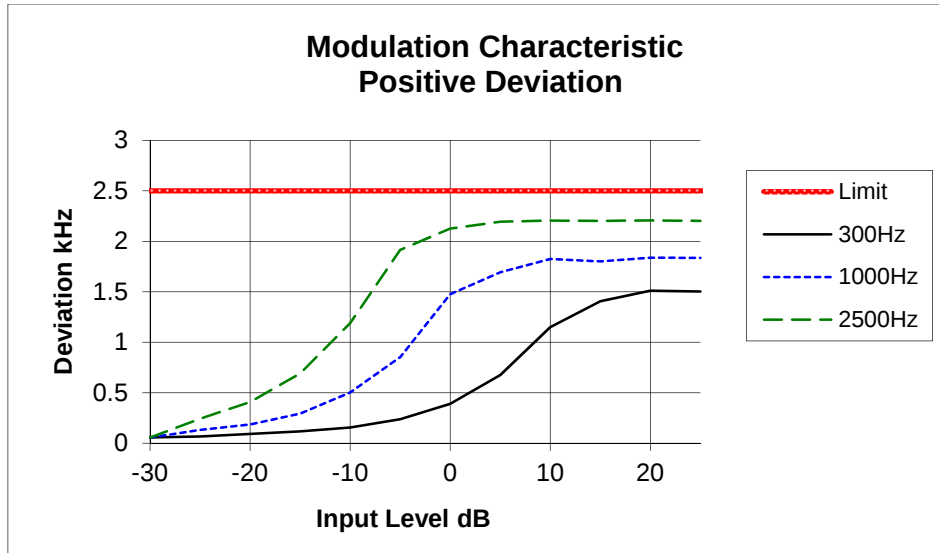


Transmitter Modulation Limiting

SPECIFICATION: FCC CFR 2.1047 (b)

Tx FREQUENCY: 469.9 MHz

12.5 kHz Channel Spacing

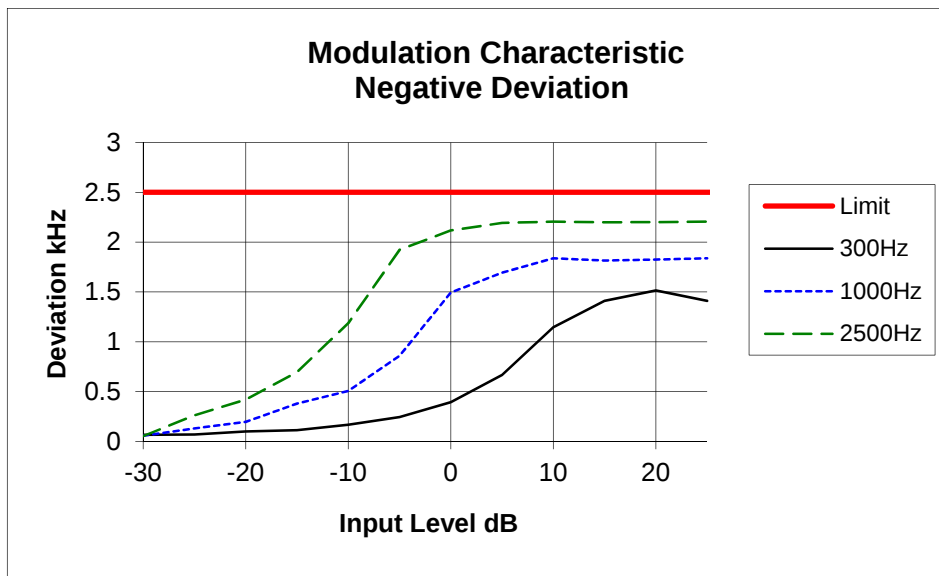
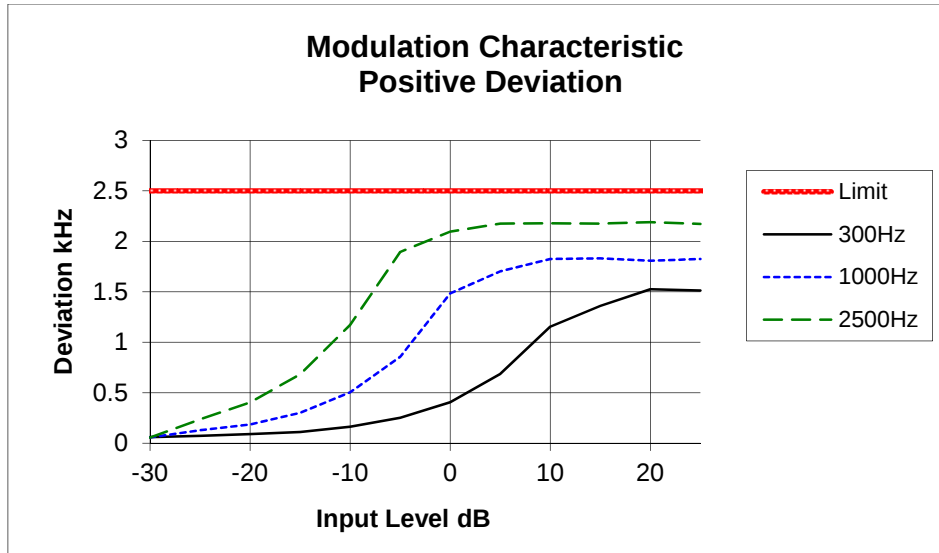


Transmitter Modulation Limiting

SPECIFICATION: FCC CFR 2.1047 (b)

Tx FREQUENCY: 511.9 MHz

12.5 kHz Channel Spacing

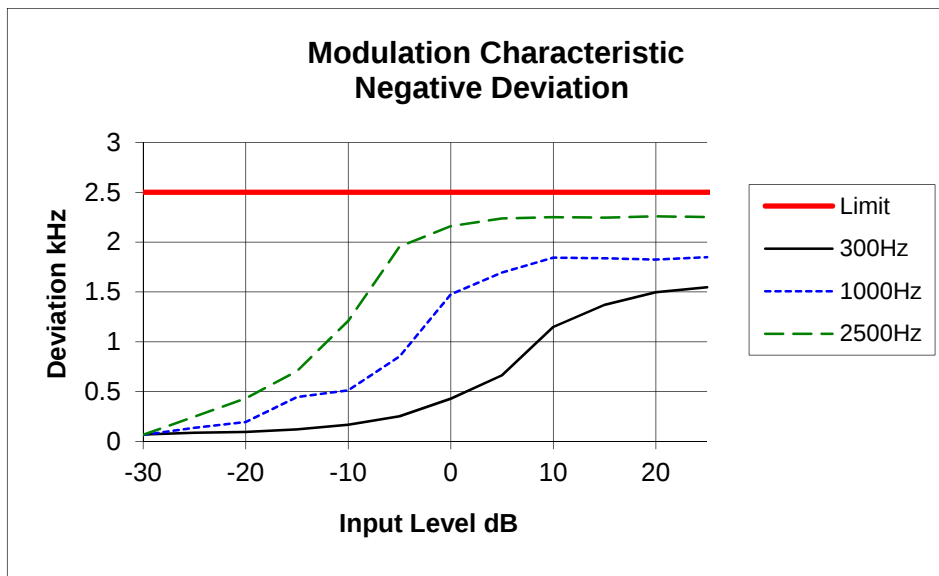
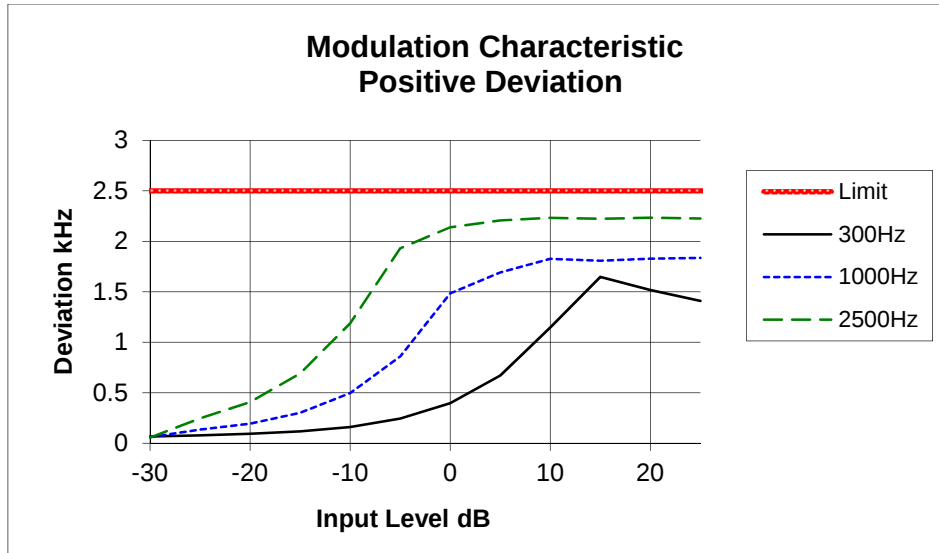


Transmitter Modulation Limiting

SPECIFICATION: FCC CFR 2.1047 (b)

Tx FREQUENCY: 450.1 MHz

25.0 kHz Channel Spacing

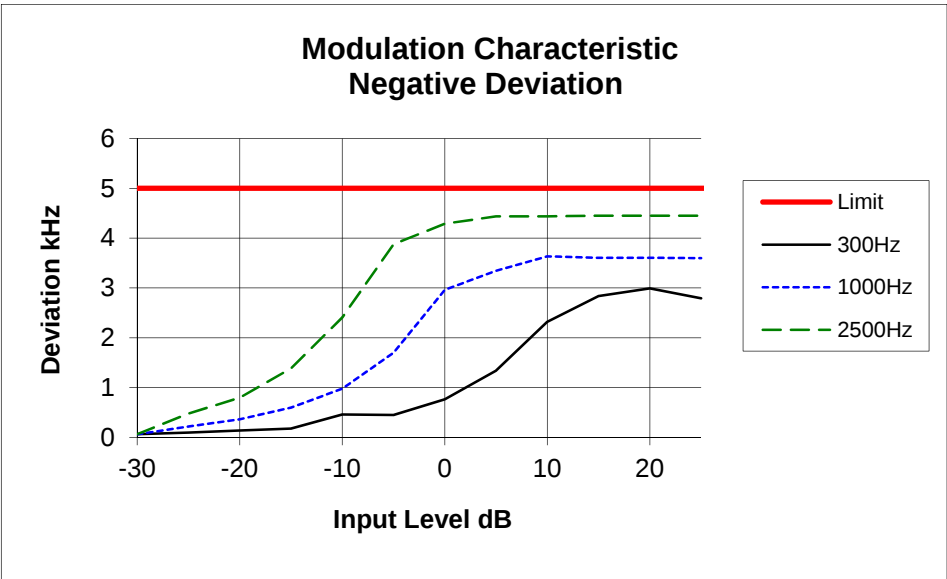
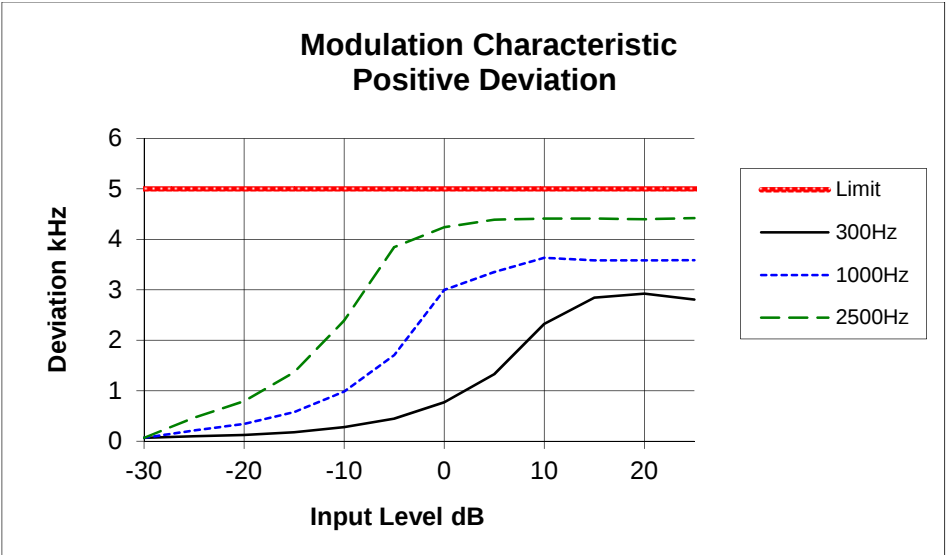


Transmitter Modulation Limiting

SPECIFICATION: FCC CFR 2.1047 (b)

Tx FREQUENCY: 459.9 MHz

25.0 kHz Channel Spacing

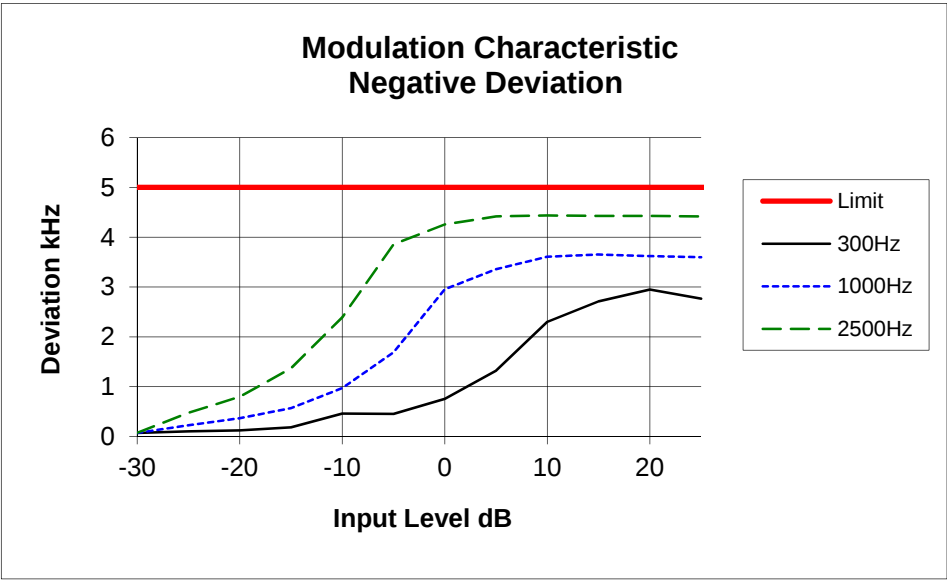
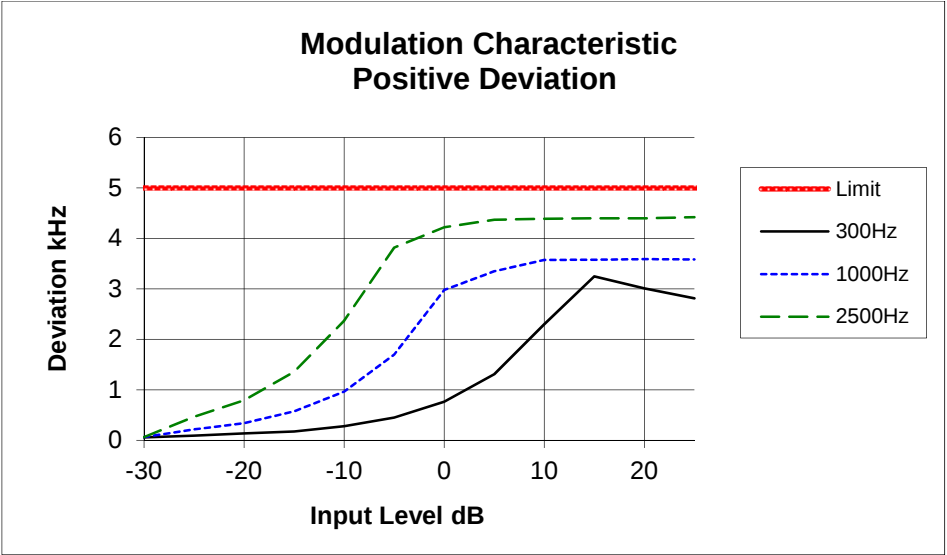


Transmitter Modulation Limiting

SPECIFICATION: FCC CFR 2.1047 (b)

Tx FREQUENCY: 469.9 MHz

25.0 kHz Channel Spacing

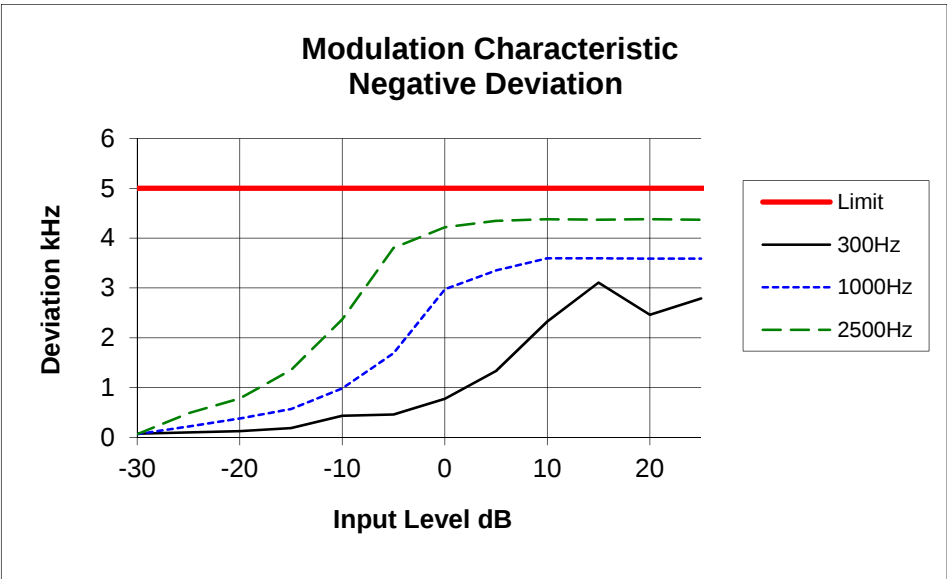
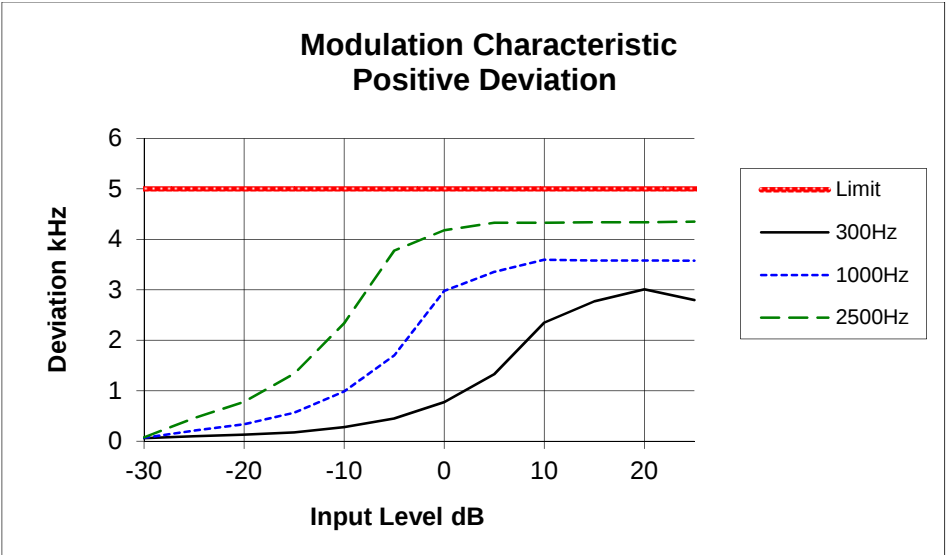


Transmitter Modulation Limiting

SPECIFICATION: FCC CFR 2.1047 (b)

Tx FREQUENCY: 511.9 MHz

25.0 kHz Channel Spacing

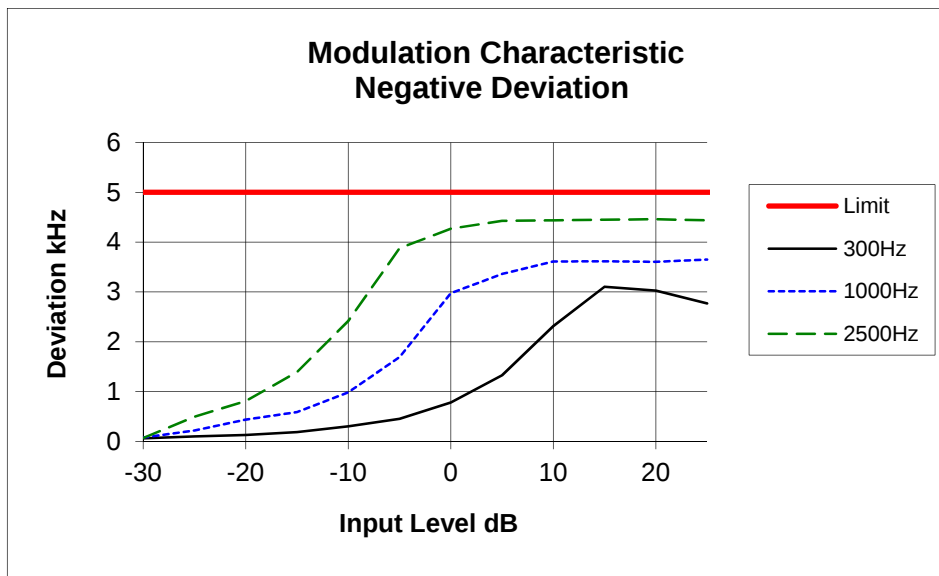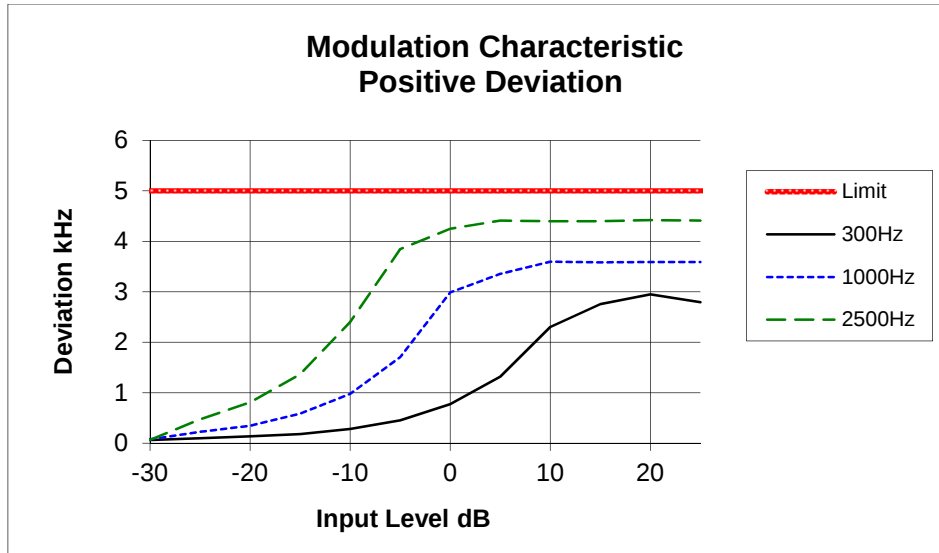

SIDEBAND SPECTRUM

SPECIFICATION: FCC 47 CFR 2.1049 (c)

RSS-119 5.5

GUIDE: TIA/EIA-603D 2.2.11

MEASUREMENT PROCEDURE:

1. Refer Annex A for Equipment Set up.
2. For analog measurements: The EUT was modulated by a 2500 Hz tone at an input level 16 dB above a level that produced 50% deviation. The input level was established at the frequency of maximum response of the audio modulating circuit.
For Data measurements: The EUT was modulated with an internally generated pseudo random bit sequence at the appropriate Baud rates.
3. The Occupied Bandwidth was measured on the Spectrum Analyser, with bandwidth settings as follows.

Emission Mask D – Resolution Bandwidth = 100 Hz, Video Bandwidth = 1 kHz

Emission Mask B – Resolution bandwidth = 300 Hz, Video Bandwidth = 3 kHz

MEASUREMENT RESULTS:

See the plots on the following pages for 12.5 kHz & 25.0 kHz channel spacings.

LIMIT CLAUSE: FCC 47 CFR 90.210

RSS-119 5.5

EMISSION MASKS:

Emission Mask D 12.5 kHz Channel Spacing

Analog, FFSK, Digital Voice/Data

Emission Mask B 25.0 kHz Channel Spacing

Analog, FFSK

DATA SPEED:

FFSK	12.5 kHz Channel Spacing	1200 bps & 2400 bps
FFSK	25.0 kHz Channel Spacing	1200 bps & 2400 bps
DMR Digital Voice	12.5 kHz Channel Spacing	9600 bps
DMR Digital Data	12.5 kHz Channel Spacing	9600 bps
P25 phase 1 Digital Voice	12.5 kHz Channel Spacing	9600 bps
P25 phase 1 Digital Data	12.5 kHz Channel Spacing	9600 bps
P25 phase 2 Digital Voice / Data	12.5 kHz Channel Spacing	12000 bps


Occupied Bandwidth and Spectrum Masks

ANALOG VOICE

SPECIFICATION: FCC CFR 2.1049 (c)


RSS-119 5.5

Tx FREQUENCY: 450.1 MHz 25 W 12.5 kHz Channel Spacing

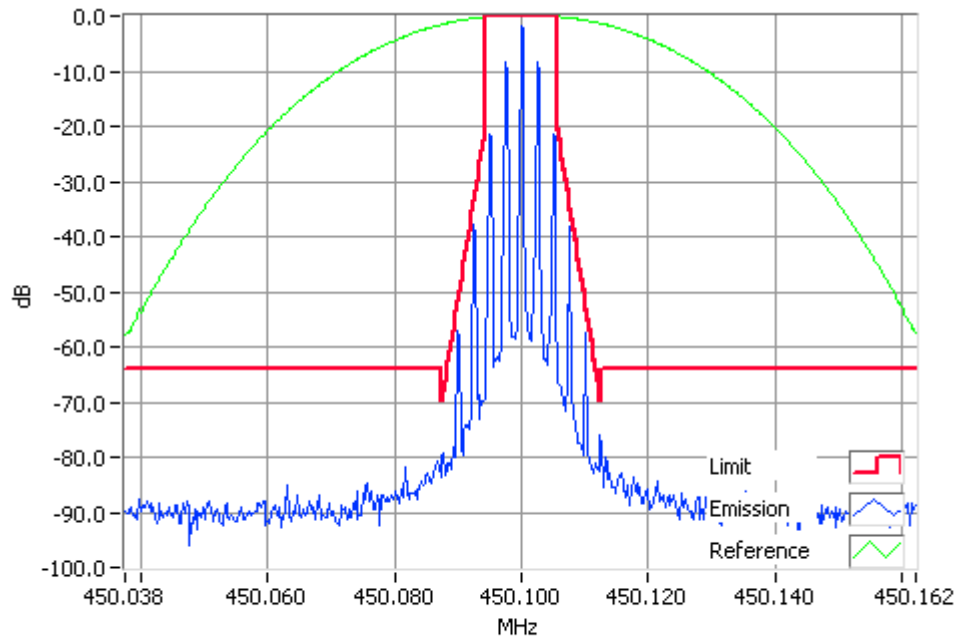

Analogue Modulation 450.1000MHz Mask D 25W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 450.1 MHz 1 W 12.5 kHz Channel Spacing

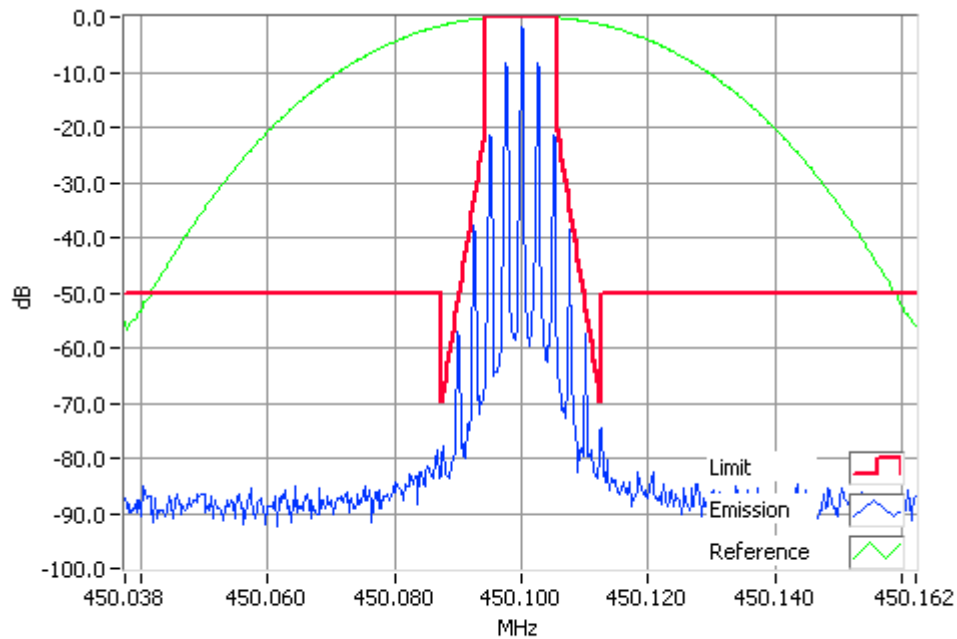

Analogue Modulation 450.1000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass


Occupied Bandwidth and Spectrum Masks

ANALOG VOICE

SPECIFICATION: FCC CFR 2.1049 (c)


RSS-119 5.5

Tx FREQUENCY: 459.9 MHz 25 W 12.5 kHz Channel Spacing

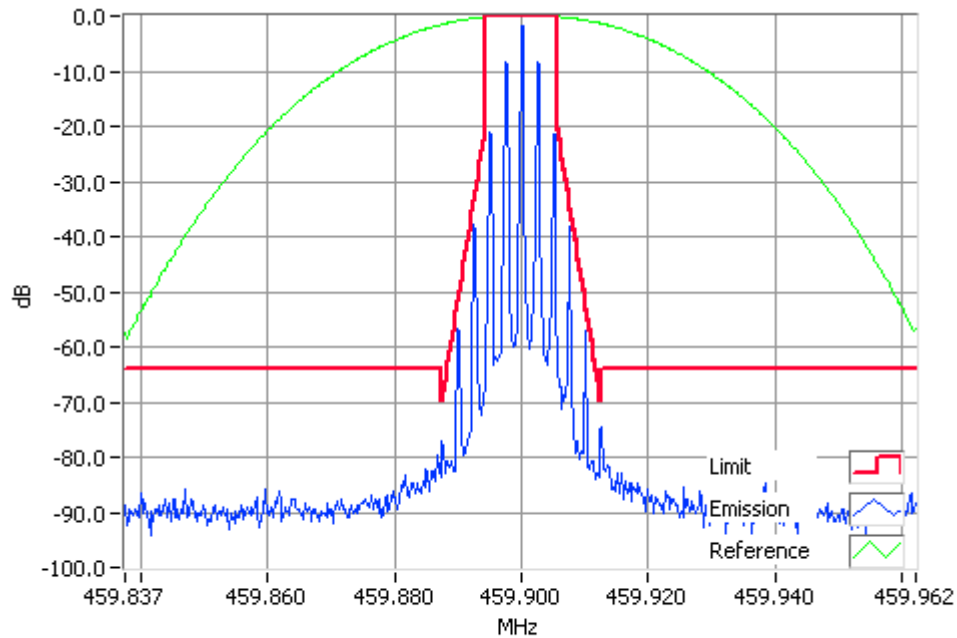

Analogue Modulation 459.9000MHz Mask D 25W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 459.9 MHz 1 W 12.5 kHz Channel Spacing

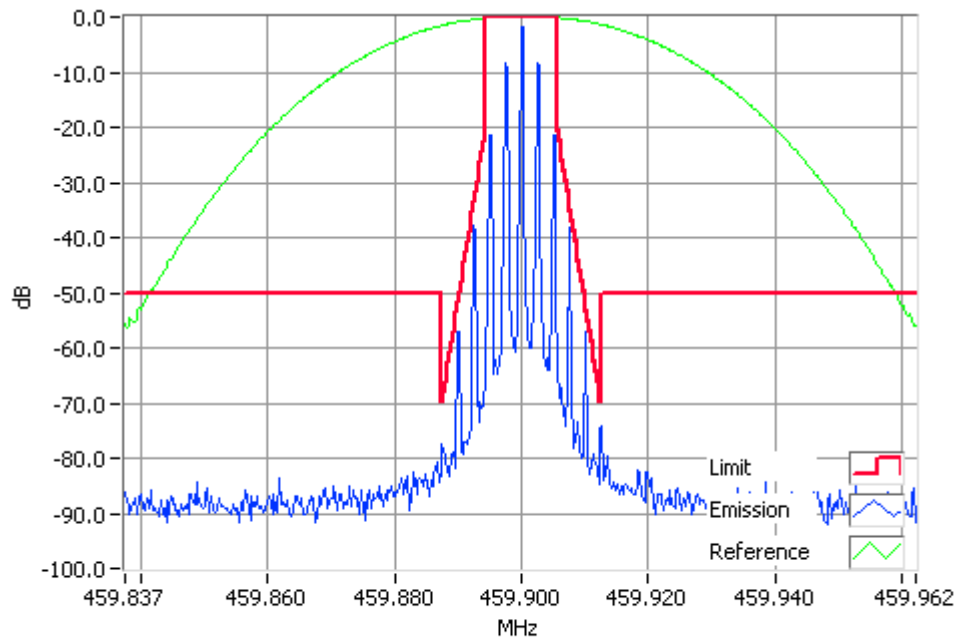


Analogue Modulation 459.9000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

ANALOG VOICE


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 469.9 MHz 25 W 12.5 kHz Channel Spacing

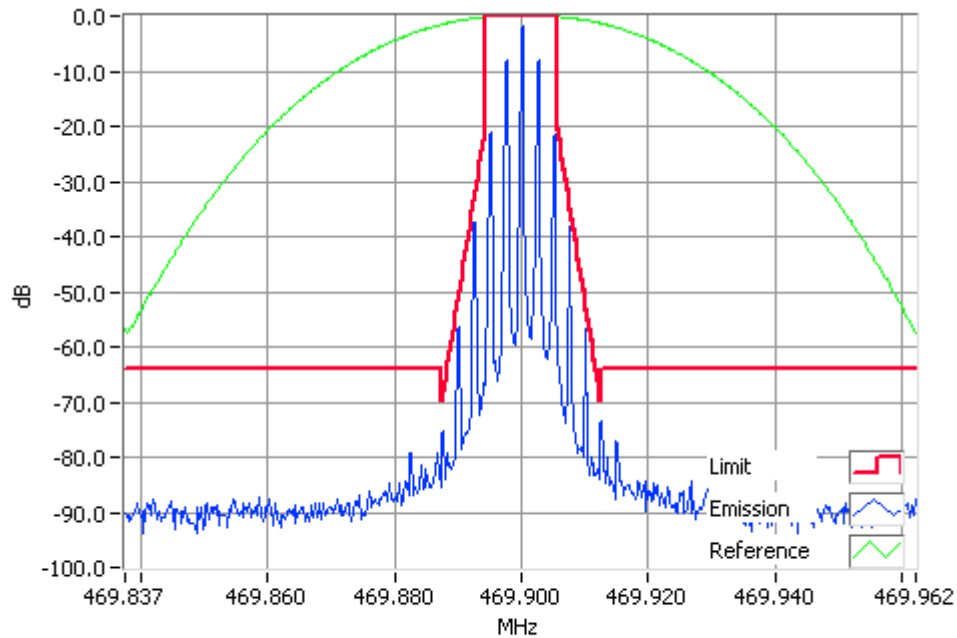

Analogue Modulation 469.9000MHz Mask D 25W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 469.9 MHz 1 W 12.5 kHz Channel Spacing

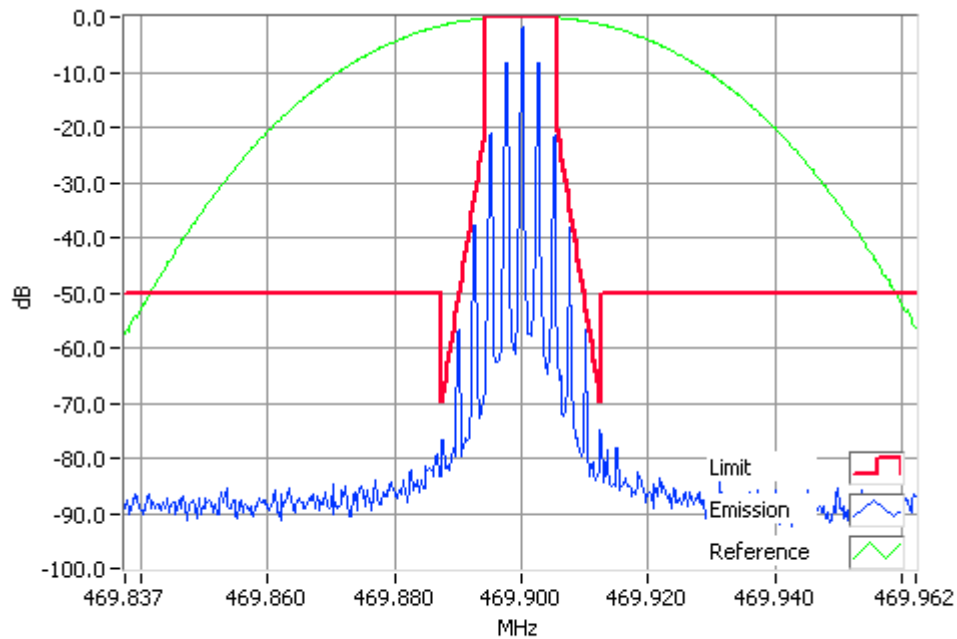


Analogue Modulation 469.9000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

ANALOG VOICE


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 511.9 MHz 25 W 12.5 kHz Channel Spacing

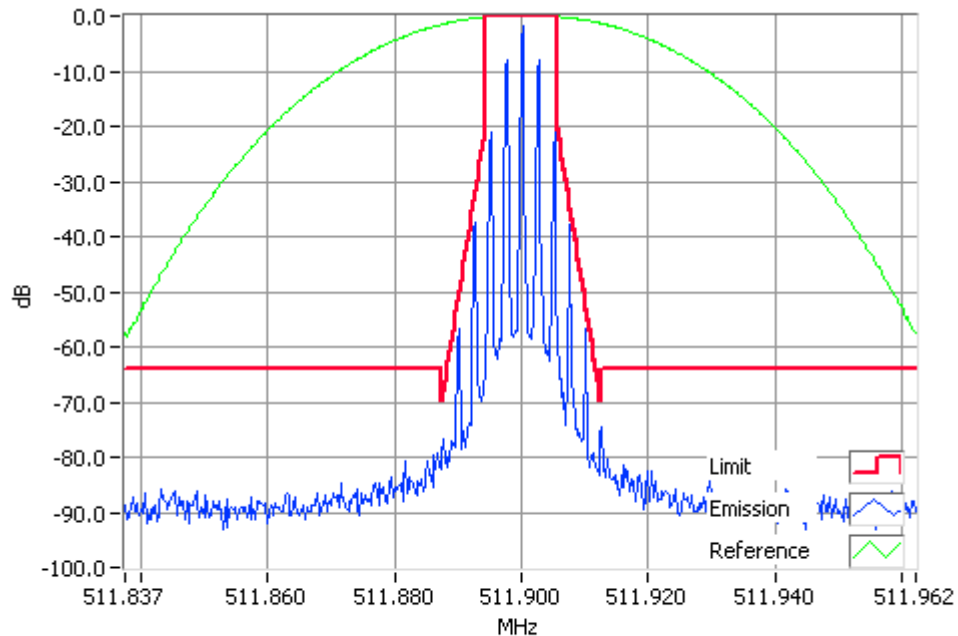

Analogue Modulation 511.9000MHz Mask D 25W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 511.9 MHz 1 W 12.5 kHz Channel Spacing

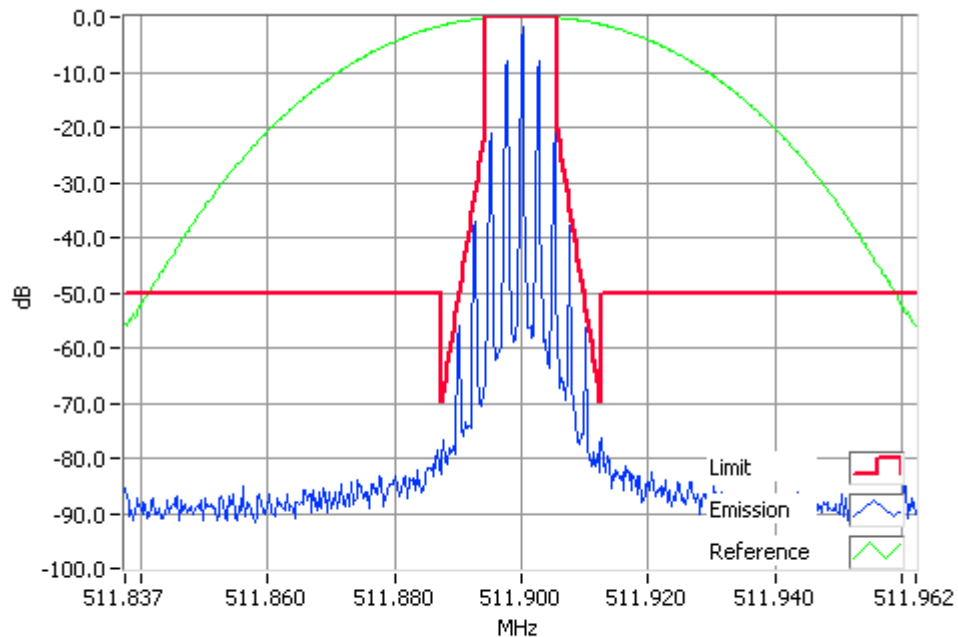


Analogue Modulation 511.9000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

ANALOG VOICE


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 450.1 MHz 25 W 25.0 kHz Channel Spacing

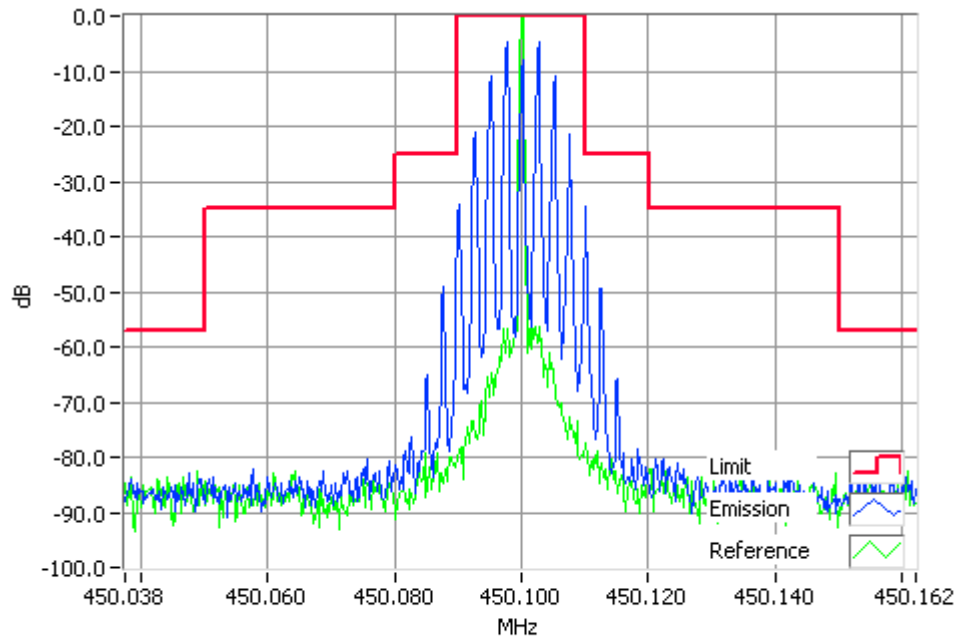

Analogue Modulation 450.1000MHz Mask B 25W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 450.1 MHz 1 W 25.0 kHz Channel Spacing

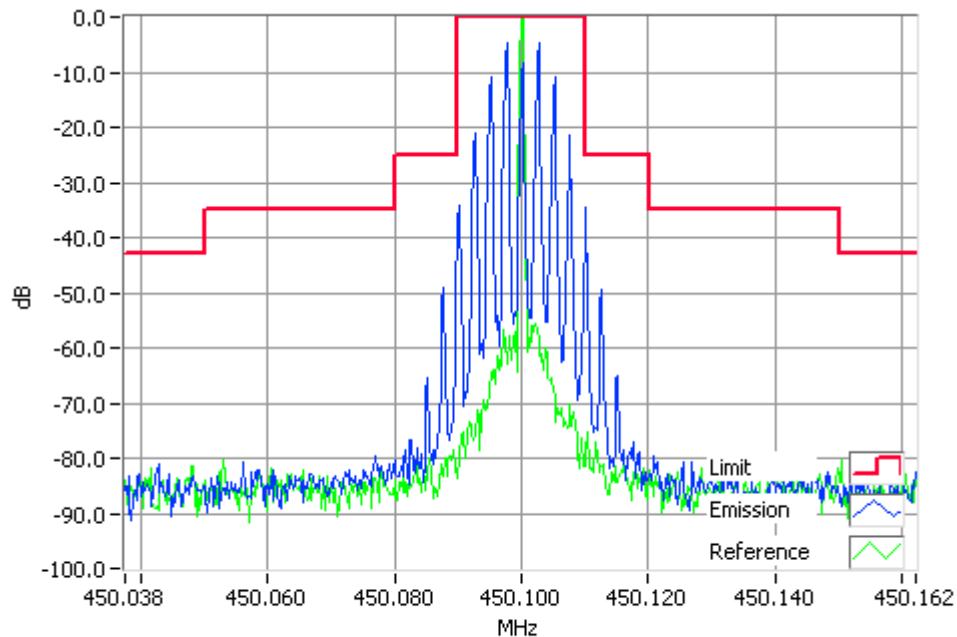


Analogue Modulation 450.1000MHz Mask B 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

ANALOG VOICE


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 459.9 MHz 25 W 25.0 kHz Channel Spacing

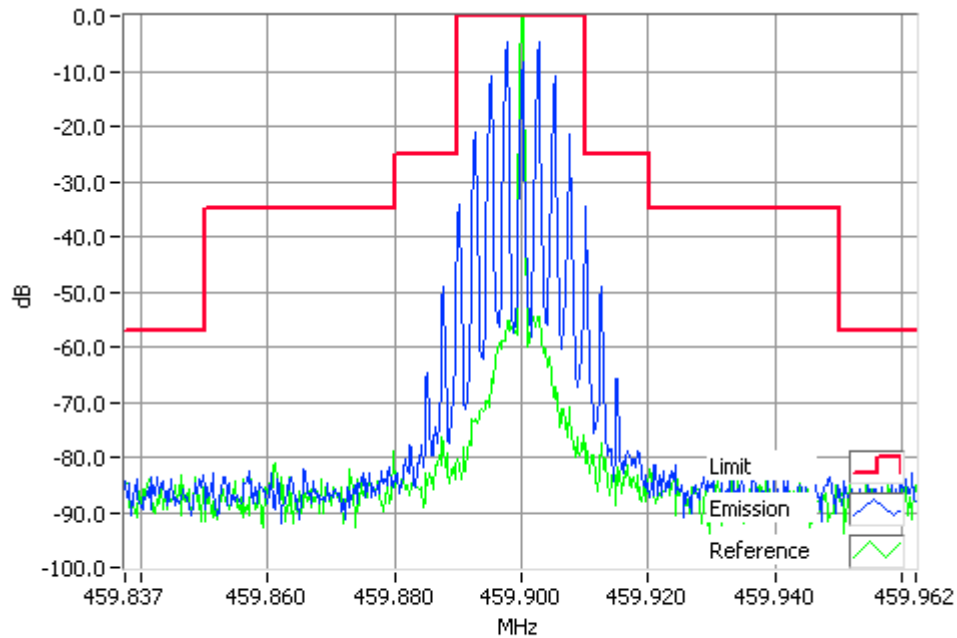

Analogue Modulation 459.9000MHz Mask B 25W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 459.9 MHz 1 W 25.0 kHz Channel Spacing

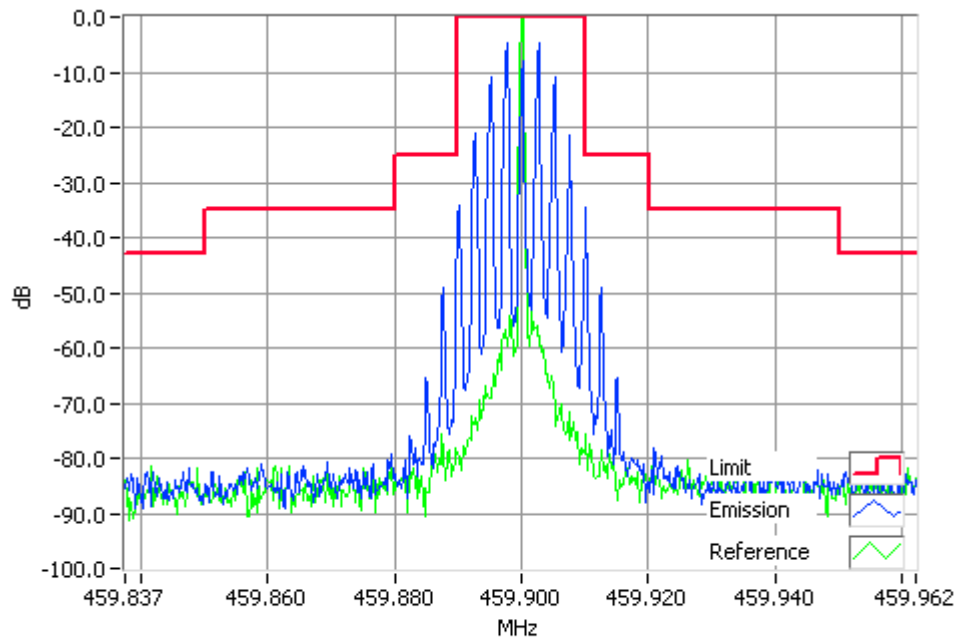


Analogue Modulation 459.9000MHz Mask B 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

ANALOG VOICE


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 469.9 MHz 25 W 25.0 kHz Channel Spacing

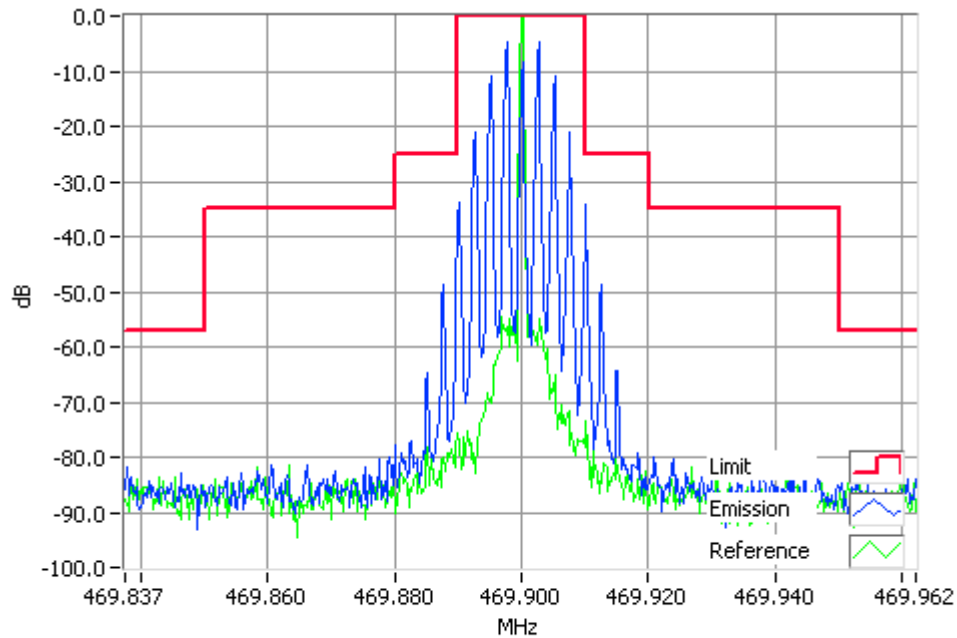

Analogue Modulation 469.9000MHz Mask B 25W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 469.9 MHz 1 W 25.0 kHz Channel Spacing

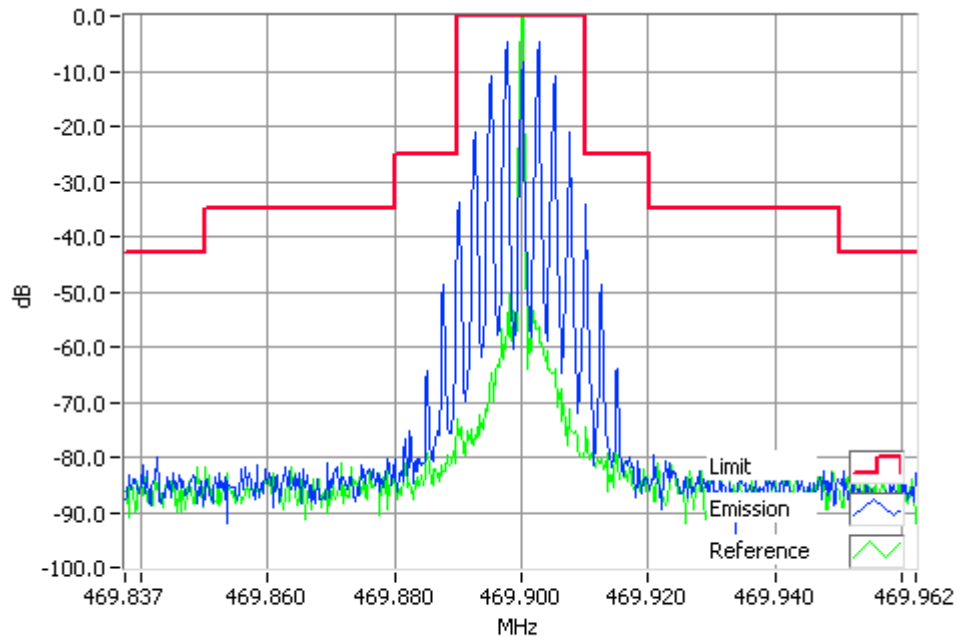


Analogue Modulation 469.9000MHz Mask B 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

ANALOG VOICE


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 511.9 MHz 25 W 25.0 kHz Channel Spacing

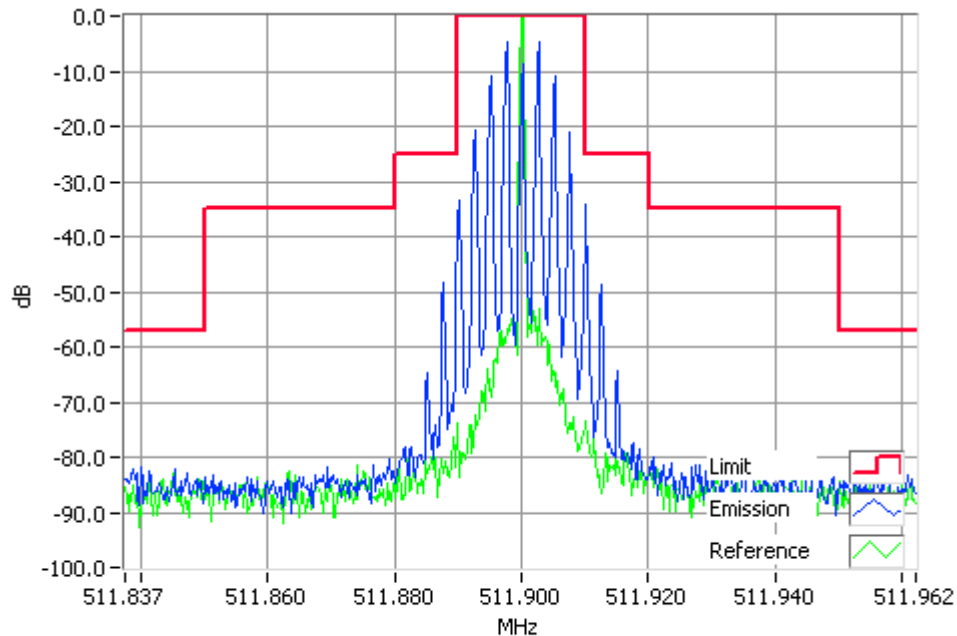

Analogue Modulation 511.9000MHz Mask B 25W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 511.9 MHz 1 W 25.0 kHz Channel Spacing

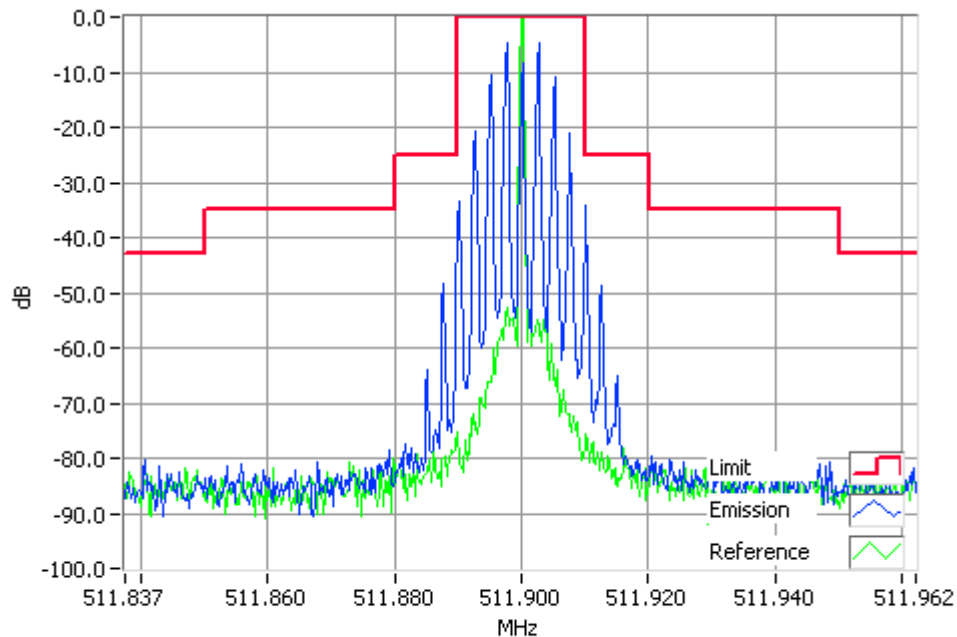


Analogue Modulation 511.9000MHz Mask B 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

FFSK – 1200 bps


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 450.1 MHz 25 W 12.5 kHz Channel Spacing

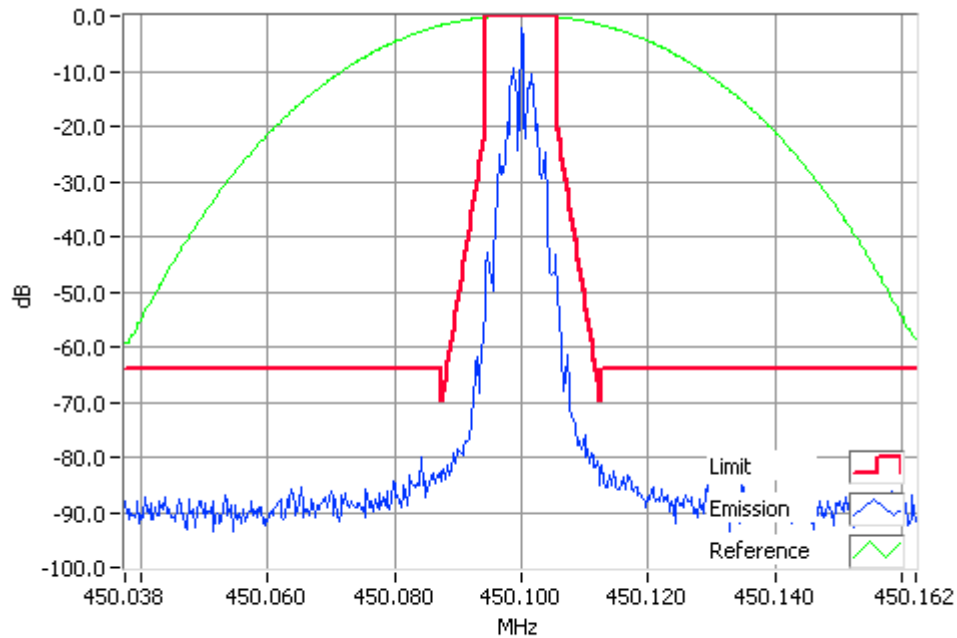

FFSK1200 450.1000MHz Mask D 25W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 450.1 MHz 1 W 12.5 kHz Channel Spacing

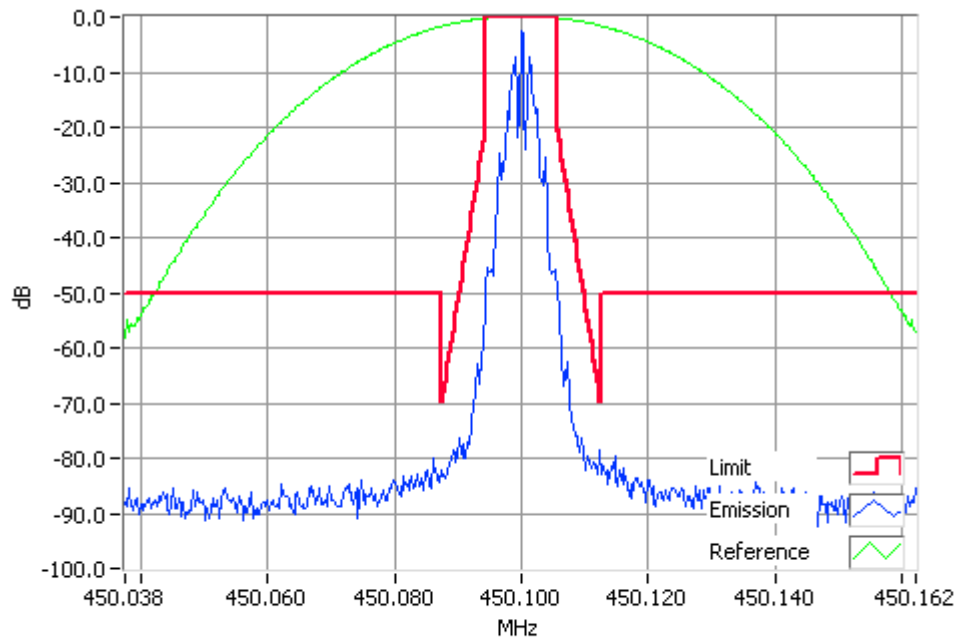


FFSK1200 450.1000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

FFSK – 1200 bps


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 459.9 MHz 25 W 12.5 kHz Channel Spacing

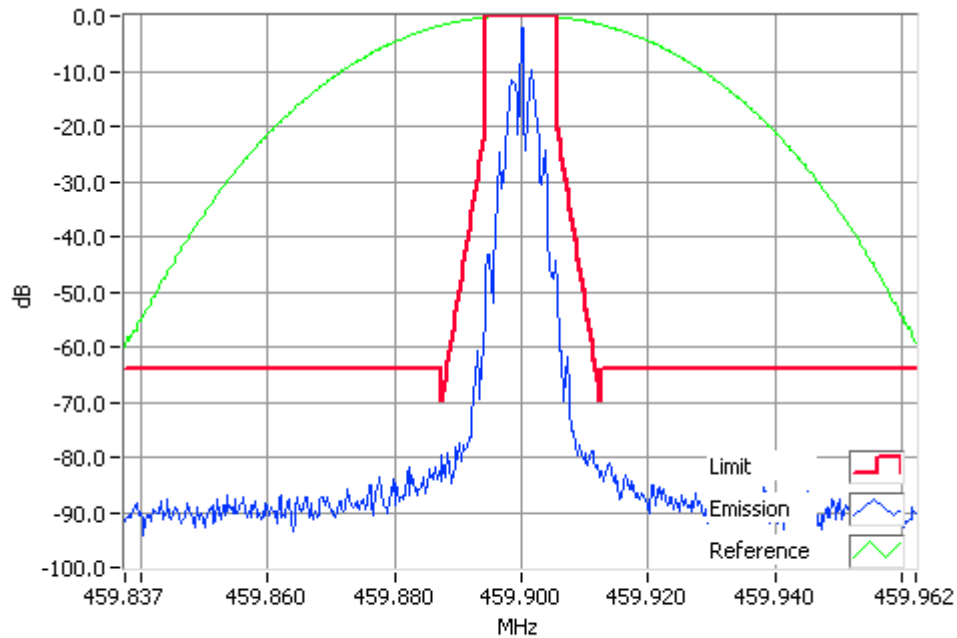

FFSK1200 459.9000MHz Mask D 25W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 459.9 MHz 1 W 12.5 kHz Channel Spacing

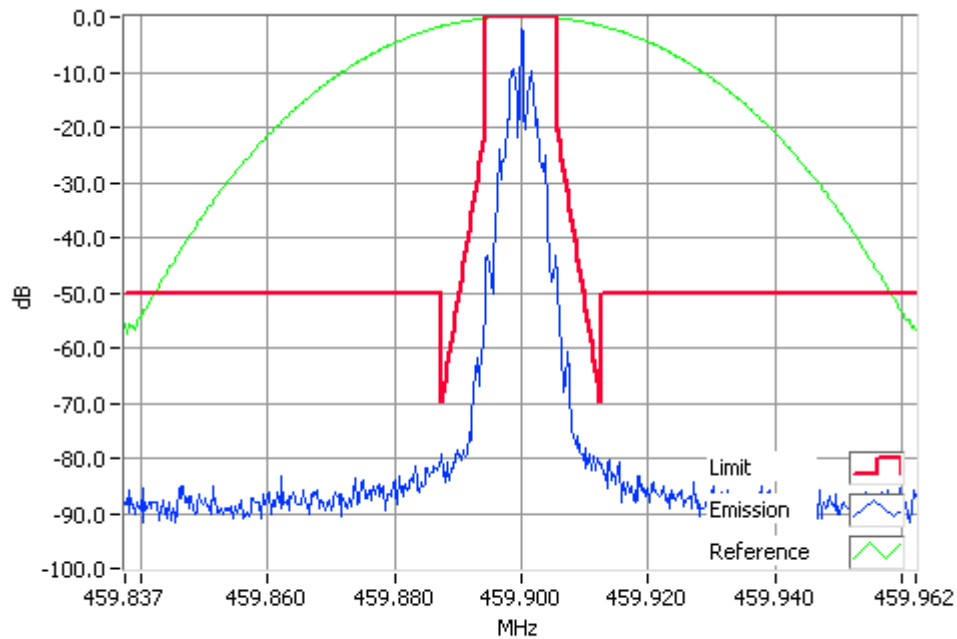


FFSK1200 459.9000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

FFSK – 1200 bps


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 469.9 MHz 25 W 12.5 kHz Channel Spacing

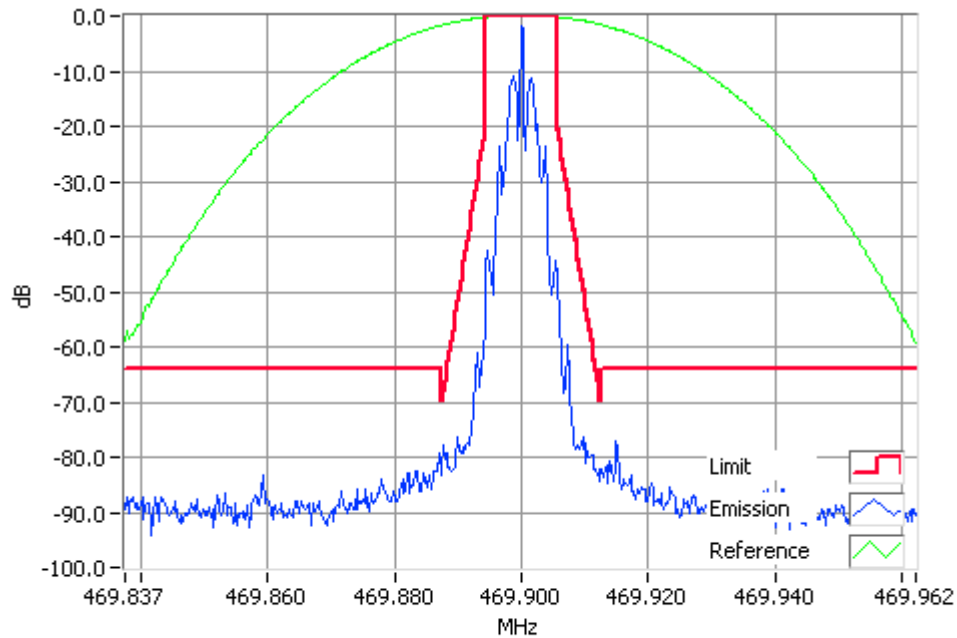

FFSK1200 469.9000MHz Mask D 25W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 469.9 MHz 1 W 12.5 kHz Channel Spacing

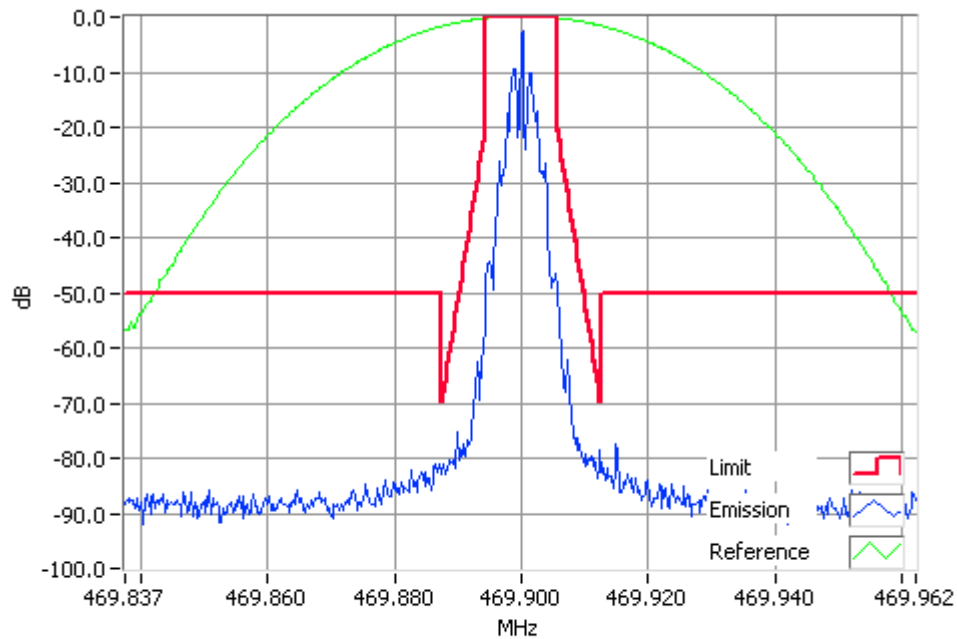


FFSK1200 469.9000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

FFSK – 1200 bps


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 511.9 MHz 25 W 12.5 kHz Channel Spacing

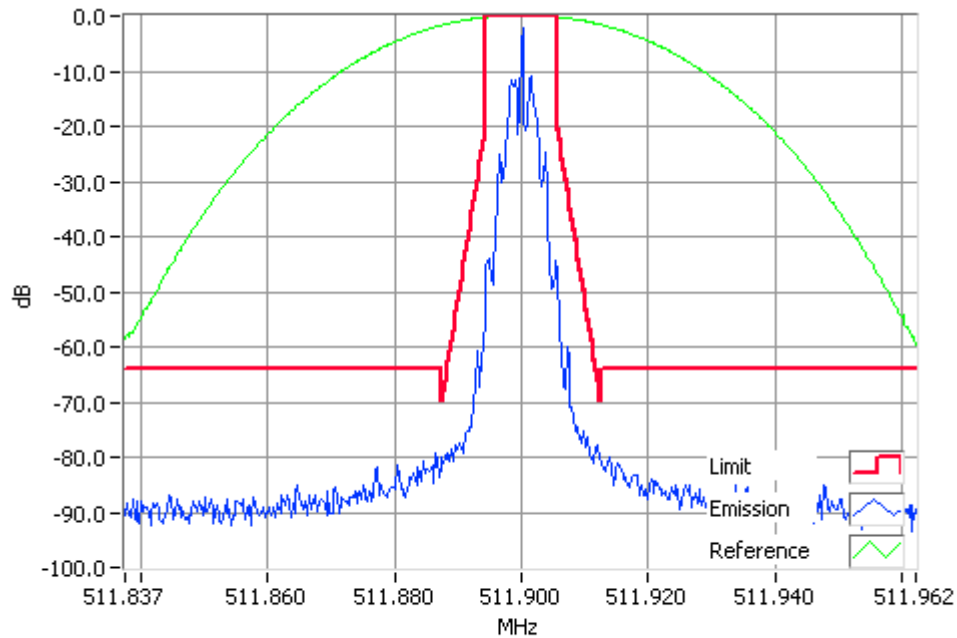

FFSK1200 511.9000MHz Mask D 25W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 511.9 MHz 1 W 12.5 kHz Channel Spacing

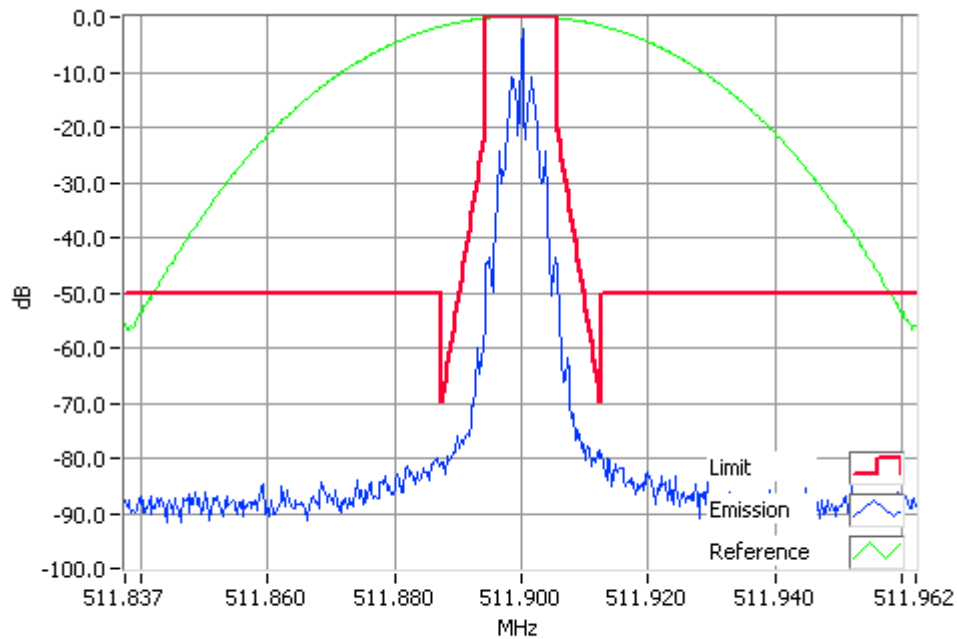


FFSK1200 511.9000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

FFSK – 1200 bps


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 450.1 MHz 25 W 25.0 kHz Channel Spacing

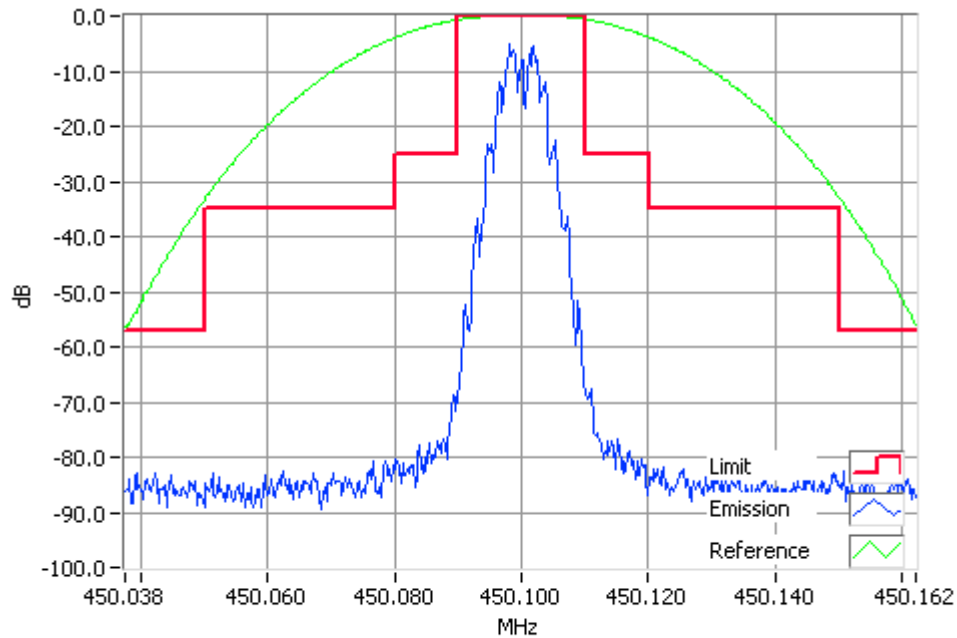

FFSK1200 450.1000MHz Mask B 25W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 450.1 MHz 1 W 25.0 kHz Channel Spacing

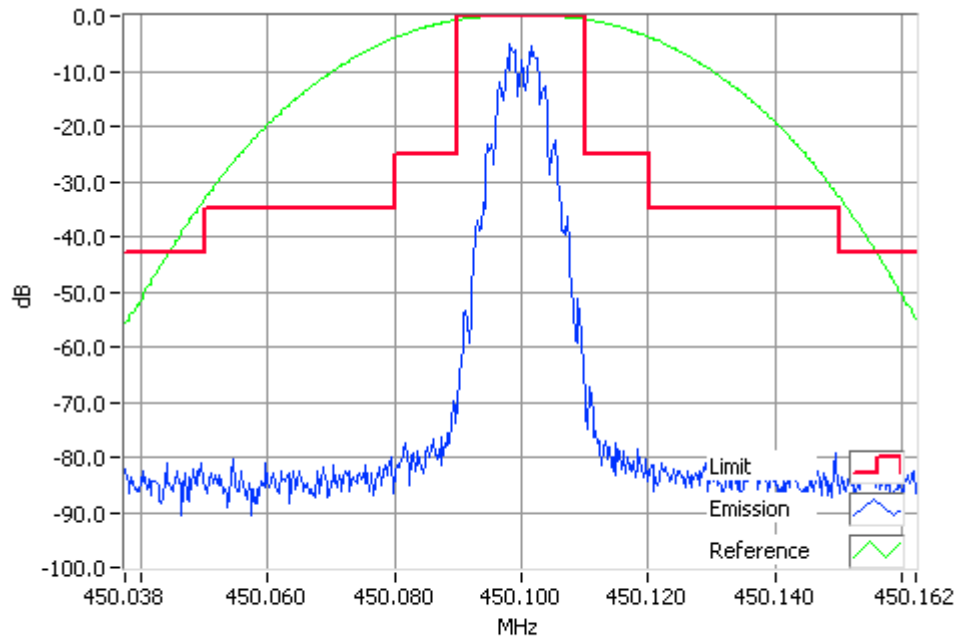


FFSK1200 450.1000MHz Mask B 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

FFSK – 1200 bps


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 459.9 MHz 25 W 25.0 kHz Channel Spacing

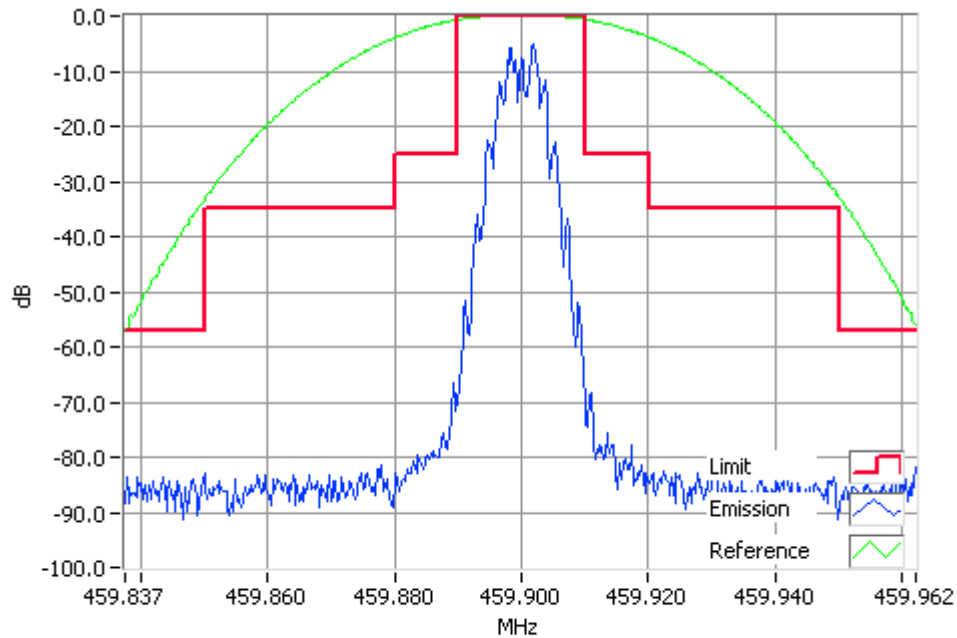

FFSK1200 459.9000MHz Mask B 25W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 459.9 MHz 1 W 25.0 kHz Channel Spacing

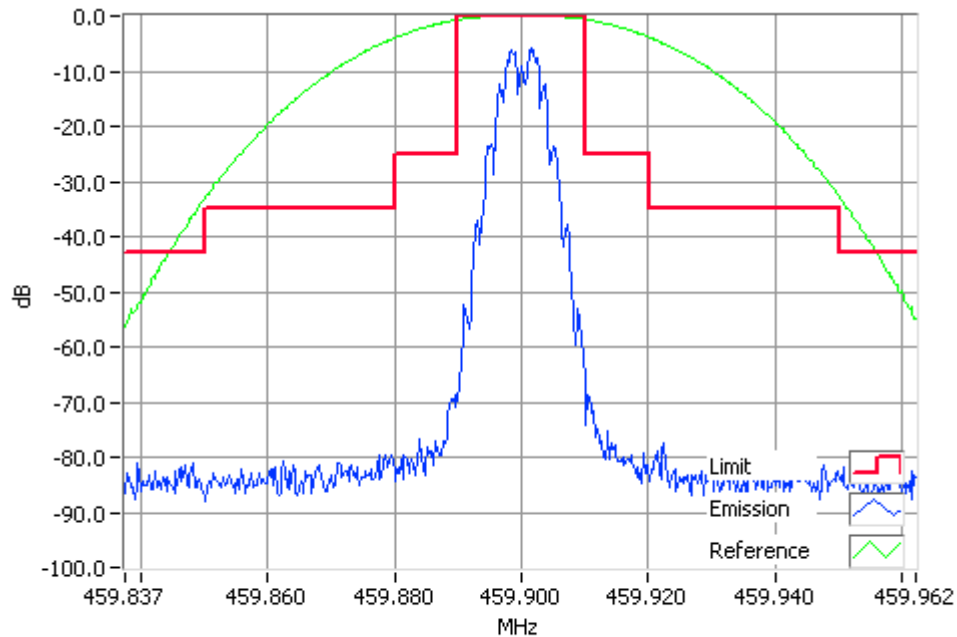


FFSK1200 459.9000MHz Mask B 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

FFSK – 1200 bps


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 469.9 MHz 25 W 25.0 kHz Channel Spacing

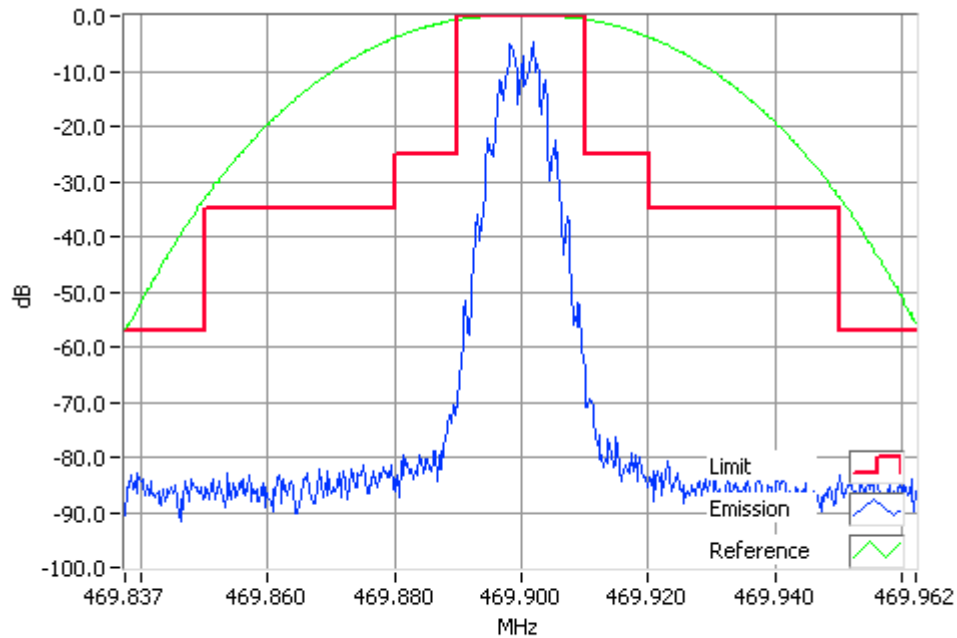

FFSK1200 469.9000MHz Mask B 25W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 469.9 MHz 1 W 25.0 kHz Channel Spacing

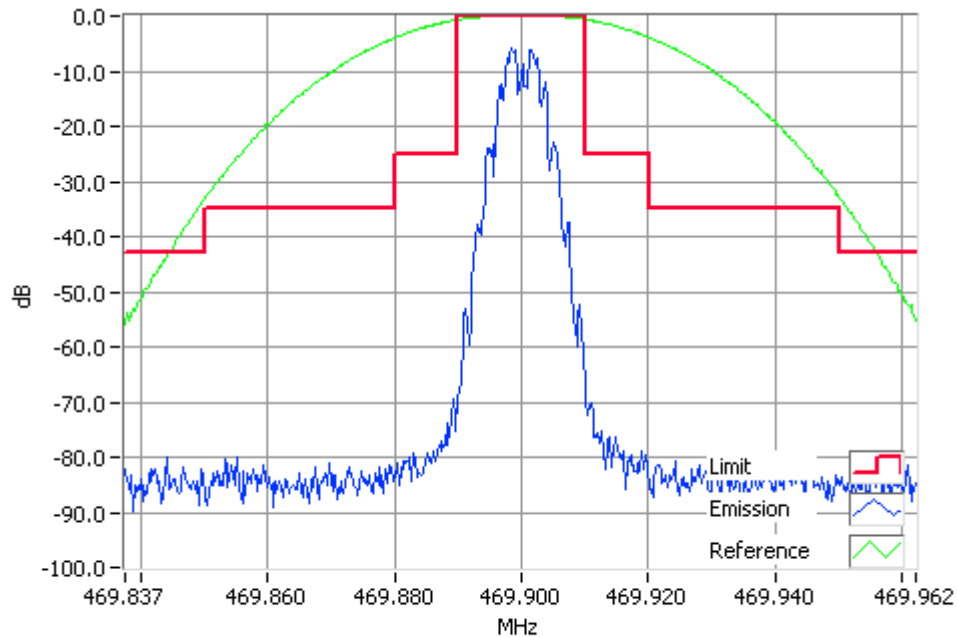


FFSK1200 469.9000MHz Mask B 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

FFSK – 1200 bps


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 511.9 MHz 25 W 25.0 kHz Channel Spacing

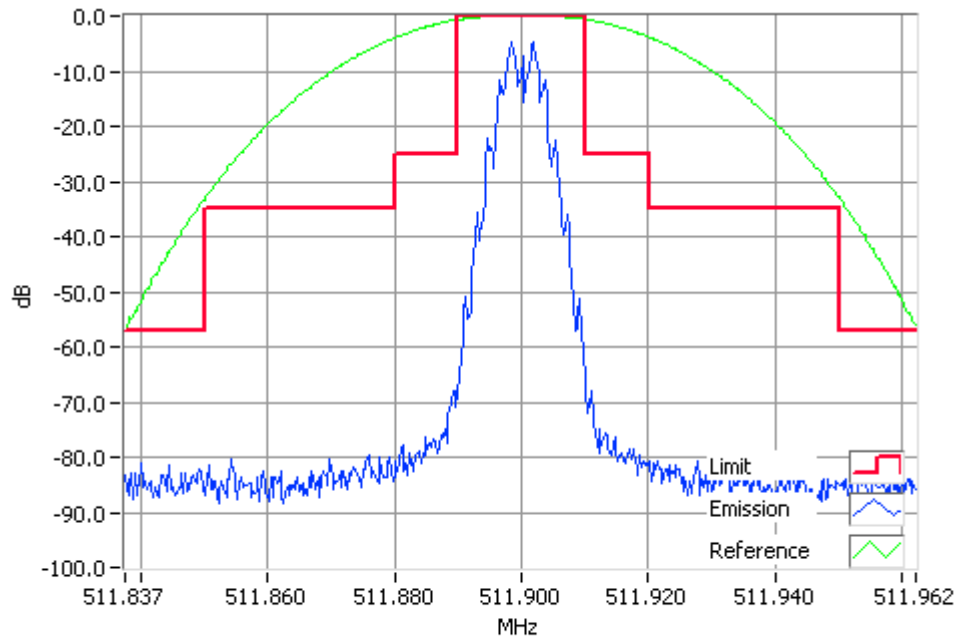

FFSK1200 511.9000MHz Mask B 25W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 511.9 MHz 1 W 25.0 kHz Channel Spacing

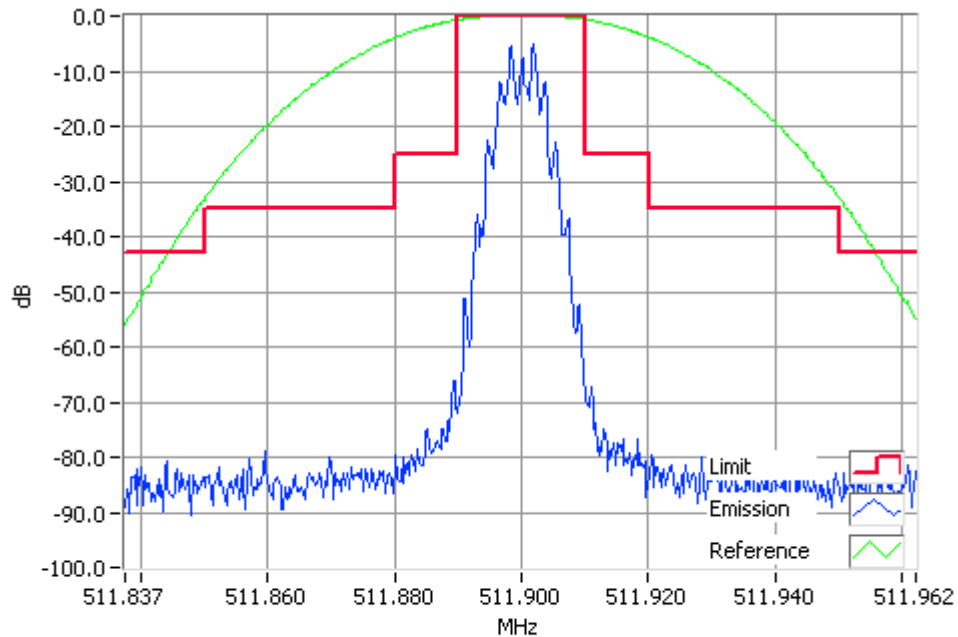


FFSK1200 511.9000MHz Mask B 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

FFSK – 2400 bps


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 450.1 MHz 25 W 12.5 kHz Channel Spacing

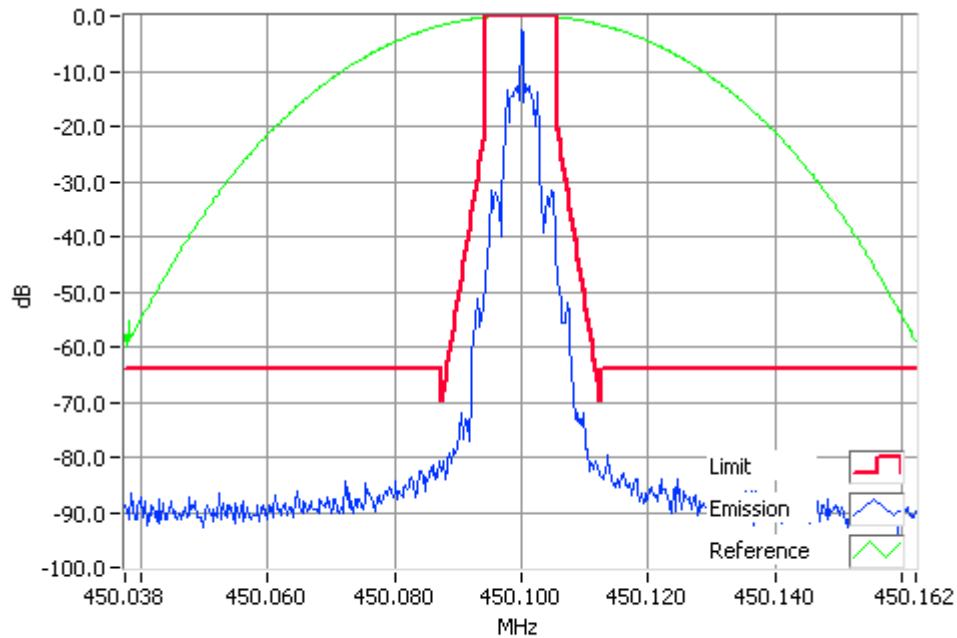

FFSK2400 450.1000MHz Mask D 25W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 450.1 MHz 1 W 12.5 kHz Channel Spacing

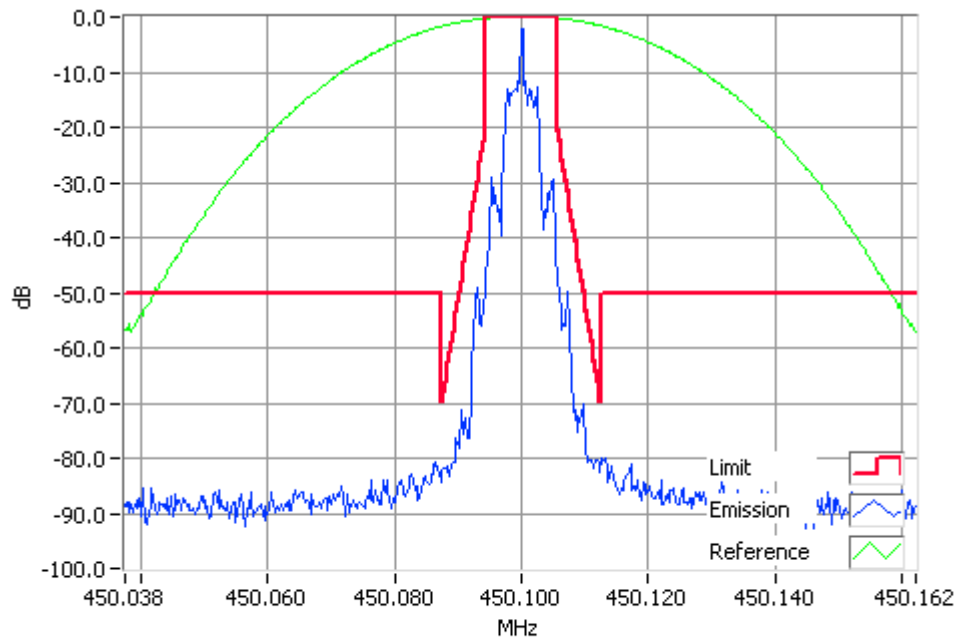


FFSK2400 450.1000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

FFSK – 2400 bps


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 459.9 MHz 25 W 12.5 kHz Channel Spacing

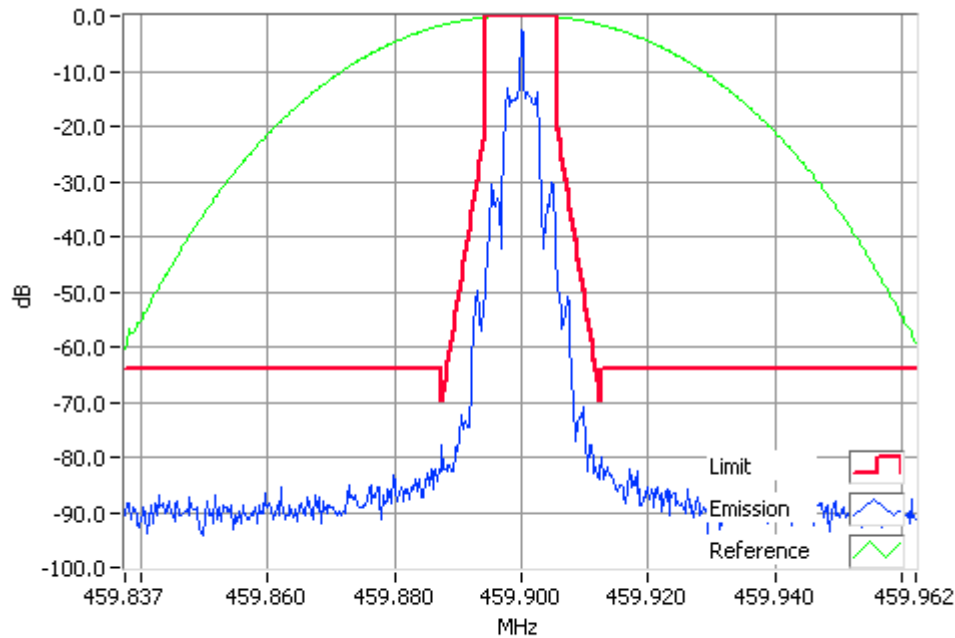

FFSK2400 459.9000MHz Mask D 25W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 459.9 MHz 1 W 12.5 kHz Channel Spacing

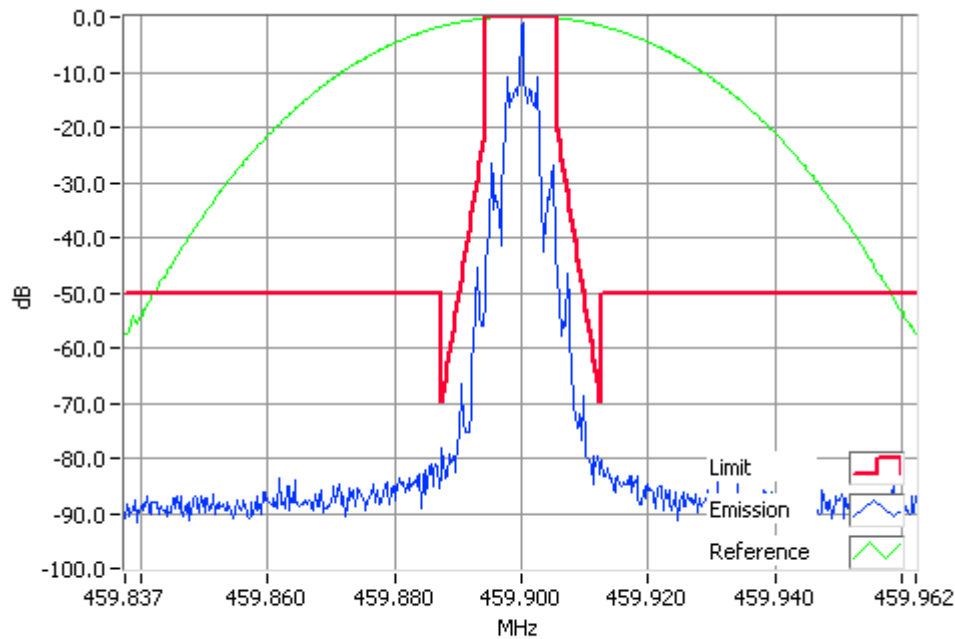


FFSK2400 459.9000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

FFSK – 2400 bps


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 469.9 MHz 25 W 12.5 kHz Channel Spacing

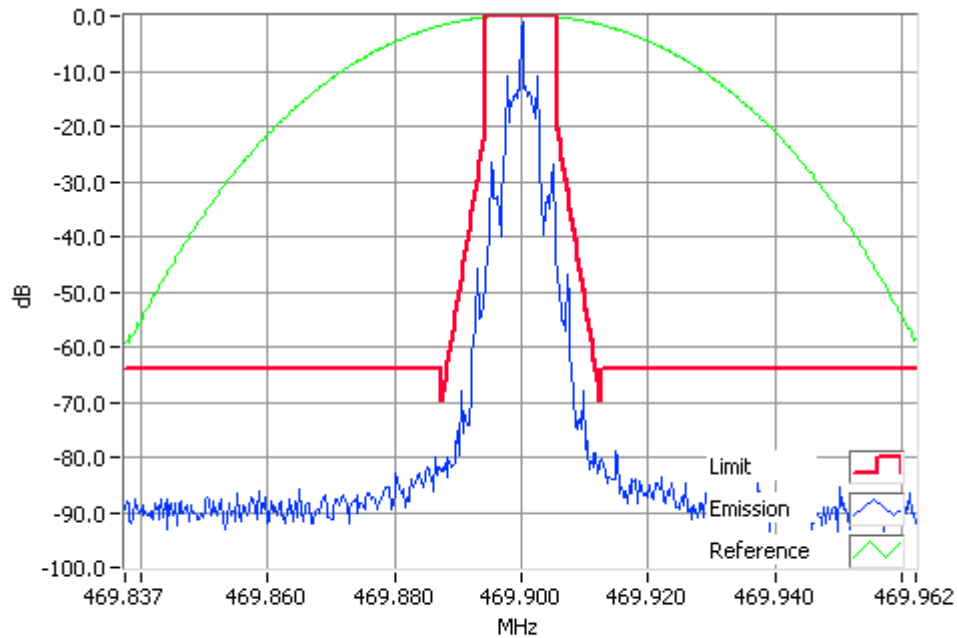

FFSK2400 469.9000MHz Mask D 25W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 469.9 MHz 1 W 12.5 kHz Channel Spacing

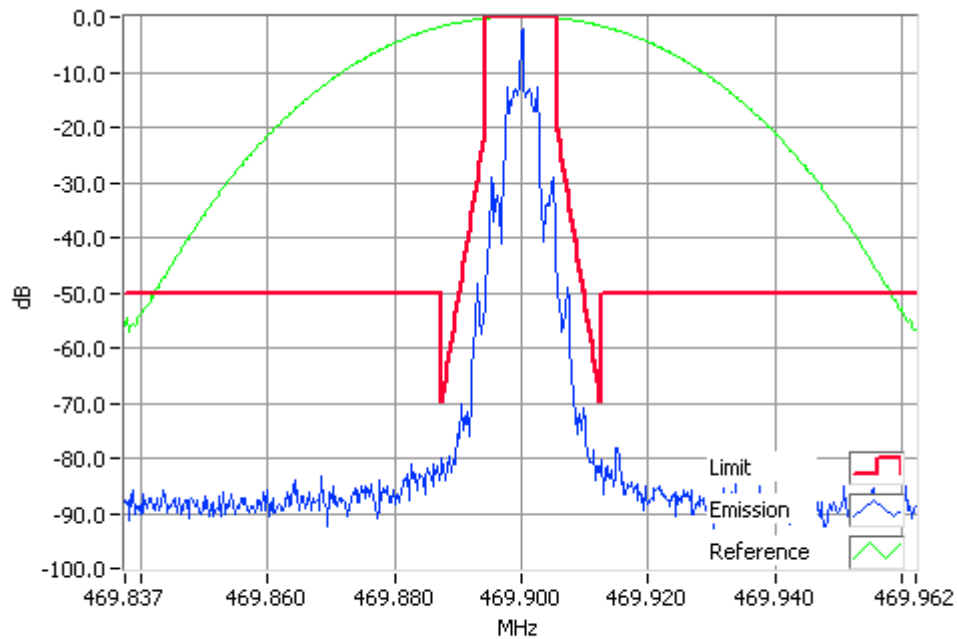


FFSK2400 469.9000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

FFSK – 2400 bps


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 511.9 MHz 25 W 12.5 kHz Channel Spacing

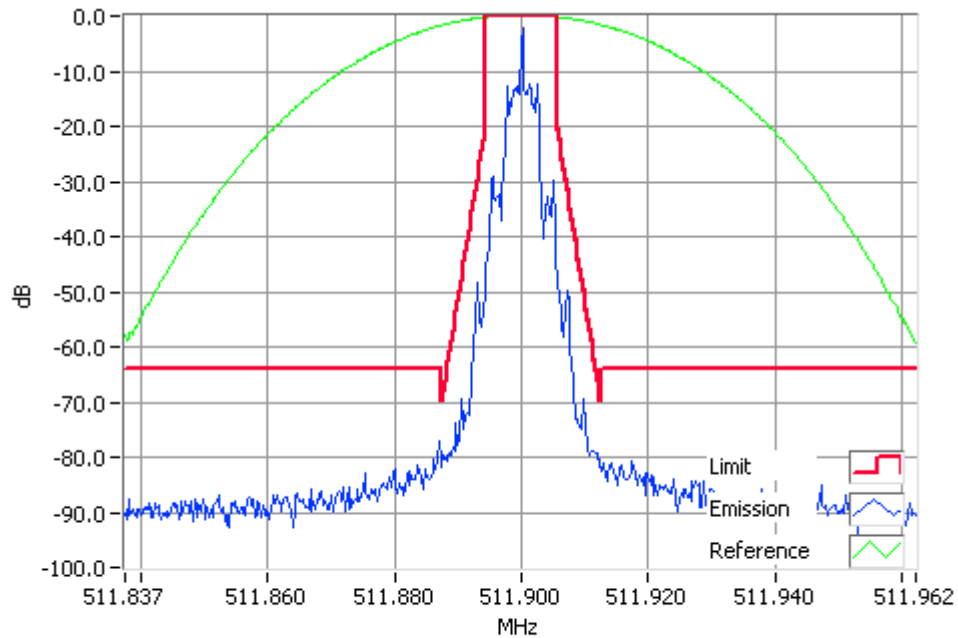

FFSK2400 511.9000MHz Mask D 25W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 511.9 MHz 1 W 12.5 kHz Channel Spacing

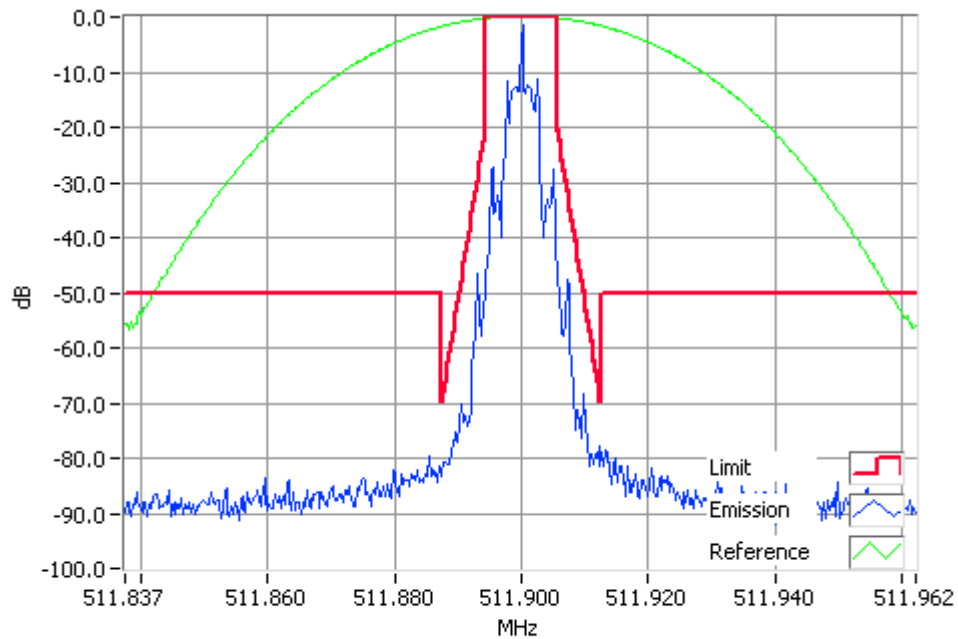


FFSK2400 511.9000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

FFSK – 2400 bps


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 450.1 MHz 25 W 25.0 kHz Channel Spacing

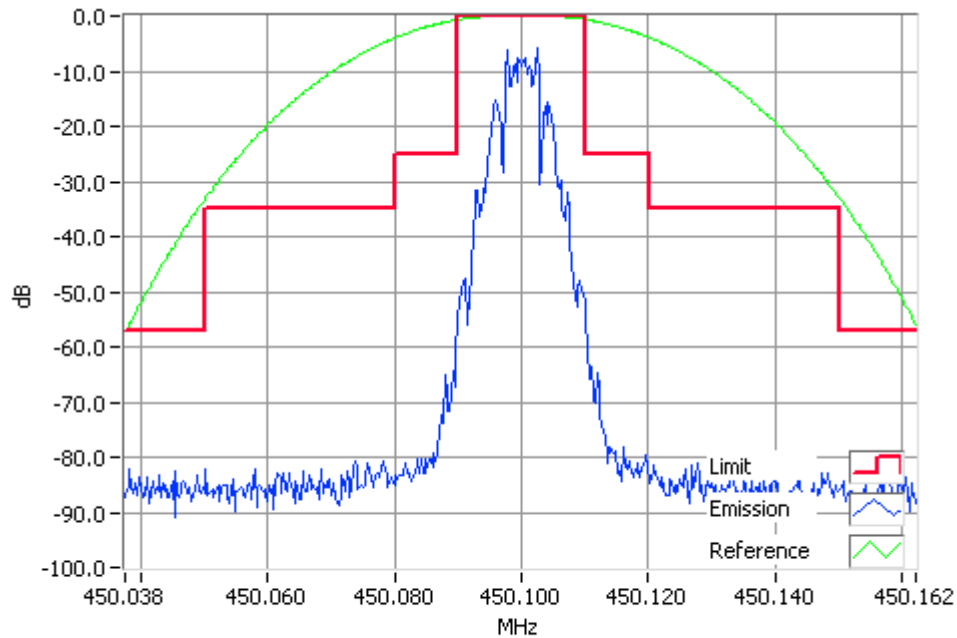

FFSK2400 450.1000MHz Mask B 25W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 450.1 MHz 1 W 25.0 kHz Channel Spacing

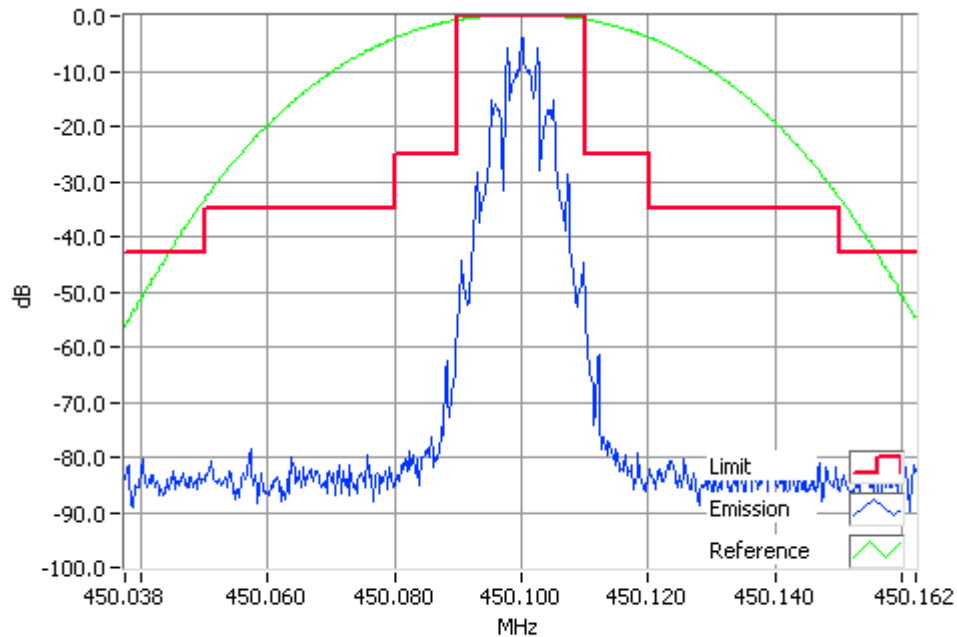


FFSK2400 450.1000MHz Mask B 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

FFSK – 2400 bps


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 459.9 MHz 25 W 25.0 kHz Channel Spacing

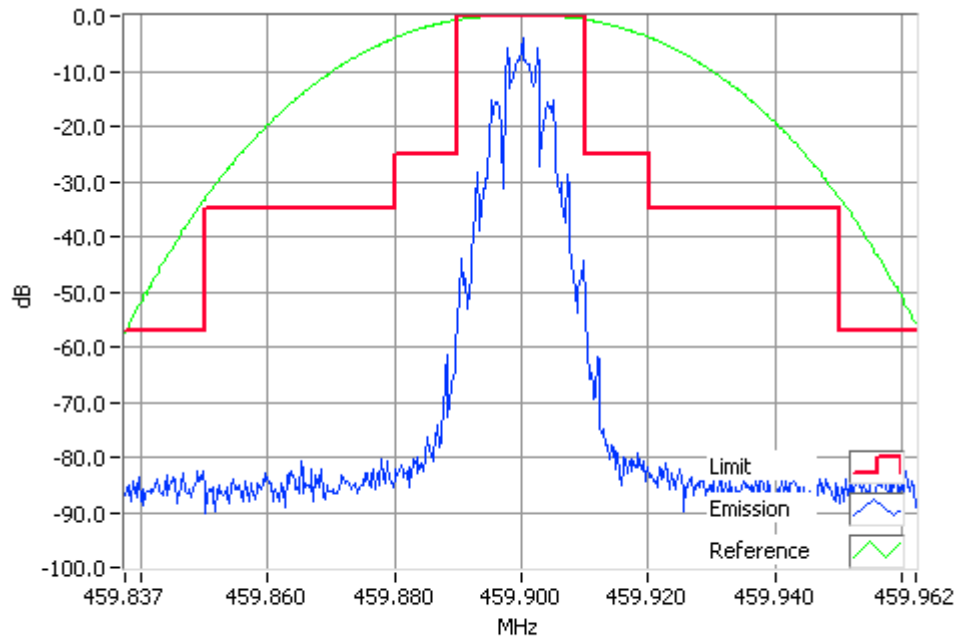

FFSK2400 459.9000MHz Mask B 25W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 459.9 MHz 1 W 25.0 kHz Channel Spacing

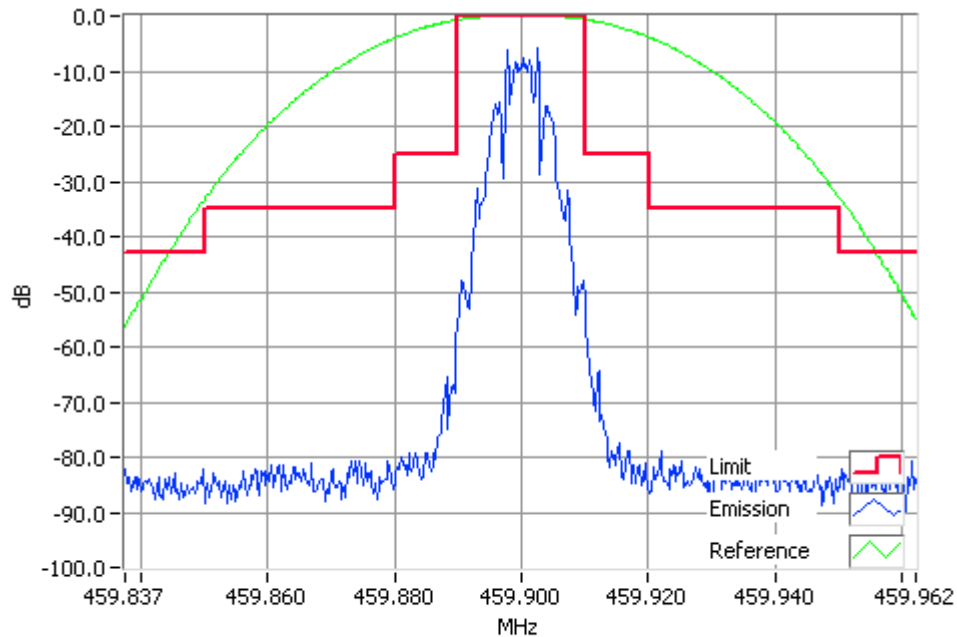


FFSK2400 459.9000MHz Mask B 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

FFSK – 2400 bps


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 469.9 MHz 25 W 25.0 kHz Channel Spacing

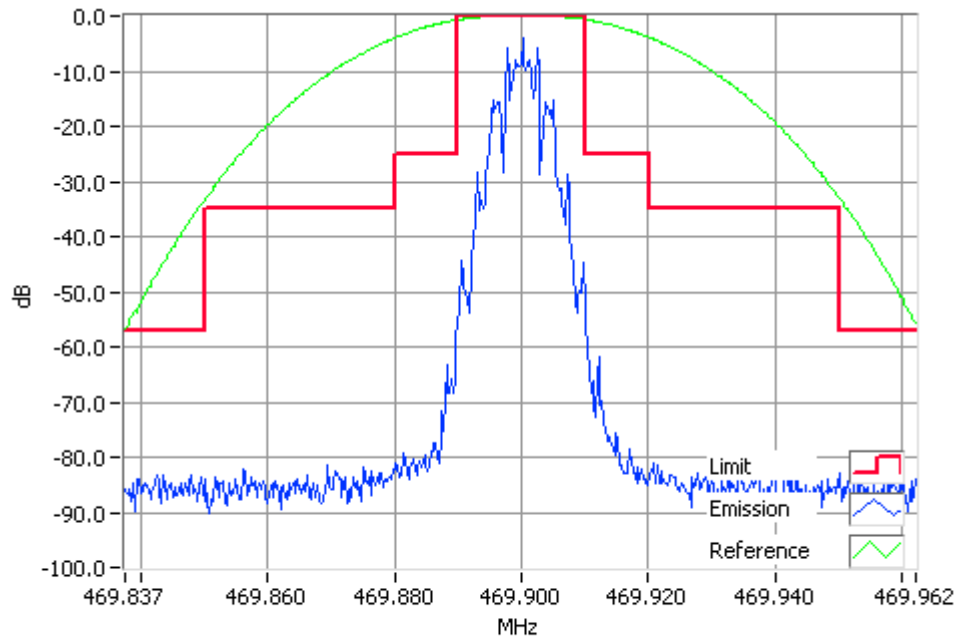

FFSK2400 469.9000MHz Mask B 25W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 469.9 MHz 1 W 25.0 kHz Channel Spacing

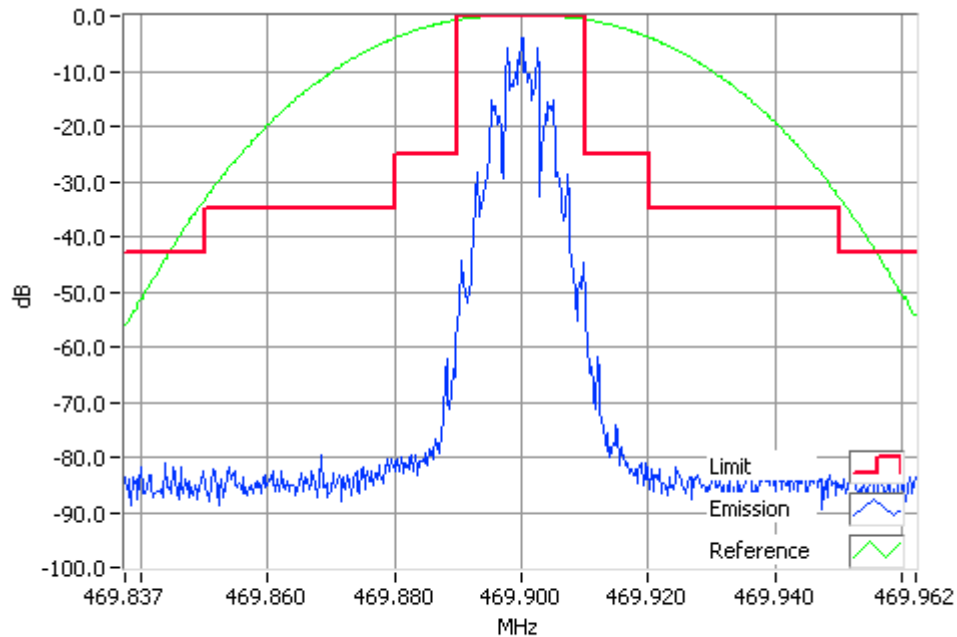


FFSK2400 469.9000MHz Mask B 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

FFSK – 2400 bps


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 511.9 MHz 25 W 25.0 kHz Channel Spacing

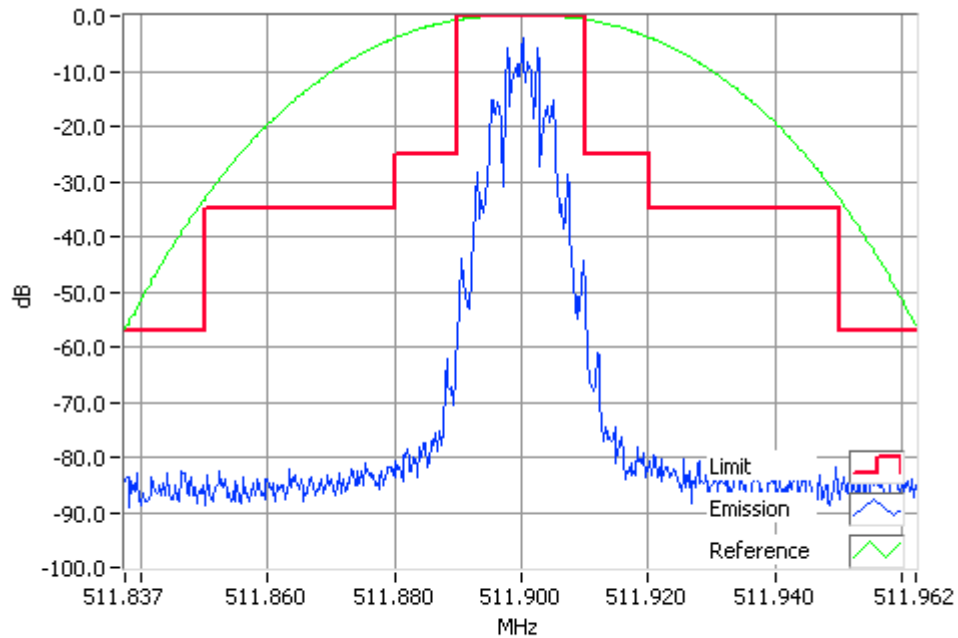

FFSK2400 511.9000MHz Mask B 25W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 511.9 MHz 1 W 25.0 kHz Channel Spacing

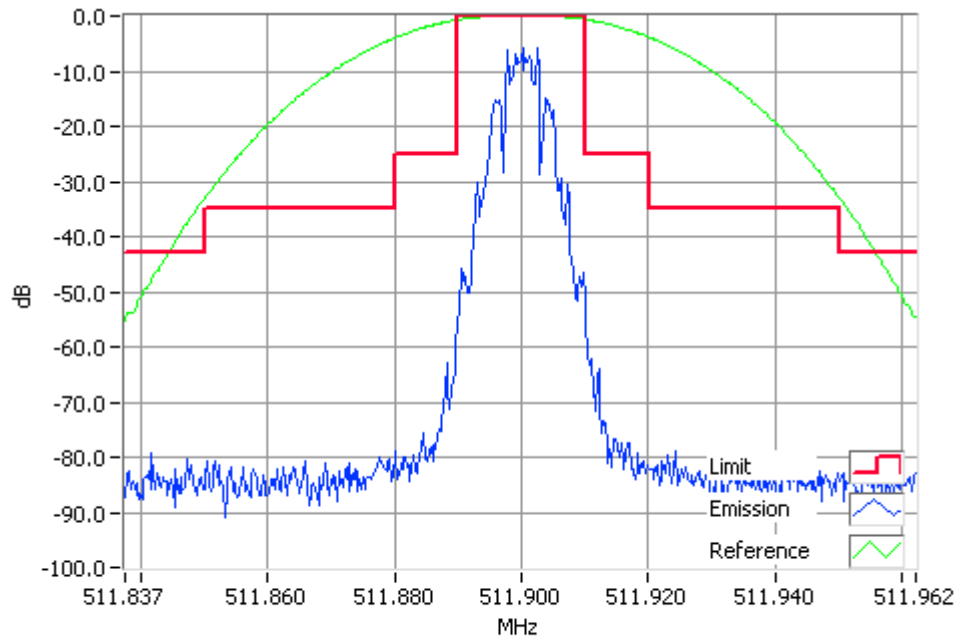


FFSK2400 511.9000MHz Mask B 1W
RBW=300Hz, VBW=3000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

DMR


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 450.1 MHz 25 W 12.5 kHz Channel Spacing

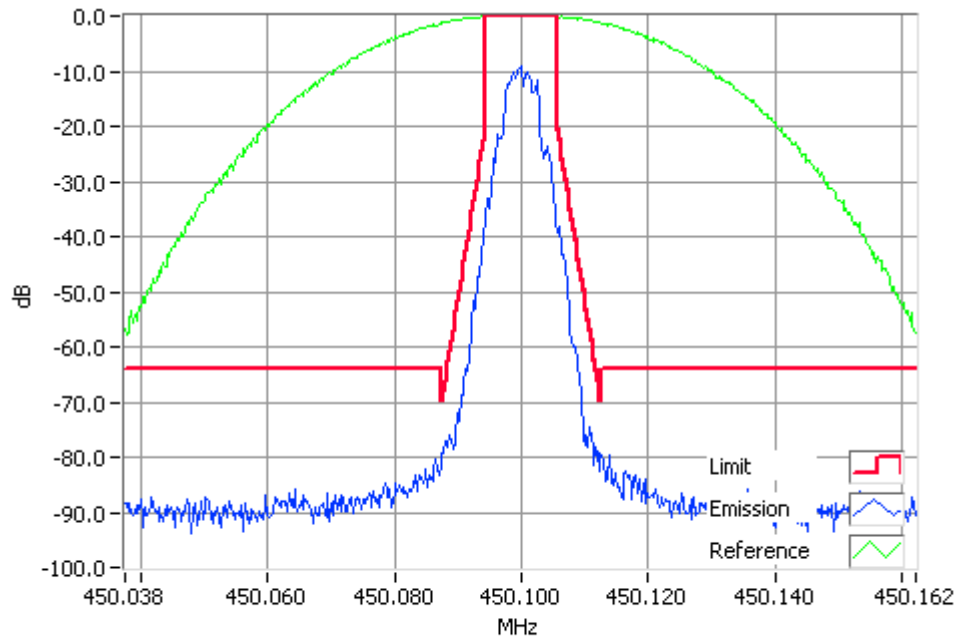

DMR 450.1000MHz Mask D 25W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 450.1 MHz 1 W 12.5 kHz Channel Spacing

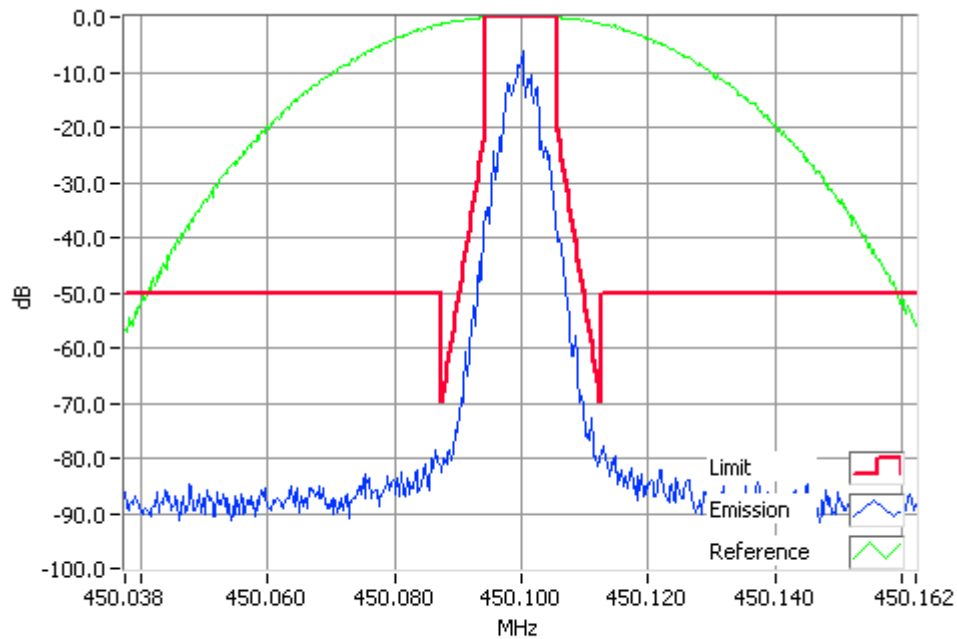


DMR 450.1000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

DMR


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 459.9 MHz 25 W 12.5 kHz Channel Spacing

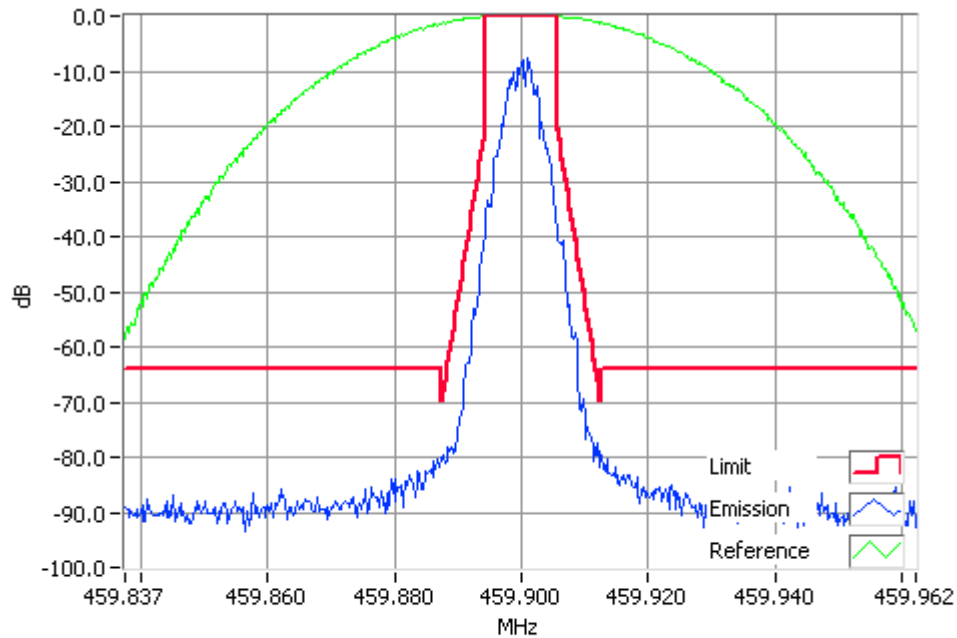

DMR 459.9000MHz Mask D 25W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 459.9 MHz 1 W 12.5 kHz Channel Spacing

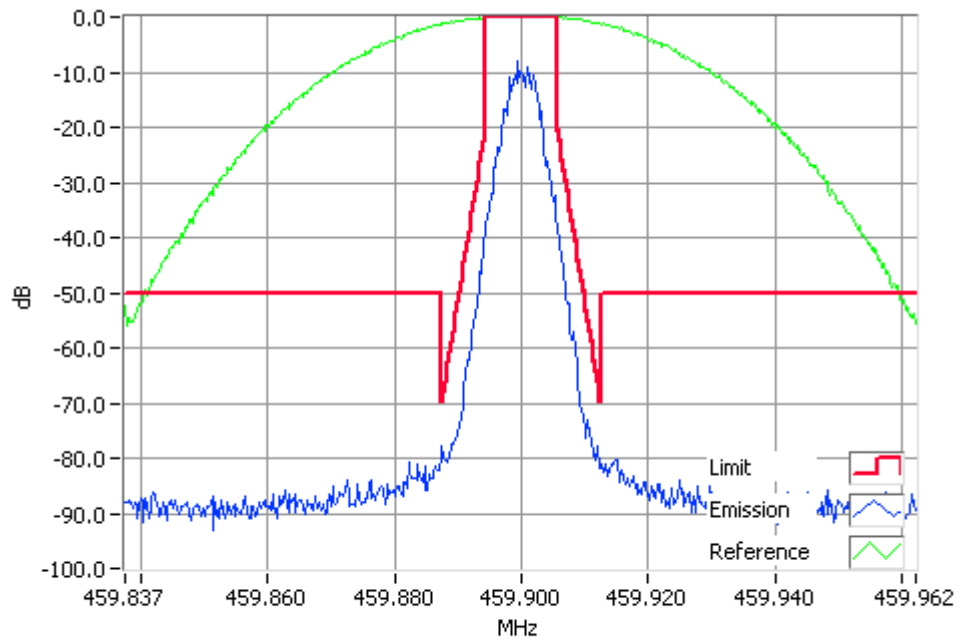


DMR 459.9000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

DMR


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 469.9 MHz 25 W 12.5 kHz Channel Spacing

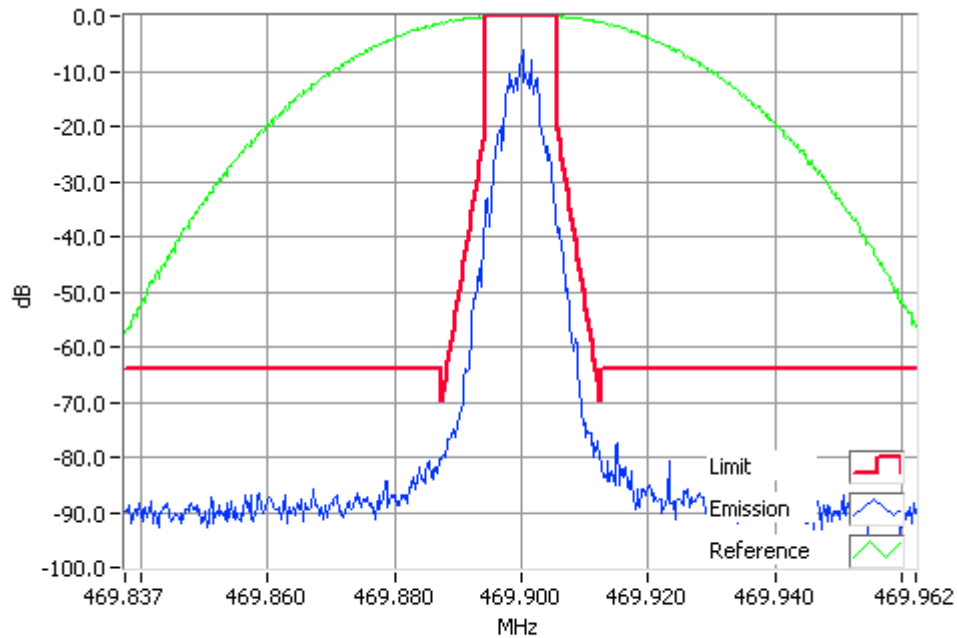

DMR 469.9000MHz Mask D 25W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 469.9 MHz 1 W 12.5 kHz Channel Spacing

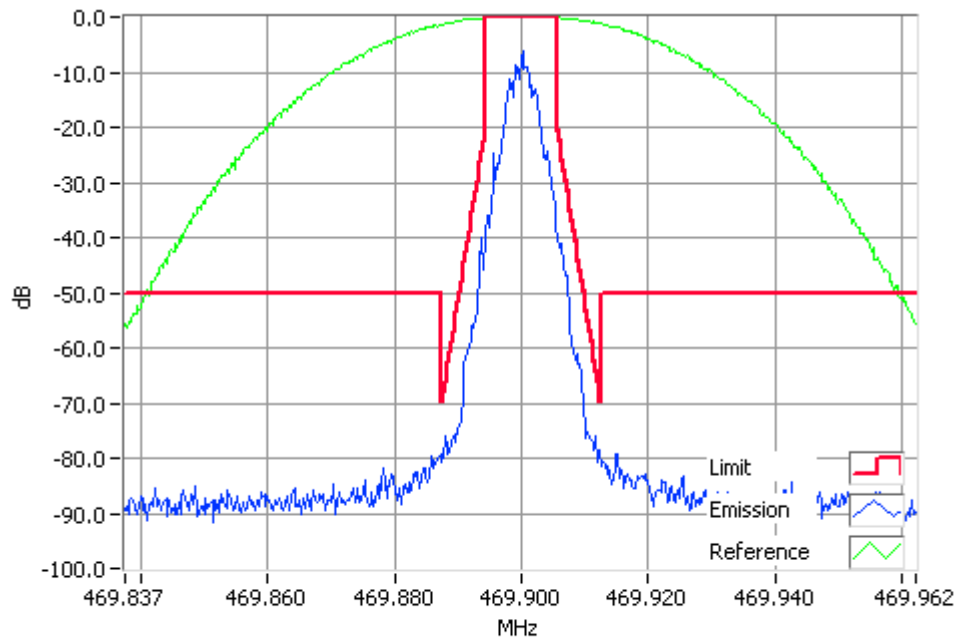


DMR 469.9000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

DMR


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 511.9 MHz 25 W 12.5 kHz Channel Spacing

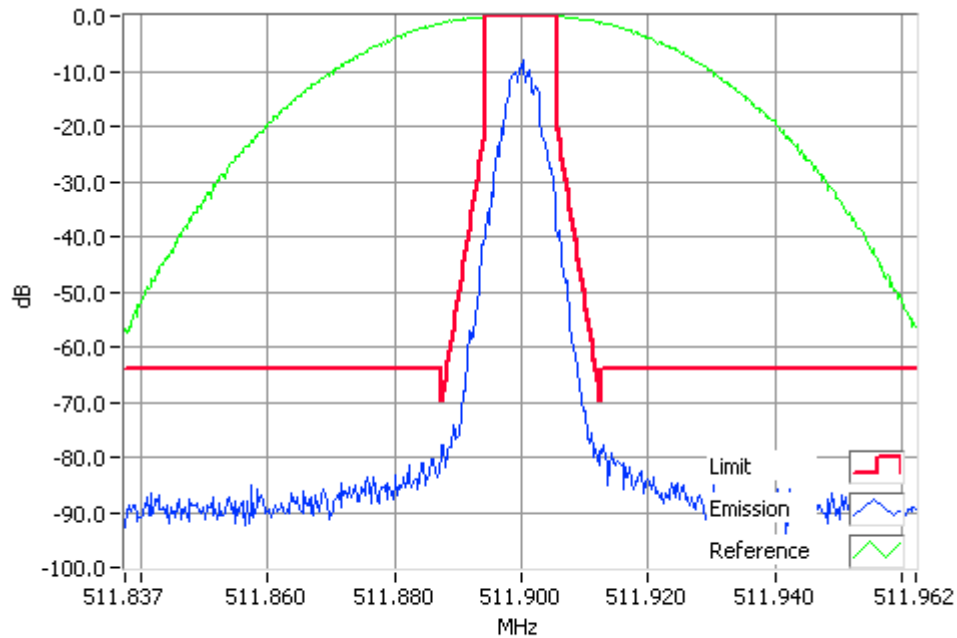

DMR 511.9000MHz Mask D 25W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 511.9 MHz 1 W 12.5 kHz Channel Spacing

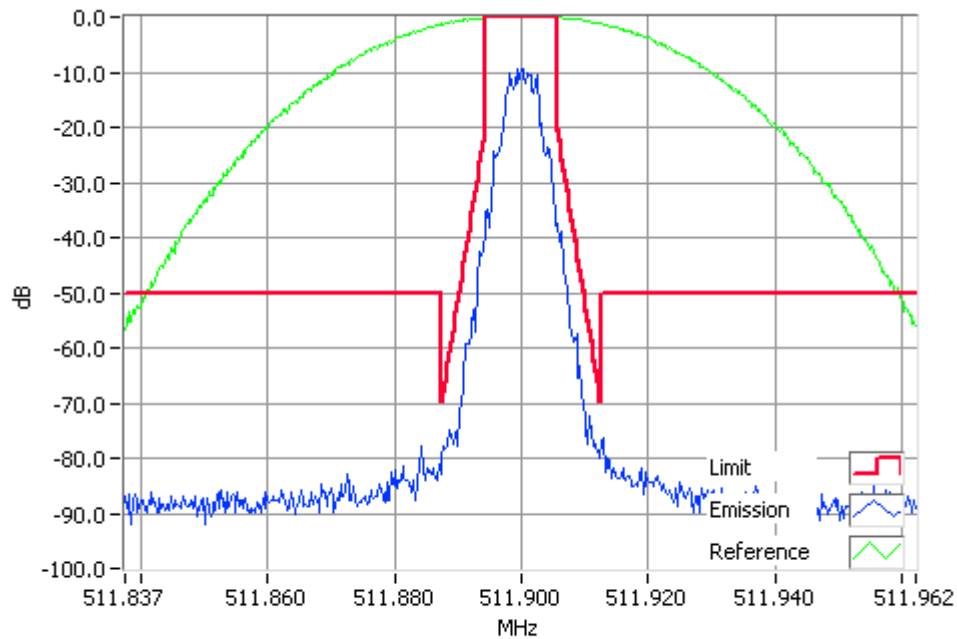


DMR 511.9000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

P25 Phase-1


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 450.1 MHz 25 W 12.5 kHz Channel Spacing

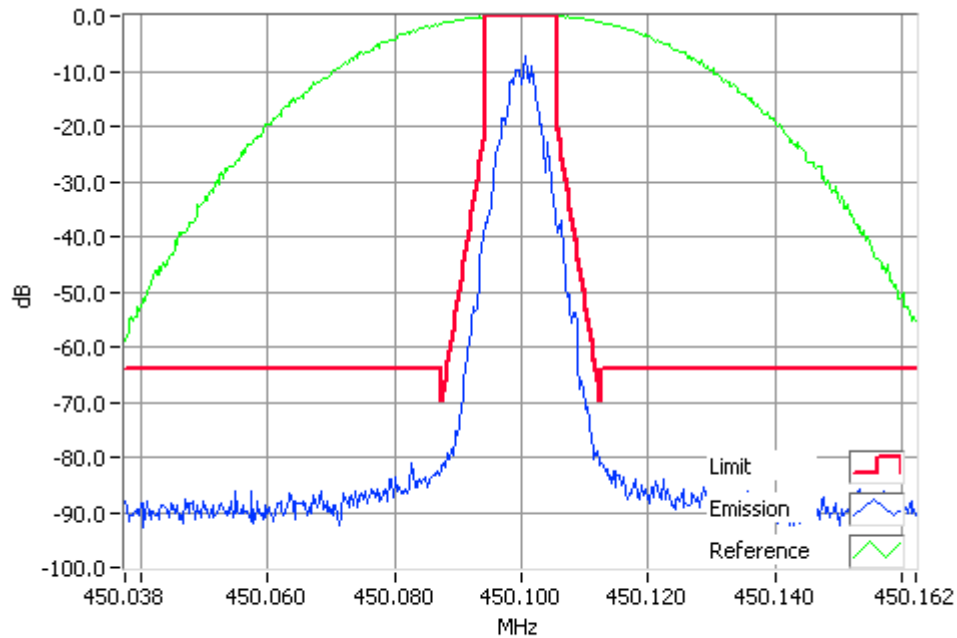

P25I C4FM 450.1000MHz Mask D 25W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 450.1 MHz 1 W 12.5 kHz Channel Spacing

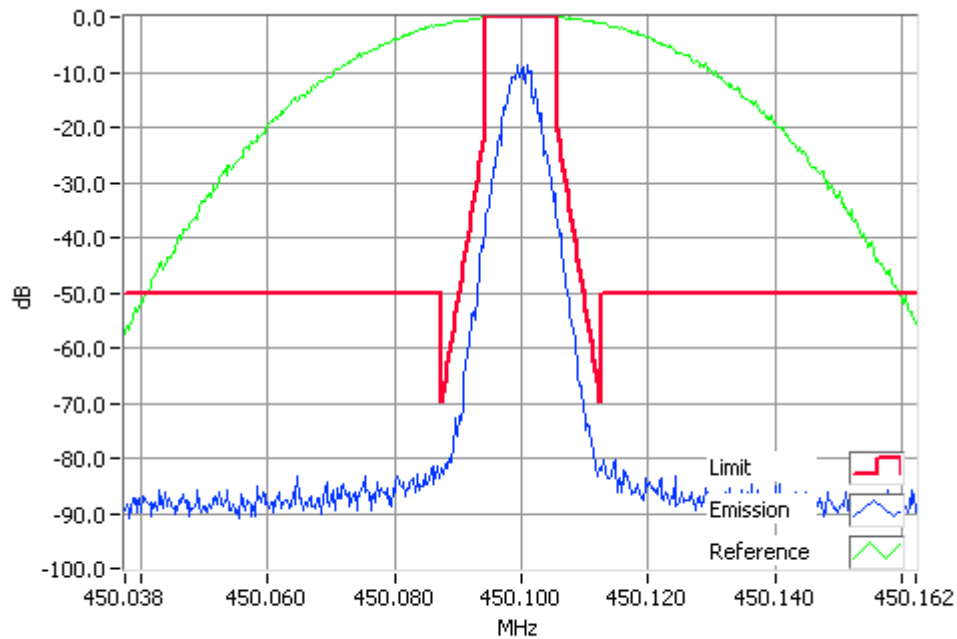


P25I C4FM 450.1000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

P25 Phase-1


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 459.9 MHz 25 W 12.5 kHz Channel Spacing

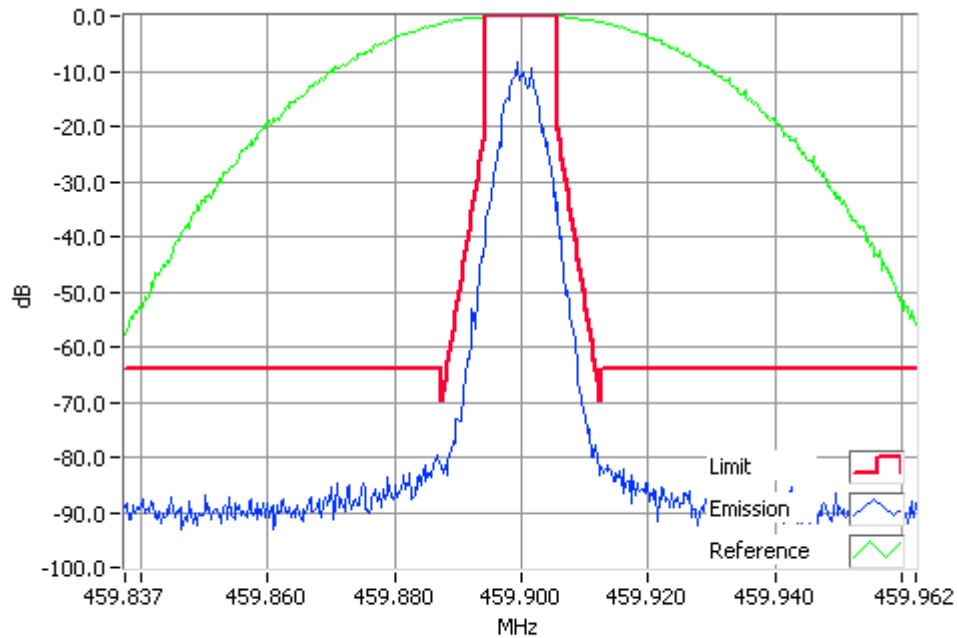

P25I C4FM 459.9000MHz Mask D 25W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 459.9 MHz 1 W 12.5 kHz Channel Spacing

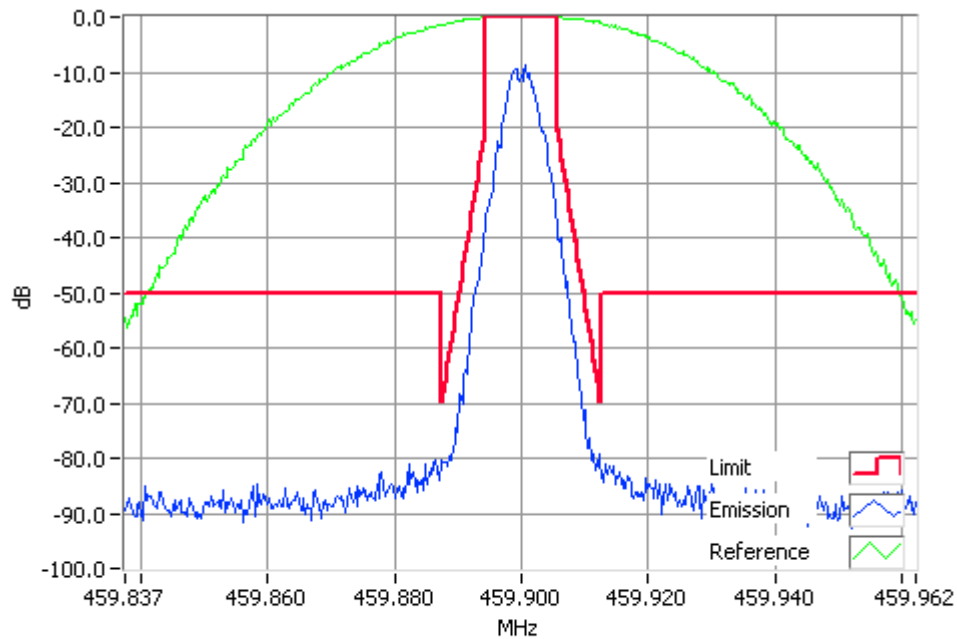


P25I C4FM 459.9000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

P25 Phase-1


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 469.9 MHz 25 W 12.5 kHz Channel Spacing

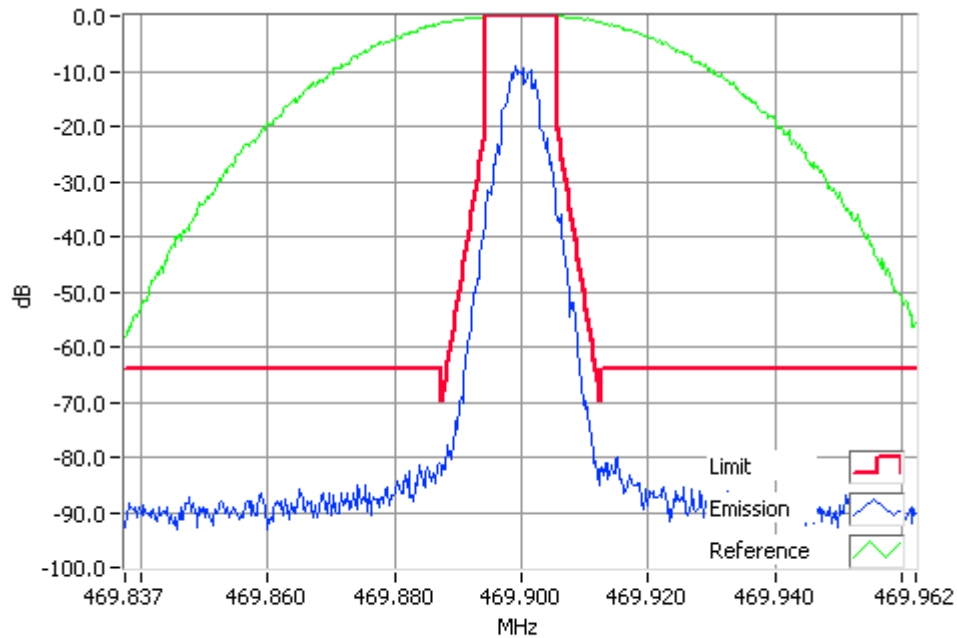

P25I C4FM 469.9000MHz Mask D 25W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 469.9 MHz 1 W 12.5 kHz Channel Spacing

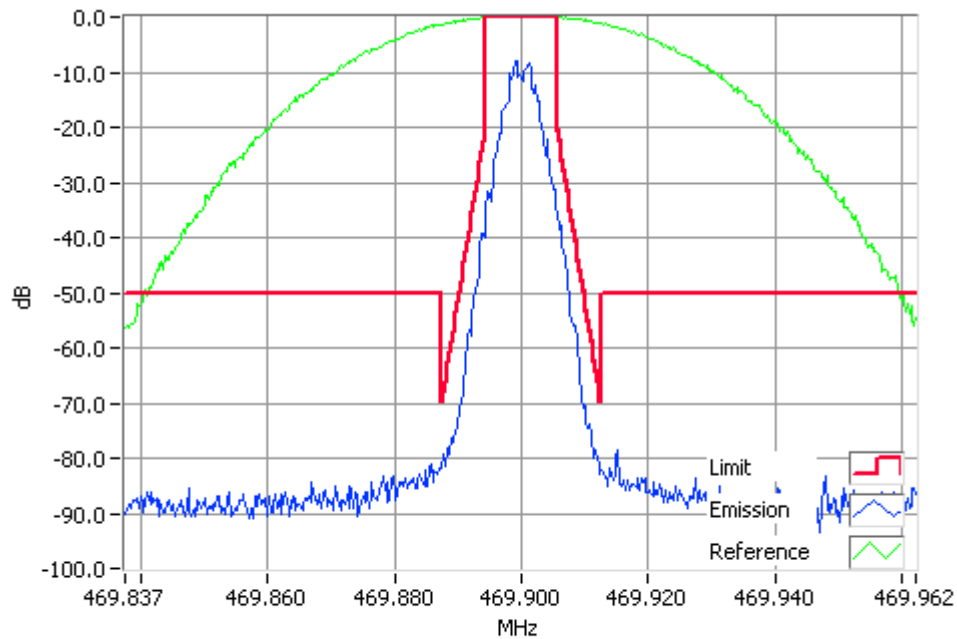


P25I C4FM 469.9000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

P25 Phase-1


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 511.9 MHz 25 W 12.5 kHz Channel Spacing

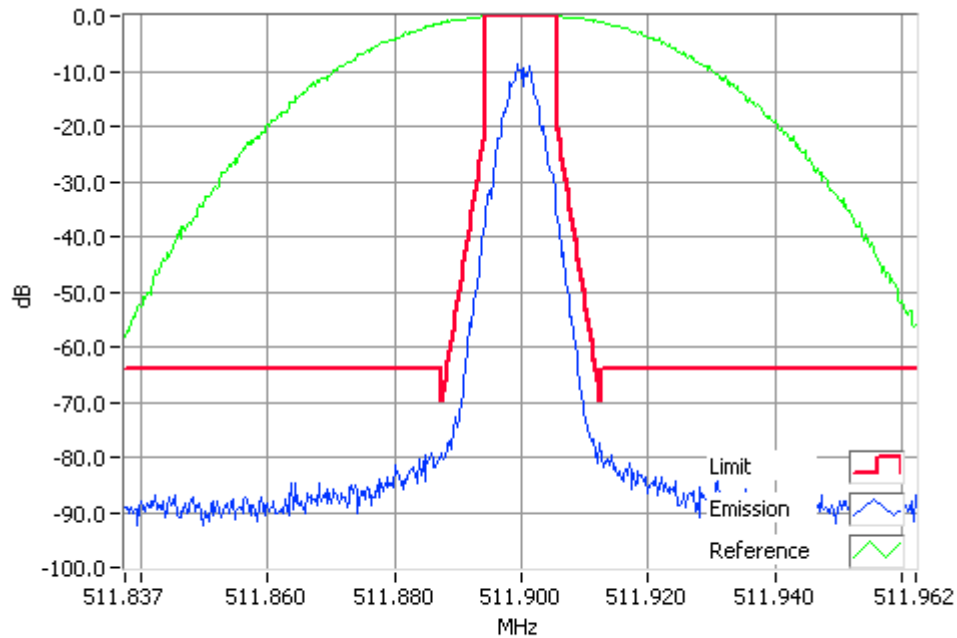

P25I C4FM 511.9000MHz Mask D 25W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 511.9 MHz 1 W 12.5 kHz Channel Spacing

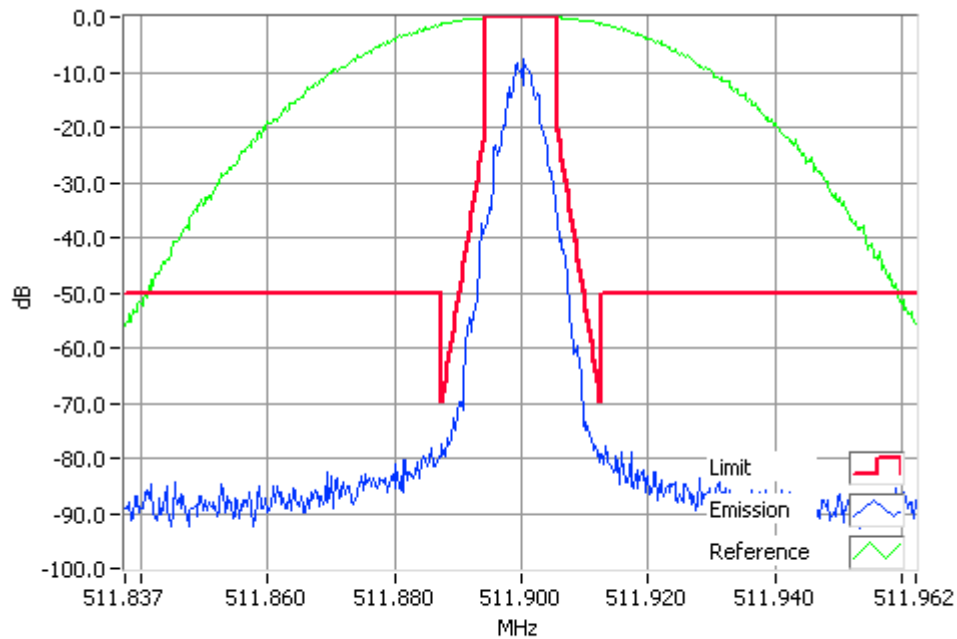


P25I C4FM 511.9000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

P25 Phase-2


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 450.1 MHz 25 W 12.5 kHz Channel Spacing

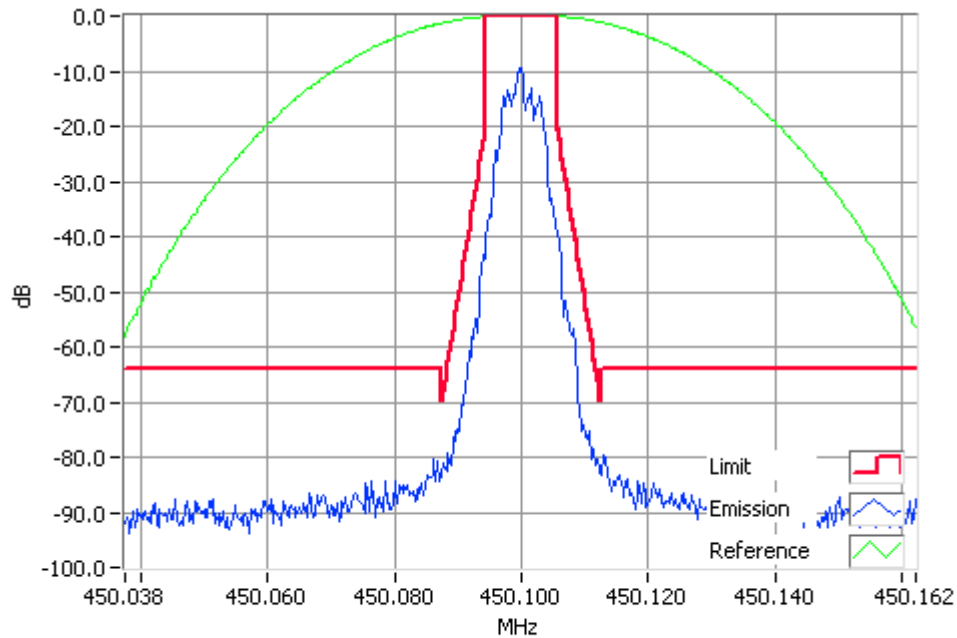

P25II hcpm 450.1000MHz Mask D 25W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 450.1 MHz 1 W 12.5 kHz Channel Spacing

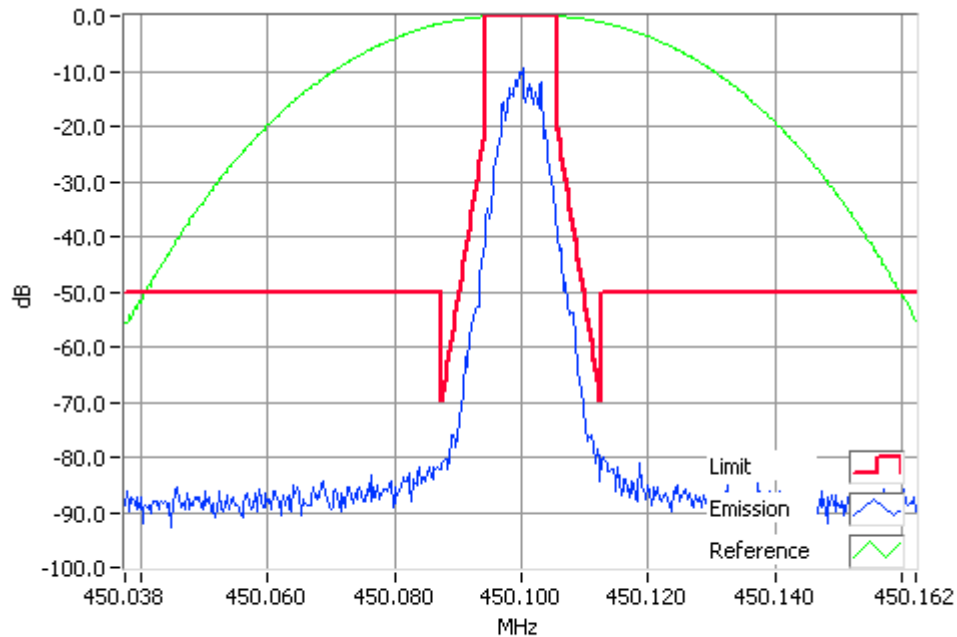


P25II hcpm 450.1000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

P25 Phase-2


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 459.9 MHz 25 W 12.5 kHz Channel Spacing

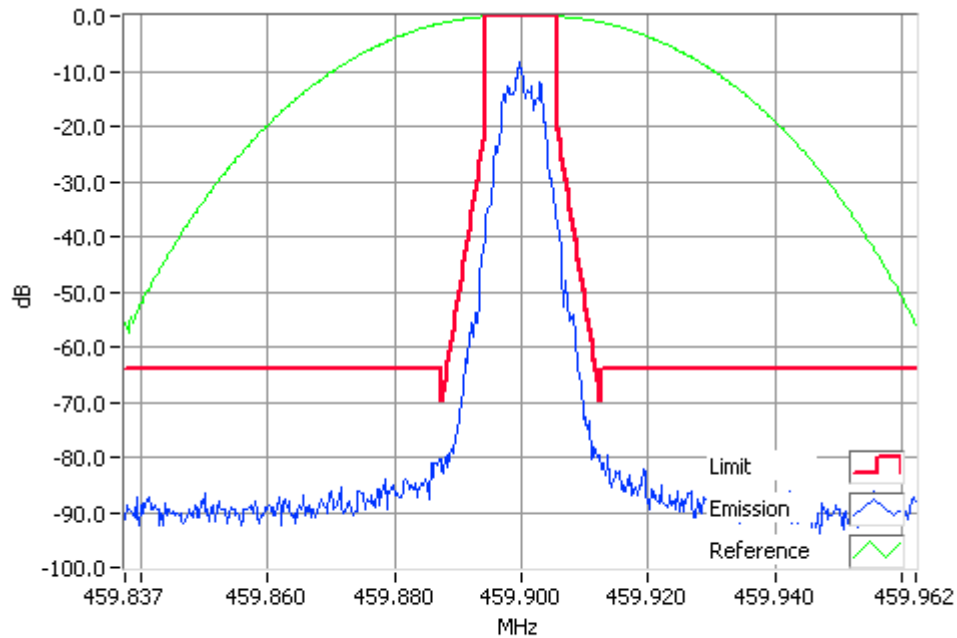

P25II hcpm 459.9000MHz Mask D 25W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 459.9 MHz 1 W 12.5 kHz Channel Spacing

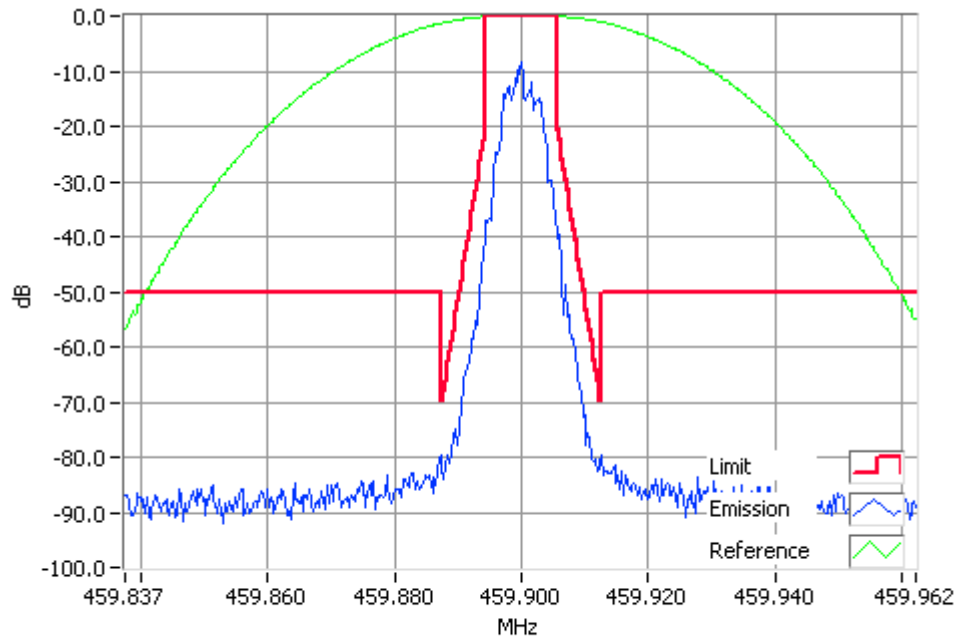


P25II hcpm 459.9000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

P25 Phase-2


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 469.9 MHz 25 W 12.5 kHz Channel Spacing

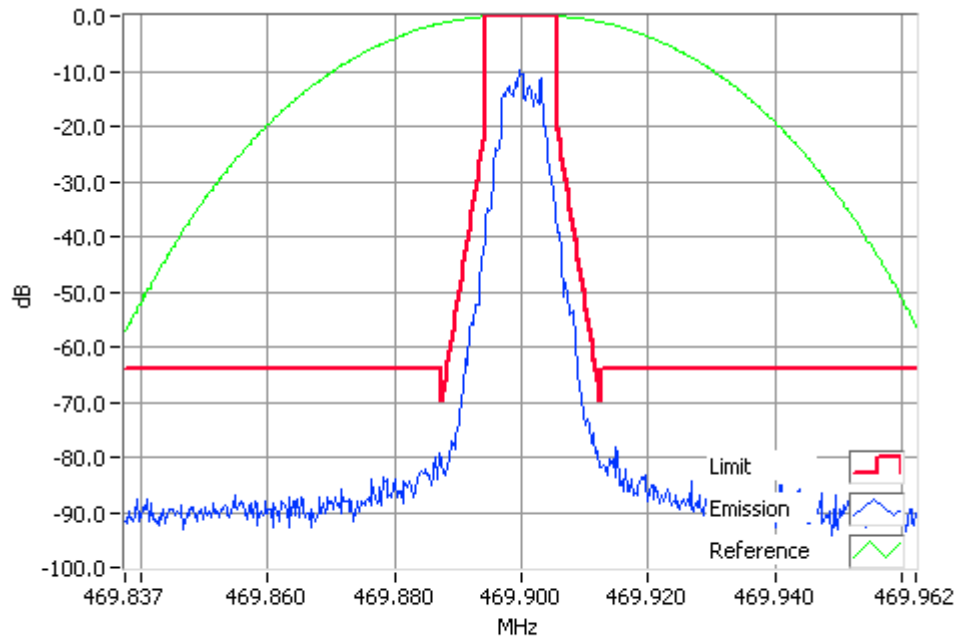

P25II hcpm 469.9000MHz Mask D 25W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 469.9 MHz 1 W 12.5 kHz Channel Spacing

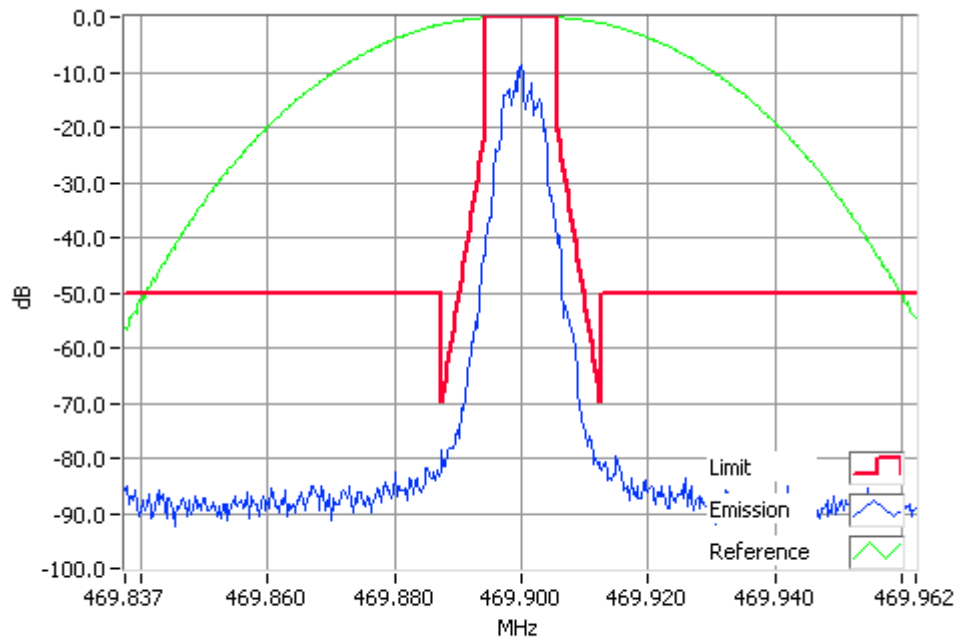


P25II hcpm 469.9000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

P25 Phase-2


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 511.9 MHz 25 W 12.5 kHz Channel Spacing

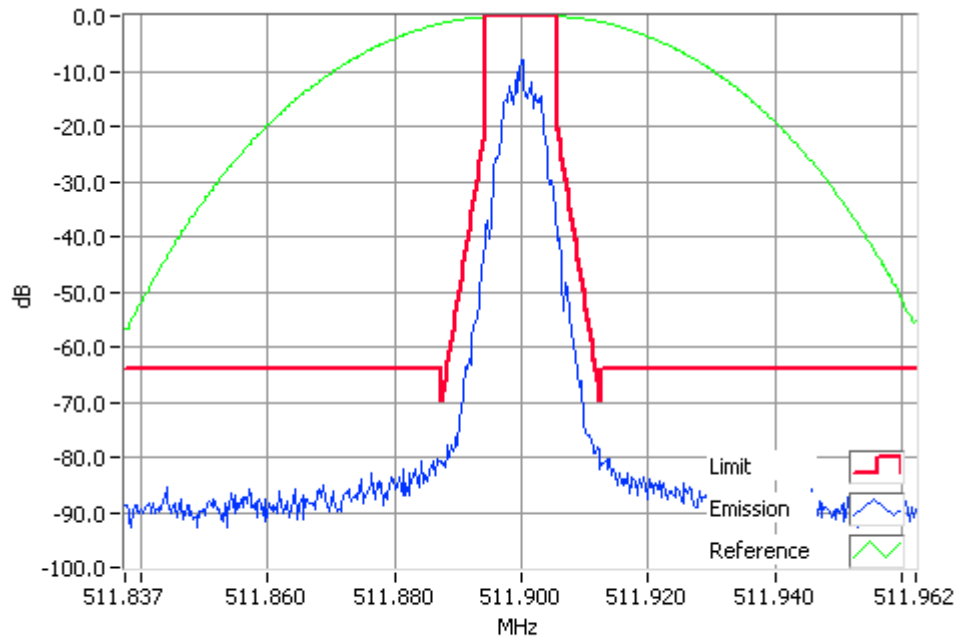

P25II hcpm 511.9000MHz Mask D 25W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 511.9 MHz 1 W 12.5 kHz Channel Spacing

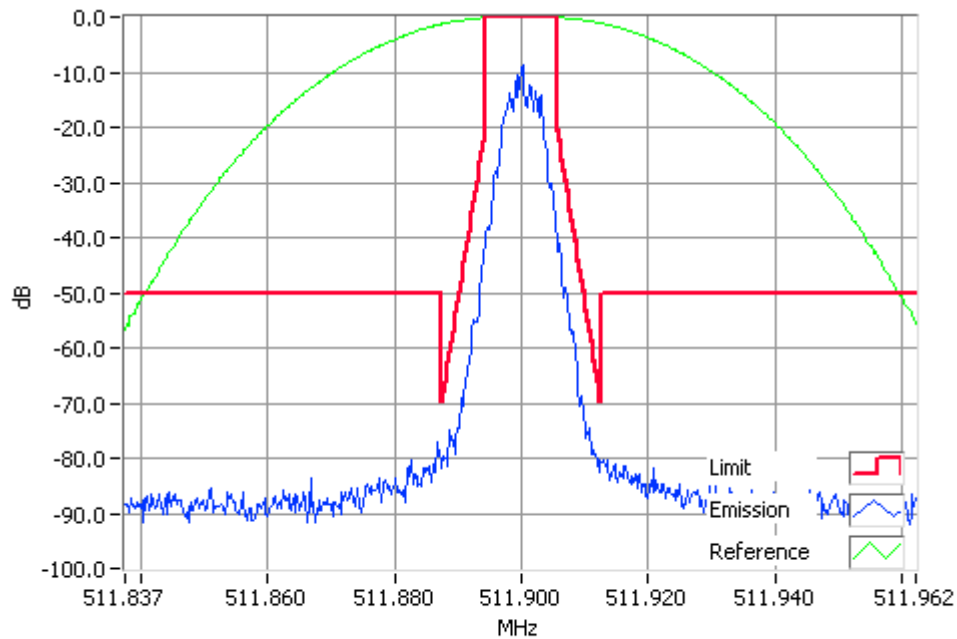

P25II hcpm 511.9000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

SPURIOUS EMISSIONS (Tx CONDUCTED)

SPECIFICATIONS: FCC 47 CFR 2.1051 RSS-119 5.8

GUIDE: TIA/EIA-603D 2.2.13

MEASUREMENT PROCEDURE:

1. Refer Annex A for equipment set up.
2. The frequency range examined was from the lowest frequency generated within the EUT, to a frequency higher than the 10th Harmonic: 100 kHz to Fc-BW
Fc+ BW to 10Fc GHz
3. A Pre-scan is performed with a resolution bandwidth of 1 kHz, and a video bandwidth of 3 kHz. If any emissions are found to be within 20 dB of the limit a second measurement is made with the carrier modulated, and a resolution bandwidth of 10 kHz, and a video bandwidth of 30 kHz.


Spurious emissions which were attenuated by more than 20 dB below the limit were not recorded.

MEASUREMENT RESULTS:

See the tables and plots on the following pages for 12.5 kHz channel spacing.

LIMIT CLAUSES: FCC 47 CFR 90.210 RSS-119 5.8

Photo: Conducted Emissions Test Setup

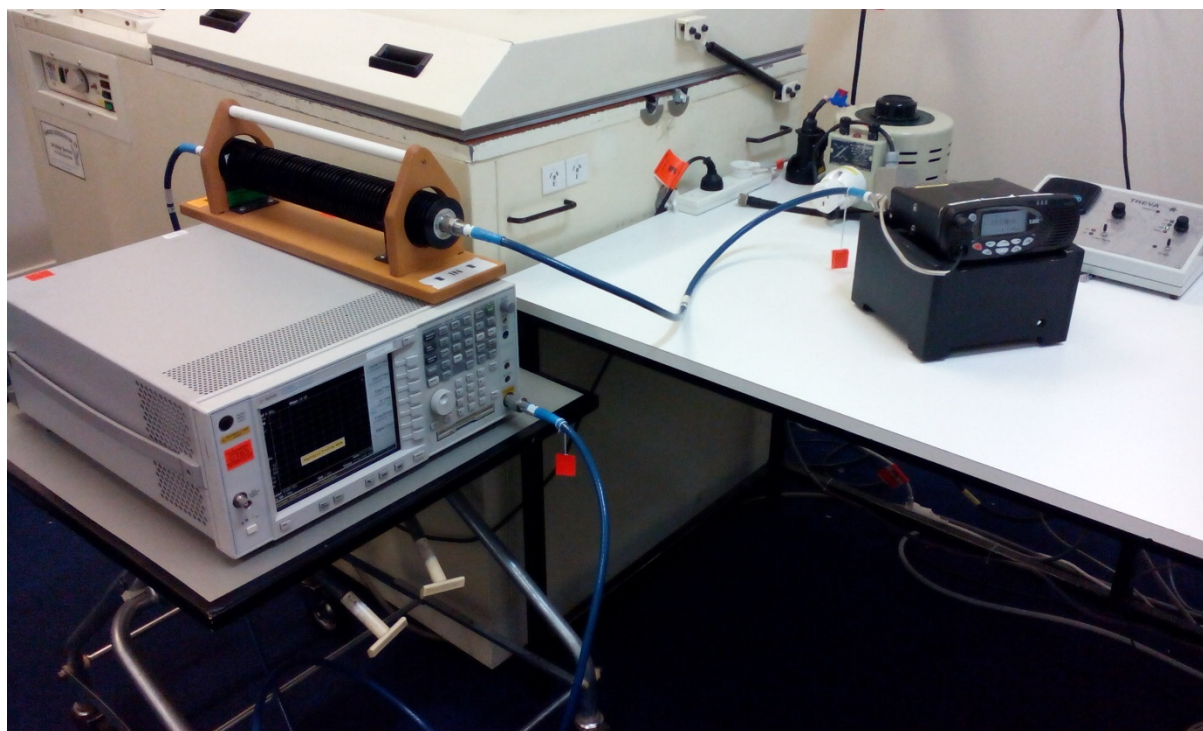


Spurious Emissions (Tx Conducted)

SPECIFICATION: FCC CFR 2.1051 RSS-119 5.8

12.5 kHz Channel Spacing		450.1MHz @ 25 W	Emission Mask D
Emission Frequency (MHz)	Level (dBm)		Level (dBc)
~	~		~
12.5 kHz Channel Spacing		450.1MHz @ 1 W	Emission Mask D
Emission Frequency (MHz)	Level (dBm)		Level (dBc)
~	~		~
No emissions were detected at a level greater than 20 dB below the limit.			

Spurious Emissions (Tx Conducted) - Continued

450.1MHz @ 25 W

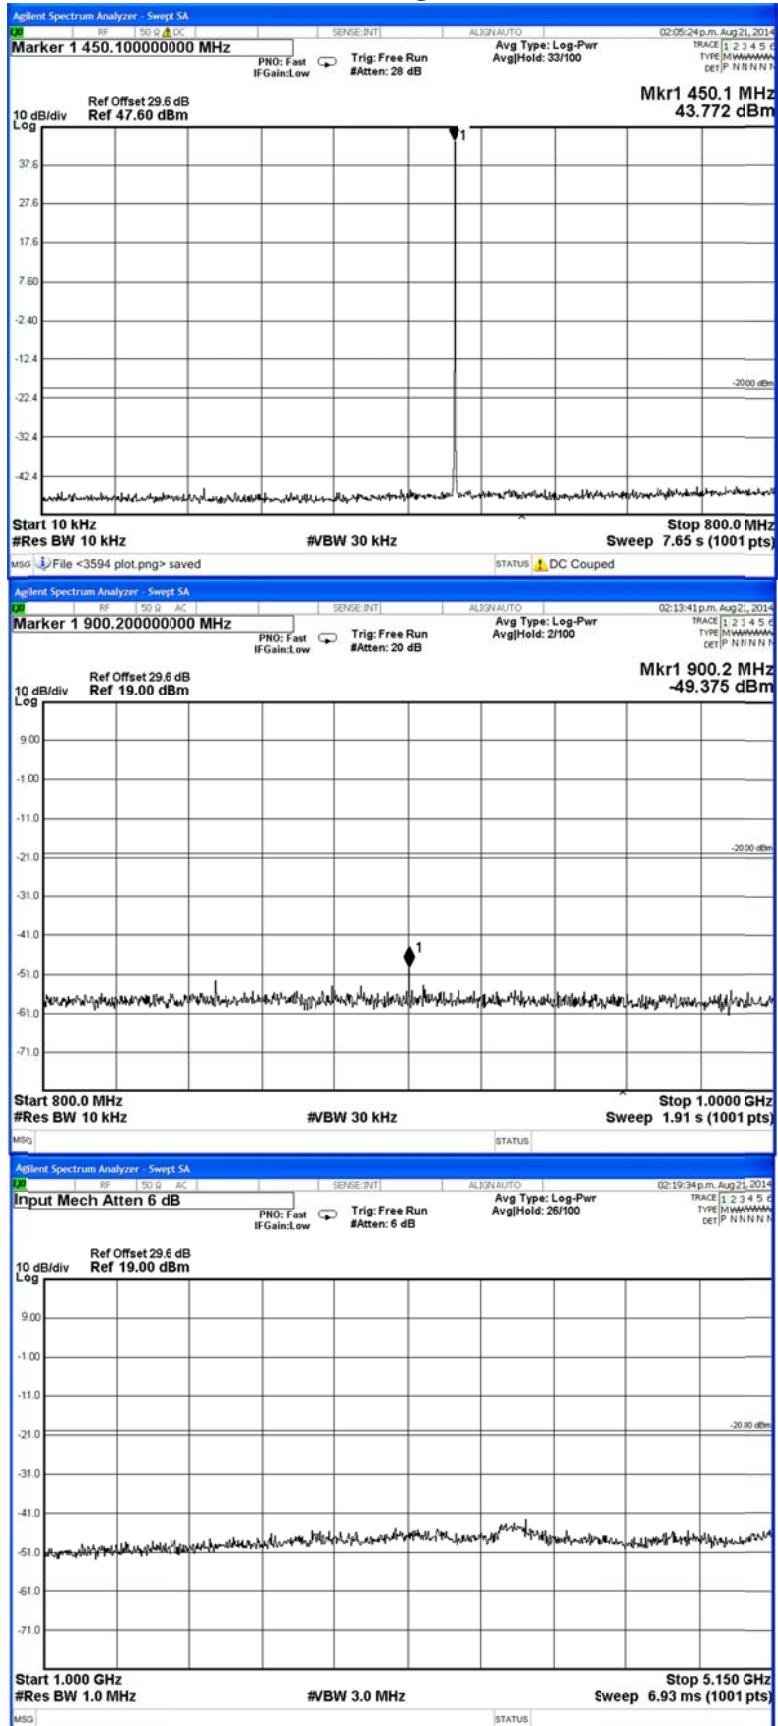


Spurious Emissions (Tx Conducted) - Continued

12.5 kHz Channel Spacing		459.9 MHz @ 25 W	Emission Mask D
Emission Frequency (MHz)	Level (dBm)		Level (dBc)
~	~		~
12.5 kHz Channel Spacing		459.9 MHz @ 1 W	Emission Mask D
Emission Frequency (MHz)	Level (dBm)		Level (dBc)
~	~		~
No emissions were detected at a level greater than 20 dB below the limit.			

Spurious Emissions (Tx Conducted) - Continued

459.9 MHz @ 25 W

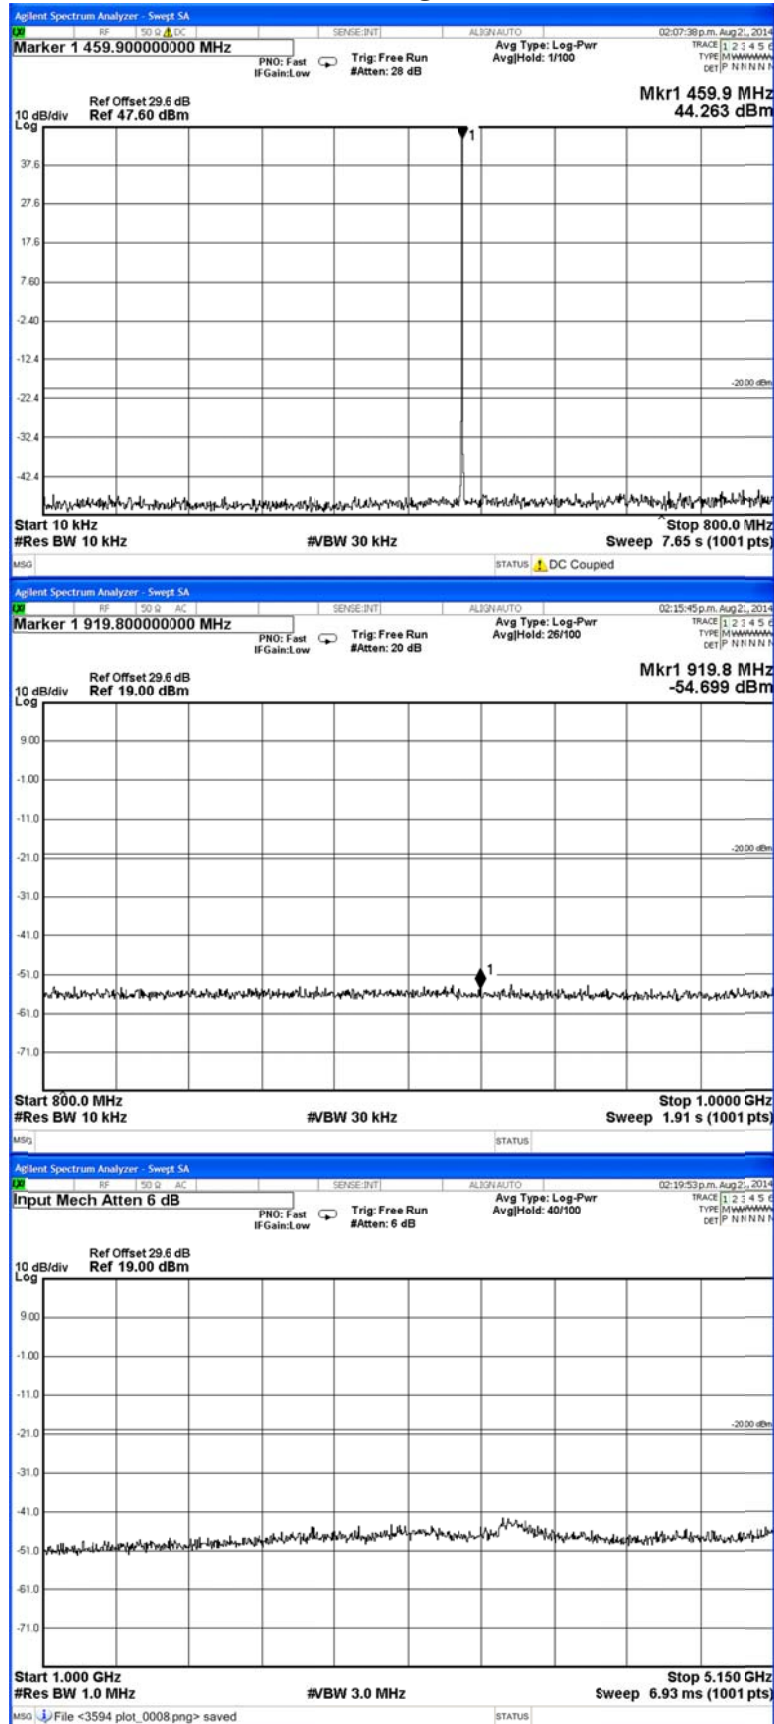


Spurious Emissions (Tx Conducted) - Continued

12.5 kHz Channel Spacing		469.9 MHz @ 25 W	Emission Mask D
Emission Frequency (MHz)	Level (dBm)		Level (dBc)
~	~		~
12.5 kHz Channel Spacing		469.9 MHz @ 1 W	Emission Mask D
Emission Frequency (MHz)	Level (dBm)		Level (dBc)
~	~		~
No emissions were detected at a level greater than 20 dB below the limit.			

Spurious Emissions (Tx Conducted) – Continued

469.9 MHz @ 25 W

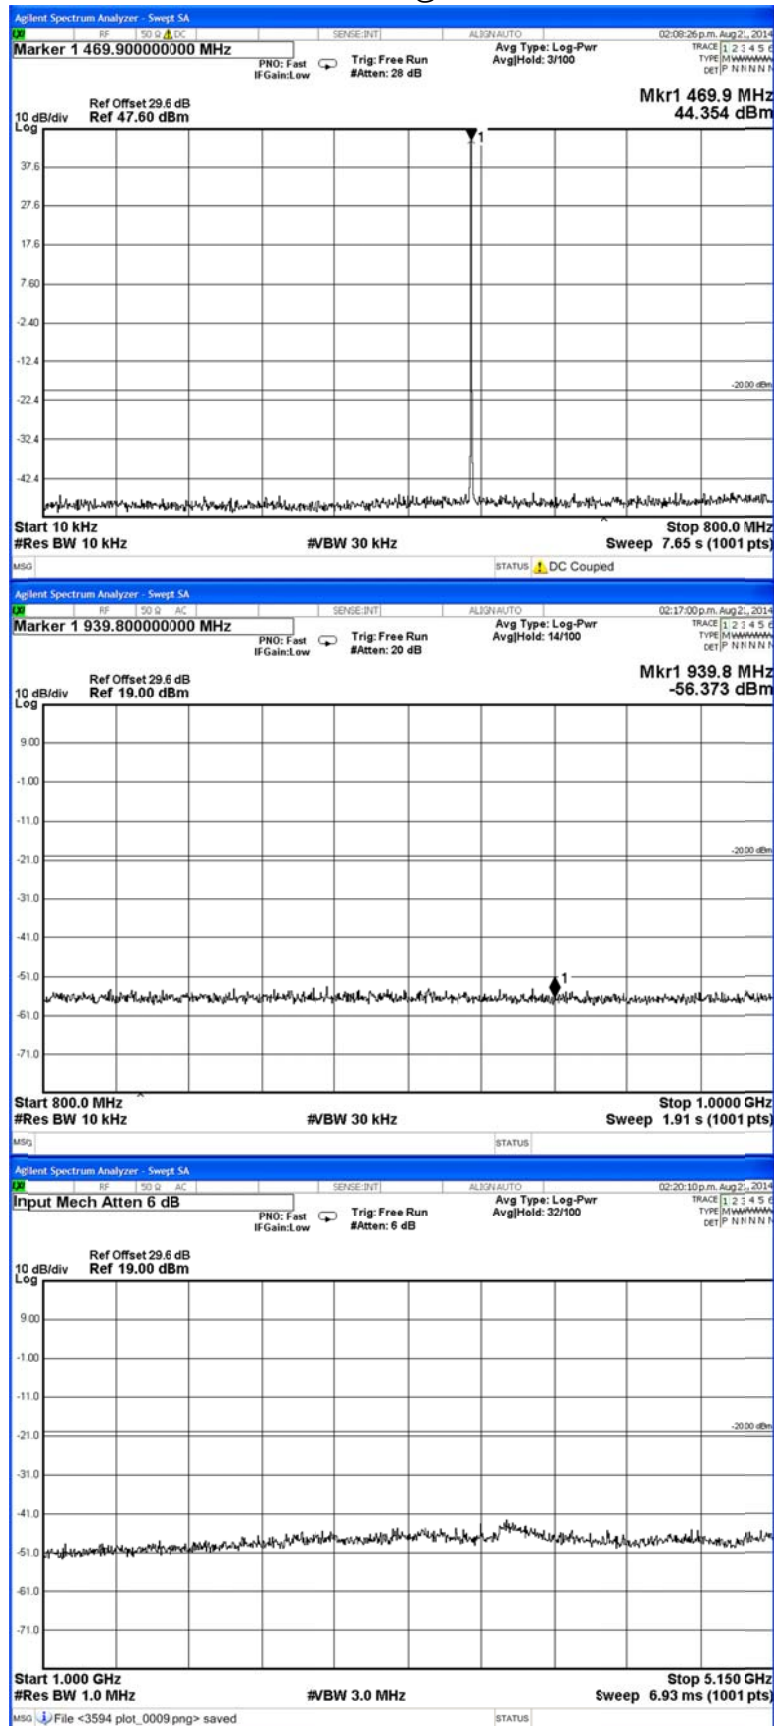


Spurious Emissions (Tx Conducted) - Continued

12.5 kHz Channel Spacing		511.9MHz @ 25 W	Emission Mask D
Emission Frequency (MHz)	Level (dBm)		Level (dBc)
~	~		~
12.5 kHz Channel Spacing		511.9MHz @ 1 W	Emission Mask D
Emission Frequency (MHz)	Level (dBm)		Level (dBc)
~	~		~
No emissions were detected at a level greater than 20 dB below the limit.			

Spurious Emissions (Tx Conducted) – Continued

511.9MHz @ 25 W

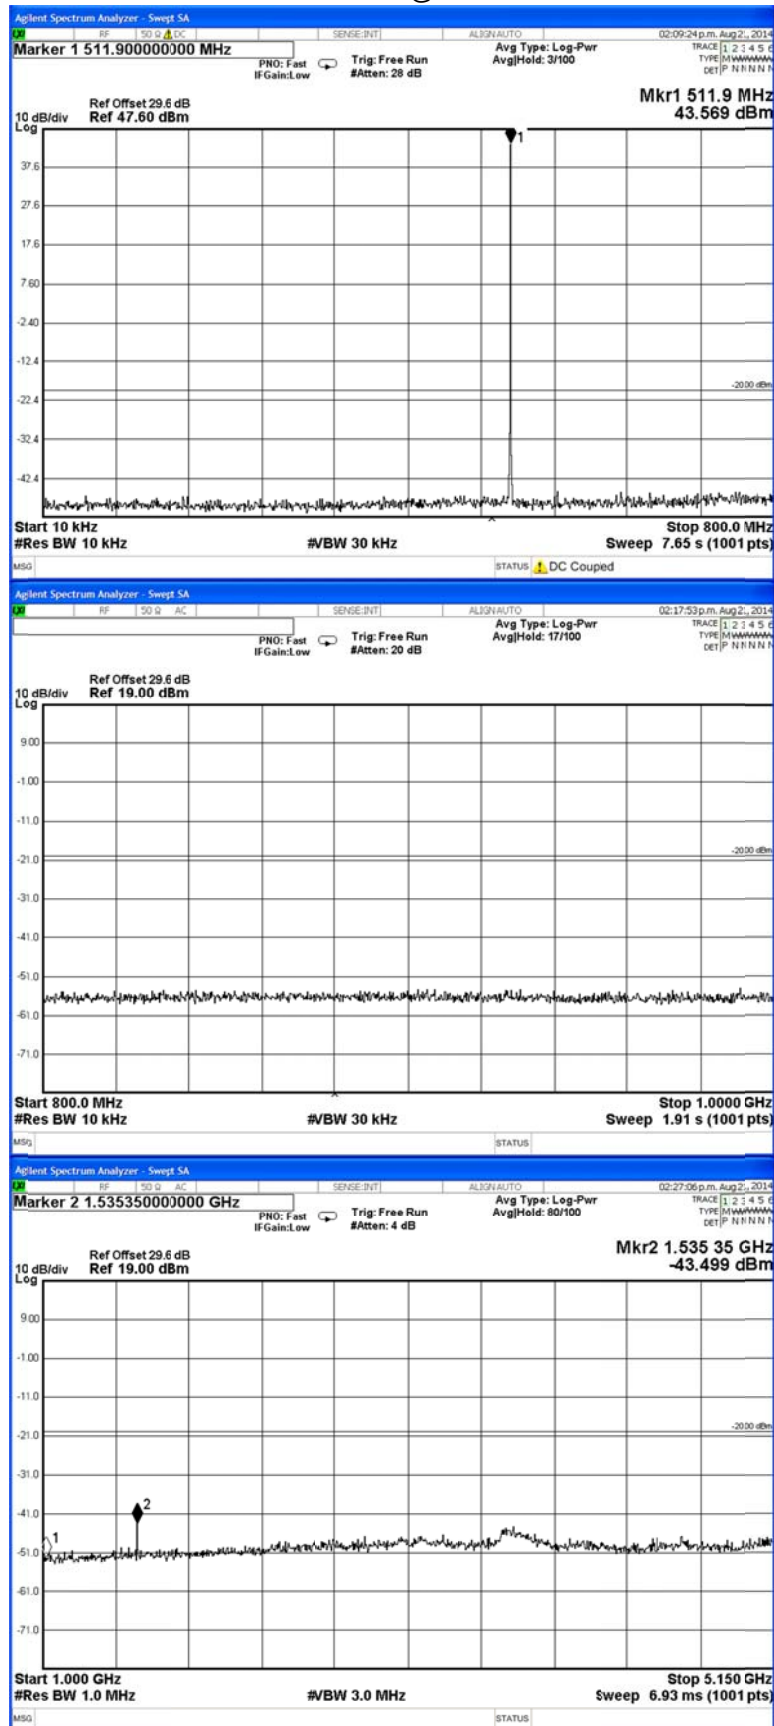

Spurious Emissions (Tx Conducted) - Continued

SPECIFICATION: FCC CFR 2.1051

RSS-119 5.8

LIMITS: FCC 47 CFR 90.210

RSS-119 5.8

Carrier Output Power	Emission Mask D 12.5 kHz Channel Spacing $50 + 10 \log_{10} (P_{\text{Watts}})$	
	-20 dBm	-64 dBc
25 W	-20 dBm	-64 dBc
1 W	-20 dBm	-50 dBc

SPURIOUS EMISSIONS (Tx RADIATED)

SPECIFICATION: FCC 47 CFR 2.1053

GUIDE: TIA/EIA-603D 2.2.12

MEASUREMENT PROCEDURE:

Initial Scan:

1. The EUT is placed in the S-Line TEM cell and emissions are measured from 30 MHz to 1000 MHz. Any emission within 20 dB of the limit is then re-tested on the OATS along with measurements from 1000 MHz to the 10th harmonic of the fundamental frequency.
2. The EUT is placed in the reverberation chamber and emissions are measured from 1000 MHz to the upper frequency required. Any emission within 20 dB of the limit is then re-tested on the OATS.
3. The harmonic emissions up to the 6th harmonic of the fundamental frequency are measured on the OATS

OATS Measurement:

1. The EUT is placed on a wooden turntable at a distance of three metres from the test antenna. The output terminal is connected to an RF dummy load.
2. The test antenna is raised from 1 m to 4 m to obtain a maximum reading; the turntable is then rotated through 360° to obtain the maximum response of each spurious emission. Valid emissions are determined by switching the EUT on and off.
3. The EUT is then replaced by a signal generator and substitution antenna to make measurements by the substitution method.

MEASUREMENT RESULTS:

See the tables on the following pages

LIMIT CLAUSE: FCC 47 CFR 90.210

Tx Radiated Emissions - Continued

12.5 kHz Channel Spacing		450.1MHz @ 25 W	Emission Mask D
Emission Frequency (MHz)	Level (dBm)		Level (dBc)
~	~		~
12.5 kHz Channel Spacing		450.1MHz @ 1 W	Emission Mask D
Emission Frequency (MHz)	Level (dBm)		Level (dBc)
~	~		~
No emissions were detected at a level greater than 20 dB below the limit.			

12.5 kHz Channel Spacing		459.9 MHz @ 25 W	Emission Mask D
Emission Frequency (MHz)	Level (dBm)		Level (dBc)
~	~		~
12.5 kHz Channel Spacing		459.9 MHz @ 1 W	Emission Mask D
Emission Frequency (MHz)	Level (dBm)		Level (dBc)
~	~		~
No emissions were detected at a level greater than 20 dB below the limit.			

12.5 kHz Channel Spacing		469.9 MHz @ 25 W	Emission Mask D
Emission Frequency (MHz)	Level (dBm)		Level (dBc)
~	~		~
12.5 kHz Channel Spacing		469.9 MHz @ 1 W	Emission Mask D
Emission Frequency (MHz)	Level (dBm)		Level (dBc)
~	~		~
No emissions were detected at a level greater than 20 dB below the limit.			

Tx Radiated Emissions - Continued

12.5 kHz Channel Spacing		511.9MHz @ 25 W	Emission Mask D
Emission Frequency (MHz)	Level (dBm)		Level (dBc)
~	~		~
12.5 kHz Channel Spacing		511.9MHz @ 1 W	Emission Mask D
Emission Frequency (MHz)	Level (dBm)		Level (dBc)
~	~		~
No emissions were detected at a level greater than 20 dB below the limit.			

LIMITS: FCC CFR 2.1053

Carrier Output Power	Emission Mask D 12.5 kHz Channel Spacing $50 + 10 \log_{10} (P_{\text{Watts}})$	
25 W	-20 dBm	-64 dBc
1 W	-20 dBm	-50 dBc

Tx Radiated Emissions – Continued

Open Area Test Site Results:

12.5 kHz Channel Spacing

459.9 MHz @ 25 W

Emission Mask D

Harmonics Emission Frequency (MHz)	Level (dBm)	Level (dBc)
919.8	-50.2	-94.2
1379.7	-53.0	-97.0
1839.6	-40.3	-84.3
2299.5	-67.2	-111.2
2759.4	-67.5	-111.5
3219.3	-60.2	-104.2

OATS Testing was performed at 9.1°C at 91% relative humidity.

Photo: OATS Setup



TRANSIENT FREQUENCY BEHAVIOR

SPECIFICATION: FCC 47 CFR 90.214 RSS-119 5.9

GUIDE: TIA/EIA-603D 2.2.19

MEASUREMENT PROCEDURE:

1. Refer Annex A for equipment set up.
2. Measurements and plots were made following the TIA/EIA procedure.

MEASUREMENT RESULTS:

See the tables and plots on the following pages for 12.5 kHz & 25.0 kHz channel spacings.

LIMIT CLAUSES: FCC 47 CFR 90.214 RSS-119 5.9

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

Tx FREQUENCY: 450.1 MHz 25 W 12.5 kHz Channel Spacing

TRANSIENT RESPONSE PERIOD	CARRIER PEAK VARIATION FROM NORMAL	
	Key ON (kHz)	Key OFF (kHz)
t1	-0.6	N/A
t2	0.6	N/A
t3	N/A	0.9

Confirm that during periods t1 and t3 the frequency difference does not exceed the value of one channel separation.	YES	NO
	☒	☐
Confirm that during the period t2 the frequency difference does not exceed half a channel separation.	YES	NO
	☒	☐
Confirm that during the period t2 to t3 the frequency difference does not exceed the frequency error limit.	YES	NO
	☒	☐

LIMIT: FCC 47 CFR 90.214

TRANSIENT PERIODS	FREQUENCY RANGE	
	150 MHz – 174 MHz	421 MHz – 512 MHz
t1 (ms)	5 ms	10 ms
t2 (ms)	20 ms	25 ms
t3 (ms)	5 ms	10 ms

LIMIT: RSS-119 5.9

Transient Frequency Behaviour for Equipment Designed to Operate on 12.5 kHz Channels			
TRANSIENT PERIODS	Maximum Frequency Difference	FREQUENCY RANGE	
		138 – 174 MHz	406.1 – 470 MHz
t1 (ms)	± 12.5 kHz	5 ms	10 ms
t2 (ms)	± 6.25 kHz	20 ms	25 ms
t3 (ms)	± 12.5 kHz	5 ms	10 ms

Note: RSS-119 5.9 - If the transmitter carrier output power rating is 6 Watts or less, the frequency difference during the time periods t1 and t3 may exceed the maximum frequency difference for these time periods.

Transient Frequency Behaviour



SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 450.1 MHz

25 W

12.5 kHz Channel Spacing

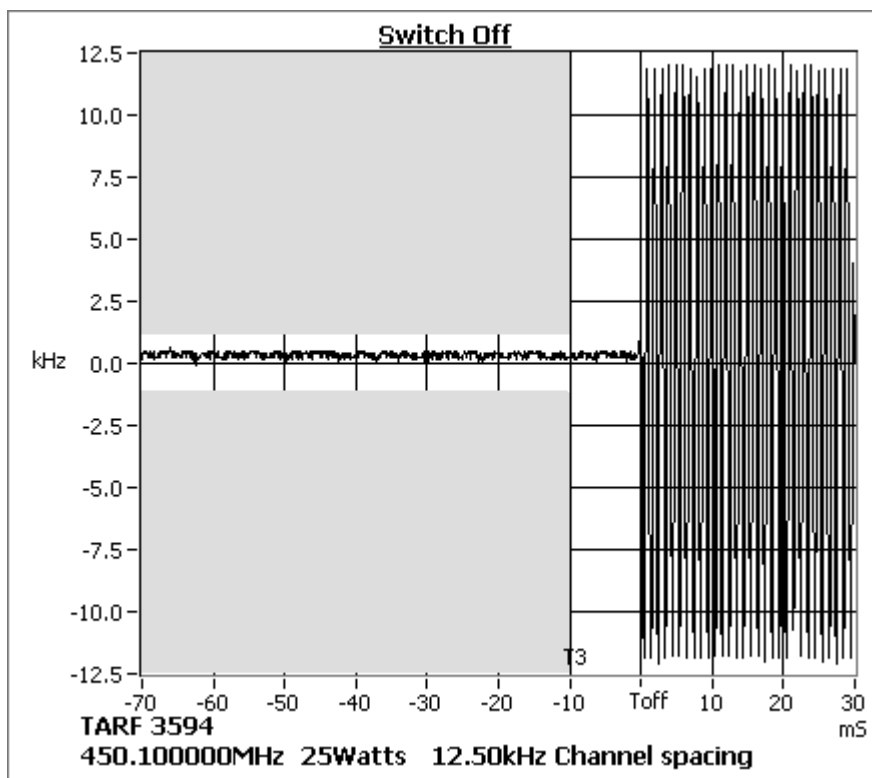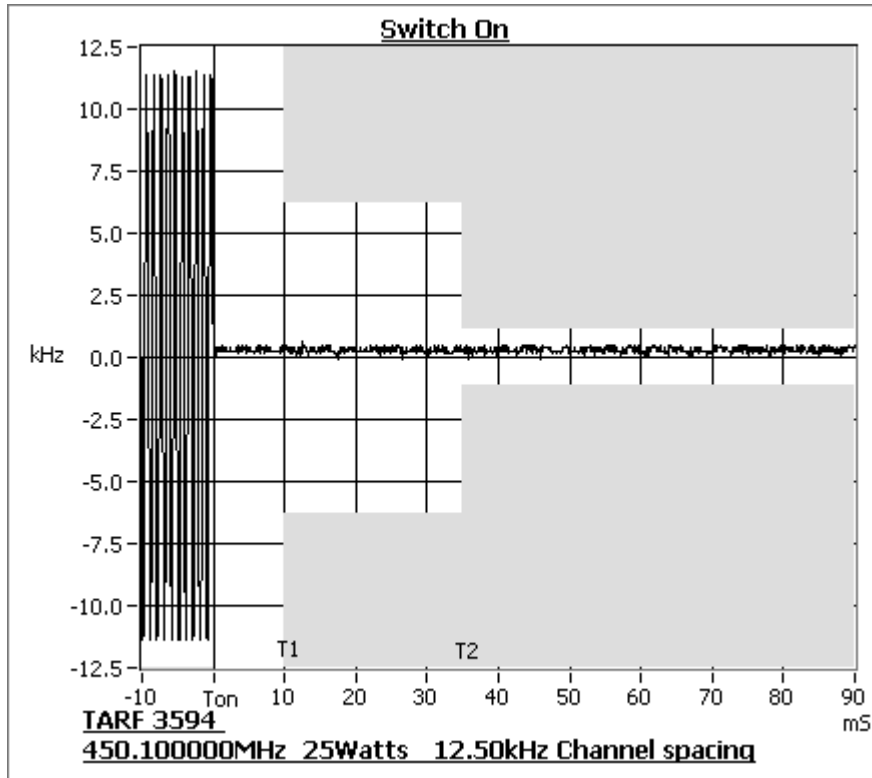

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

Tx FREQUENCY: 459.9 MHz 25 W 12.5 kHz Channel Spacing

TRANSIENT RESPONSE PERIOD	CARRIER PEAK VARIATION FROM NORMAL	
	Key ON (kHz)	Key OFF (kHz)
t1	1.1	N/A
t2	1.1	N/A
t3	N/A	0.8

Confirm that during periods t1 and t3 the frequency difference does not exceed the value of one channel separation.	YES	NO
	☒	☐
Confirm that during the period t2 the frequency difference does not exceed half a channel separation.	YES	NO
	☒	☐
Confirm that during the period t2 to t3 the frequency difference does not exceed the frequency error limit.	YES	NO
	☒	☐

LIMIT: FCC 47 CFR 90.214

TRANSIENT PERIODS	FREQUENCY RANGE	
	150 MHz – 174 MHz	421 MHz – 512 MHz
t1 (ms)	5 ms	10 ms
t2 (ms)	20 ms	25 ms
t3 (ms)	5 ms	10 ms

LIMIT: RSS-119 5.9



Transient Frequency Behaviour for Equipment Designed to Operate on 12.5 kHz Channels			
TRANSIENT PERIODS	Maximum Frequency Difference	FREQUENCY RANGE	
		138 – 174 MHz	406.1 – 470 MHz
t1 (ms)	± 12.5 kHz	5 ms	10 ms
t2 (ms)	± 6.25 kHz	20 ms	25 ms
t3 (ms)	± 12.5 kHz	5 ms	10 ms

Note: RSS-119 5.9 - If the transmitter carrier output power rating is 6 Watts or less, the frequency difference during the time periods t1 and t3 may exceed the maximum frequency difference for these time periods,

Transient Frequency Behavior

SPECIFICATION: FCC 47 CFR 90.214

Tx FREQUENCY: 459.9 MHz 25 W 12.5 kHz Channel Spacing

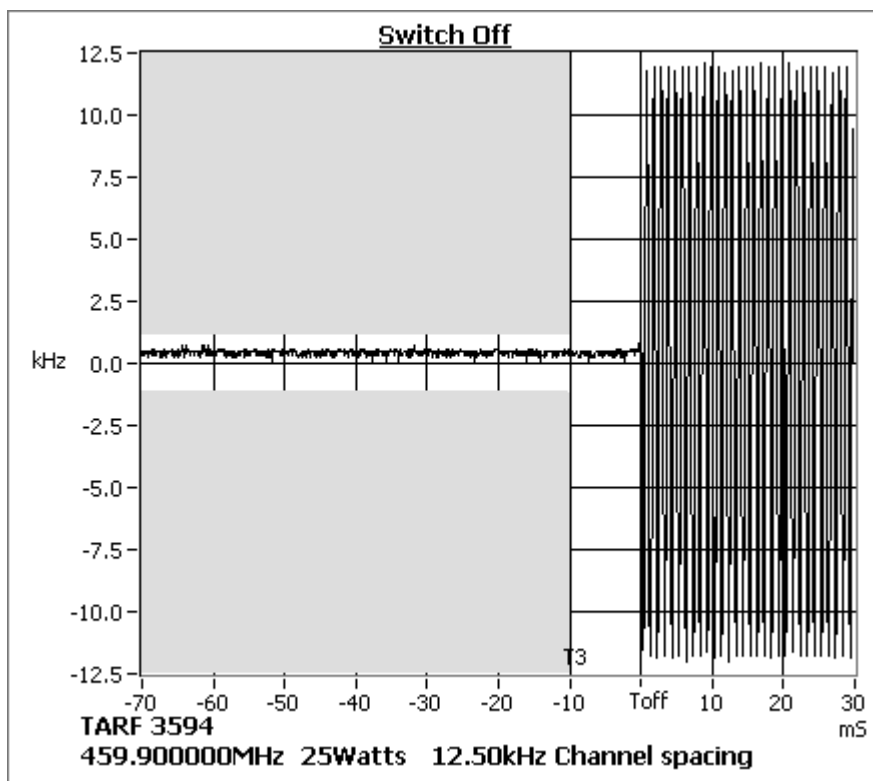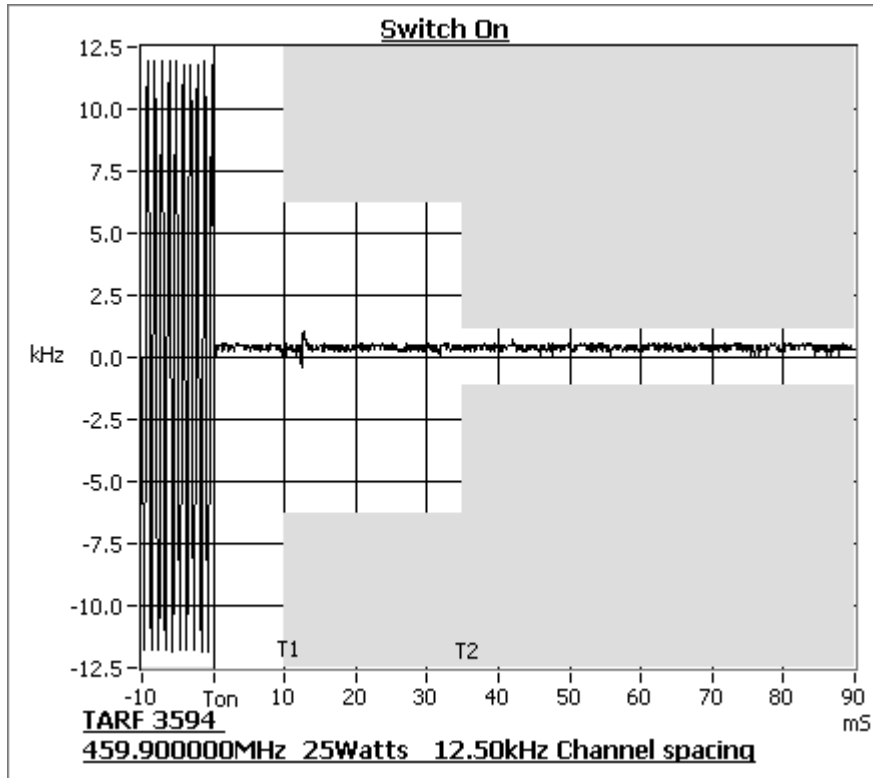

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

Tx FREQUENCY: 469.9 MHz 25 W 12.5 kHz Channel Spacing

TRANSIENT RESPONSE PERIOD	CARRIER PEAK VARIATION FROM NORMAL	
	Key ON (kHz)	Key OFF (kHz)
t1	0.8	N/A
t2	0.5	N/A
t3	N/A	1.4

Confirm that during periods t1 and t3 the frequency difference does not exceed the value of one channel separation.	YES	NO
	☒	☐
Confirm that during the period t2 the frequency difference does not exceed half a channel separation.	YES	NO
	☒	☐
Confirm that during the period t2 to t3 the frequency difference does not exceed the frequency error limit.	YES	NO
	☒	☐

LIMIT: FCC 47 CFR 90.214

TRANSIENT PERIODS	FREQUENCY RANGE	
	150 MHz – 174 MHz	421 MHz – 512 MHz
t1 (ms)	5 ms	10 ms
t2 (ms)	20 ms	25 ms
t3 (ms)	5 ms	10 ms

LIMIT: RSS-119 5.9



Transient Frequency Behaviour for Equipment Designed to Operate on 12.5 kHz Channels			
TRANSIENT PERIODS	Maximum Frequency Difference	FREQUENCY RANGE	
		138 – 174 MHz	406.1 – 470 MHz
t1 (ms)	± 12.5 kHz	5 ms	10 ms
t2 (ms)	± 6.25 kHz	20 ms	25 ms
t3 (ms)	± 12.5 kHz	5 ms	10 ms

Note: RSS-119 5.9 - If the transmitter carrier output power rating is 6 Watts or less, the frequency difference during the time periods t1 and t3 may exceed the maximum frequency difference for these time periods,

Transient Frequency Behavior

SPECIFICATION: FCC 47 CFR 90.214

Tx FREQUENCY: 469.9 MHz 25 W 12.5 kHz Channel Spacing

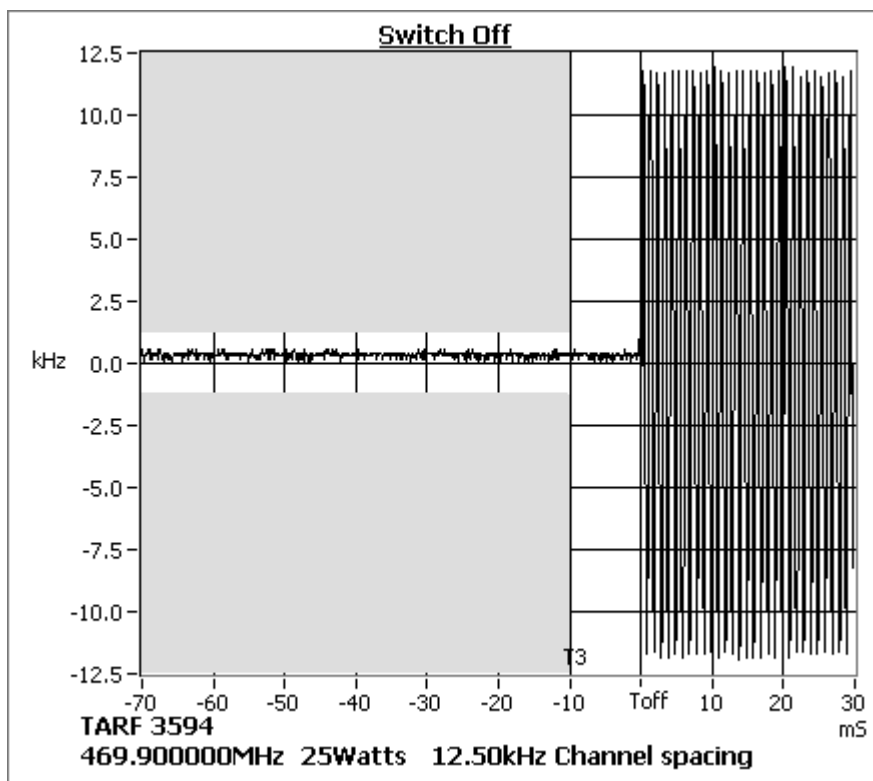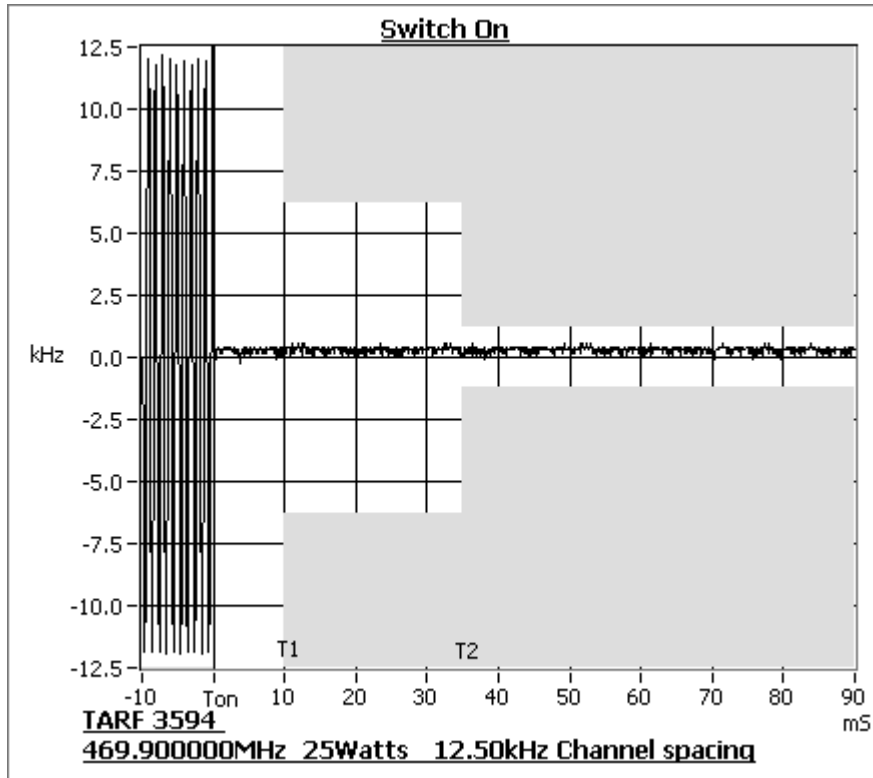

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

Tx FREQUENCY: 511.9 MHz 25 W 12.5 kHz Channel Spacing

TRANSIENT RESPONSE PERIOD	CARRIER PEAK VARIATION FROM NORMAL	
	Key ON (kHz)	Key OFF (kHz)
t1	0.8	N/A
t2	-1.1	N/A
t3	N/A	0.9

Confirm that during periods t1 and t3 the frequency difference does not exceed the value of one channel separation.	YES	NO
	☒	☐
Confirm that during the period t2 the frequency difference does not exceed half a channel separation.	YES	NO
	☒	☐
Confirm that during the period t2 to t3 the frequency difference does not exceed the frequency error limit.	YES	NO
	☒	☐

LIMIT: FCC 47 CFR 90.214

TRANSIENT PERIODS	FREQUENCY RANGE	
	150 MHz – 174 MHz	421 MHz – 512 MHz
t1 (ms)	5 ms	10 ms
t2 (ms)	20 ms	25 ms
t3 (ms)	5 ms	10 ms

LIMIT: RSS-119 5.9



Transient Frequency Behaviour for Equipment Designed to Operate on 12.5 kHz Channels			
TRANSIENT PERIODS	Maximum Frequency Difference	FREQUENCY RANGE	
		138 – 174 MHz	406.1 – 470 MHz
t1 (ms)	± 12.5 kHz	5 ms	10 ms
t2 (ms)	± 6.25 kHz	20 ms	25 ms
t3 (ms)	± 12.5 kHz	5 ms	10 ms

Note: RSS-119 5.9 - If the transmitter carrier output power rating is 6 Watts or less, the frequency difference during the time periods t1 and t3 may exceed the maximum frequency difference for these time periods,

Transient Frequency Behavior

SPECIFICATION: FCC 47 CFR 90.214

Tx FREQUENCY: 511.9 MHz 25 W 12.5 kHz Channel Spacing

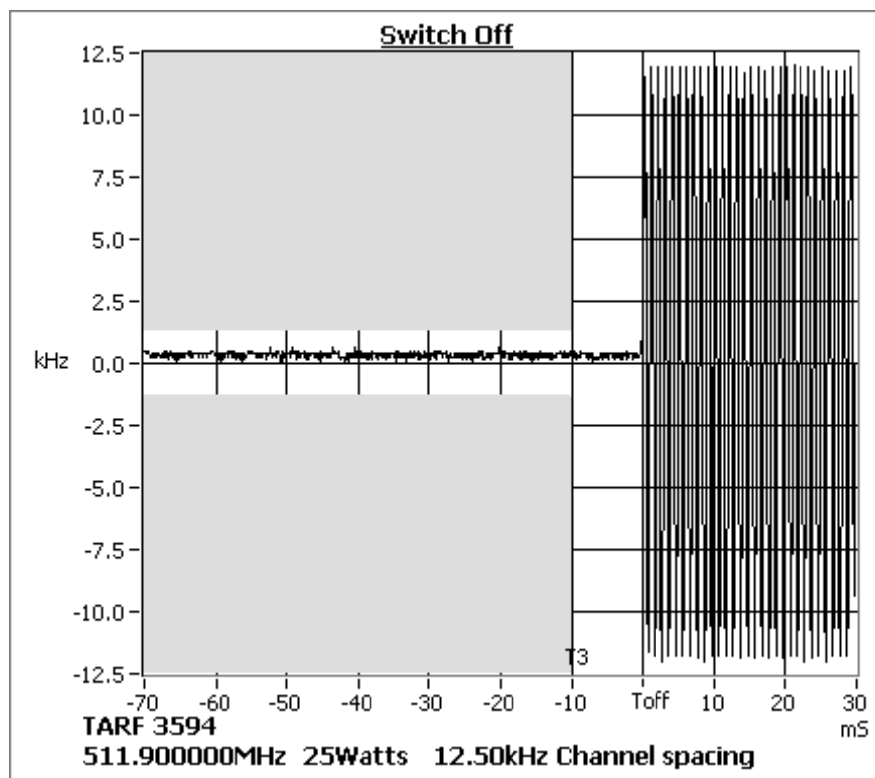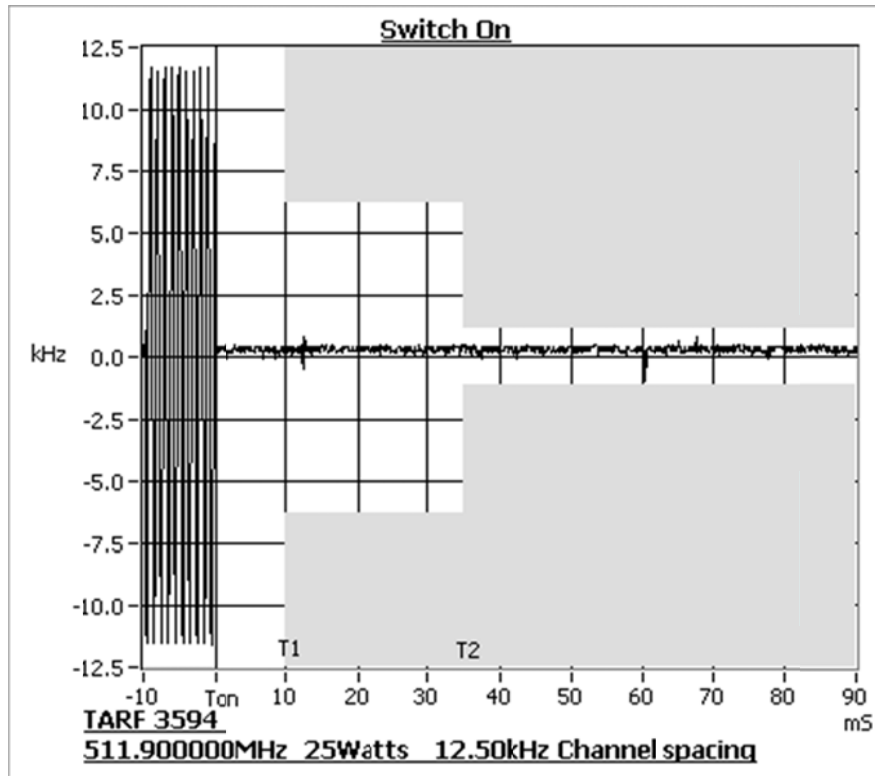

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 450.1 MHz 25 W 25.0 kHz Channel Spacing

TRANSIENT RESPONSE PERIOD	CARRIER PEAK VARIATION FROM NORMAL	
	Key ON (kHz)	Key OFF (kHz)
t1	1.0	N/A
t2	1.2	N/A
t3	N/A	1.0

Confirm that during periods t1 and t3 the frequency difference does not exceed the value of one channel separation.	YES	NO
	☒	☐
Confirm that during the period t2 the frequency difference does not exceed half a channel separation.	YES	NO
	☒	☐
Confirm that during the period t2 to t3 the frequency difference does not exceed the frequency error limit.	YES	NO
	☒	☐

LIMIT: FCC 47 CFR 90.214

TRANSIENT PERIODS	FREQUENCY RANGE	
	150 MHz – 174 MHz	421 MHz – 512 MHz
t1 (ms)	5 ms	10 ms
t2 (ms)	20 ms	25 ms
t3 (ms)	5 ms	10 ms

LIMIT: RSS-119 5.9

Transient Frequency Behaviour for Equipment Designed to Operate on 12.5 kHz Channels			
TRANSIENT PERIODS	Maximum Frequency Difference	FREQUENCY RANGE	
		138 – 174 MHz	406.1 – 470 MHz
t1 (ms)	± 12.5 kHz	5 ms	10 ms
t2 (ms)	± 6.25 kHz	20 ms	25 ms
t3 (ms)	± 12.5 kHz	5 ms	10 ms

Note: RSS-119 5.9 - If the transmitter carrier output power rating is 6 Watts or less, the frequency difference during the time periods t1 and t3 may exceed the maximum frequency difference for these time periods.

Transient Frequency Behaviour



SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 450.1 MHz

25 W

25.0 kHz Channel Spacing

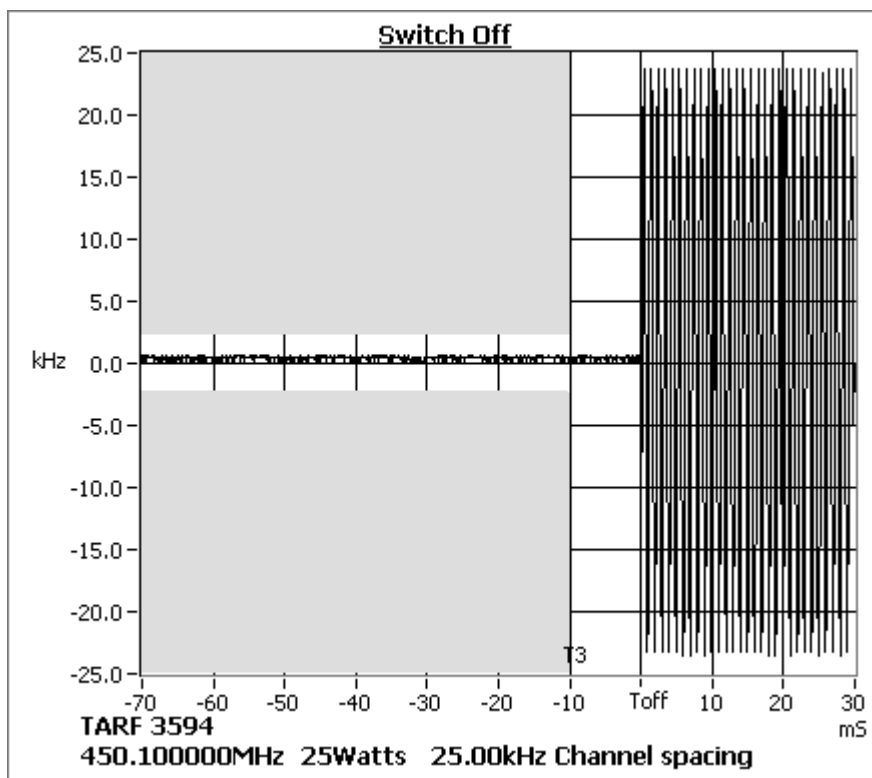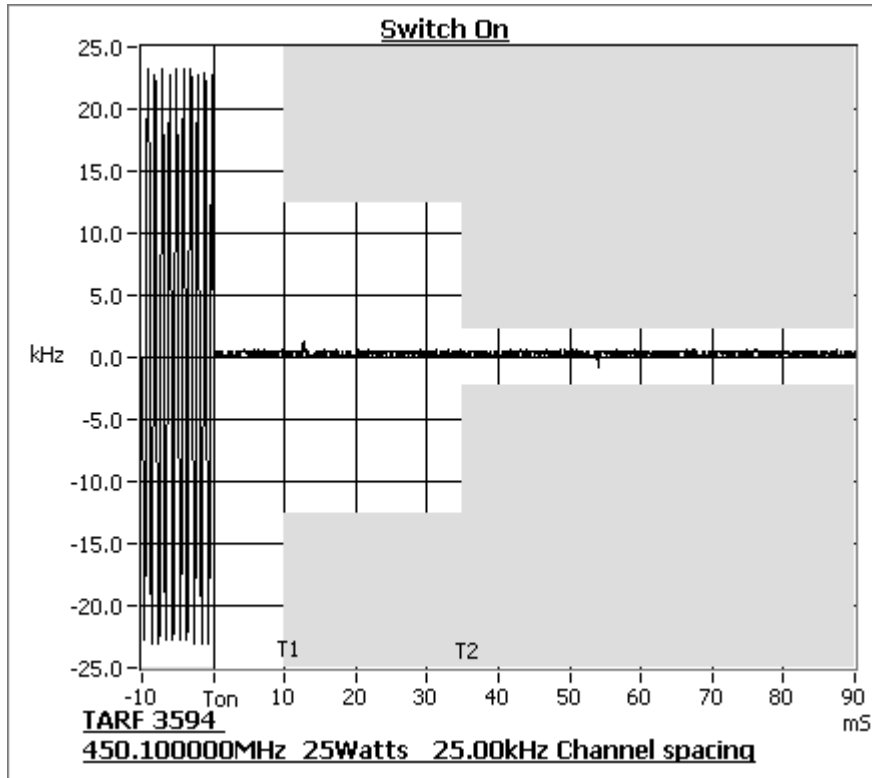

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

Tx FREQUENCY: 459.9 MHz 25 W 25.0 kHz Channel Spacing

TRANSIENT RESPONSE PERIOD	CARRIER PEAK VARIATION FROM NORMAL	
	Key ON (kHz)	Key OFF (kHz)
t1	-1.3	N/A
t2	1.2	N/A
t3	N/A	1.2

Confirm that during periods t1 and t3 the frequency difference does not exceed the value of one channel separation.	YES	NO
	☒	☐
Confirm that during the period t2 the frequency difference does not exceed half a channel separation.	YES	NO
	☒	☐
Confirm that during the period t2 to t3 the frequency difference does not exceed the frequency error limit.	YES	NO
	☒	☐

LIMIT: FCC 47 CFR 90.214

TRANSIENT PERIODS	FREQUENCY RANGE	
	150 MHz – 174 MHz	421 MHz – 512 MHz
t1 (ms)	5 ms	10 ms
t2 (ms)	20 ms	25 ms
t3 (ms)	5 ms	10 ms

LIMIT: RSS-119 5.9



Transient Frequency Behaviour for Equipment Designed to Operate on 12.5 kHz Channels			
TRANSIENT PERIODS	Maximum Frequency Difference	FREQUENCY RANGE	
		138 – 174 MHz	406.1 – 470 MHz
t1 (ms)	± 12.5 kHz	5 ms	10 ms
t2 (ms)	± 6.25 kHz	20 ms	25 ms
t3 (ms)	± 12.5 kHz	5 ms	10 ms

Note: RSS-119 5.9 - If the transmitter carrier output power rating is 6 Watts or less, the frequency difference during the time periods t1 and t3 may exceed the maximum frequency difference for these time periods,

Transient Frequency Behavior

SPECIFICATION: FCC 47 CFR 90.214

Tx FREQUENCY: 459.9 MHz 25 W 25.0 kHz Channel Spacing

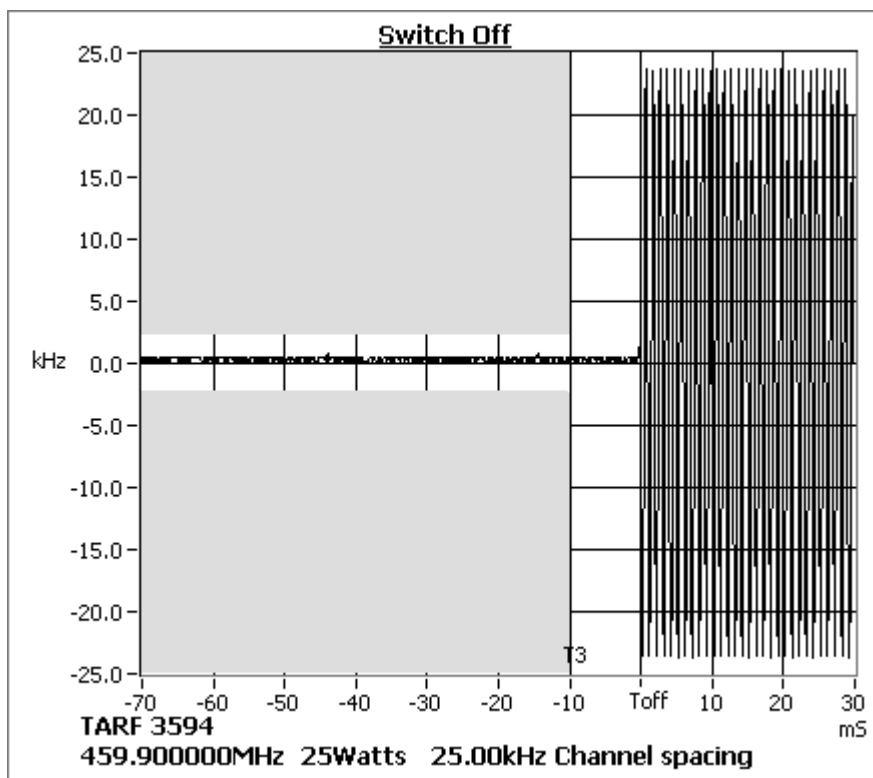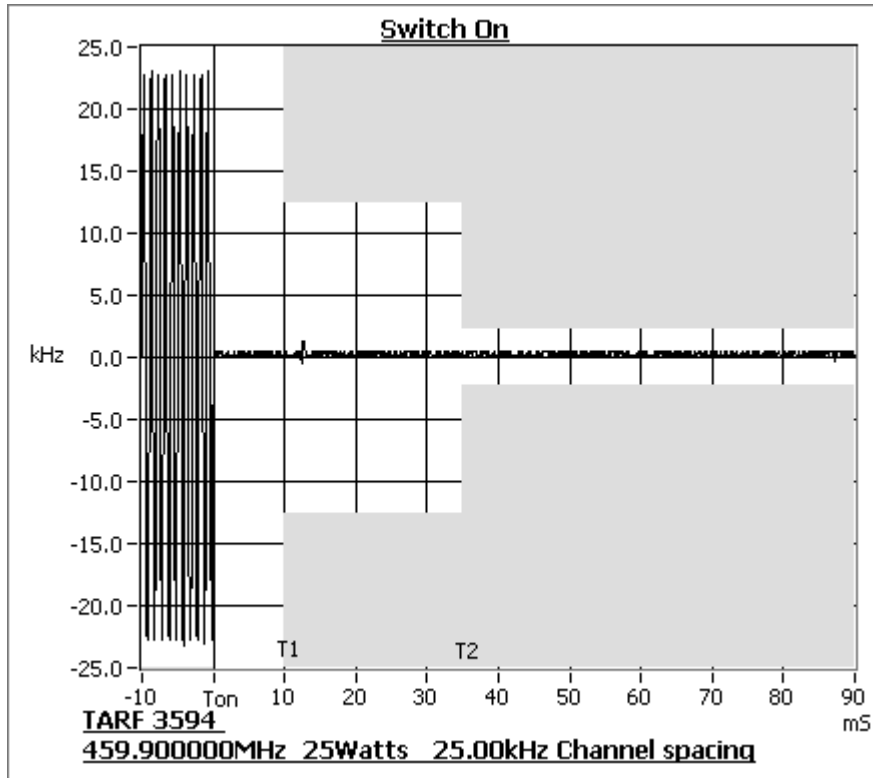

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

Tx FREQUENCY: 469.9 MHz 25 W 25.0 kHz Channel Spacing

TRANSIENT RESPONSE PERIOD	CARRIER PEAK VARIATION FROM NORMAL	
	Key ON (kHz)	Key OFF (kHz)
t1	-1.5	N/A
t2	1.2	N/A
t3	N/A	2.0

Confirm that during periods t1 and t3 the frequency difference does not exceed the value of one channel separation.	YES	NO
	☒	☐
Confirm that during the period t2 the frequency difference does not exceed half a channel separation.	YES	NO
	☒	☐
Confirm that during the period t2 to t3 the frequency difference does not exceed the frequency error limit.	YES	NO
	☒	☐

LIMIT: FCC 47 CFR 90.214

TRANSIENT PERIODS	FREQUENCY RANGE	
	150 MHz – 174 MHz	421 MHz – 512 MHz
t1 (ms)	5 ms	10 ms
t2 (ms)	20 ms	25 ms
t3 (ms)	5 ms	10 ms

LIMIT: RSS-119 5.9



Transient Frequency Behaviour for Equipment Designed to Operate on 12.5 kHz Channels			
TRANSIENT PERIODS	Maximum Frequency Difference	FREQUENCY RANGE	
		138 – 174 MHz	406.1 – 470 MHz
t1 (ms)	± 12.5 kHz	5 ms	10 ms
t2 (ms)	± 6.25 kHz	20 ms	25 ms
t3 (ms)	± 12.5 kHz	5 ms	10 ms

Note: RSS-119 5.9 - If the transmitter carrier output power rating is 6 Watts or less, the frequency difference during the time periods t1 and t3 may exceed the maximum frequency difference for these time periods,

Transient Frequency Behavior

SPECIFICATION: FCC 47 CFR 90.214

Tx FREQUENCY: 469.9 MHz 25 W 25.0 kHz Channel Spacing

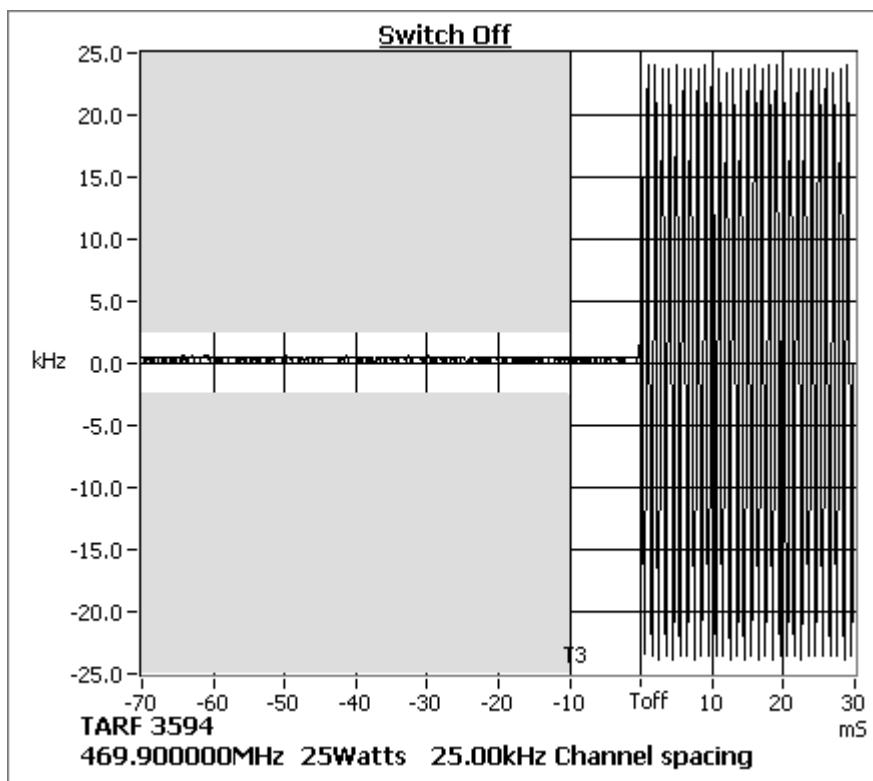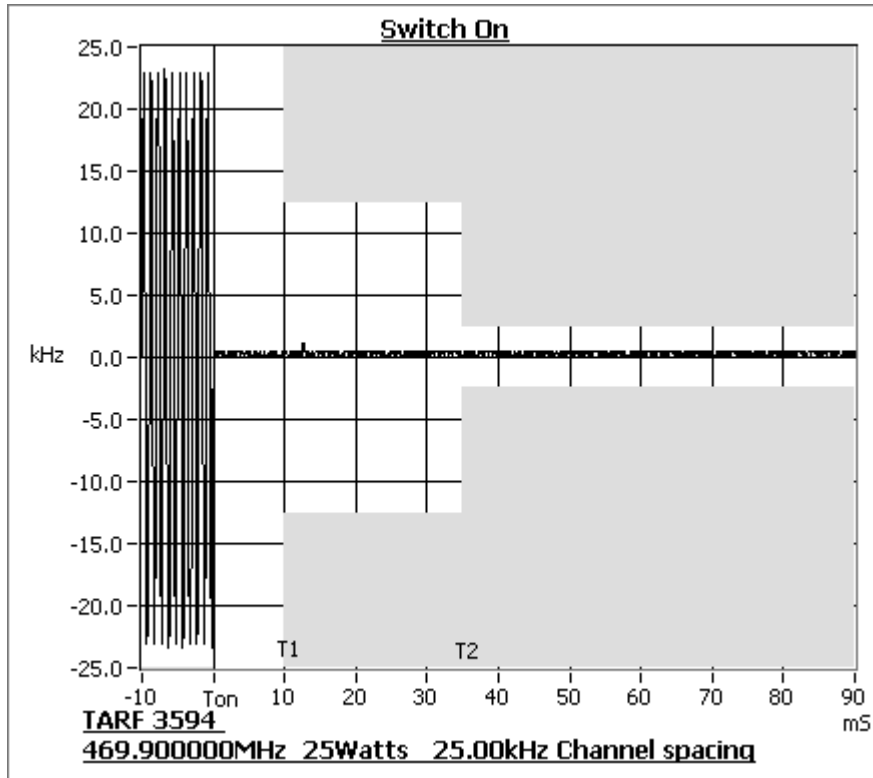

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

Tx FREQUENCY: 511.9 MHz 25 W 25.0 kHz Channel Spacing

TRANSIENT RESPONSE PERIOD	CARRIER PEAK VARIATION FROM NORMAL	
	Key ON (kHz)	Key OFF (kHz)
t1	-3.0	N/A
t2	0.5	N/A
t3	N/A	0.8

Confirm that during periods t1 and t3 the frequency difference does not exceed the value of one channel separation.	YES	NO
	☒	☐
Confirm that during the period t2 the frequency difference does not exceed half a channel separation.	YES	NO
	☒	☐
Confirm that during the period t2 to t3 the frequency difference does not exceed the frequency error limit.	YES	NO
	☒	☐

LIMIT: FCC 47 CFR 90.214

TRANSIENT PERIODS	FREQUENCY RANGE	
	150 MHz – 174 MHz	421 MHz – 512 MHz
t1 (ms)	5 ms	10 ms
t2 (ms)	20 ms	25 ms
t3 (ms)	5 ms	10 ms

LIMIT: RSS-119 5.9



Transient Frequency Behaviour for Equipment Designed to Operate on 12.5 kHz Channels			
TRANSIENT PERIODS	Maximum Frequency Difference	FREQUENCY RANGE	
		138 – 174 MHz	406.1 – 470 MHz
t1 (ms)	± 12.5 kHz	5 ms	10 ms
t2 (ms)	± 6.25 kHz	20 ms	25 ms
t3 (ms)	± 12.5 kHz	5 ms	10 ms

Note: RSS-119 5.9 - If the transmitter carrier output power rating is 6 Watts or less, the frequency difference during the time periods t1 and t3 may exceed the maximum frequency difference for these time periods,

Transient Frequency Behavior

SPECIFICATION: FCC 47 CFR 90.214

Tx FREQUENCY: 511.9 MHz 25 W 25.0 kHz Channel Spacing

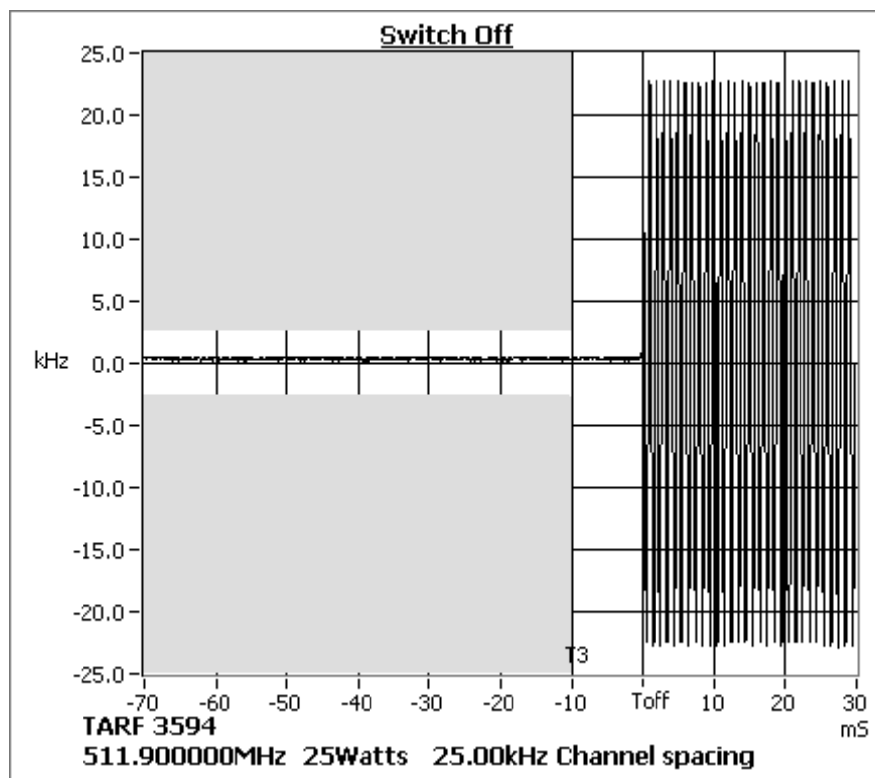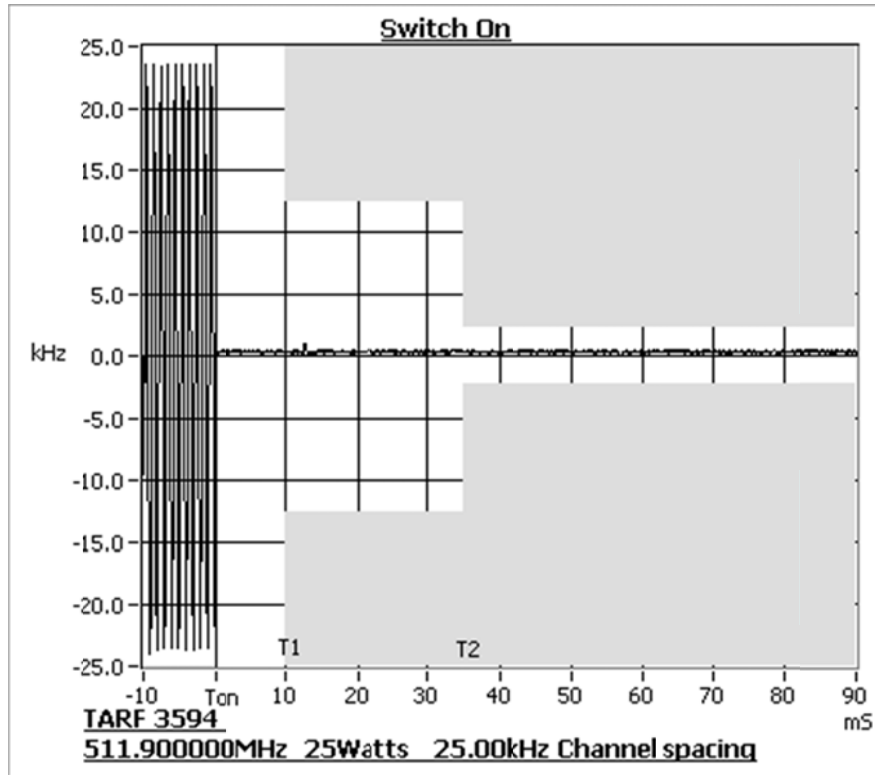

TRANSMITTER FREQUENCY STABILITY - TEMPERATURE

SPECIFICATION: FCC 47 CFR 2.1055 (a) (1)

RSS-119 5.3

GUIDE: TIA/EIA-603D 2.2.2

MEASUREMENT PROCEDURE:



1. Refer Annex A for equipment set up.
2. The EUT was tested for frequency error from -30°C to $+50^{\circ}\text{C}$ in 10°C increments
3. The frequency error was recorded in parts per million (ppm).

MEASUREMENT RESULTS:



See the plots on the following pages for 12.5 kHz channel spacing.

Temperature ($^{\circ}\text{C}$)	FREQUENCY ERROR (ppm) for 12.5 kHz channel spacing @ 25 watts			
	450.1 MHz	459.9 MHz	469.9 MHz	511.9 MHz
-30	0.59	0.61	0.62	0.62
-20	0.57	0.56	0.56	0.56
-10	0.63	0.64	0.65	0.65
0	0.54	0.54	0.53	0.51
10	0.50	0.51	0.53	0.54
20	0.62	0.63	0.64	0.64
30	0.66	0.66	0.66	0.65
40	0.66	0.67	0.68	0.70
50	0.78	0.80	0.81	0.83

Transmitter Frequency Stability - Temperature

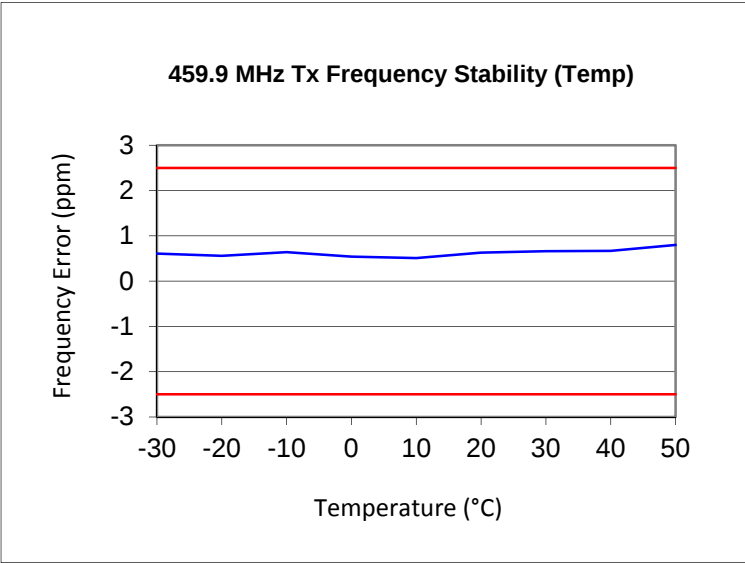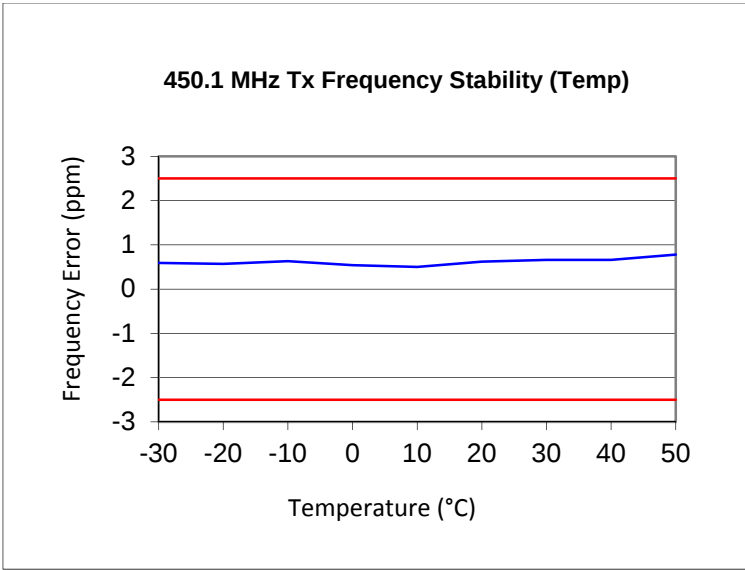

Transmitter Frequency Stability - Temperature

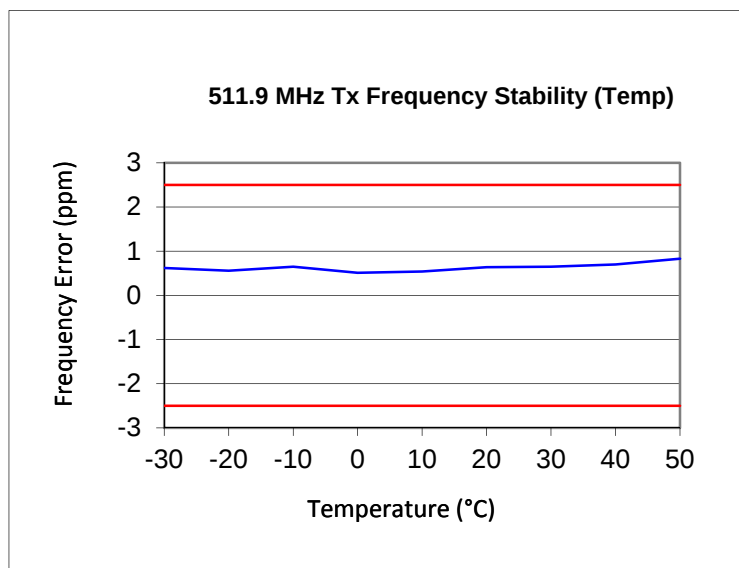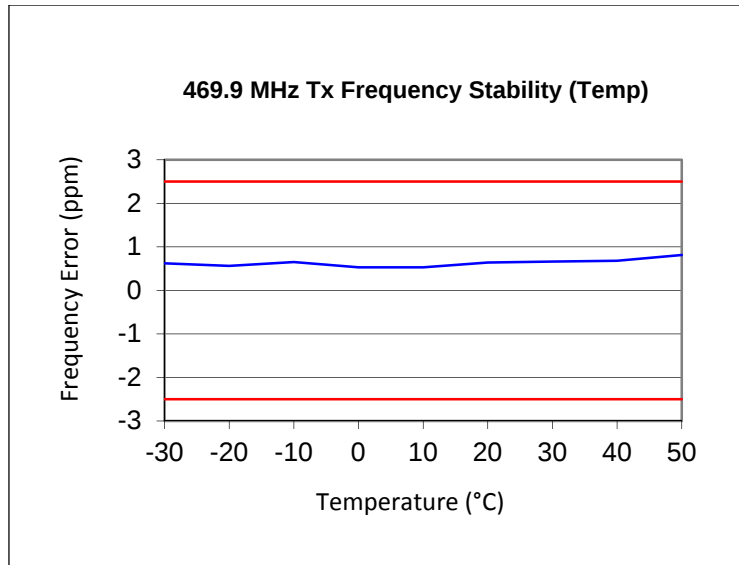

LIMIT: FCC 47 CFR 90.213 RSS-119 5.3

Channel Spacing (kHz)	Frequency Error (ppm)
12.5	2.5

TRANSMITTER FREQUENCY STABILITY - VOLTAGE

SPECIFICATION: FCC 47 CFR 2.1055 (d) (1)

RSS-119 5.3

GUIDE: TIA/EIA-603D 2.2.2

MEASUREMENT PROCEDURE:

1. Refer Annex A for equipment set up.
2. The EUT was tested for frequency error at an input voltage to the radio of 85% to 115%.
3. The frequency error was recorded in parts per million (ppm).

MEASUREMENT RESULTS:

Voltage	FREQUENCY ERROR (ppm) for 12.5 kHz			
	450.1 MHz	459.9 MHz	469.9 MHz	511.9 MHz
13.8 V _{DC}	0.79	0.80	0.79	0.79
11.7 V _{DC}	0.78	0.78	0.78	0.78
15.9 V _{DC}	0.79	0.79	0.79	0.79

LIMIT CLAUSES: FCC 47 CFR 90.213

RSS-119 5.3

Channel Spacing (kHz)	Frequency Error (ppm)
12.5	2.5

SPURIOUS EMISSIONS – Rx CONDUCTED

SPECIFICATION: RSS-119 5.11

GUIDE: TIA/EIA-603D 2.1.2

MEASUREMENT PROCEDURE:

1. Refer Annex A for Equipment set up diagram.
2. The frequency range examined was from 30 MHz to 3 times highest tunable frequency.
3. Spurious emissions which were attenuated more than 20 dB below the limit were not recorded.

450.1 MHz Receive		
Emission Frequency (MHz)	Level (nW)	Level (dBm)
~	~	~
459.9 MHz Receive		
Emission Frequency (MHz)	Level (nW)	Level (dBm)
~	~	~
469.9 MHz Receive		
Emission Frequency (MHz)	Level (nW)	Level (dBm)
~	~	~
511.9MHz Receive		
Emission Frequency (MHz)	Level (nW)	Level (dBm)
~	~	~
No emissions were detected within 20 dB of Limit.		

LIMIT CLAUSE: RSS-Gen 6(b)

LIMIT	30 → 1000 MHz	2 nW	- 57 dBm
	> 1000 MHz	5 nW	- 53 dBm

TEST EQUIPMENT LIST

Equipment Type	Information	Manufacturer	Model No	Serial No#	Tait ID	Cal Due
Antenna	Reference Dipoles	Emco	3121C DB1	9510-1164	E3559	30-Jan-16
Antenna	18GHz DRG	Emco	DRG3115	9512-4638	E3560	6-Mar-16
Antenna	18GHz DRG	Emco	DRG3115	2084	E3076	6-Mar-16
Antenna	Log Periodic	Schwarzbeck	VUSLP	9111-219	E4147	*
Antenna	Reverb - 1-18GHz DRG	Schwarzbeck	BBHA 9120 D	9120D-885	E4857	*
Antenna	Reverb - 1-18GHz DRG	Schwarzbeck	BBHA 9120 D	9120D-884	E4858	*
Audio Analyser	TREVA2	Hewlett Packard	HP8903B	2818A04275	E3710	17-Oct-14
Coax Cable	1m Blue	Suhner	Sucoflex 104A	44610/4A	E4619	16-Oct-14
Coax Cable	2m Black	Suhner	RG214HF/Nm/Nm/2000	TeltestBlack4	E4653	15-Oct-14
Coax Cable	OATS Tower Cable	Intelcom	RG214	OATS1	E4621	13-Oct-14
Coax Cable	OATS Turntable Cable	Intelcom	RG215	OATS2	E4622	13-Oct-14
Coax Cable	2m Black	Suhner	RG214HF/Nm/Nm/2000	TeltestBlack5	E4850	15-Oct-14
Coax Cable	2m Black	Suhner	RG214HF/Nm/Nm/2000	TeltestBlack6	E4849	16-Oct-14
Coax Cable	Reverb - 2m Multiflex 141	TeltestBlue5	MF 141	TeltestBlue5	E4844	16-Oct-14
Coax Cable	Reverb - 1m Multiflex 141	TeltestBlue3	MF 141	TeltestBlue3	E4846	17-Oct-14
Coax Cable	Reverb - 1m Multiflex 141	TeltestBlue2	MF 141	TeltestBlue2	E4847	17-Oct-14
Environ. Chamber	Chest	Contherm	Chest	E3397	E3397	2-Aug-15
Modulation Analyser	TREVA2	Hewlett Packard	HP8901B (Opt 002)	3704A05837	E3786	19-Oct-14
Multimeter		Fluke	77	35069359	E3237	16-Oct-14
OATS	NSA	Tait				4-Jun-15
OATS	Antenna Tower	Electrometrics	EM-4720-2	112	E4447	*
OATS	Controller	Electrometrics	EM-4700	119	E4445	*
OATS	FCC Listing Registration			837095		12-May-16
OATS	Turntable	Electrometrics	EM-4704A	105	E4446	*
Oscilloscope	100MHz Digital	Tektronics	TDS340	B013611	E3585	16-Oct-14
Power Meter	TREVA2 Power Head for HP8901	Hewlett Packard	HP11722A	2716A02037	1575	21-Oct-14
Power Supply	TREVA2 60V/25A	Agilent	N5767A	US09F4901H	E4656	16-Oct-14
RF Amplifier	+21.7 dB 1GHz	Tait	ZFL-1000LN	E3660	E3360	16-Jan-15
RF Amplifier	Pre-amplifier	Agilent	87405C	MY47010688	E4941	18-Oct-14
RF Attenuator	30dB 250W	Weinschel	45-30-34	JW663	E3386	18-Oct-14
RF Attenuator	TREVA2 20dB 150W	Weinschel	40-20-33	CJ405	E3733	21-Oct-14
RF Attenuator	30dB 350W	Weinschel	67-30-33	BR0531	E4280	18-Oct-14
RF Attenuator	TREVA2 3dB	Weinschel	Model 1	BL9950	E4080	*
RF Chamber	S-LINE TEM CELL	Rohde & Schwarz	1089.9296.02	338232/003	E3636	31-Aug-15
RF Chamber	Reverb - Stirrer controller for reverb chamber	Teseq	Stirrer Controller	29765.1	E4854	*
RF Chamber	Reverb - 0.5 - 18GHz Reverberation Chamber	Teseq	RVC XS	29765	E4855	*
RF Combiner	TREVA2	Minicircuits	ZFSC-4-1	-	E4084	*
RF Load	50W	Weinschel	F1426	BF0487	E3675	22-Oct-14
RF Load	2W	MCL	NTRM-50	01		16-Jan-15
Signal Generator	Analog 4GHz	Agilent	E4422B	GB40050320	E3788	20-Oct-14

TELTEST Laboratories
Tait Ltd
Report Number 3594


Equipment Type	Information	Manufacturer	Model No	Serial No#	Tait ID	Cal Due
Spectrum Analyser	26.5GHz	Agilent	PXA N9030A	MY49432161	E4907	6-Jul-16
Spectrum Analyser	13.2GHz	Hewlett Packard	HP8562E	3821A00779	E3715	18-Oct-14
Spectrum Analyser	13.2GHz	Agilent	E4445A	MY42510072	E4139	21-Nov-14
Temp & Humidity datalogger		Hobo	U21-011	10134275	E4980	30-Jun-15
Transient Limiter	9kHz to 200MHz	Agilent	11947A	3107A03657	E4982	18-Apr-15
TREVA 2		Teltest	-	2	-	9-Oct-14

* Note:

Items E4080 3 dB attenuator and E4084 RF Combiner are part of TREVA 2 Calibration.

Items E4447 OATS Antenna Tower, E4445 OATS Controller, E4446 OATS Turntable, E4147 Log Periodic Antenna and Items E4854 Reverb Stirrer, E4855 Reverb Chamber, E4857 DRG Antenna and E4858 DRG Antenna are calibrated prior to use.

ANNEX A – TEST SETUP DETAILS

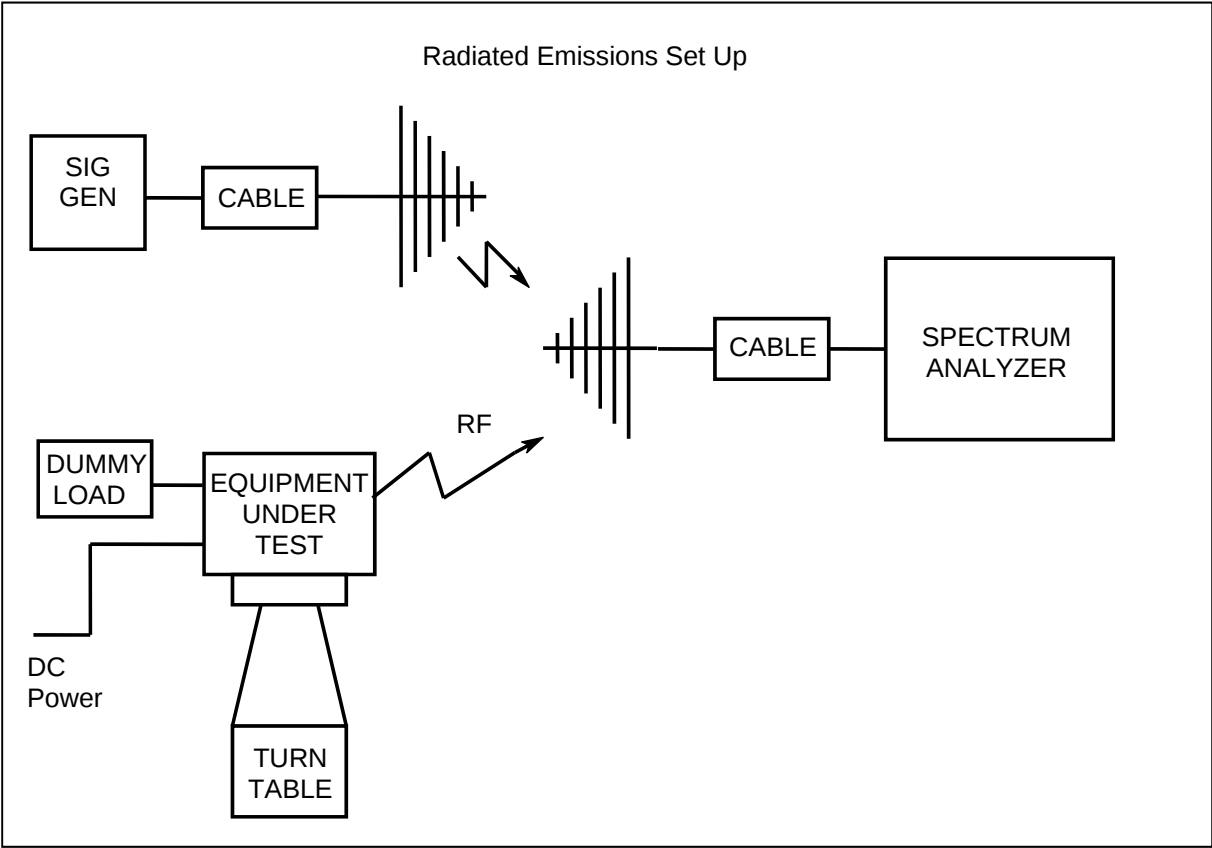

All other testing is performed using the Teltest **Radio EVALuation** system (TREVA), which is configured as shown below. The Spectrum Analyser is connected to the EUT via the attenuator network for Conducted Emissions testing, and Occupied Bandwidth.

