

Laboratory Test Report

ELECTROMAGNETIC COMPATIBILITY

for the

TPDHKC HANDPORTABLE Transceiver

Tested In accordance with

47CFR 15.109 & 15.111

Report Revision: 1
Issue Date: 07-February-2018
FCC ID: CASTPDHKC

PREPARED BY: Alf Schinkelshoek


Test Technician

CHECKED & APPROVED BY: M. C. James


Laboratory Technical Manager



IANZ
ACCREDITED LABORATORY

Tests indicated as not accredited are outside the laboratory's scope of accreditation.

This document must not be reproduced except in full, without the written permission of the Compliance Laboratory Manager.

TELTEST Laboratories (A Division of Tait Communications) Telephone: 64 3 358 3399
PO Box 1645, 558 Wairakei Road, Christchurch, New Zealand. FAX: 64 3 359 4632

TABLE OF CONTENTS

REVISION HISTORY	3
INTRODUCTION	4
REPORT PREPARED FOR	4
DESCRIPTION OF SAMPLE	4
STATEMENT OF COMPLIANCE	4
TEST CONDITIONS	4
MEASUREMENT FREQUENCY RANGE FOR UNINTENTIONAL RADIATORS.....	5
TEST RESULTS.....	6
RADIATED SPURIOUS EMISSIONS – UNINTENTIONAL RADIATOR	6
CONDUCTED SPURIOUS EMISSIONS - RECEIVER.....	8
TEST EQUIPMENT LIST	10
ANNEX A.....	11
TEST SETUP DETAILS	11

Revision History

Date	Revision	Comments
07-February-2018	1	Initial test report

Introduction

Type Approval Testing of the
TPDHKC
Serial No 25939663
378 → 470 MHz

in accordance with:

47CFR , 15.109 & 15.111

Report Prepared For

Tait Ltd
245 Wooldridge Road
Harewood
Christchurch 8051
New Zealand

Description of Sample

Manufacturer: Tait Limited
Equipment: HANDPORTABLE Transceiver
Type: TPDHKC
Product code: T03-00072-ECAB
Serial Numbers: 25939663
Quantity: 1
Hardware & Software:

Hardware ID	TPDB2X-HB00_0001
Boot Code	QPD2B_S00_3.03.00.0002
DSP	QPD2A_E00ML_2.18.00.0594
Radio Application	QPD2F_E00ML_2.18.00.0594
FPGA Image	QPD2G_S01_1.12.00.0004

Statement of Compliance

The TPDHKC HANDPORTABLE transceiver as tested in this report was found to conform to the following standards:

47CFR , 15.109 & 15.111

Test Conditions

Environmental Conditions

All testing was performed between 22 January 2018 → 07 February 2018, and under the following conditions:

Ambient Temperature: 15° C → 30° C
Relative Humidity: 20% → 75%
Standard Test Voltage: 7.5 V_{DC}

Measurement Frequency Range for Unintentional Radiators

The measured frequency range is determined in accordance with FCC 47CFR 15.33 (b) (1)

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement (MHz)	Upper frequency selected for test
Below 1.705	30	<input type="checkbox"/>
1.705 – 108	1000	<input type="checkbox"/>
108 – 500	2000	<input checked="" type="checkbox"/>
500 – 1000	5000	<input type="checkbox"/>
Above 1000	5 th Harmonic of highest frequency or 40 GHz, whichever is lower	<input type="checkbox"/> MHz

Test Results

RADIATED SPURIOUS EMISSIONS – Unintentional Radiator

Note: This test is not accredited

SPECIFICATION: FCC 47 CFR 15.109

GUIDE: TIA-603E 2.1.1

MEASUREMENT PROCEDURE: Direct Measurement

Initial Scan:

1. The EUT is placed in the S-Line TEM cell and emissions are measured from 30 MHz to 800 MHz. Any emission within 10 dB of the limit is then re-tested on the OATS .
2. The EUT is placed in the reverberation chamber and emissions are measured from 800 MHz to the upper frequency required. Any emission within 10 dB of the limit is then re-tested on the OATS.

OATS Measurement:

1. The EUT is placed on a wooden turntable at a distance of three metres from the test antenna. The output terminal is connected to a RF dummy load.
2. The test antenna is raised from 1 m to 4 m to obtain a maximum reading; the turntable is then rotated through 360° to obtain the maximum response of each spurious emission. Valid emissions are determined by switching the EUT on and off.
3. The maximum response of each spurious emission is recorded.

LIMIT CLAUSE: FCC 47CFR 15.109

EMISSION FREQUENCY (MHz)	µVolts / Metre @ 3 Metres
30 → 88	100
88 → 216	150
216 → 960	200
960 →	500

Measurement Uncertainty (dB)	±4.6 dB
------------------------------	---------

RADIATED SPURIOUS EMISSIONS – Unintentional Radiator

SPECIFICATION: FCC 47CFR 15.109

12.5 kHz Channel Spacing 406.2 MHz Receive / Tx Standby	
Emission Frequency (MHz)	Level (µV/m)
~	~
12.5 kHz Channel Spacing 418.05 MHz Receive / Tx Standby	
Emission Frequency (MHz)	Level (µV/m)
~	~
12.5 kHz Channel Spacing 429.9 MHz Receive / Tx Standby	
Emission Frequency (MHz)	Level (µV/m)
~	~
12.5 kHz Channel Spacing 450.1 MHz Receive / Tx Standby	
Emission Frequency (MHz)	Level (µV/m)
~	~
12.5 kHz Channel Spacing 459.9 MHz Receive / Tx Standby	
Emission Frequency (MHz)	Level (µV/m)
~	~
12.5 kHz Channel Spacing 469.9 MHz Receive / Tx Standby	
Emission Frequency (MHz)	Level (µV/m)
~	~

Measurement Uncertainty (dB)	±4.6 dB
No emissions were detected within 10 dB of Limit.	

CONDUCTED SPURIOUS EMISSIONS - Receiver

SPECIFICATION: FCC 47CFR 15.111

GUIDE: TIA-603E 2.1.2

MEASUREMENT PROCEDURE:

1. Refer Annex A for Equipment set up.
2. The measurement frequency range is from 30 MHz to the upper frequency limit as determined by FCC 47 CFR 15.33.
3. Spurious emissions which were attenuated more than 20 dB below the limit were not recorded.
4. Rx and Tx (Standby) ports are tested separately.

LIMIT CLAUSE: FCC 47CFR 15.111

MEASUREMENT RESULTS:

12.5 kHz Channel Spacing 406.2 MHz Receive / Tx Standby	
Emission Frequency (MHz)	Level (nW)
~	~
12.5 kHz Channel Spacing 418.05 MHz Receive / Tx Standby	
Emission Frequency (MHz)	Level (nW)
~	~
12.5 kHz Channel Spacing 429.9 MHz Receive / Tx Standby	
Emission Frequency (MHz)	Level (nW)
~	~
12.5 kHz Channel Spacing 450.1 MHz Receive / Tx Standby	
Emission Frequency (MHz)	Level (nW)
~	~
12.5 kHz Channel Spacing 459.9 MHz Receive / Tx Standby	
Emission Frequency (MHz)	Level (nW)
~	~

Conducted Spurious Emissions - continued

12.5 kHz Channel Spacing		469.9 MHz Receive / Tx Standby	
Emission Frequency (MHz)		Level (nW)	
~		~	
No emissions were detected within 20 dB of Limit.			

LIMITS:

LIMIT	2 nW
-------	------

TEST EQUIPMENT LIST


Equipment Type	Information	Manufacturer	Model No	Serial No#	Tait ID	Cal Due
Signal Generator	Analog 3.2GHz	Hewlett Packard	HP8648C	3443U00543	E3558	26-Sep-18
Power Supply	TREVA2 60V/25A	Agilent	N5767A	US09F4901H	E4656	7-Oct-19
RF Chamber	S-LINE TEM CELL	Rohde & Schwarz	1089.9296.02	338232/003	E3636	
Coax Cable	2m Black	Suhner	RG214HF/Nm/Nm/2000	TeltestBlack5	E4850	20-Dec-18
Coax Cable	2m Black	Suhner	RG214HF/Nm/Nm/2000	TeltestBlack6	E4849	20-Dec-18
Antenna	Log Periodic	Schwarzbeck	VUSLP	9111-219	E4617	
TREVA 2		Teltest	-	2	-	2-Jul-18
Coax Cable	Reverb - 4.5m Multiflex 141	TeltestBlue6	MF 141	TeltestBlue6	E4843	20-Dec-18
Coax Cable	Reverb - 2m Multiflex 141	TeltestBlue5	MF 141	TeltestBlue5	E4844	20-Dec-18
Coax Cable	Reverb - 2m Multiflex 141	TeltestBlue4	MF 141	TeltestBlue4	E4845	20-Dec-18
Coax Cable	Reverb - 1m Multiflex 141	TeltestBlue2	MF 141	TeltestBlue2	E4847	20-Dec-18
Coax Cable	Reverb - 1m Multiflex 141	TeltestBlue1	MF 141	TeltestBlue1	E4848	20-Dec-18
RF Chamber	Reverb - Stirrer controller for reverb chamber	Teseq	Stirrer Controller	29765.1	E4854	
RF Chamber	Reverb - 0.5 - 18GHz Reverberation Chamber	Teseq	RVC XS	29765	E4855	
Antenna	Reverb - 1-18GHz DRG	Schwarzbeck	BBHA 9120 D	9120D-885	E4857	
Antenna	Reverb - 1-18GHz DRG	Schwarzbeck	BBHA 9120 D	9120D-884	E4858	
Coax Cable	OATS Turntable Cable 2	Intelcom	RG215	OATS3	E4995	1-Jan-19
Testware	Conducted Emissions		16/12/2015			
Testware	Radiated Emissions		September 2015			
Testware	Reverb Emissions		28 May 2015			
Testware	S-Line Radiated Emissions		May 2016			
RF Attenuator	20dB 25W	Weinschel	33-20-33	BD5871	E3673	20-Dec-18

NOTE: Items without calibration dates are calibrated immediately before use, or set using calibrated instruments.

ANNEX A

Test Setup Details

Radiated Emissions Set up.

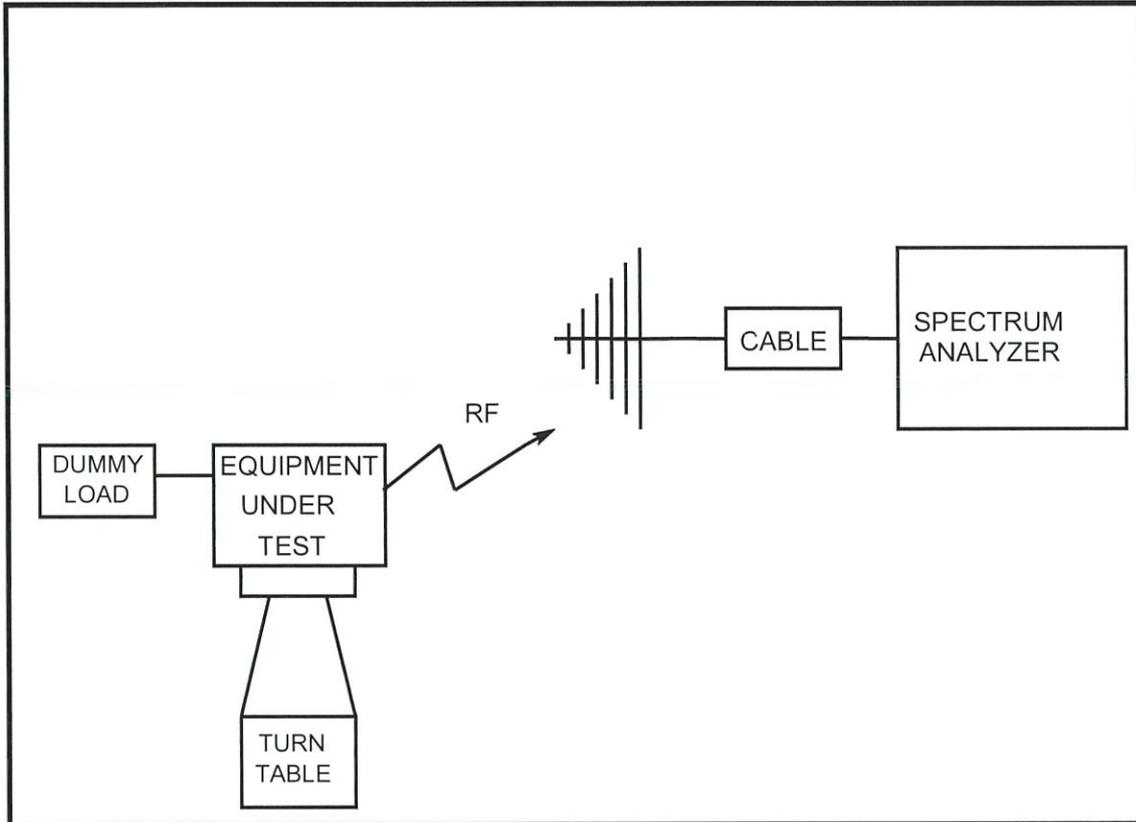

Conducted Emissions Set up.

