



中认信通
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: Tait International Limited

Address: 245 Wooldridge Road, Harewood, P.O. Box 1645 Christchurch 8051 New Zealand

FCC ID: CASTWXNFA

IC: 737A-TWXNFA

HVIN: TWXNFA

Product Name: TWX500 series LTE Wearable Data device

**Standard(s): 47 CFR Part 15, Subpart E(15.407)
RSS-247 Issue 2, February 2017
RSS-Gen, Issue 5, February 2021 Amendment 2
ANSI C63.10-2013
KDB 789033 D02 General U-NII Test Procedures New Rules v02r01**

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR21110026-00C

Date Of Issue: 2022-01-24

Reviewed By: Sun Zhong

Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 DESCRIPTION OF TEST CONFIGURATION.....	8
1.2.2 Support Equipment List and Details	8
1.2.3 Support Cable List and Details	8
1.2.4 Block Diagram of Test Setup.....	9
1.3 MEASUREMENT UNCERTAINTY	11
2. SUMMARY OF TEST RESULTS	12
3. REQUIREMENTS AND TEST PROCEDURES	13
3.1 AC LINE CONDUCTED EMISSIONS.....	13
3.1.1 Applicable Standard.....	13
3.1.2 EUT Setup.....	14
3.1.3 EMI Test Receiver Setup	15
3.1.4 Test Procedure	15
3.1.5 Corrected Amplitude & Margin Calculation.....	15
3.2 RADIATION SPURIOUS EMISSIONS.....	16
3.2.1 Applicable Standard.....	16
3.2.2 EUT Setup.....	17
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	19
3.2.4 Test Procedure	19
3.2.5 Corrected Amplitude & Margin Calculation.....	19
3.3 EMISSION BANDWIDTH:	20
3.3.1 Applicable Standard.....	20
3.3.2 EUT Setup.....	20
3.3.3 Test Procedure	20
3.4 MAXIMUM CONDUCTED OUTPUT POWER:.....	22
3.4.1 Applicable Standard.....	22
3.4.2 EUT Setup.....	23
3.4.3 Test Procedure	23
3.5 MAXIMUM POWER SPECTRAL DENSITY:	24
3.5.1 Applicable Standard.....	24
3.5.2 EUT Setup.....	25
3.5.3 Test Procedure	25
3.7 DUTY CYCLE:.....	26
3.7.1 EUT Setup.....	26
3.7.2 Test Procedure	26
3.8 ANTENNA REQUIREMENT.....	27
3.8.1 Applicable Standard.....	27
3.8.2 Judgment.....	27

3.9 ADDITIONAL REQUIREMENT28
 3.9.1 Applicable Standard.....28
3.9.2 JUDGMENT.....29

4. Test DATA AND RESULTS 30
 4.1 AC LINE CONDUCTED EMISSIONS.....30
 4.2 RADIATION SPURIOUS EMISSIONS33
 4.3 EMISSION BANDWIDTH:52
 4.4 MAXIMUM CONDUCTED OUTPUT POWER:83
 4.5 MAXIMUM POWER SPECTRAL DENSITY:86
 4.6 DUTY CYCLE: 103

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	TWX500 series LTE Wearable Data device
EUT Model:	TWXNFA
Operation Frequency:	5180-5240 MHz (802.11a/n ht20/ac vht20) 5190-5230 MHz(802.11n ht40/ac vht40) 5210 MHz(802.11ac vht80) 5260-5320 MHz (802.11a/n ht20/ac vht20) 5270-5310 MHz(802.11n ht40/ac vht40) 5290 MHz(802.11ac vht80) 5500-5720 MHz (802.11a/n ht20/ac vht20) 5510-5710 MHz(802.11n ht40/ac vht40) 5530-5690 MHz(802.11ac vht80) 5745-5825 MHz (802.11a/n ht20/ac vht20) 5755-5795 MHz(802.11n ht40/ac vht40) 5775 MHz(802.11ac vht80)
Maximum Peak Output Power (Conducted):	12.81dBm (5150-5250 MHz) 11.95 dBm (5250-5350 MHz) 11.42 dBm (5470-5725 MHz) 10.32 dBm (5725-5850 MHz)
Modulation Type:	OFDM
Rated Input Voltage:	DC 3.85V from battery or DC 5V from USB port
Serial Number:	CR21110026-RF-S1
EUT Received Date:	2021.11.25
EUT Received Status:	Good

Operation Frequency Detail:

For 802.11a/n ht20/ac vht20:

5150-5250MHz Band		5250-5350 MHz Band		5470-5725 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
40	5200	56	5280	104	5520	153	5765
44	5220	60	5300	108	5540	157	5785
48	5240	64	5320	112	5560	161	5805
/	/	/	/	116	5580	165	5825
/	/	/	/	120	5600	/	/
/	/	/	/	124	5620	/	/
/	/	/	/	128	5640	/	/
/	/	/	/	132	5660	/	/
/	/	/	/	136	5680	/	/
/	/	/	/	140	5700	/	/
/	/	/	/	144	5720	/	/

Note: For Canada, the channels 120-128 were disabled by software.

Per section 15.31(m)/RSS-Gen, the below frequencies were performed the test as below:

Test Channel	Test Frequency (MHz)			
	5150-5250MHz Band	5250-5350 MHz Band	5470-5725 MHz Band	5725-5850MHz Band
Lowest	5180	5260	5500	5745
Middle	5200	5280	5580	5785
Highest	5240	5320	5700	5825
Note: Channel 144 crossed the band U-NII 2C to U-NII 3, were choose to test for compliance requirement.				

For 802.11n ht40/ac vht40:

5150-5250MHz Band		5250-5350 MHz Band		5470-5725 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
46	5230	62	5310	110	5550	159	5795
/	/	/	/	118	5590	/	/
/	/	/	/	126	5630	/	/
/	/	/	/	134	5670	/	/
/	/	/	/	142	5710	/	/
Note: For Canada, the channels 118-126 were disabled by software.							

Per section 15.31(m)/RSS-Gen, the below frequencies were performed the test as below:

Test Channel	Test Frequency (MHz)			
	5150-5250MHz Band	5250-5350 MHz Band	5470-5725 MHz Band	5725-5850MHz Band
Lowest	5190	5270	5510	5755
Middle	/	/	5550	/
Highest	5230	5310	5670	5795
Additional	/	/	5710	/
Note: Channel 142 crossed the band U-NII 2C to U-NII 3, were choose to test for compliance requirement.				

For 802.11ac vht80:

5150-5250MHz Band		5250-5350 MHz Band		5470-5725 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
/	/	/	/	122	5610	/	/
/	/	/	/	138	5690	/	/
Note: For Canada, the channel 122 was disabled by software.							

Per section 15.31(m)/RSS-Gen, the below frequencies were performed the test as below:

Test Channel	Test Frequency (MHz)			
	5150-5250MHz Band	5250-5350 MHz Band	5470-5725 MHz Band	5725-5850MHz Band
Lowest	/	/	5530	/
Middle	5210	5290	5610	5775
Highest	/	/	/	/
Additional	/	/	5690	/
Note: Channel 138 crossed the band U-NII 2C to U-NII 3, were choose to test for compliance requirement.				

1.1.3 Antenna Information Detail▲:

Antenna Manufacturer	Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range	§15.203& RSS-Gen Requirement
Tait International Limited	Monopole	50	3.6 dBi/ 5.15~5.85GHz	Compliance

The Method of §15.203 Compliance:

- Antenna must be permanently attached to the unit.
 Antenna must use a unique type of connector to attach to the EUT.
 Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

1.1.4 Accessory Information:

Accessory Description	Manufacturer	Model
Curly Cord	Tait International Limited	TWX55000-TCTP9
USB Cable		TWX55000-USB

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.					
Equipment Modifications:	No					
EUT Exercise Software:	Testmode					
The software " Testmode "was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer ▲:						
Frequency Band	Test Modes	Data Rate	Power Level Setting			
			Lowest Channel	Middle Channel	Highest Channel	Additional channel
5150-5250 MHz	802.11a	6Mbps	12	12	15	/
	802.11n ht20	MCS0	12	12	15	/
	802.11n ht40	MCS0	10	/	15	/
	802.11ac vht80	MCS0	/	10	/	/
5250-5350 MHz	802.11a	6Mbps	15	15	12	/
	802.11n ht20	MCS0	15	15	12	/
	802.11n ht40	MCS0	15	/	10	/
	802.11ac vht80	MCS0	/	10	/	/
5470-5725 MHz:	802.11a	6Mbps	12	15	12	12
	802.11n ht20	MCS0	12	15	12	12
	802.11n ht40	MCS0	10	15	10	10
	802.11ac vht80	MCS0	10	10	/	10
5725-5850 MHz	802.11a	6Mbps	12	15	12	/
	802.11n ht20	MCS0	12	15	12	/
	802.11n ht40	MCS0	10	/	10	/
	802.11ac vht80	MCS0	/	10	/	/
Note: The system support 802.11 a/n ht20/n ht40/ac vht20/ac vht40/ac vht80, the vht20/vht40 were reduced since the identical parameters with 802.11n ht20 and ht40.						

1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Unknown	Earphone	Unknown	CR21110026-RF-S4
Huawei	Adapter 5V,2A	HW-050200C33W	H333L5F4M06947

1.2.3 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Earphone Cable	No	No	1.2	EUT	Earphone
USB Cable	No	No	1.2	Adapter	EUT

1.2.4 Block Diagram of Test Setup


AC line conducted emissions:

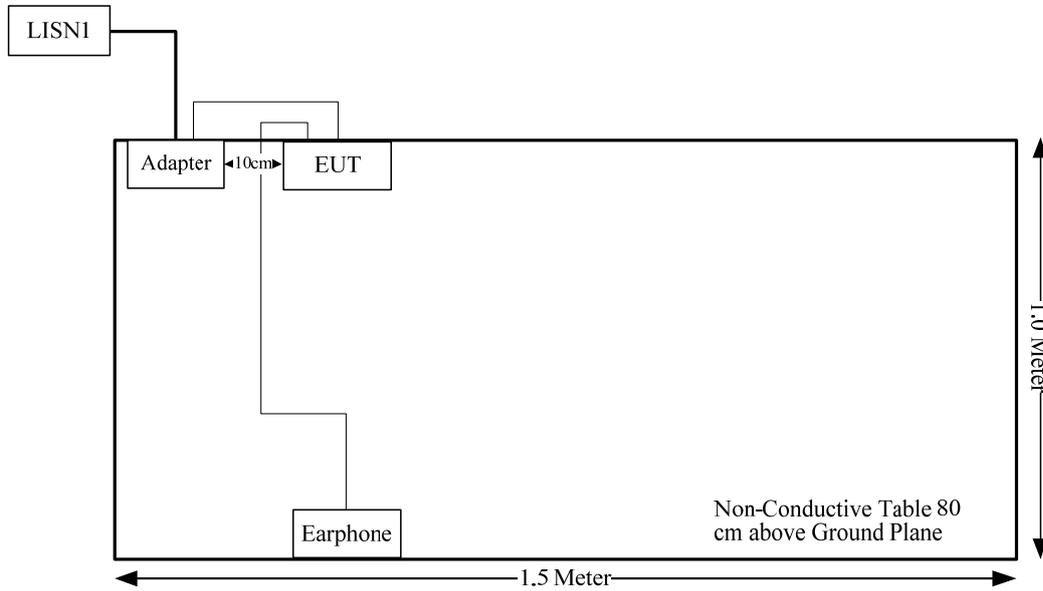

Spurious Emissions:

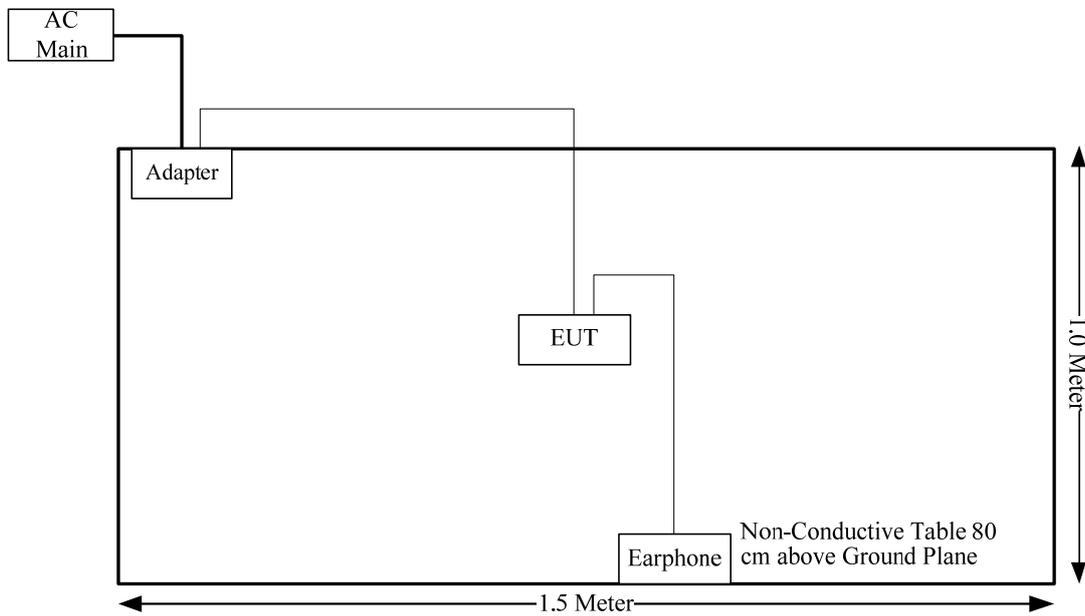

Above 1GHz:

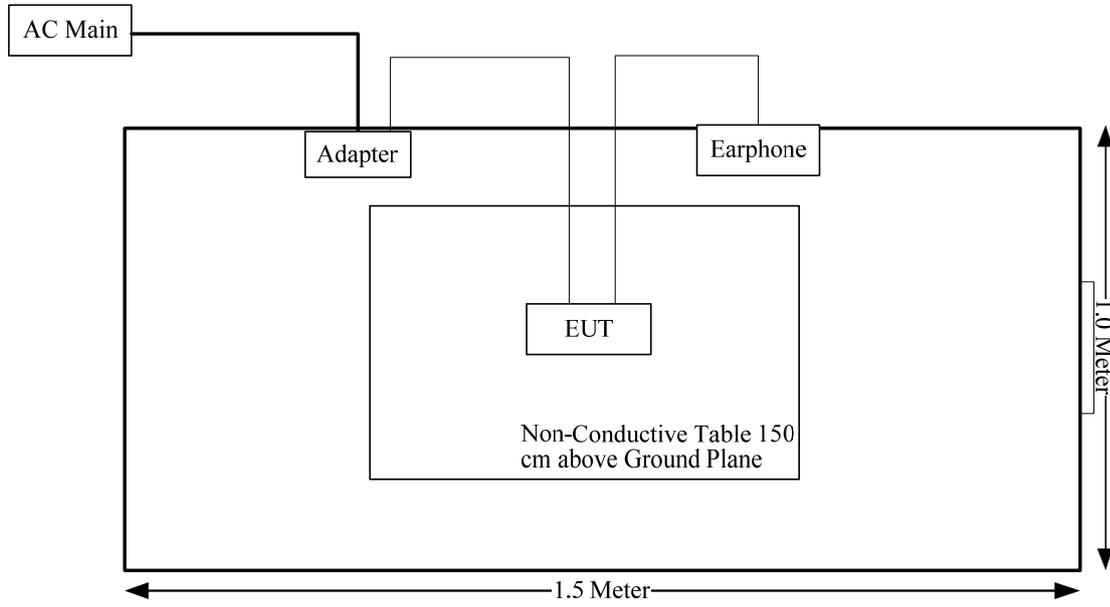

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result	Note
§15.207(a) RSS-Gen Clause 8.8	AC line conducted emissions	Compliant	/
FCC§15.205& §15.209 &§15.407(b) RSS-247 Clause 6.2	Undesirable Emission& Restricted Bands	Compliant	/
FCC§15.407(a) (e) RSS-247 Clause 6.2 RSS-Gen Clause 6.7	Emission Bandwidth	Compliant	/
FCC§15.407(a) RSS-247 Clause 6.2	Conducted Transmitter Output Power	Compliant	/
FCC§15.407 (a) RSS-247 Clause 6.2	Power Spectral Density	Compliant	/
FCC§15.407 (h) RSS-247 Clause 6.3	Dynamic Frequency Selection (DFS)	Compliant	Please refer to the DFS report: CR21110026-00E
§15.203 RSS-GEN Clause 6.8	Antenna Requirement	Compliant	/
RSS-247 Clause 6.4	Additional requirements	Compliant	/

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

RSS-Gen Clause 8.8

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50 μ H / 50 Ω line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the

boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ¹	56 to 46 ¹
0.5 – 5	56	46
5 – 30	60	50


Note 1: The level decreases linearly with the logarithm of the frequency.

For an EUT with a permanent or detachable antenna operating between 150 kHz and 30 MHz, the AC power-line conducted emissions must be measured using the following configurations:

(a) Perform the AC power-line conducted emissions test with the antenna connected to determine compliance with the limits of table 4 outside the transmitter's fundamental emission band.

(b) Retest with a dummy load instead of the antenna to determine compliance with the limits of table 4 within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network that simulates the antenna in the fundamental frequency band.

3.1.2 EUT Setup

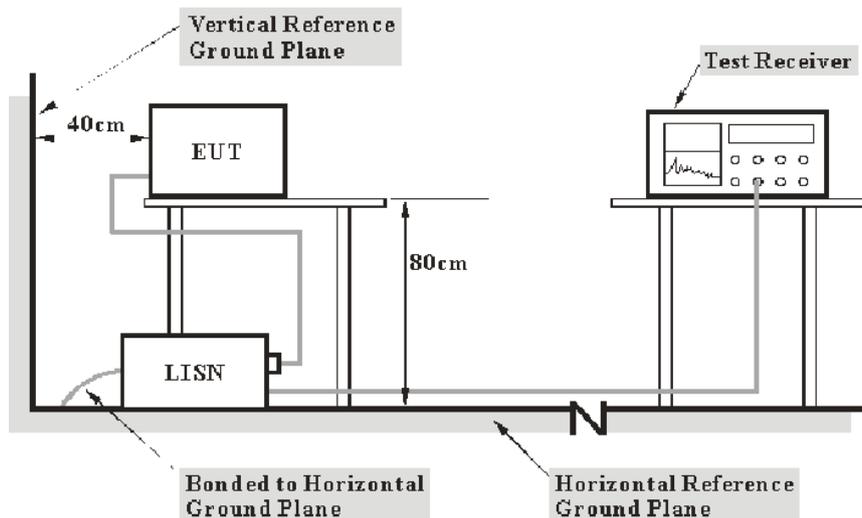

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207,RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiation Spurious Emissions

3.2.1 Applicable Standard

FCC §15.407 (b);

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(4) For transmitters operating solely in the 5.725-5.850 GHz band:

(i) All emissions shall be limited to a level of - 27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.

(10) The provisions of § 15.205 apply to intentional radiators operating under this section.

(11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

(c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

RSS-247 Clause 6.2

Frequency band 5150-5250 MHz

6.2.1.2 Unwanted emission limits

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

Frequency band 5725-5850 MHz

6.2.4.2 Unwanted emission limits

Devices operating in the band 5725-5850 MHz with antenna gain greater than 10 dBi can have unwanted emissions that comply with either the limits in this section or in section 5.5 until six (6) months after the publication date of this standard for certification. Certified devices that do not comply with emission limits in this section shall not be manufactured, imported, distributed, leased, offered for sale or sold after April 1, 2018.


Devices operating in the band 5725-5850 MHz with antenna gain of 10 dBi or less can have unwanted emissions that comply with either the limits in this section or in section 5.5 until April 1, 2018 for certification. Certified devices that do not comply with emission limits in this section shall not be manufactured, imported, distributed, leased, offered for sale or sold after April 1, 2020.



Devices operating in the band 5725-5850 MHz shall have e.i.r.p. of unwanted emissions comply with the following:

- 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;
- 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- 27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

3.2.2 EUT Setup

Below 1GHz:

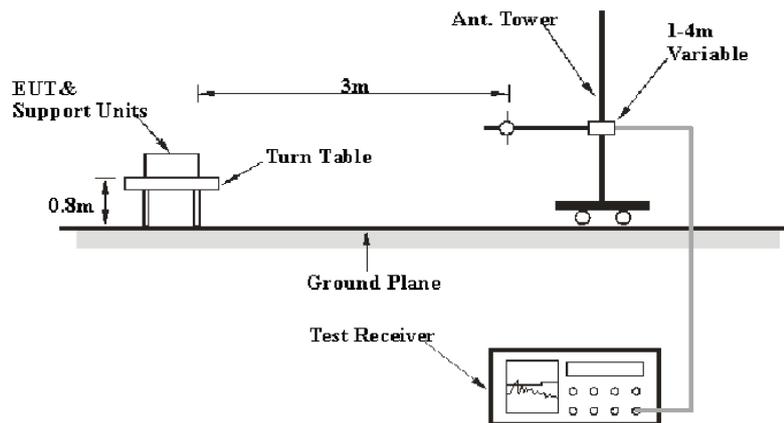

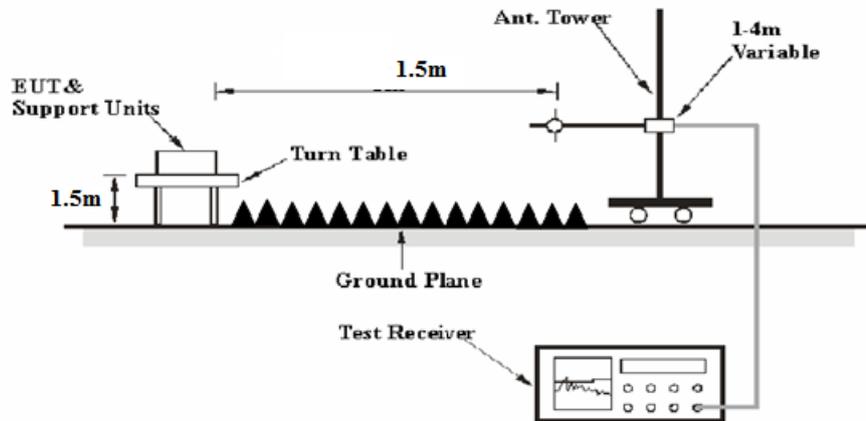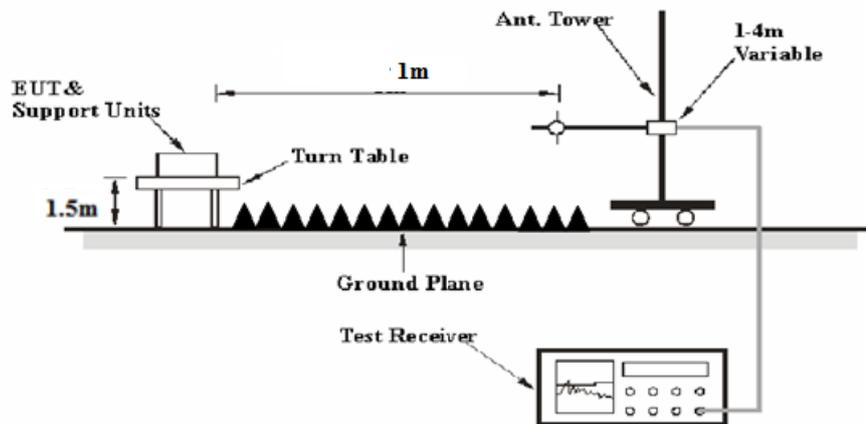1-26.5 GHz:**26.5-40 GHz:**

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was FCC 15.209, FCC 15.407, RSS-247, RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.5m or 1m

Distance extrapolation Factor = $20 \log(\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB= 6.02 dB

or

Distance extrapolation Factor = $20 \log(\text{specific distance [3m]}/\text{test distance [1m]})$ dB= 9.54 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Factor = Antenna Factor + Cable Loss- Amplifier Gain

For 30MHz-1GHz:

Result = Reading + Factor

For 1GHz-40GHz

Result = Reading + Factor+ Distance extrapolation Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.3 Emission Bandwidth:

3.3.1 Applicable Standard

FCC §15.407 (a),(h)

(h)(2) Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

FCC §15.407 (e)

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

RSS-247 Clause 6.2.1.2

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

RSS-247 Clause 6.2.4.1

For equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

3.3.2 EUT Setup



3.3.3 Test Procedure

26dB Emission Bandwidth:

According to ANSI C63.10-2013 Section 12.4.1

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = peak.
- d) Trace mode = max hold
- e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

99% Occupied Bandwidth:

According to ANSI C63.10-2013 Section 12.4.2&6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

6 dB emission bandwidth:

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) ≥ 3 RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

3.4 Maximum conducted output power:

3.4.1 Applicable Standard

FCC §15.407(a) (1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

RSS-247 Clause 6.2.1.1

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log 10B$, dBm, whichever is less stringent. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log 10B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

RSS-247 Clause 6.2.2.1

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log 10B$, dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

Devices, other than devices installed in vehicles, shall comply with the following:


a) The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log 10B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;

b) The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log 10B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

RSS-247 Clause 6.2.4.1

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

3.4.2 EUT Setup

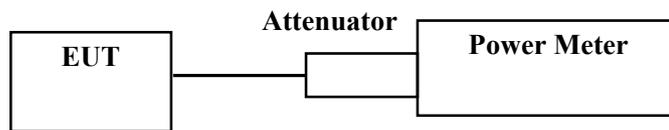

3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 11.9.1.3

Method PM-G is measurement using a gated RF average power meter. Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.5 Maximum power spectral density:

3.5.1 Applicable Standard

FCC §15.407(a) (1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

RSS-247 Clause 6.2.1.1

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10} B$, dBm, whichever is less stringent. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

RSS-247 Clause 6.2.2.1

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10} B$, dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

Devices, other than devices installed in vehicles, shall comply with the following:

a) The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;

b) The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

RSS-247 Clause 6.2.4.1

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

3.5.2 EUT Setup



3.5.3 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Method SA-3 (power averaging (rms) detection with max hold):

(i) Set span to encompass the entire EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set sweep trigger to “free run.”

(iii) Set RBW = 1 MHz.

(iv) Set VBW \geq 3 MHz

(v) Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)

(vi) Sweep time \leq (number of points in sweep) $\times T$, where T is defined in II.B.1.a).

Note: If this results in a sweep time less than the auto sweep time of the analyzer, Method SA-3 Alternative shall not be used. (The purpose of this step is to ensure that averaging time in each bin is less than or equal to the minimum time of a transmission.)

(vii) Detector = power averaging (rms).

(viii) Trace mode = max hold.

(ix) Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.

For devices operating in the band 5.725–5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used.

3.7 Duty Cycle:

3.7.1 EUT Setup



3.7.2 Test Procedure

According to ANSI C63.10-2013 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

3.8 Antenna Requirement

3.8.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

RSS-GEN Clause 6.8

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

3.8.2 Judgment

Please refer to the Antenna Information detail in Section 1.

3.9 Additional requirement

3.9.1 Applicable Standard

According to RSS-247 Clause 6.4 Additional requirement

The following requirements shall apply:

- a) The device shall automatically discontinue transmission in cases of absence of information to transmit, or operational failure. A description on how this is done shall accompany the application for equipment certification. Note that this is not intended to prohibit transmission of control or signalling information or the use of repetitive codes where required by the technology.
- b) All LE-LAN devices must contain security features to protect against modification of software by unauthorized parties.

Manufacturers must implement security features in any digitally modulated devices capable of operating in any of the frequency ranges within the 5 GHz band, so that third parties are not able to reprogram the device to operate outside the parameters for which the device was certified. The software must prevent the user from operating the transmitter with operating frequencies, output power, modulation types or other radio frequency parameters outside those that were approved for the device. Manufacturers may use various means, including the use of a private network that allows only authenticated users to download software, electronic signatures in software or coding in hardware that is decoded by software to verify that new software can be legally loaded into a device to meet these requirements and must describe the methods in their application for equipment certification.

Manufacturers must take steps to ensure that DFS functionality cannot be disabled by the operator of the LE-LAN device.

- c) The user manual for LE-LAN devices shall contain instructions related to the restrictions mentioned in the above sections, namely that:
 - i. the device for operation in the band 5150–5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;⁴
 - ii. for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall be such that the equipment still complies with the e.i.r.p. limit;
 - iii. for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits as appropriate; and
 - iv. where applicable, antenna type(s), antenna models(s), and worst-case tilt angle(s) necessary to remain compliant with the e.i.r.p. elevation mask requirement set forth in section 6.2.2.3 shall be clearly indicated.

3.9.2 Judgment

RSS-247 Clause 6.4 a):

The device shall automatically discontinue transmission in cases of absence of information to transmit, or operational failure. Please refer to the declaration

RSS-247 Clause 6.4 b):

The devices must contain security features to protect against modification of software by unauthorized parties. Please refer to the declaration

RSS-247 Clause 6.4 c):

The device was only for indoor use, please refer to the user manual.

The device operates on 5150-5250MHz,5250-5350MHz, 5470-5600MHz&5650-5725MHz and 5725-5850MHz, all the EIPR compliance with RSS-247 requirement. Please refer to the conducted output power test result.

4. Test DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	CR21110026-RF-S1	Test Date:	2021-11-29
Test Site:	CE	Test Mode:	Transmitting (802.11a 5785MHz was the worst)
Tester:	Nick Tang	Test Result:	Pass

Environmental Conditions:


Temperature: (°C)	21.4	Relative Humidity: (%)	65	ATM Pressure: (kPa)	101.4
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101132	2021-04-25	2022-04-24
R&S	EMI Test Receiver	ESR3	102726	2021-07-22	2022-07-21
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2021-08-08	2022-08-07
Audix	Test Software	E3	190306 (V9)	N/A	N/A


* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Line:

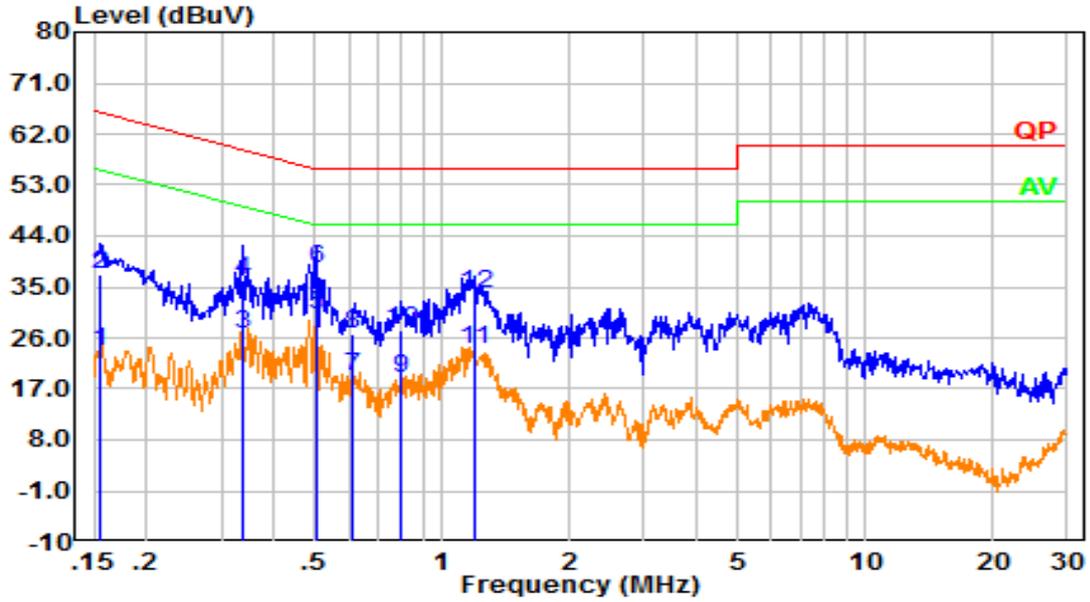

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.155	14.03	9.61	23.64	55.71	32.07	Average
2	0.155	27.51	9.61	37.12	65.71	28.59	QP
3	0.337	17.10	9.61	26.71	49.28	22.57	Average
4	0.337	26.61	9.61	36.22	59.28	23.06	QP
5	0.504	20.46	9.61	30.08	46.00	15.92	Average
6	0.504	28.77	9.61	38.38	56.00	17.62	QP
7	0.612	9.48	9.62	19.10	46.00	26.90	Average
8	0.612	17.16	9.62	26.78	56.00	29.22	QP
9	0.795	9.39	9.62	19.01	46.00	26.99	Average
10	0.795	17.74	9.62	27.36	56.00	28.64	QP
11	1.189	14.24	9.62	23.86	46.00	22.14	Average
12	1.189	24.23	9.62	33.85	56.00	22.15	QP

Neutral:

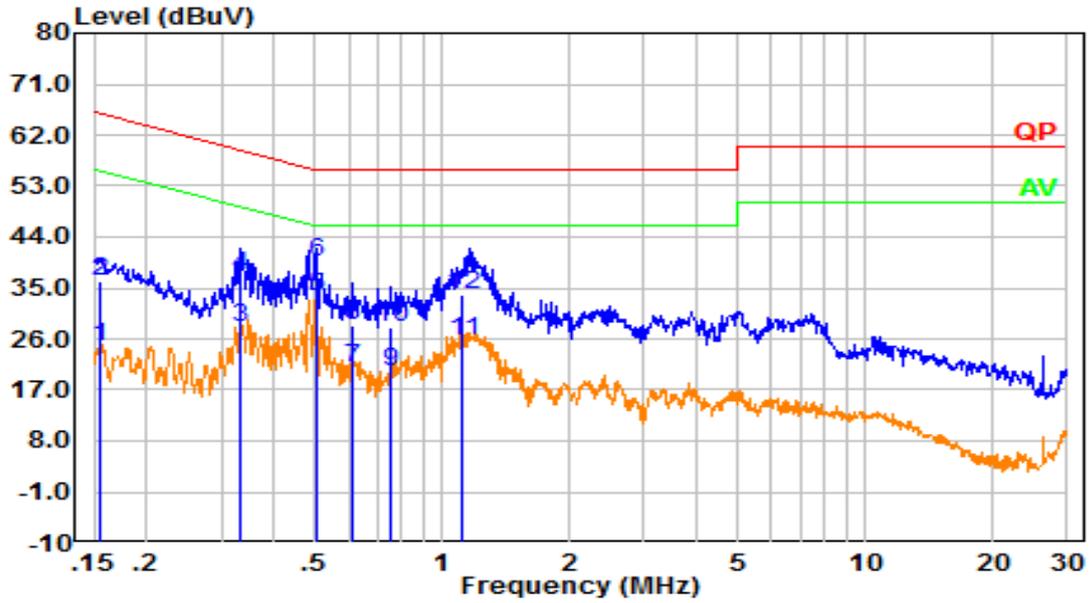

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.155	14.90	9.61	24.51	55.72	31.21	Average
2	0.155	26.63	9.61	36.24	65.72	29.48	QP
3	0.335	18.49	9.61	28.10	49.33	21.23	Average
4	0.335	27.60	9.61	37.21	59.33	22.12	QP
5	0.502	23.84	9.61	33.45	46.00	12.55	Average
6	0.502	29.84	9.61	39.45	56.00	16.55	QP
7	0.616	11.43	9.62	21.05	46.00	24.95	Average
8	0.616	18.87	9.62	28.49	56.00	27.51	QP
9	0.758	10.45	9.62	20.07	46.00	25.93	Average
10	0.758	18.34	9.62	27.96	56.00	28.04	QP
11	1.119	16.06	9.62	25.68	46.00	20.32	Average
12	1.119	24.10	9.62	33.72	56.00	22.28	QP

4.2 Radiation Spurious Emissions

Serial Number:	CR21110026-RF-S1	Test Date:	2021-11-29~2021-12-09
Test Site:	966-1,966-2	Test Mode:	Transmitting
Tester:	Great Qiao	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	21.9~23.5	Relative Humidity: (%)	55	ATM Pressure: (kPa)	101.4~101.8
----------------------	-----------	---------------------------	----	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020-10-19	2023-10-18
R&S	EMI Test Receiver	ESR3	102724	2021-07-22	2022-07-21
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2021-07-18	2022-07-17
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2021-07-18	2022-07-17
Sonoma	Amplifier	310N	186165	2021-07-18	2022-07-17
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020-10-13	2023-10-12
R&S	Spectrum Analyzer	FSV40	101591	2021-07-22	2022-07-21
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2021-08-08	2022-08-07
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2021-08-08	2022-08-07
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2021-11-10	2022-11-09
Audix	Test Software	E3	201021 (V9)	N/A	N/A
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021-02-05	2023-02-04
AH	Preamplifier	PAM-1840VH	190	2021-11-19	2022-11-18
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2021-08-08	2022-08-07
E-Microwave	Band Rejection Filter	5150-5850MHz	OE01902423	2021-08-08	2022-08-07
Mini Circuits	High Pass Filter	VHF-6010+	31119	2021-08-08	2022-08-07
PASTERNAK	Horn Antenna	PE9850/2F-20	072001	2021-02-05	2023-02-04

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Please refer to the below table and plots.

Note: The device can be mounted in multiple orientations, test was performed with X,Y, Z Axis, the worst orientation was photographed and it's data was recorded.


1) 30MHz-1GHz(802.11a 5785 MHz was the worst)

Horizontal:

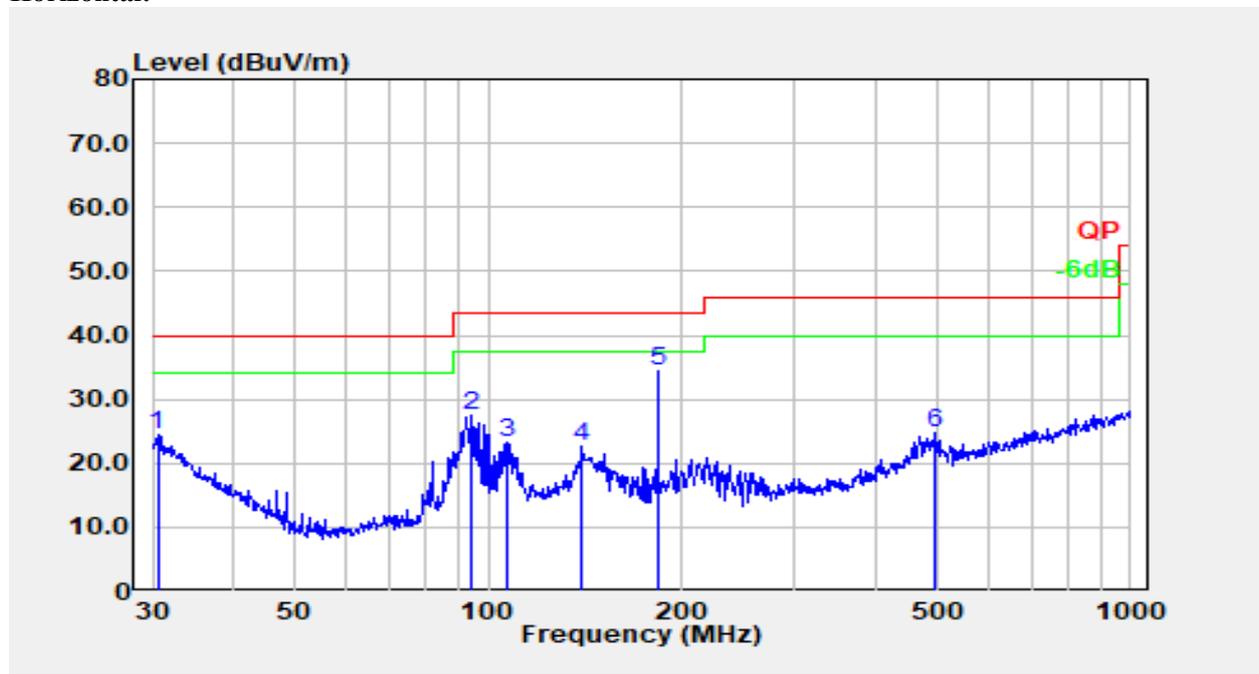

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	30.531	28.52	-4.20	24.32	40.00	15.68	Peak
2	93.768	43.65	-16.22	27.43	43.50	16.07	Peak
3	106.759	36.32	-13.22	23.10	43.50	20.40	Peak
4	139.851	34.62	-12.12	22.50	43.50	21.00	Peak
5	183.844	48.16	-13.72	34.43	43.50	9.07	Peak
6	495.934	31.27	-6.37	24.90	46.00	21.10	Peak

Vertical:

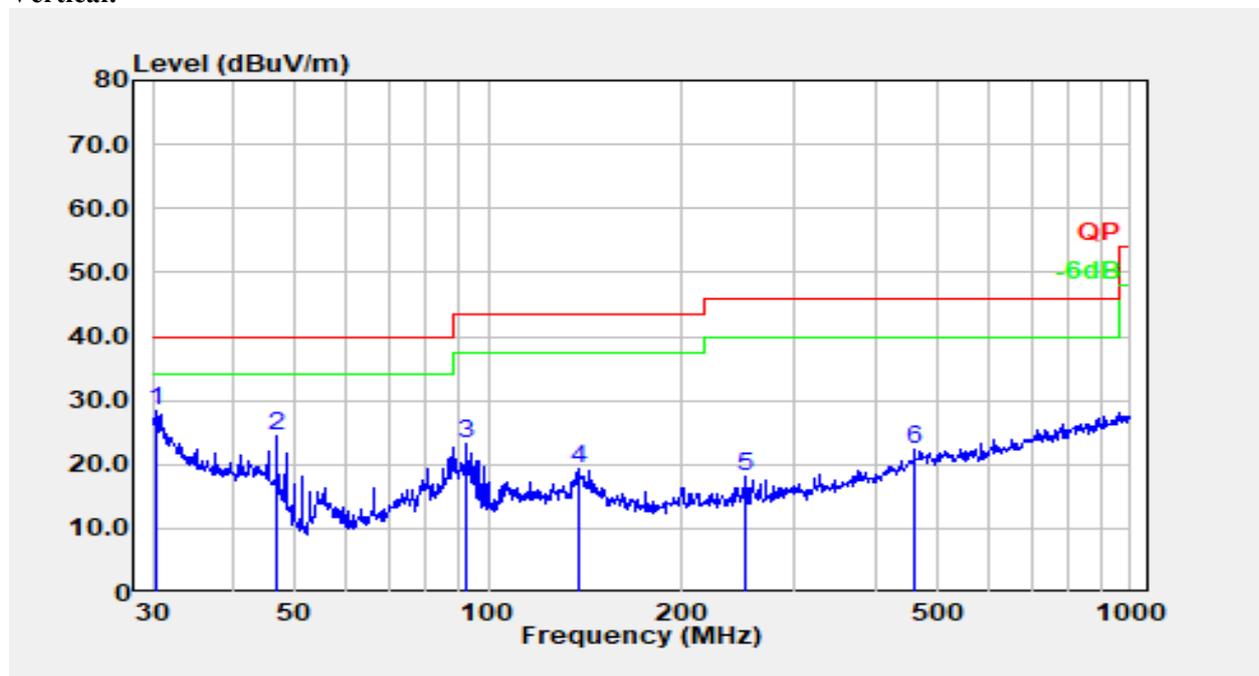

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.424	32.57	-4.12	28.45	40.00	11.55	Peak
2	46.830	39.96	-15.55	24.40	40.00	15.60	Peak
3	92.462	39.73	-16.56	23.16	43.50	20.34	Peak
4	137.903	31.37	-12.05	19.32	43.50	24.18	Peak
5	250.301	31.47	-13.25	18.22	46.00	27.78	Peak
6	460.727	29.36	-6.92	22.43	46.00	23.57	Peak

2) 1GHz-40GHz:
5150-5250MHz
802.11a Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5180 MHz							
5180.00	75.33	PK	H	38.68	107.99	N/A	N/A
5180.00	64.58	AV	H	38.68	97.24	N/A	N/A
5180.00	68.12	PK	V	38.68	100.78	N/A	N/A
5180.00	59.07	AV	V	38.68	91.73	N/A	N/A
5150.00	31.16	PK	H	38.64	63.78	74.00	10.22
5150.00	17.95	AV	H	38.64	50.57	54.00	3.43
10360.00	34.28	PK	H	19.18	47.44	68.20	20.76
15540.00	33.73	PK	H	22.44	50.15	74.00	23.85
15540.00	21.64	AV	H	22.44	38.06	54.00	15.94
Middle Channel: 5200 MHz							
5200.00	75.10	PK	H	38.70	107.78	N/A	N/A
5200.00	64.24	AV	H	38.70	96.92	N/A	N/A
5200.00	69.13	PK	V	38.70	101.81	N/A	N/A
5200.00	58.57	AV	V	38.70	91.25	N/A	N/A
10400.00	33.84	PK	H	19.16	46.98	68.20	21.22
15600.00	34.15	PK	H	22.41	50.54	74.00	23.46
15600.00	21.76	AV	H	22.41	38.15	54.00	15.85
High Channel: 5240 MHz							
5240.00	77.21	PK	H	38.85	110.04	N/A	N/A
5240.00	65.89	AV	H	38.85	98.72	N/A	N/A
5240.00	72.05	PK	V	38.85	104.88	N/A	N/A
5240.00	60.99	AV	V	38.85	93.82	N/A	N/A
5350.00	32.44	PK	H	39.03	65.45	74.00	8.55
5350.00	17.73	AV	H	39.03	50.74	54.00	3.26
10480.00	33.62	PK	H	18.86	46.46	68.20	21.74
15720.00	33.79	PK	H	22.28	50.05	74.00	23.95
15720.00	21.53	AV	H	22.28	37.79	54.00	16.21

802.11n ht20 Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5180 MHz							
5180.00	75.82	PK	H	38.68	108.48	N/A	N/A
5180.00	63.56	AV	H	38.68	96.22	N/A	N/A
5180.00	69.52	PK	V	38.68	102.18	N/A	N/A
5180.00	58.20	AV	V	38.68	90.86	N/A	N/A
5150.00	31.48	PK	H	38.64	64.10	74.00	9.90
5150.00	18.28	AV	H	38.64	50.90	54.00	3.10
10360.00	33.98	PK	H	19.18	47.14	68.20	21.06
15540.00	34.23	PK	H	22.44	50.65	74.00	23.35
15540.00	22.54	AV	H	22.44	38.96	54.00	15.04
Middle Channel: 5200 MHz							
5200.00	74.69	PK	H	38.70	107.37	N/A	N/A
5200.00	62.73	AV	H	38.70	95.41	N/A	N/A
5200.00	70.46	PK	V	38.70	103.14	N/A	N/A
5200.00	59.14	AV	V	38.70	91.82	N/A	N/A
10400.00	34.56	PK	H	19.16	47.70	68.20	20.50
15600.00	33.87	PK	H	22.41	50.26	74.00	23.74
15600.00	21.40	AV	H	22.41	37.79	54.00	16.21
High Channel: 5240 MHz							
5240.00	76.85	PK	H	38.85	109.68	N/A	N/A
5240.00	65.26	AV	H	38.85	98.09	N/A	N/A
5240.00	71.91	PK	V	38.85	104.74	N/A	N/A
5240.00	60.30	AV	V	38.85	93.13	N/A	N/A
5350.00	32.17	PK	H	39.03	65.18	74.00	8.82
5350.00	16.67	AV	H	39.03	49.68	54.00	4.32
10480.00	34.21	PK	H	18.86	47.05	68.20	21.15
15720.00	34.55	PK	H	22.28	50.81	74.00	23.19
15720.00	22.31	AV	H	22.28	38.57	54.00	15.43

802.11n ht40 Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5190 MHz							
5190.00	71.57	PK	H	38.69	104.24	N/A	N/A
5190.00	59.92	AV	H	38.69	92.59	N/A	N/A
5190.00	65.51	PK	V	38.69	98.18	N/A	N/A
5190.00	53.48	AV	V	38.69	86.15	N/A	N/A
5150.00	34.46	PK	H	38.64	67.08	74.00	6.92
5150.00	21.03	AV	H	38.64	53.65	54.00	0.35
10380.00	33.85	PK	H	19.17	47.00	68.20	21.20
15570.00	33.94	PK	H	22.43	50.35	74.00	23.65
15570.00	21.67	AV	H	22.43	38.08	54.00	15.92
High Channel: 5230 MHz							
5230.00	74.35	PK	H	38.81	107.14	N/A	N/A
5230.00	63.78	AV	H	38.81	96.57	N/A	N/A
5230.00	69.16	PK	V	38.81	101.95	N/A	N/A
5230.00	57.26	AV	V	38.81	90.05	N/A	N/A
5350.00	31.86	PK	H	39.03	64.87	74.00	9.13
5350.00	17.65	AV	H	39.03	50.66	54.00	3.34
10460.00	33.54	PK	H	18.94	46.46	68.20	21.74
15690.00	34.06	PK	H	22.29	50.33	74.00	23.67
15690.00	21.89	AV	H	22.29	38.16	54.00	15.84

802.11ac vht80 Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5210 MHz							
5210.00	66.60	PK	H	38.74	99.32	N/A	N/A
5210.00	53.84	AV	H	38.74	86.56	N/A	N/A
5210.00	56.32	PK	V	38.74	89.04	N/A	N/A
5210.00	45.05	AV	V	38.74	77.77	N/A	N/A
5150.00	32.20	PK	H	38.64	64.82	74.00	9.18
5150.00	20.17	AV	H	38.64	52.79	54.00	1.21
5350.00	31.22	PK	H	39.03	64.23	74.00	9.77
5350.00	16.83	AV	H	39.03	49.84	54.00	4.16
10420.00	34.62	PK	H	19.09	47.69	68.20	20.51
15630.00	34.57	PK	H	22.37	50.92	74.00	23.08
15630.00	22.43	AV	H	22.37	38.78	54.00	15.22

5250-5350 MHz
802.11a Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5260 MHz							
5260.00	80.74	PK	H	38.90	113.62	N/A	N/A
5260.00	69.40	AV	H	38.90	102.28	N/A	N/A
5260.00	71.17	PK	V	38.90	104.05	N/A	N/A
5260.00	60.61	AV	V	38.90	93.49	N/A	N/A
5150.00	32.40	PK	H	38.64	65.02	74.00	8.98
5150.00	17.02	AV	H	38.64	49.64	54.00	4.36
10520.00	34.51	PK	H	18.93	47.42	68.20	20.78
15780.00	33.65	PK	H	22.26	49.89	74.00	24.11
15780.00	21.36	AV	H	22.26	37.60	54.00	16.40
Middle Channel: 5280 MHz							
5280.00	80.84	PK	H	38.91	113.73	N/A	N/A
5280.00	69.91	AV	H	38.91	102.80	N/A	N/A
5280.00	71.56	PK	V	38.91	104.45	N/A	N/A
5280.00	60.37	AV	V	38.91	93.26	N/A	N/A
10560.00	34.52	PK	H	19.20	47.70	68.20	20.50
15840.00	34.30	PK	H	22.34	50.62	74.00	23.38
15840.00	22.47	AV	H	22.34	38.79	54.00	15.21
High Channel: 5320 MHz							
5320.00	77.96	PK	H	38.97	110.91	N/A	N/A
5320.00	66.84	AV	H	38.97	99.79	N/A	N/A
5320.00	68.44	PK	V	38.97	101.39	N/A	N/A
5320.00	57.23	AV	V	38.97	90.18	N/A	N/A
5350.00	33.21	PK	H	39.03	66.22	74.00	7.78
5350.00	19.41	AV	H	39.03	52.42	54.00	1.58
10640.00	34.76	PK	H	19.50	48.24	74.00	25.76
10640.00	22.59	AV	H	19.50	36.07	54.00	17.93
15960.00	34.44	PK	H	22.22	50.64	74.00	23.36
15960.00	22.18	AV	H	22.22	38.38	54.00	15.62

802.11n ht20 Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5260 MHz							
5260.00	80.22	PK	H	38.90	113.10	N/A	N/A
5260.00	67.92	AV	H	38.90	100.80	N/A	N/A
5260.00	71.59	PK	V	38.90	104.47	N/A	N/A
5260.00	60.60	AV	V	38.90	93.48	N/A	N/A
5150.00	31.68	PK	H	38.64	64.30	74.00	9.70
5150.00	17.08	AV	H	38.64	49.70	54.00	4.30
10520.00	34.47	PK	H	18.93	47.38	68.20	20.82
15780.00	33.67	PK	H	22.26	49.91	74.00	24.09
15780.00	21.55	AV	H	22.26	37.79	54.00	16.21
Middle Channel: 5280 MHz							
5280.00	79.84	PK	H	38.91	112.73	N/A	N/A
5280.00	68.95	AV	H	38.91	101.84	N/A	N/A
5280.00	72.49	PK	V	38.91	105.38	N/A	N/A
5280.00	61.04	AV	V	38.91	93.93	N/A	N/A
10560.00	33.69	PK	H	19.20	46.87	68.20	21.33
15840.00	34.23	PK	H	22.34	50.55	74.00	23.45
15840.00	22.37	AV	H	22.34	38.69	54.00	15.31
High Channel: 5320 MHz							
5320.00	77.69	PK	H	38.97	110.64	N/A	N/A
5320.00	66.19	AV	H	38.97	99.14	N/A	N/A
5320.00	69.21	PK	V	38.97	102.16	N/A	N/A
5320.00	57.23	AV	V	38.97	90.18	N/A	N/A
5350.00	35.53	PK	H	39.03	68.54	74.00	5.46
5350.00	19.72	AV	H	39.03	52.73	54.00	1.27
10640.00	34.59	PK	H	19.50	48.07	74.00	25.93
10640.00	22.43	AV	H	19.50	35.91	54.00	18.09
15960.00	34.26	PK	H	22.22	50.46	74.00	23.54
15960.00	22.48	AV	H	22.22	38.68	54.00	15.32

802.11n ht40 Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5270 MHz							
5270.00	77.47	PK	H	38.91	110.36	N/A	N/A
5270.00	66.16	AV	H	38.91	99.05	N/A	N/A
5270.00	70.24	PK	V	38.91	103.13	N/A	N/A
5270.00	57.41	AV	V	38.91	90.30	N/A	N/A
5150.00	30.13	PK	H	38.64	62.75	74.00	11.25
5150.00	17.11	AV	H	38.64	49.73	54.00	4.27
10540.00	34.26	PK	H	19.07	47.31	68.20	20.89
15810.00	34.25	PK	H	22.28	50.51	74.00	23.49
15810.00	22.47	AV	H	22.28	38.73	54.00	15.27
High Channel: 5310 MHz							
5310.00	70.30	PK	H	38.95	103.23	N/A	N/A
5310.00	59.11	AV	H	38.95	92.04	N/A	N/A
5310.00	63.15	PK	V	38.95	96.08	N/A	N/A
5310.00	50.88	AV	V	38.95	83.81	N/A	N/A
5350.00	33.32	PK	H	39.03	66.33	74.00	7.67
5350.00	20.72	AV	H	39.03	53.73	54.00	0.27
10620.00	33.20	PK	H	19.49	46.67	74.00	27.33
10620.00	21.91	AV	H	19.49	35.38	54.00	18.62
15930.00	33.80	PK	H	22.33	50.11	74.00	23.89
15930.00	21.56	AV	H	22.33	37.87	54.00	16.13

802.11ac vht80 Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5290 MHz							
5290.00	67.58	PK	H	38.92	100.48	N/A	N/A
5290.00	55.41	AV	H	38.92	88.31	N/A	N/A
5290.00	59.51	PK	V	38.92	92.41	N/A	N/A
5290.00	47.39	AV	V	38.92	80.29	N/A	N/A
5150.00	30.27	PK	H	38.64	62.89	74.00	11.11
5150.00	17.01	AV	H	38.64	49.63	54.00	4.37
5350.00	33.86	PK	H	39.03	66.87	74.00	7.13
5350.00	20.37	AV	H	39.03	53.38	54.00	0.62
10580.00	33.76	PK	H	19.34	47.08	68.20	21.12
15870.00	34.20	PK	H	22.39	50.57	74.00	23.43
15870.00	22.11	AV	H	22.39	38.48	54.00	15.52

5470-5725 MHz**802.11a Mode**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5500 MHz							
5500.00	76.02	PK	H	39.32	109.32	N/A	N/A
5500.00	64.91	AV	H	39.32	98.21	N/A	N/A
5500.00	66.10	PK	V	39.32	99.40	N/A	N/A
5500.00	54.69	AV	V	39.32	87.99	N/A	N/A
5470.00	30.75	PK	H	39.27	64.00	68.20	4.20
11000.00	34.15	PK	H	19.83	47.96	74.00	26.04
11000.00	22.41	AV	H	19.83	36.22	54.00	17.78
16500.00	34.27	PK	H	22.73	50.98	68.20	17.22
Middle Channel: 5580 MHz							
5580.00	77.69	PK	H	39.43	111.10	N/A	N/A
5580.00	66.67	AV	H	39.43	100.08	N/A	N/A
5580.00	67.25	PK	V	39.43	100.66	N/A	N/A
5580.00	56.35	AV	V	39.43	89.76	N/A	N/A
11160.00	33.86	PK	H	19.97	47.81	74.00	26.19
11160.00	21.47	AV	H	19.97	35.42	54.00	18.58
16740.00	34.50	PK	H	23.68	52.16	68.20	16.04
High Channel: 5700 MHz							
5700.00	73.49	PK	H	39.51	106.98	N/A	N/A
5700.00	62.34	AV	H	39.51	95.83	N/A	N/A
5700.00	63.12	PK	V	39.51	96.61	N/A	N/A
5700.00	51.79	AV	V	39.51	85.28	N/A	N/A
5725.00	32.03	PK	H	39.48	65.49	122.20	56.71
11400.00	32.99	PK	H	20.93	47.90	74.00	26.10
11400.00	21.36	AV	H	20.93	36.27	54.00	17.73
17100.00	34.16	PK	H	26.19	54.33	68.20	13.87

802.11n ht20 Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5500 MHz							
5500.00	75.23	PK	H	39.32	108.53	N/A	N/A
5500.00	64.55	AV	H	39.32	97.85	N/A	N/A
5500.00	66.39	PK	V	39.32	99.69	N/A	N/A
5500.00	54.66	AV	V	39.32	87.96	N/A	N/A
5470.00	31.04	PK	H	39.27	64.29	68.20	3.91
11000.00	34.62	PK	H	19.83	48.43	74.00	25.57
11000.00	22.30	AV	H	19.83	36.11	54.00	17.89
16500.00	34.15	PK	H	22.73	50.86	68.20	17.34
Middle Channel: 5580 MHz							
5580.00	78.31	PK	H	39.43	111.72	N/A	N/A
5580.00	67.05	AV	H	39.43	100.46	N/A	N/A
5580.00	67.15	PK	V	39.43	100.56	N/A	N/A
5580.00	55.55	AV	V	39.43	88.96	N/A	N/A
11160.00	34.26	PK	H	19.97	48.21	74.00	25.79
11160.00	22.51	AV	H	19.97	36.46	54.00	17.54
16740.00	34.28	PK	H	23.68	51.94	68.20	16.26
High Channel: 5700 MHz							
5700.00	73.90	PK	H	39.51	107.39	N/A	N/A
5700.00	62.85	AV	H	39.51	96.34	N/A	N/A
5700.00	62.95	PK	V	39.51	96.44	N/A	N/A
5700.00	51.44	AV	V	39.51	84.93	N/A	N/A
5725.00	31.74	PK	H	39.48	65.20	68.20	3.00
11400.00	34.11	PK	H	20.93	49.02	74.00	24.98
11400.00	22.04	AV	H	20.93	36.95	54.00	17.05
17100.00	34.26	PK	H	26.19	54.43	68.20	13.77

802.11n ht40 Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5510 MHz							
5510.00	69.30	PK	H	39.35	102.63	N/A	N/A
5510.00	57.32	AV	H	39.35	90.65	N/A	N/A
5510.00	59.22	PK	V	39.35	92.55	N/A	N/A
5510.00	36.35	AV	V	39.35	69.68	N/A	N/A
5470.00	34.44	PK	H	39.27	67.69	68.20	0.51
11020.00	33.95	PK	H	19.85	47.78	74.00	26.22
11020.00	21.74	AV	H	19.85	35.57	54.00	18.43
16530.00	34.61	PK	H	23.02	51.61	68.20	16.59
Middle Channel: 5550 MHz							
5550.00	76.22	PK	H	39.46	109.66	N/A	N/A
5550.00	64.58	AV	H	39.46	98.02	N/A	N/A
5550.00	65.28	PK	V	39.46	98.72	N/A	N/A
5550.00	53.89	AV	V	39.46	87.33	N/A	N/A
11100.00	34.23	PK	H	19.95	48.16	74.00	25.84
11100.00	22.45	AV	H	19.95	36.38	54.00	17.62
16650.00	34.62	PK	H	23.65	52.25	68.20	15.95
High Channel: 5670 MHz							
5670.00	70.98	PK	H	39.50	104.46	N/A	N/A
5670.00	58.01	AV	H	39.50	91.49	N/A	N/A
5670.00	59.96	PK	V	39.50	93.44	N/A	N/A
5670.00	47.45	AV	V	39.50	80.93	N/A	N/A
5725.00	30.07	PK	H	39.48	63.53	68.20	4.67
11340.00	33.42	PK	H	20.77	48.17	74.00	25.83
11340.00	21.10	AV	H	20.77	35.85	54.00	18.15
17010.00	34.52	PK	H	25.56	54.06	68.20	14.14

802.11ac vht80 Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5530 MHz							
5530.00	67.29	PK	H	39.40	100.67	N/A	N/A
5530.00	54.71	AV	H	39.40	88.09	N/A	N/A
5530.00	58.36	PK	V	39.40	91.74	N/A	N/A
5530.00	46.71	AV	V	39.40	80.09	N/A	N/A
5470.00	33.28	PK	H	39.27	66.53	68.20	1.67
11060.00	33.64	PK	H	19.90	47.52	74.00	26.48
11060.00	21.29	AV	H	19.90	35.17	54.00	18.83
16590.00	34.37	PK	H	23.59	51.94	68.20	16.26
High Channel: 5610 MHz							
5610.00	69.03	PK	H	39.43	102.44	N/A	N/A
5610.00	56.23	AV	H	39.43	89.64	N/A	N/A
5610.00	57.07	PK	V	39.43	90.48	N/A	N/A
5610.00	44.48	AV	V	39.43	77.89	N/A	N/A
5725.00	32.24	PK	H	39.48	65.70	68.20	2.50
11220.00	34.62	PK	H	20.13	48.73	74.00	25.27
11220.00	22.41	AV	H	20.13	36.52	54.00	17.48
16830.00	34.69	PK	H	24.13	52.80	68.20	15.40

5725-5850 MHz
802.11a Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5745 MHz							
5745.00	73.41	PK	H	39.46	106.85	N/A	N/A
5745.00	62.94	AV	H	39.46	96.38	N/A	N/A
5745.00	63.15	PK	V	39.46	96.59	N/A	N/A
5745.00	52.60	AV	V	39.46	86.04	N/A	N/A
5725.00	34.99	PK	H	39.48	68.45	122.20	53.75
5720.00	30.80	PK	H	39.49	64.27	110.80	46.53
5700.00	30.40	PK	H	39.51	63.89	105.20	41.31
5650.00	31.44	PK	H	39.49	64.91	68.20	3.29
11490.00	35.71	PK	H	20.67	50.36	74.00	23.64
11490.00	22.38	AV	H	20.67	37.03	54.00	16.97
17235.00	35.13	PK	H	26.76	55.87	68.20	12.33
Middle Channel: 5785 MHz							
5785.00	75.81	PK	H	39.44	109.23	N/A	N/A
5785.00	64.95	AV	H	39.44	98.37	N/A	N/A
5785.00	66.42	PK	V	39.44	99.84	N/A	N/A
5785.00	54.27	AV	V	39.44	87.69	N/A	N/A
11570.00	34.80	PK	H	20.83	49.61	74.00	24.39
11570.00	22.71	AV	H	20.83	37.52	54.00	16.48
17355.00	34.53	PK	H	27.74	56.25	68.20	11.95
High Channel: 5825 MHz							
5825.00	73.49	PK	H	39.46	106.93	N/A	N/A
5825.00	62.56	AV	H	39.46	96.00	N/A	N/A
5825.00	64.22	PK	V	39.46	97.66	N/A	N/A
5825.00	53.77	AV	V	39.46	87.21	N/A	N/A
5850.00	33.12	PK	H	39.49	66.59	122.20	55.61
5855.00	31.44	PK	H	39.51	64.93	110.80	45.87
5875.00	30.40	PK	H	39.60	63.98	105.20	41.22
5925.00	31.53	PK	H	39.68	65.19	68.20	3.01
11650.00	34.23	PK	H	21.07	49.28	74.00	24.72
11650.00	22.18	AV	H	21.07	37.23	54.00	16.77
17475.00	34.60	PK	H	28.61	57.19	68.20	11.01

802.11n ht20 Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5745 MHz							
5745.00	73.04	PK	H	39.46	106.48	N/A	N/A
5745.00	62.55	AV	H	39.46	95.99	N/A	N/A
5745.00	62.04	PK	V	39.46	95.48	N/A	N/A
5745.00	50.09	AV	V	39.46	83.53	N/A	N/A
5725.00	37.46	PK	H	39.48	70.92	122.20	51.28
5720.00	31.74	PK	H	39.49	65.21	110.80	45.59
5700.00	30.08	PK	H	39.51	63.57	105.20	41.63
5650.00	30.57	PK	H	39.49	64.04	68.20	4.16
11490.00	33.14	PK	H	20.67	47.79	74.00	26.21
11490.00	21.39	AV	H	20.67	36.04	54.00	17.96
17235.00	34.57	PK	H	26.76	55.31	68.20	12.89
Middle Channel: 5785 MHz							
5785.00	77.20	PK	H	39.44	110.62	N/A	N/A
5785.00	64.63	AV	H	39.44	98.05	N/A	N/A
5785.00	64.40	PK	V	39.44	97.82	N/A	N/A
5785.00	54.22	AV	V	39.44	87.64	N/A	N/A
11570.00	33.41	PK	H	20.83	48.22	74.00	25.78
11570.00	21.06	AV	H	20.83	35.87	54.00	18.13
17355.00	34.61	PK	H	27.74	56.33	68.20	11.87
High Channel: 5825 MHz							
5825.00	73.26	PK	H	39.46	106.70	N/A	N/A
5825.00	61.88	AV	H	39.46	95.32	N/A	N/A
5825.00	64.28	PK	V	39.46	97.72	N/A	N/A
5825.00	53.03	AV	V	39.46	86.47	N/A	N/A
5850.00	30.96	PK	H	39.49	64.43	122.20	57.77
5855.00	29.94	PK	H	39.51	63.43	110.80	47.37
5875.00	31.59	PK	H	39.60	65.17	105.20	40.03
5925.00	30.01	PK	H	39.68	63.67	68.20	4.53
11650.00	33.83	PK	H	21.07	48.88	74.00	25.12
11650.00	21.60	AV	H	21.07	36.65	54.00	17.35
17475.00	34.52	PK	H	28.61	57.11	68.20	11.09

802.11n ht40 Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5755 MHz							
5755.00	69.26	PK	H	39.45	102.69	N/A	N/A
5755.00	57.77	AV	H	39.45	91.20	N/A	N/A
5755.00	59.16	PK	V	39.45	92.59	N/A	N/A
5755.00	47.61	AV	V	39.45	81.04	N/A	N/A
5725.00	35.06	PK	H	39.48	68.52	122.20	53.68
5720.00	39.97	PK	H	39.49	73.44	110.80	37.36
5700.00	31.06	PK	H	39.51	64.55	105.20	40.65
5650.00	31.62	PK	H	39.49	65.09	68.20	3.11
11510.00	33.25	PK	H	20.67	47.90	74.00	26.10
11510.00	21.47	AV	H	20.67	36.12	54.00	17.88
17265.00	34.36	PK	H	26.94	55.28	68.20	12.92
High Channel: 5795 MHz							
5795.00	69.52	PK	H	39.43	102.93	N/A	N/A
5795.00	57.79	AV	H	39.43	91.20	N/A	N/A
5795.00	59.15	PK	V	39.43	92.56	N/A	N/A
5795.00	45.93	AV	V	39.43	79.34	N/A	N/A
5850.00	30.87	PK	H	39.49	64.34	122.20	57.86
5855.00	31.42	PK	H	39.51	64.91	110.80	45.89
5875.00	32.33	PK	H	39.60	65.91	105.20	39.29
5925.00	31.80	PK	H	39.68	65.46	68.20	2.74
11590.00	33.54	PK	H	20.88	48.40	74.00	25.60
11590.00	21.42	AV	H	20.88	36.28	54.00	17.72
17385.00	34.26	PK	H	28.07	56.31	68.20	11.89

802.11ac vht80 Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
High Channel: 5775							
5775.00	66.79	PK	H	39.44	100.21	N/A	N/A
5775.00	54.98	AV	H	39.44	88.40	N/A	N/A
5775.00	57.96	PK	V	39.44	91.38	N/A	N/A
5775.00	42.90	AV	V	39.44	76.32	N/A	N/A
5725.00	35.08	PK	H	39.48	68.54	122.20	53.66
5720.00	35.96	PK	H	39.49	69.43	110.80	41.37
5700.00	32.97	PK	H	39.51	66.46	105.20	38.74
5650.00	32.01	PK	H	39.49	65.48	68.20	2.72
5850.00	37.11	PK	H	39.49	70.58	122.20	51.62
5855.00	33.07	PK	H	39.51	66.56	110.80	44.24
5875.00	34.10	PK	H	39.60	67.68	105.20	37.52
5925.00	33.90	PK	H	39.68	67.56	68.20	0.64
11550.00	33.36	PK	H	20.78	48.12	74.00	25.88
11550.00	21.27	AV	H	20.78	36.03	54.00	17.97
17325.00	34.36	PK	H	27.41	55.75	68.20	12.45

Note:

Result = Reading + Factor- Distance extrapolation Factor

For 1-26.5GHz:




Distance extrapolation Factor = $20 \log(\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB= 6.02 dB


For 26.5-40GHz:

Distance extrapolation Factor = $20 \log(\text{specific distance [3m]}/\text{test distance [1m]})$ dB= 9.54 dB

**Worst Test plots(802.11n ht20 5825MHz Mode High channel was the worst)
Horizontal:**



Fundamental
Test with Band
Rejection Filter

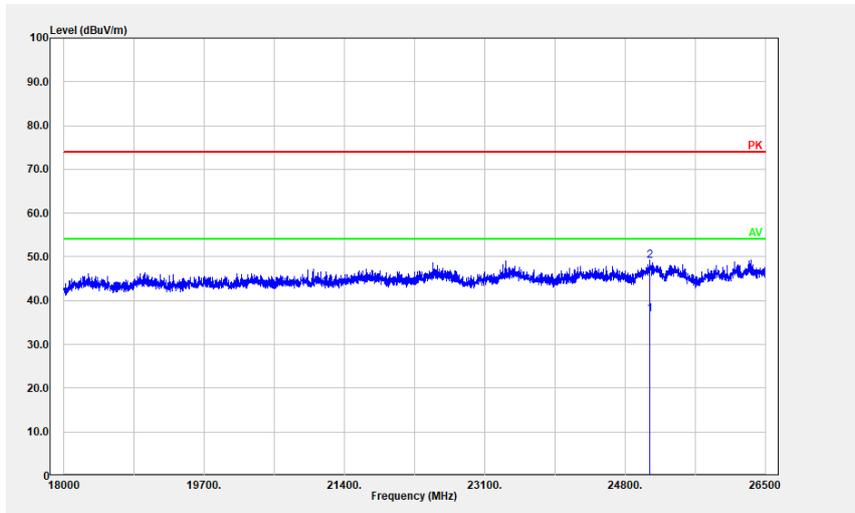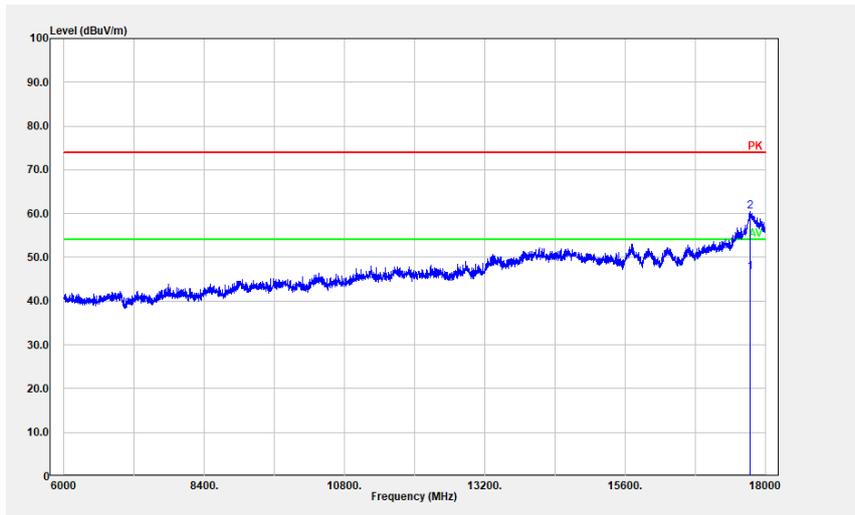
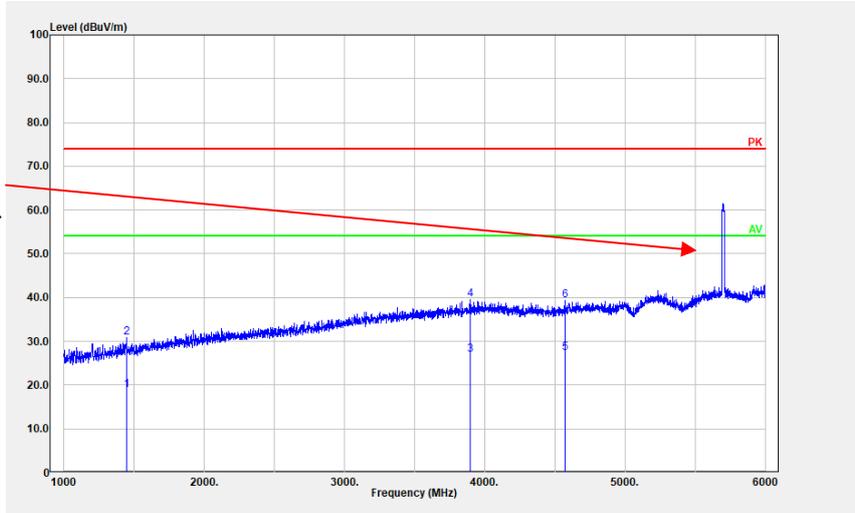


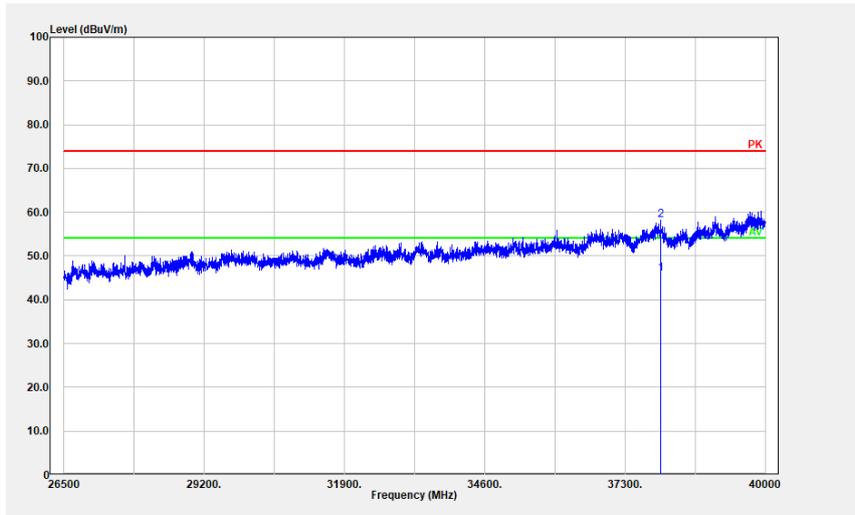

Vertical:

Fundamental Test with Band Rejection Filter

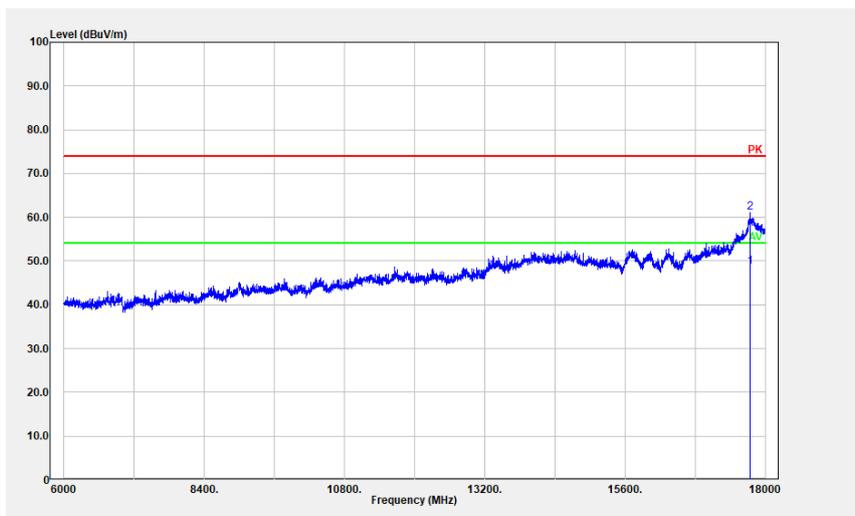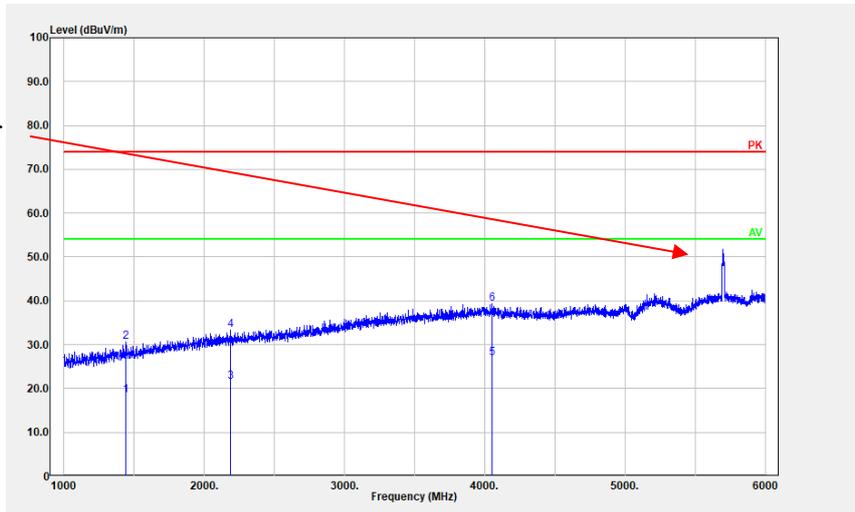

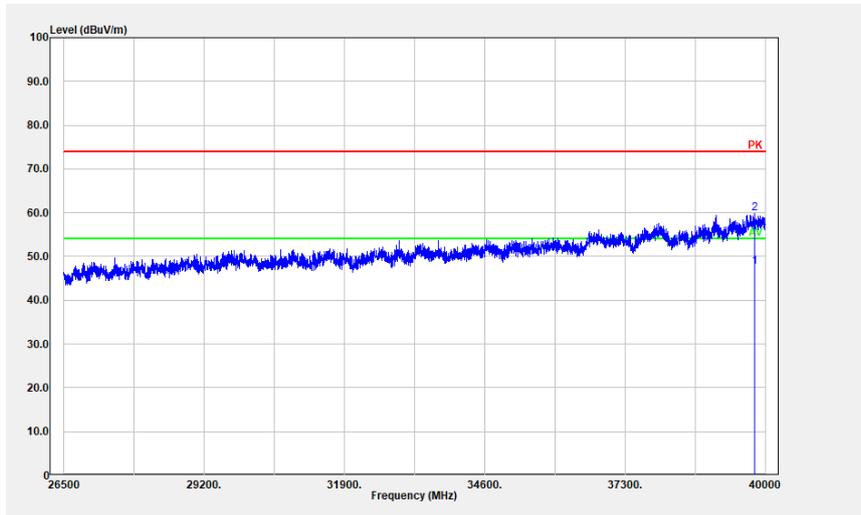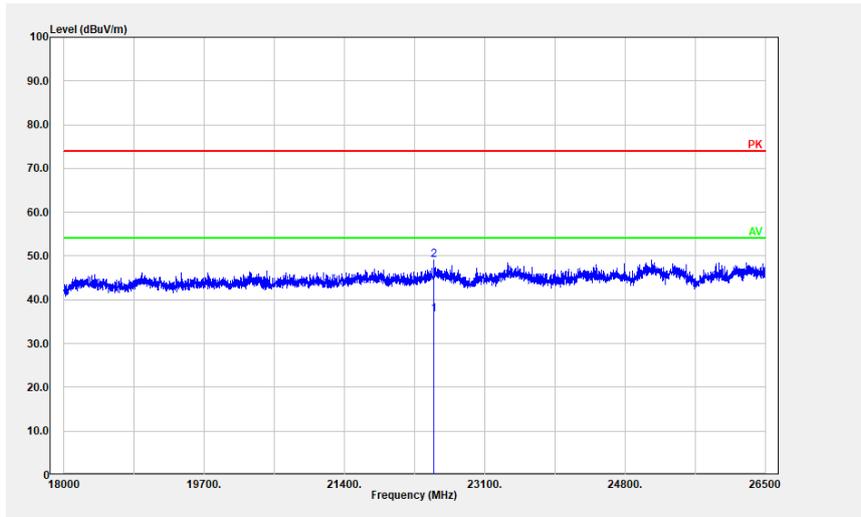

4.3 Emission Bandwidth:

Serial Number:	CR21110026-RF-S1	Test Date:	2021-12-10~2021-12-13
Test Site:	RF	Test Mode:	Transmitting
Tester:	LE Qiao	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	22.8~24.3	Relative Humidity: (%)	40~49	ATM Pressure: (kPa)	101.6~101.8
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2021-07-22	2022-07-21
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180	23.520	17.325
	5200	22.080	17.246
	5240	22.000	17.246
802.11n ht20	5180	23.120	18.443
	5200	24.320	18.443
	5240	24.800	18.523
802.11n ht40	5190	54.847	37.046
	5230	53.760	37.685
802.11ac vht80	5210	90.880	76.008

5250-5350 MHz:

Test Modes	Test Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5260	21.920	17.246
	5280	22.000	17.325
	5320	21.920	17.246
802.11n ht20	5260	23.840	18.523
	5280	24.160	18.443
	5320	23.040	18.443
802.11n ht40	5270	55.200	37.365
	5310	43.840	37.046
802.11ac vht80	5290	89.600	76.327

5470-5725 MHz:


Test Modes	Test Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5500	21.760	17.246
	5580	21.920	17.325
	5700	21.840	17.246
	5720	21.812	17.166
802.11n ht20	5500	22.320	18.204
	5580	23.760	18.363
	5700	22.400	18.283
	5720	21.869	18.283
802.11n ht40	5510	40.320	36.886
	5550	49.440	37.365
	5670	48.900	37.046
	5710	42.61	37.046
802.11ac vht80	5530	82.880	76.008
	5610	82.560	76.008
	5690	85.626	76.327

5725-5850 MHz:

Test Modes	Test Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5745	16.240	17.166
	5785	16.160	17.246
	5825	16.240	17.246
802.11n ht20	5745	17.600	18.283
	5785	16.960	18.443
	5825	17.600	18.204
802.11n ht40	5755	35.840	36.886
	5795	35.840	37.046
802.11ac vht80	5775	75.520	76.008


Note:6dB Emission Bandwidth Limit: ≥ 0.5 MHz

5150-5250MHz:

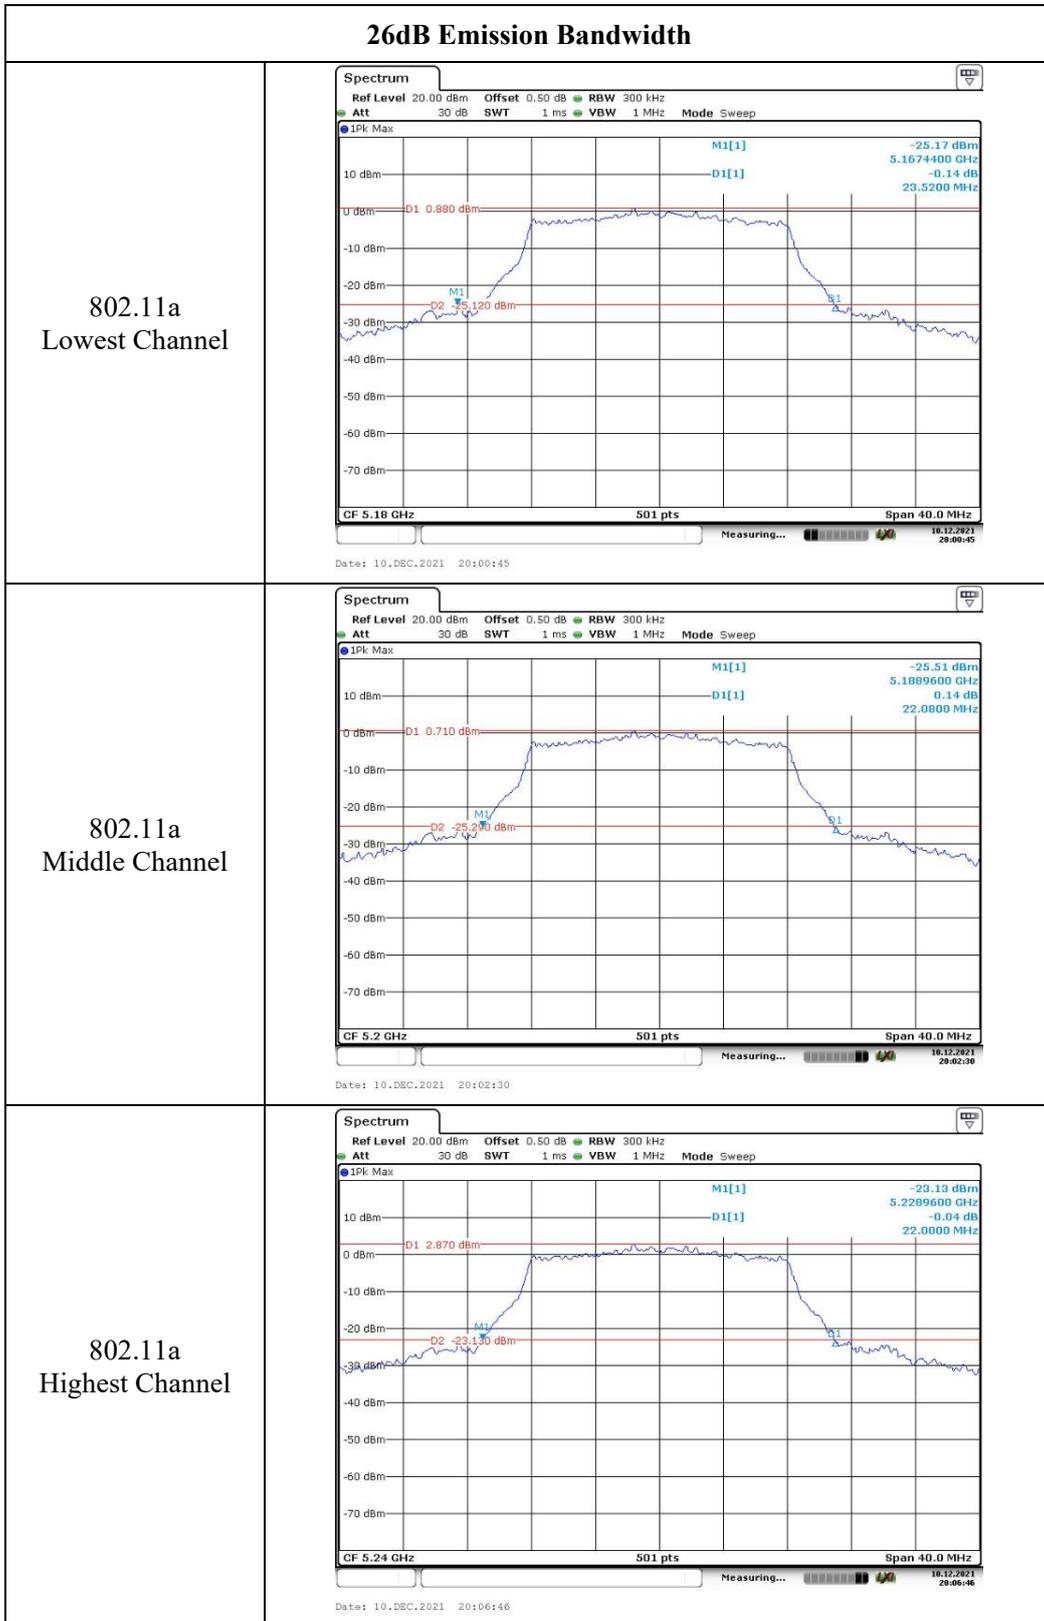


26dB Emission Bandwidth


802.11n ht20
Lowest Channel

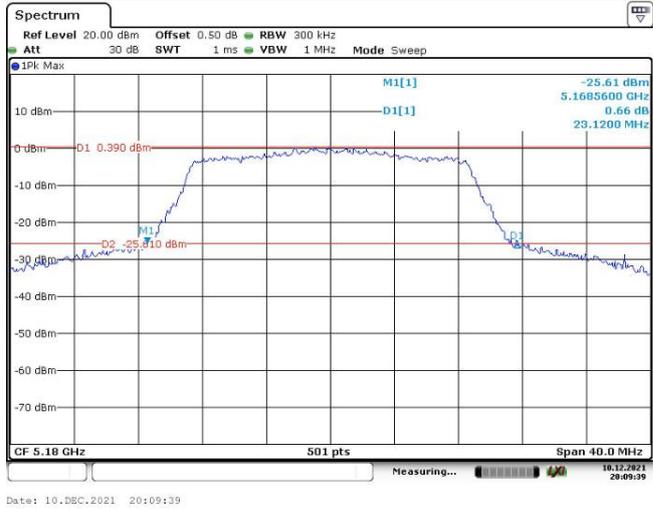

802.11n ht20
Middle Channel

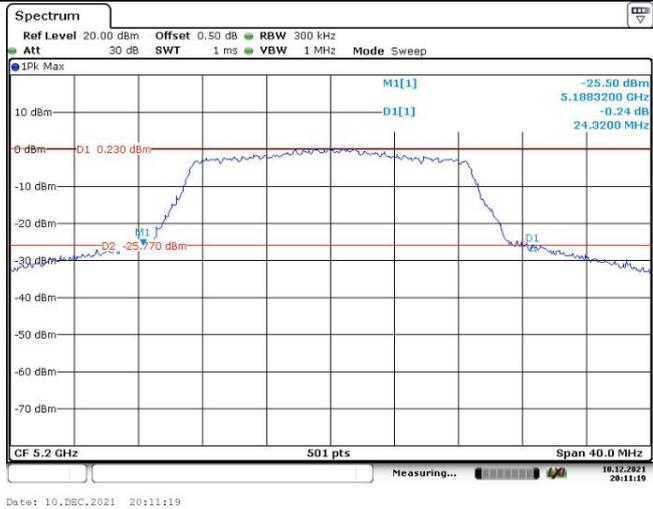

802.11n ht20
Highest Channel

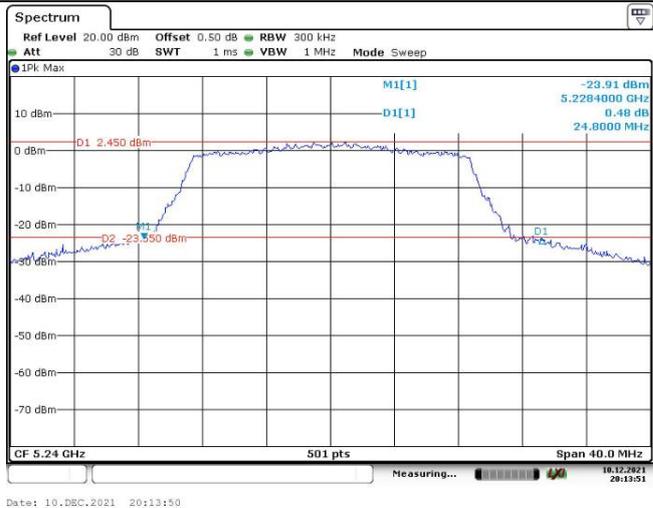

26dB Emission Bandwidth


<p>802.11n ht40 Lowest Channel</p>	<p>Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 300 kHz Att 30 dB SWT 1 ms VBW 1 MHz Mode Sweep 1Pk Max D1[1] 0.19 dBm M1[1] 54.847 MHz D1 -3.800 dBm D2 -29.800 dBm -30.18 dBm 5.157601 GHz CF 5.19 GHz 501 pts Span 80.0 MHz Measuring... 13.12.2021 18:12:35</p>
<p>802.11n ht40 Highest Channel</p>	<p>Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 300 kHz Att 30 dB SWT 1 ms VBW 1 MHz Mode Sweep 1Pk Max M1[1] -25.97 dBm D1[1] 5.201200 GHz D1 -0.080 dBm D2 -26.080 dBm -0.25 dBm 53.760 MHz CF 5.23 GHz 501 pts Span 80.0 MHz Measuring... 10.12.2021 20:22:23</p>
<p>802.11ac vht80 Middle Channel</p>	<p>Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 1 MHz Att 30 dB SWT 1 ms VBW 3 MHz Mode Sweep 1Pk Max M1[1] -26.17 dBm D1[1] 5.161040 GHz D1 -0.090 dBm D2 -26.090 dBm -0.48 dBm 90.880 MHz CF 5.21 GHz 501 pts Span 160.0 MHz Measuring... 10.12.2021 20:24:50</p>

99% Emission Bandwidth

<p>802.11a Lowest Channel</p>	<p>Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 300 kHz Att 30 dB SWT 1 ms VBW 1 MHz Mode Sweep 1Pk Max M1[1] 0.80 dBm 5.1783230 GHz 17.325349301 MHz Occ Bw CF 5.18 GHz 501 pts Span 40.0 MHz Measuring... 16.12.2021 20:00:59 Date: 10.DEC.2021 20:00:59</p>
<p>802.11a Middle Channel</p>	<p>Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 300 kHz Att 30 dB SWT 1 ms VBW 1 MHz Mode Sweep 1Pk Max M1[1] 0.82 dBm 5.1984030 GHz 17.245508982 MHz Occ Bw CF 5.2 GHz 501 pts Span 40.0 MHz Measuring... 16.12.2021 20:02:43 Date: 10.DEC.2021 20:02:43</p>
<p>802.11a Highest Channel</p>	<p>Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 300 kHz Att 30 dB SWT 1 ms VBW 1 MHz Mode Sweep 1Pk Max M1[1] 2.74 dBm 5.2384030 GHz 17.245508982 MHz Occ Bw CF 5.24 GHz 501 pts Span 40.0 MHz Measuring... 16.12.2021 20:07:00 Date: 10.DEC.2021 20:07:00</p>

99% Emission Bandwidth

802.11n ht20
Lowest Channel

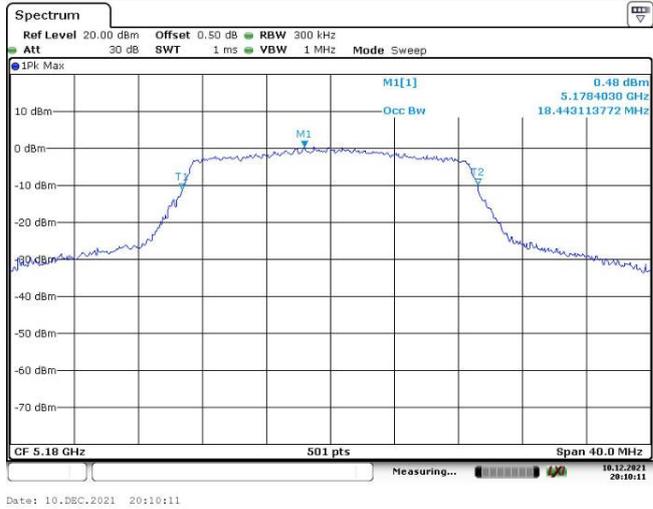

802.11n ht20
Middle Channel




802.11n ht20
Highest Channel



99% Emission Bandwidth

<p>802.11n ht40 Lowest Channel</p>	
<p>802.11n ht40 Highest Channel</p>	
<p>802.11ac vht80 Middle Channel</p>	

5250-5350 MHz:

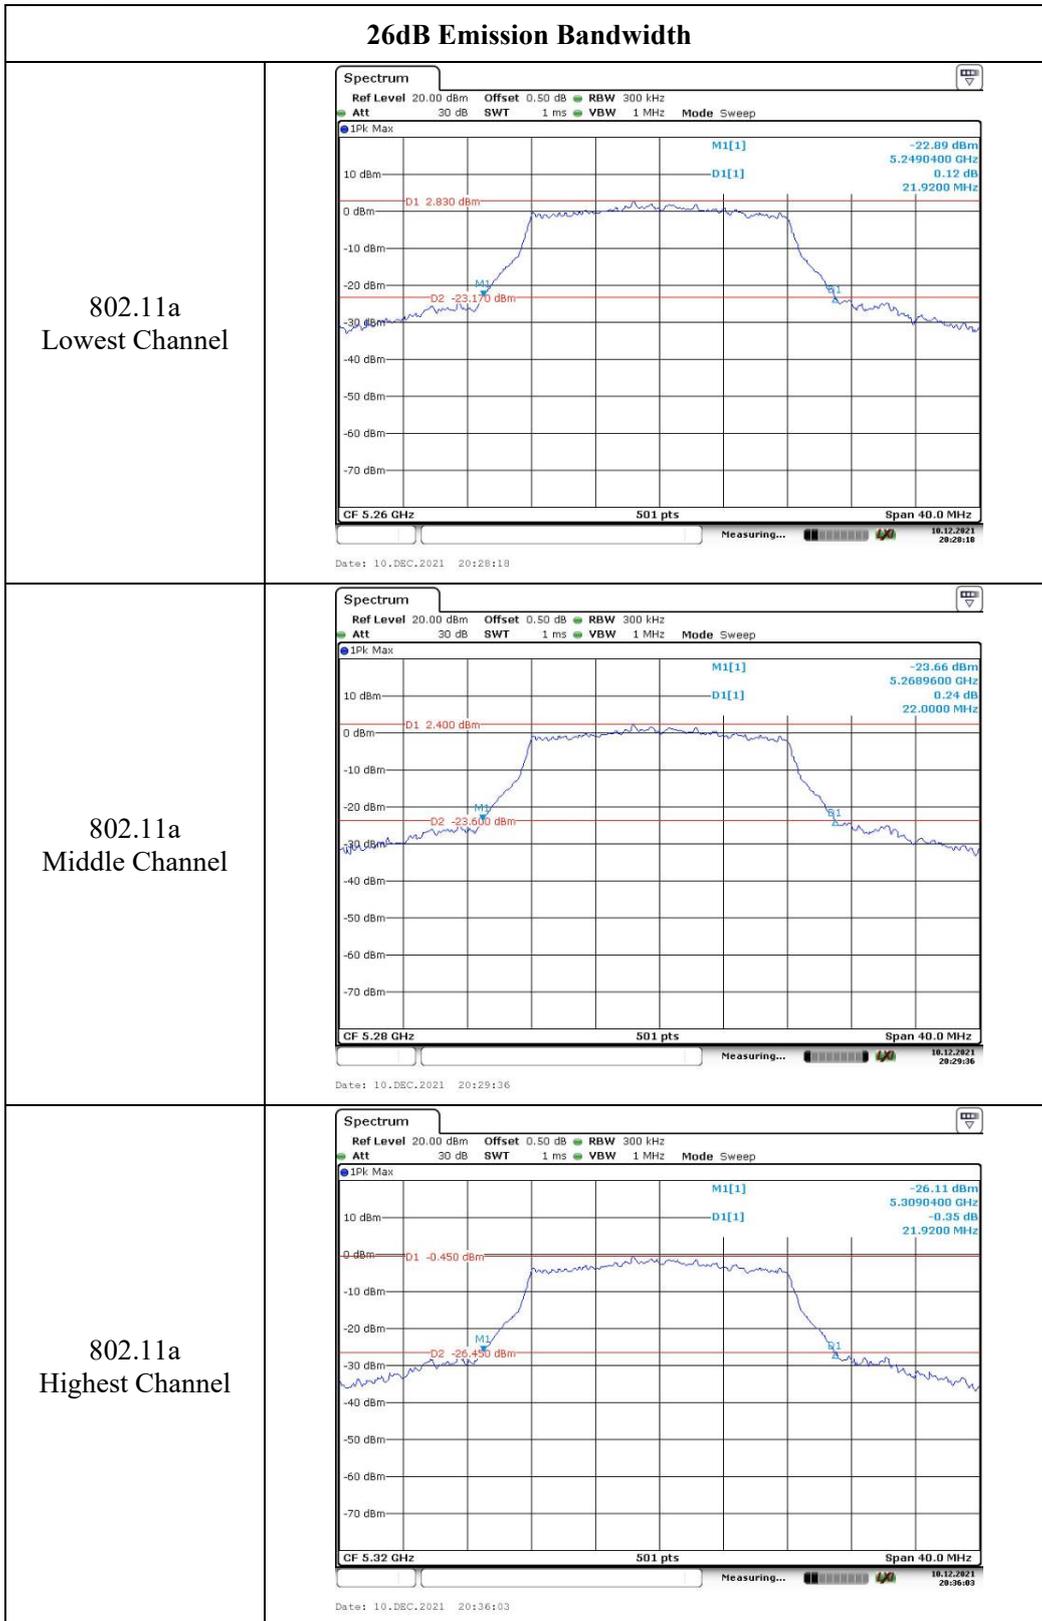

26dB Emission Bandwidth

<p>802.11n ht20 Lowest Channel</p>	
<p>802.11n ht20 Middle Channel</p>	
<p>802.11n ht20 Highest Channel</p>	

26dB Emission Bandwidth

<p>802.11n ht40 Lowest Channel</p>	<p>Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 300 kHz Att 30 dB SWT 1 ms VBW 1 MHz Mode Sweep</p> <p>1Pk Max -26.97 dBm 5.243760 GHz 55.200 MHz</p> <p>M1 -26.350 dBm D1 -0.350 dBm</p> <p>CF 5.27 GHz 501 pts Span 80.0 MHz</p> <p>Date: 10.DEC.2021 20:56:44</p>
<p>802.11n ht40 Highest Channel</p>	<p>Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 300 kHz Att 30 dB SWT 1 ms VBW 1 MHz Mode Sweep</p> <p>1Pk Max -31.40 dBm 5.287280 GHz 49.840 MHz</p> <p>M1 -31.910 dBm D1 -5.510 dBm</p> <p>CF 5.31 GHz 501 pts Span 80.0 MHz</p> <p>Date: 10.DEC.2021 20:59:08</p>
<p>802.11ac vht80 Middle Channel</p>	<p>Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 1 MHz Att 30 dB SWT 1 ms VBW 3 MHz Mode Sweep</p> <p>1Pk Max -26.98 dBm 5.242320 GHz 89.600 MHz</p> <p>M1 -26.970 dBm D1 -0.970 dBm</p> <p>CF 5.29 GHz 501 pts Span 160.0 MHz</p> <p>Date: 10.DEC.2021 21:01:21</p>

99% Emission Bandwidth

<p>802.11a Lowest Channel</p>	<p>Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 300 kHz Att 30 dB SWT 1 ms VBW 1 MHz Mode Sweep 1Pk Max 2.79 dBm 5.2584030 GHz 17.245508982 MHz CF 5.26 GHz 501 pts Span 40.0 MHz Measuring... 16.12.2021 20:28:31 Date: 10.DEC.2021 20:28:31</p>
<p>802.11a Middle Channel</p>	<p>Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 300 kHz Att 30 dB SWT 1 ms VBW 1 MHz Mode Sweep 1Pk Max 2.34 dBm 5.2784030 GHz 17.325349301 MHz CF 5.28 GHz 501 pts Span 40.0 MHz Measuring... 16.12.2021 20:29:50 Date: 10.DEC.2021 20:29:50</p>
<p>802.11a Highest Channel</p>	<p>Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 300 kHz Att 30 dB SWT 1 ms VBW 1 MHz Mode Sweep 1Pk Max -0.49 dBm 5.3184030 GHz 17.405189602 MHz CF 5.32 GHz 501 pts Span 40.0 MHz Measuring... 16.12.2021 20:36:16 Date: 10.DEC.2021 20:36:16</p>

99% Emission Bandwidth

802.11n ht20
Lowest Channel



802.11n ht20
Middle Channel




802.11n ht20
Highest Channel



99% Emission Bandwidth

<p>802.11n ht40 Lowest Channel</p>	
<p>802.11n ht40 Highest Channel</p>	
<p>802.11ac vht80 Middle Channel</p>	

5470-5725 MHz:

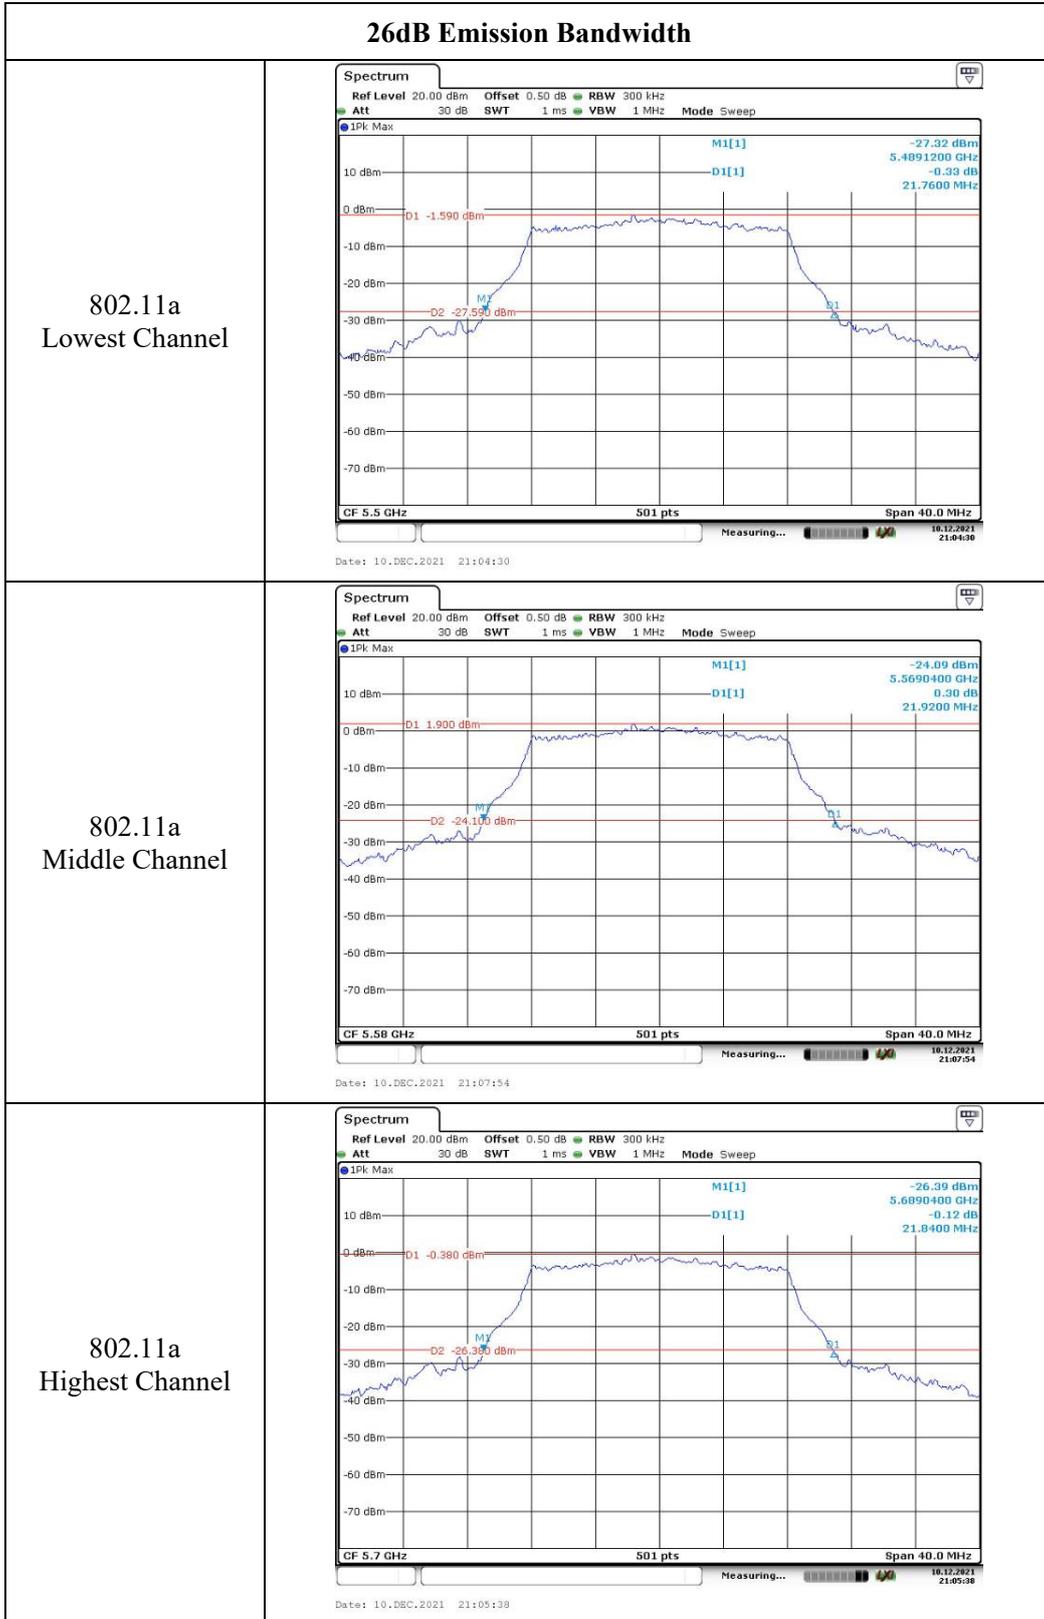

26dB Emission Bandwidth

802.11a
Additional Channel



802.11n ht20
Lowest Channel



802.11n ht20
Middle Channel




26dB Emission Bandwidth


<p>802.11n ht20 Highest Channel</p>	
<p>802.11n ht20 Additional Channel</p>	
<p>802.11n ht40 Lowest Channel</p>	

26dB Emission Bandwidth


802.11n ht40
Middle Channel

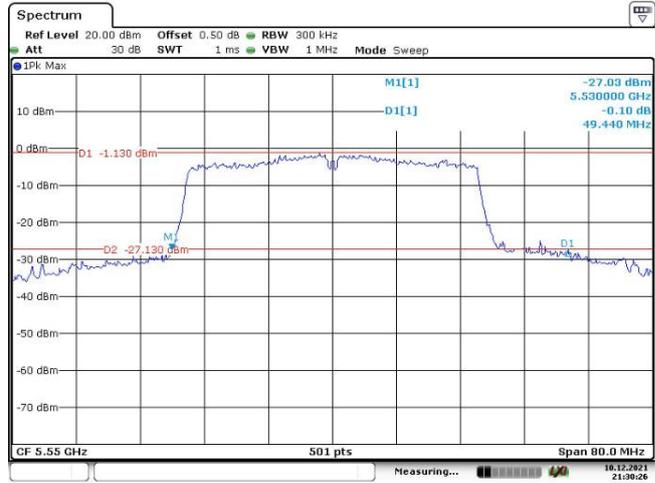

802.11n ht40
Highest Channel

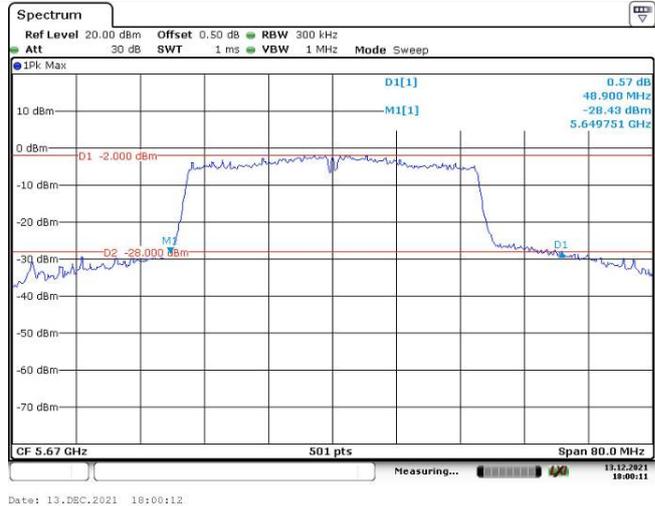

802.11n ht40
Additional Channel

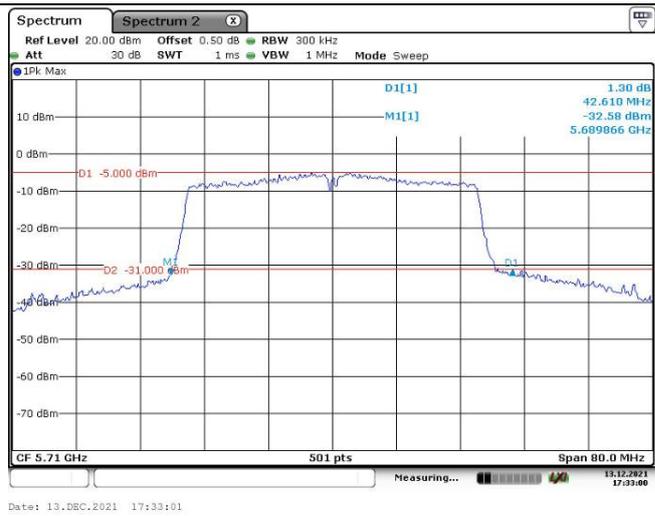

26dB Emission Bandwidth


<p>802.11ac vht80 Lowest Channel</p>	
<p>802.11ac vht80 Highest Channel</p>	
<p>802.11ac vht80 Additional Channel</p>	

99% Emission Bandwidth

<p>802.11a Lowest Channel</p>	
<p>802.11a Middle Channel</p>	
<p>802.11a Highest Channel</p>	

99% Emission Bandwidth

802.11a
Additional Channel

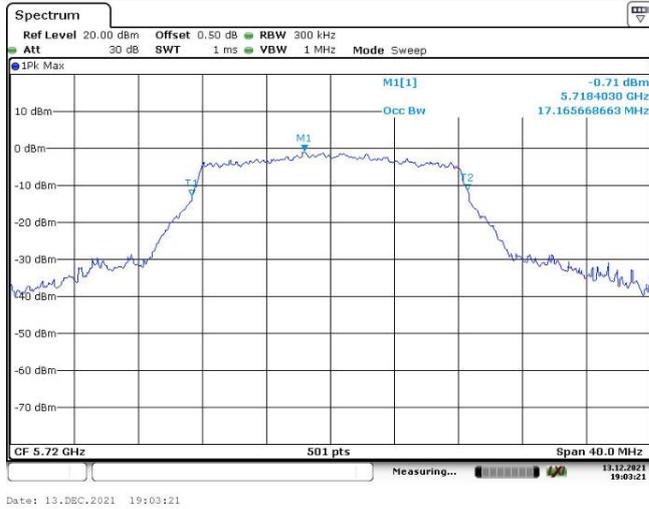

802.11n ht20
Lowest Channel



802.11n ht20
Middle Channel




99% Emission Bandwidth

<p>802.11n ht20 Highest Channel</p>	<p>Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 300 kHz Att 30 dB SWT 1 ms VBW 1 MHz Mode Sweep 1Pk Max M1[1] -0.63 dBm 5.6999200 GHz 18.283433134 MHz Occ Bw CF 5.7 GHz 501 pts Span 40.0 MHz Measuring... 16.12.2021 21:12:10 Date: 10.DEC.2021 21:12:10</p>
<p>802.11n ht20 Additional Channel</p>	<p>Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 300 kHz Att 30 dB SWT 1 ms VBW 1 MHz Mode Sweep 1Pk Max M1[1] 2.06 dBm 5.7188020 GHz 18.283433134 MHz Occ Bw CF 5.72 GHz 501 pts Span 40.0 MHz Measuring... 13.12.2021 19:05:41 Date: 13.DEC.2021 19:05:45</p>
<p>802.11n ht40 Lowest Channel</p>	<p>Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 1 MHz Att 30 dB SWT 1 ms VBW 3 MHz Mode Sweep 1Pk Max M1[1] -0.31 dBm 5.509840 GHz 36.886227545 MHz Occ Bw CF 5.51 GHz 501 pts Span 80.0 MHz Measuring... 16.12.2021 21:18:34 Date: 10.DEC.2021 21:18:33</p>

99% Emission Bandwidth

802.11n ht40
Middle Channel

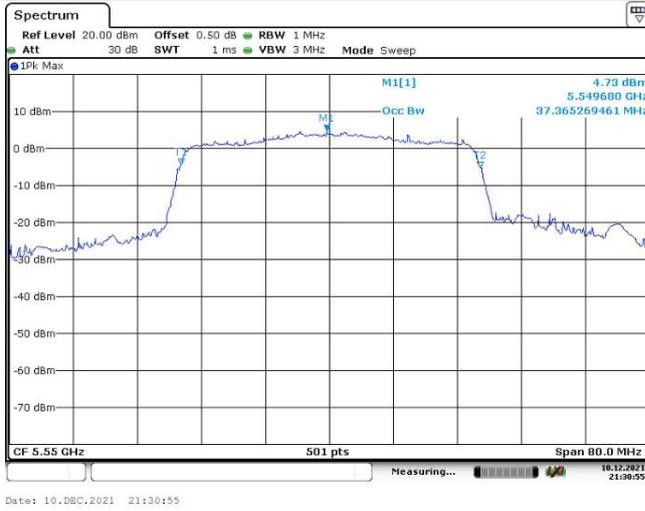

802.11n ht40
Highest Channel




802.11n ht40
Additional Channel



99% Emission Bandwidth


<p>802.11ac vht80 Lowest Channel</p>	<p>Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 1 MHz Att 30 dB SWT 1 ms VBW 3 MHz Mode Sweep 1Pk Max -1.55 dBm 5.530000 GHz 76.007984032 MHz Occ Bw M1[1] T1 T2 CF 5.53 GHz 501 pts Span 160.0 MHz Measuring... 10.DEC.2021 21:37:30</p>
<p>802.11ac vht80 Highest Channel</p>	<p>Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 1 MHz Att 30 dB SWT 1 ms VBW 3 MHz Mode Sweep 1Pk Max -2.17 dBm 5.684250 GHz 76.007984032 MHz Occ Bw M1[1] T1 T2 CF 5.69 GHz 501 pts Span 160.0 MHz Measuring... 10.DEC.2021 21:39:12</p>
<p>802.11ac vht80 Additional Channel</p>	<p>Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 1 MHz Att 30 dB SWT 1 ms VBW 3 MHz Mode Sweep 1Pk Max 1.67 dBm 5.691600 GHz 76.327345309 MHz Occ Bw M1[1] T1 T2 CF 5.69 GHz 501 pts Span 160.0 MHz Measuring... 13.DEC.2021 19:23:15</p>

5725-5850MHz:

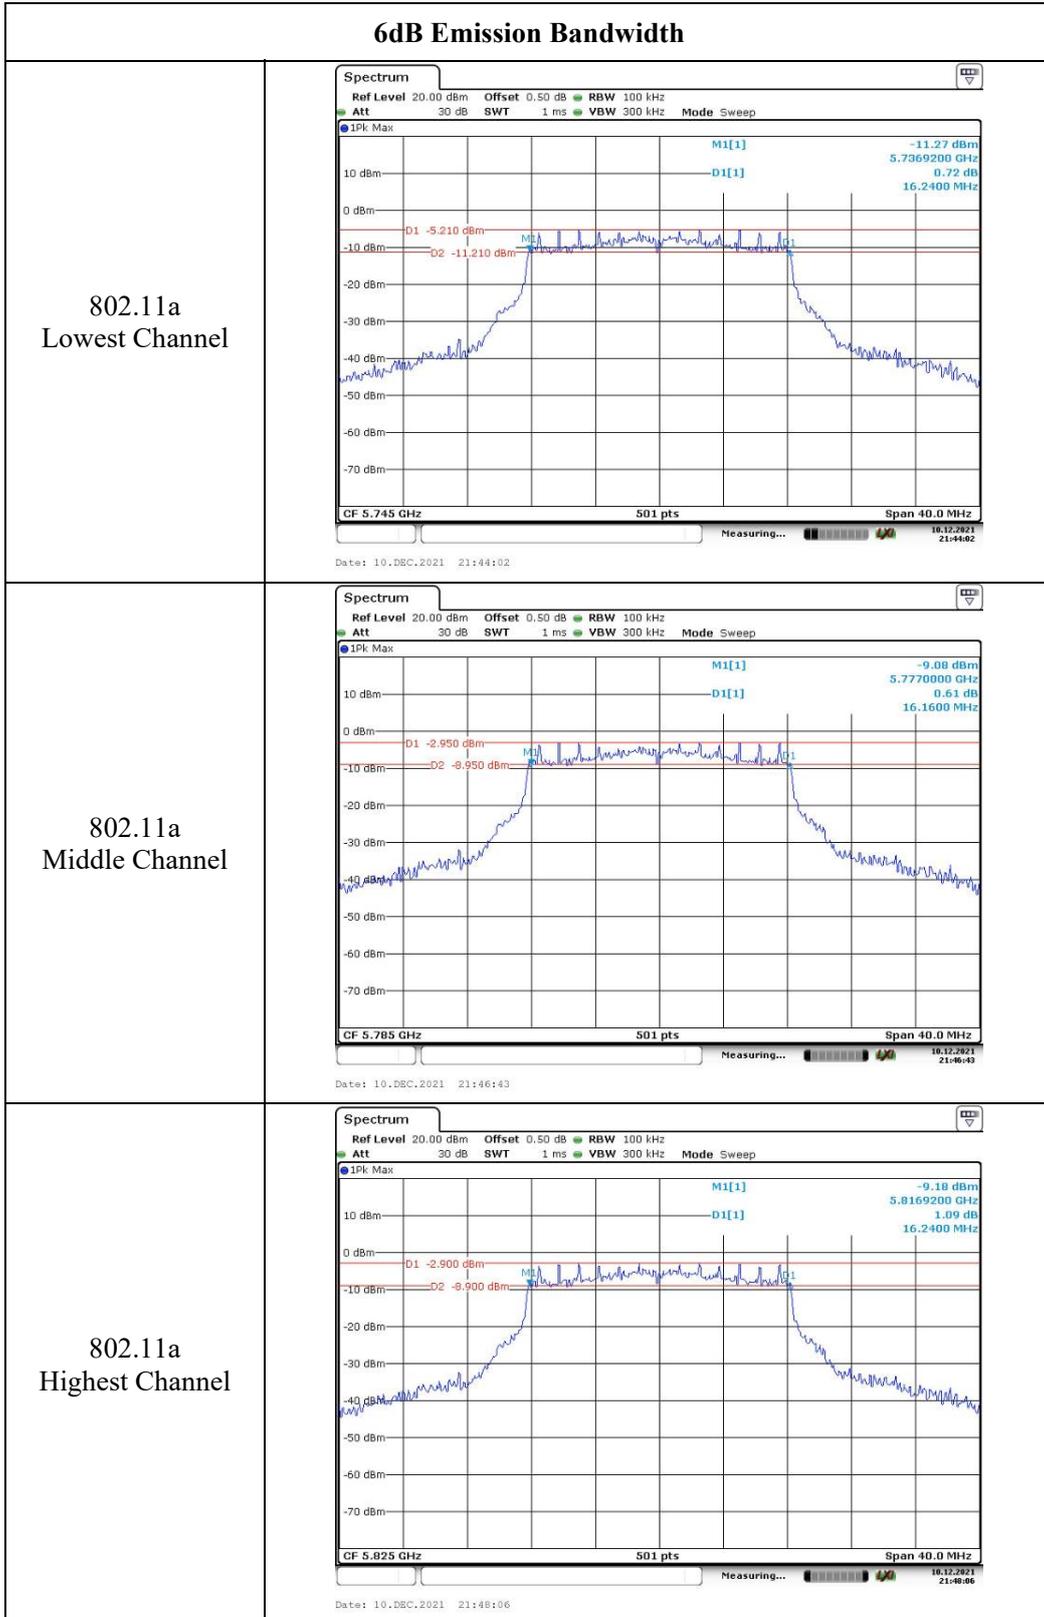


6dB Emission Bandwidth


802.11n ht20
Lowest Channel

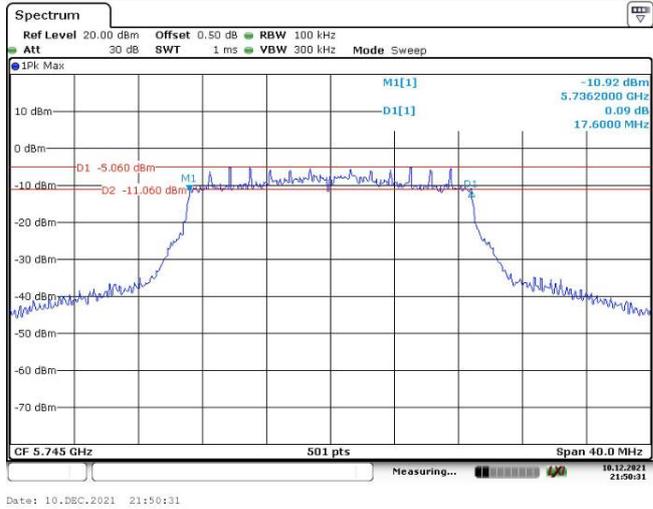

802.11n ht20
Middle Channel

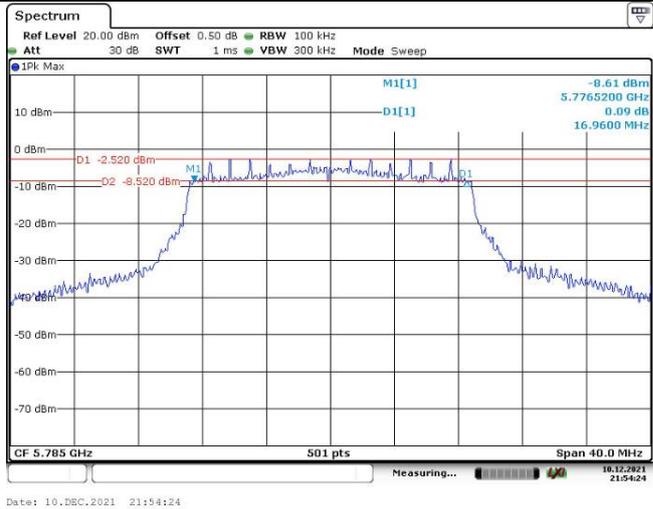


802.11n ht20
Highest Channel

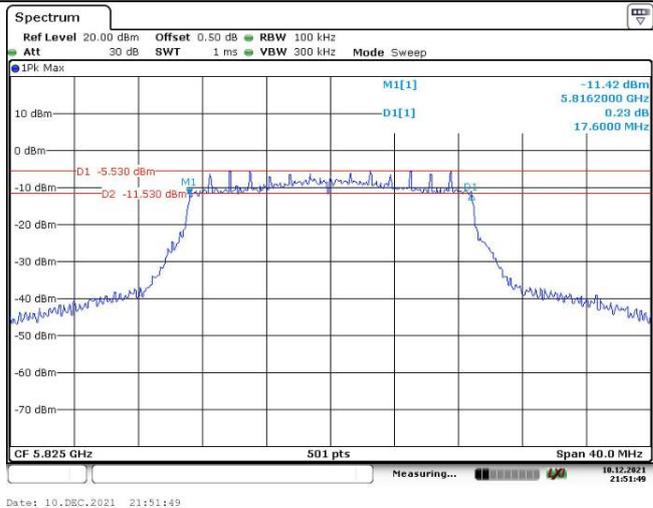


6dB Emission Bandwidth


802.11n ht40
Lowest Channel

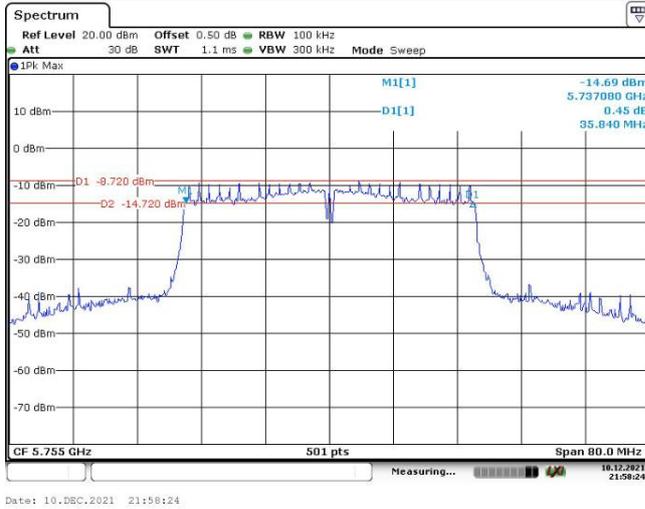

802.11n ht40
Highest Channel

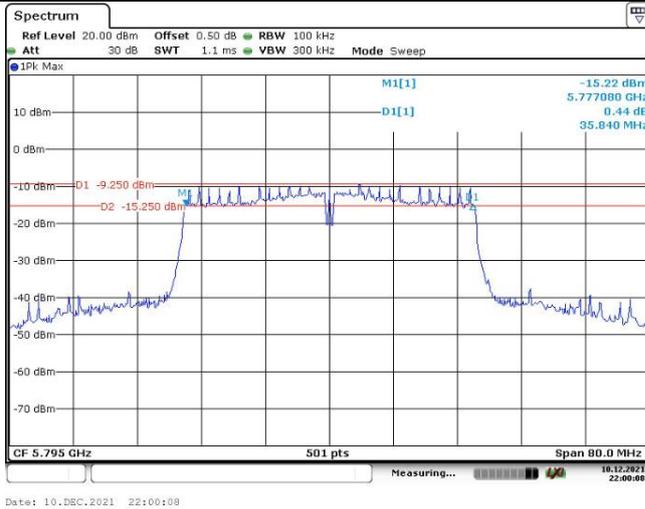

802.11ac vht80
Middle Channel

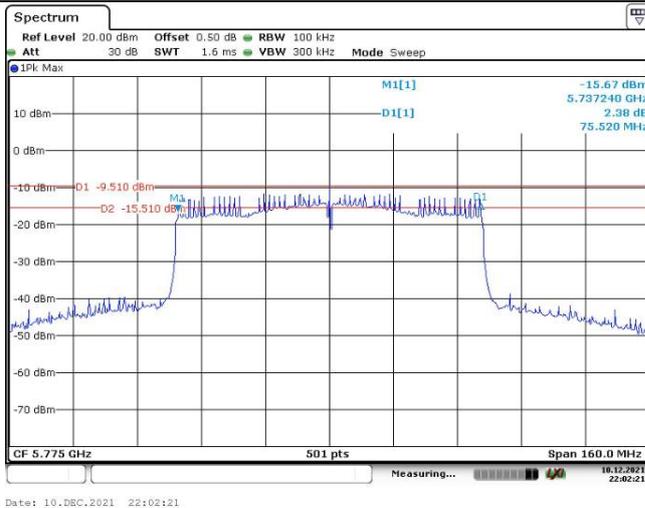


99% Emission Bandwidth


802.11a
Lowest Channel



802.11a
Middle Channel

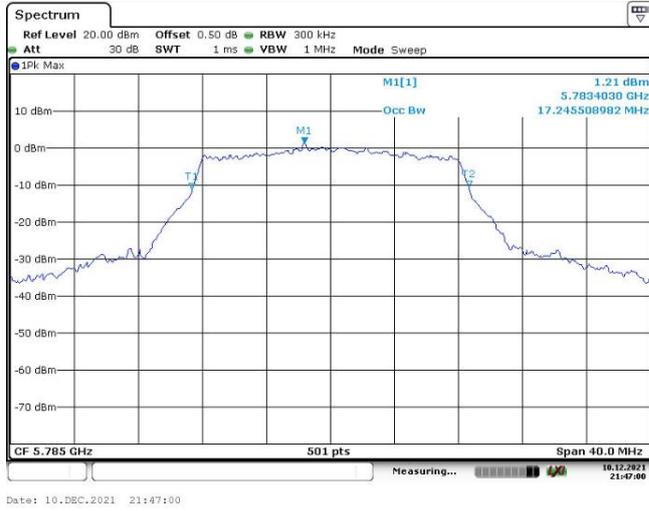

802.11a
Highest Channel

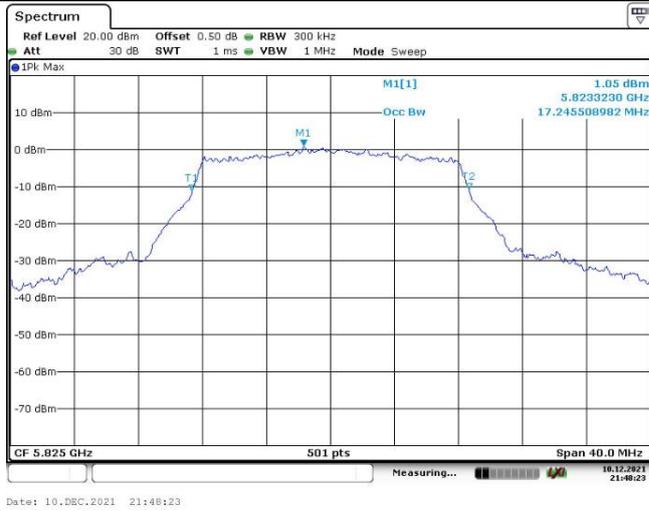

99% Emission Bandwidth

802.11n ht20
Lowest Channel



802.11n ht20
Middle Channel




802.11n ht20
Highest Channel



99% Emission Bandwidth

802.11n ht40
Lowest Channel

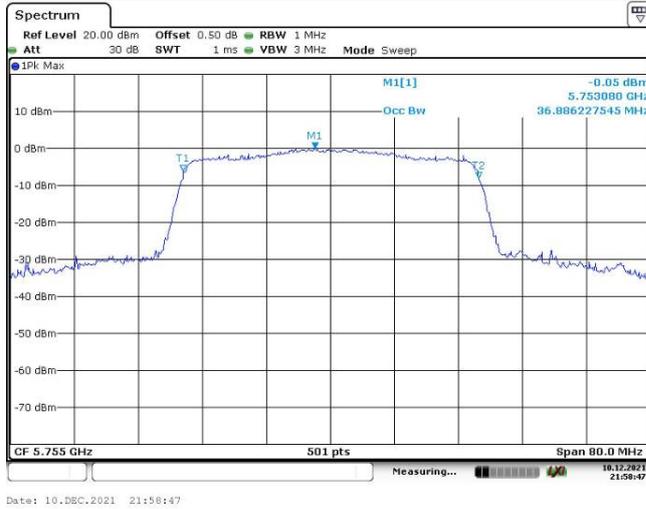

802.11n ht40
Highest Channel



802.11ac vht80
Middle Channel



4.4 Maximum Conducted Output Power:

Serial Number:	CR21110026-RF-S1	Test Date:	2021-12-10~2021-12-13
Test Site:	RF	Test Mode:	Transmitting
Tester:	LE Qiao	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	22.8~24.3	Relative Humidity: (%)	40~49	ATM Pressure: (kPa)	101.6~101.8
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2021XA	MY54080015	2021-07-22	2022-07-21
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power(dBm)		EIRP (dBm)	
		Result	FCC Limit	Result	RSS-247 Limit
802.11a	5180	10.84	24	14.44	22.39
	5200	10.65	24	14.25	22.37
	5240	12.81	24	16.41	22.37
802.11n ht20	5180	10.53	24	14.13	22.66
	5200	10.39	24	13.99	22.66
	5240	12.43	24	16.03	22.68
802.11n ht40	5190	9.61	24	13.21	23.00
	5230	11.96	24	15.56	23.00
802.11ac vht80	5210	8.75	24	12.35	23.00

Note:

The device is a client device.

The duty cycle factor has been calculated into the test data.

5250-5350 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power(dBm)			EIRP (dBm)	
		Result	FCC Limit	RSS-247 Limit	Result	RSS-247 Limit
802.11a	5260	11.75	24	23.37	15.35	29.37
	5280	11.35	24	23.39	14.95	29.39
	5320	9.59	24	23.37	13.19	29.37
802.11n ht20	5260	11.26	24	23.68	14.86	29.68
	5280	11.53	24	23.66	15.13	29.66
	5320	8.66	24	23.66	12.26	29.66
802.11n ht40	5270	11.95	24	24.00	15.55	30.00
	5310	8.68	24	24.00	12.28	30.00
802.11ac vht80	5290	6.29	24	24.00	9.89	30.00

Note:

The device is a client device.

The duty cycle factor has been calculated into the test data.

5470-5725 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power(dBm)			EIRP (dBm)	
		Result	FCC Limit	RSS-247 Limit	Result	RSS-247 Limit
802.11a	5500	8.63	24	23.37	12.23	29.37
	5580	11.26	24	23.39	14.86	29.39
	5700	8.54	24	23.37	12.14	29.37
	5720	10.59	24	23.35	14.19	29.35
802.11n ht20	5500	9.24	24	23.60	12.84	29.6
	5580	11.37	24	23.64	14.97	29.64
	5700	9.83	24	23.62	13.43	29.62
	5720	11.42	24	23.62	15.02	29.62
802.11n ht40	5510	8.66	24	24.00	12.26	30.00
	5550	10.32	24	24.00	13.92	30.00
	5670	8.58	24	24.00	12.18	30.00
	5710	9.02	24	24.00	12.62	30.00
802.11ac vht80	5530	6.54	24	24.00	10.14	30.00
	5610	6.68	24	24.00	10.28	30.00
	5690	5.56	24	24.00	9.16	30.00

Note:

The device is a client device.

The duty cycle factor has been calculated into the test data.

5725-5850 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power(dBm)	
		Result	Limit
802.11a	5745	8.77	30
	5785	10.32	30
	5825	8.46	30
802.11n ht20	5745	8.69	30
	5785	10.26	30
	5825	8.93	30
802.11n ht40	5755	5.87	30
	5795	5.53	30
802.11ac vht80	5775	6.37	30

Note:
The duty cycle factor has been calculated into the test data.

4.5 Maximum power spectral density:

Serial Number:	CR21110026-RF-S1	Test Date:	2021-12-10~2022-01-24
Test Site:	RF	Test Mode:	Transmitting
Tester:	LE Qiao	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	22.8~24.3	Relative Humidity: (%)	40~49	ATM Pressure: (kPa)	101.6~101.8
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2021/7/22	2022/7/21
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	Maximum Conducted Power Spectral Density (dBm/MHz)		Maximum EIRP Power Spectral Density (dBm/MHz)	
		Result	FCC Limit	Result	RSS-247 Limit
802.11a	5180	2.75	11	6.35	10
	5200	2.52	11	6.12	10
	5240	4.81	11	8.41	10
802.11n ht20	5180	2.66	11	6.26	10
	5200	2.70	11	6.3	10
	5240	4.45	11	8.05	10
802.11n ht40	5190	-0.49	11	3.11	10
	5230	1.48	11	5.08	10
802.11ac vht80	5210	-5.29	11	-1.69	10

Note:

The device is a client device.

Method SA-3 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 was used for PSD test.

5250-5350 MHz:

Test Modes	Test Frequency (MHz)	Maximum Power Spectral Density(dBm/MHz)	
		Result	Limit
802.11a	5260	4.54	11
	5280	4.00	11
	5320	3.32	11
802.11n ht20	5260	3.97	11
	5280	3.78	11
	5320	1.28	11
802.11n ht40	5270	0.86	11
	5310	-0.01	11
802.11ac vht80	5290	-5.29	11

Note:
The device is a client device.
Method SA-3 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 was used for PSD test.

5470-525 MHz:

Test Modes	Test Frequency (MHz)	Maximum Power Spectral Density(dBm/MHz)	
		Result	Limit
802.11a	5500	0.19	11
	5580	3.46	11
	5700	1.36	11
	5720	2.56	11
802.11n ht20	5500	0.91	11
	5580	2.59	11
	5700	1.59	11
	5720	2.68	11
802.11n ht40	5510	-1.50	11
	5550	0.25	11
	5670	-2.84	11
	5710	-0.18	11
802.11ac vht80	5530	-6.78	11
	5610	-5.37	11
	5690	-5.05	11

Note:
The device is a client device.
Method SA-3 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 was used for PSD test.

5725-5850 MHz:

Test Modes	Test Frequency (MHz)	Reading (dBm/300kHz)	Maximum Power Spectral Density (dBm/500kHz)	
			Result	Limit
802.11a	5745	-2.15	0.07	30
	5785	0.39	2.61	30
	5825	0.15	2.37	30
802.11n ht20	5745	-2.17	0.05	30
	5785	-0.17	2.05	30
	5825	-3.08	-0.86	30
802.11n ht40	5755	-6.47	-4.25	30
	5795	-7.13	-4.91	30
802.11ac vht80	5775	-9.56	-7.34	30

Note: Method SA-3 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 was used for PSD test.

If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement

5150-5250MHz:

Maximum power spectral density

<p>802.11a Lowest Channel</p>	
<p>802.11a Middle Channel</p>	
<p>802.11a Highest Channel</p>	