

Verification

**With The 47 CFR, Part2 and Part15
Of FCC Requirement**

Hereby certifies that

Type of device: All other devices

Category: PIR Multi Sensor

Model No.: CIS-PM01

Additional Model name: -

Manufactures and address

COMMAX Co.,Ltd

Dunchon-daero 494, Jungwon-gu, Seongnam-si, Gyeonggi-do, S.korea

This document is the proof that above product, system, and also relates OEM models are complying with FCC requirement. We, LTA Co., Ltd is the accredited EMC laboratory for NVLAP(US), RRA(KOREA). We certify that the above products had performed test on our laboratory and it was confirmed to comply with FCC requirement. These products might be marketed at the US accordance to DoC of FCC Rule based on the standard 47CFR Part 2 and 15. The test was performed accordance to the procedures from ANSI C63.4-2014. Test data and results are issue on the EMC test report No. as follows.

Reference Endorsed Test Report No. is LR500111702D

Date: February 08, 2017



**Won Wook Kim, Technical Manager
LTA Co., Ltd.**


NVLAP[®]

NVLAP LAB CODE 200723-0

TEST REPORT

This laboratory is accredited by Radio Research Laboratory and National Voluntary Laboratory Accreditation Program.
The tests reported herein have been performed in accordance with its terms of accreditation.

Test Report No. : LR500111702D
Issue Date : February 08, 2017
Applied Standard : FCC Part 15, Subpart B
Trade Name : COMMAX Co.,Ltd
Category : PIR Multi Sensor
Model Name : CIS-PM01
Additional Model name : -
Serial Number : Identification

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.


NVLAP LAB CODE 200723-0

Revision history

| Revision | Date of issue | Test report No. | Description |
|----------|---------------|-----------------|-------------|
| 0 | 08.02.2017 | LR500111702D | Initial |

TABLE OF CONTENTS

| <u>Text</u> | <u>Page</u> |
|--|-------------|
| Contents ----- | 3 |
| LTA Certification ----- | |
| General Information ----- | |
| Brief Information ----- | |
| Test site description ----- | |
| Test Procedure ----- | |
| List of test equipment used for the test ----- | |
| Radiated disturbance measurement (Result & Graph) ----- | |
| Conducted disturbance measurement (Result & Graph) ----- | |
| Conclusions ----- | 17 |
| Photograph of the measurements ----- | 18 |
| Photograph of the EUT ----- | 20 |



LTA Certification

Applicant / Manufacture

Company name : COMMAX Co.,Ltd
Address : Dunchon-daero 494, Jungwon-gu, Seongnam-si, Gyeonggi-do, S.korea
Telephone /Facsimile : +82-31-739-3682

Factory 1

Company name : COMMAX Co.,Ltd
Address : Dunchon-daero 494, Jungwon-gu, Seongnam-si, Gyeonggi-do, S.korea

Equipment Under Test (EUT)

Category : PIR Multi Sensor
Brand : COMMAX Co.,Ltd
Model name : CIS-PM01
Serial number : Identification
Intended environment : Residential area
Date of receipt : January 18, 2017
EUT condition : Pre-production, not damaged
Operating Mode : Zigbee Mode
Interface ports : -
Power rating : DC 3 V
Test memory size : -
Crystal/Oscillator(s) : -
Firmware version : XXXX

*** To be continued next page ***

LTA Certification –cont.-

Model Description

- NONE

Model Specification

- NONE

Test Performed

Test started & completed : January19-20, 2017

Location : LTA Co., Ltd.

Test Specification

Purpose of the test : Compliance test to the following standard

Applied standard : FCC Part 15, Subpart B

Classification : Class B

Deviations from Standard

: N/A

Test Method

Test Results

| Measurement | Results* | Test method |
|-------------|----------|-------------|
|-------------|----------|-------------|

| | | |
|----------------------|----------|------------------|
| Radiated disturbance | Complies | ANSI C 63.4-2014 |
|----------------------|----------|------------------|

| | | |
|-----------------------|----------|------------------|
| Conducted disturbance | Complies | ANSI C 63.4-2014 |
|-----------------------|----------|------------------|

* : The compliance statement is based on nominal value only.

Modification performed by the lab.:

- N.A

-We were performed the test according to LTA procedure LTA-QI-04.

Laboratory's Certificate

Report number : LR500111702D

Issue date : February 08, 2017

This test report is issued under the authority of:

The test was supervised by:



Won Wook Kim, Technical Manager



Sung Un Sin, Test Engineer

The results in this report apply only to the sample(s) tested.

It is not allowed to copy this report even partly without the allowance of the test laboratory.

General information's

Purpose

This document is based on the Electromagnetic Interference (EMI) tests performed on the “**CIS-PM01**”. The measurements were performed according to the measurement procedure described in ANSI C 63.4-2014. The tests were carried out in order to confirm whether the electromagnetic emissions from the EUT(Equipment Under Test), are within the class A limits defined in FCC Part 15, Subpart B- “Section 15.107- Conducted limits” and “Section 15.109-Radiated emission limits”.

Test Performed

Company name : LTA Co., Ltd.
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Measurement uncertainty

Radiated disturbance (30 to 1000MHz) : +3.94 [dB] , -3.94 [dB] (k=2)
 (1GHz to 18GHz) : +3.46 [dB] , -3.46 [dB] (k=2)
 Conducted disturbance (0.15 to 30MHz) : +1.46[dB] , -1.46 [dB] (k=2)

The coverage factor k=2 yields approx. a 95% level of confidence for near-normal distribution typical of most measurement results.

Accredited agencies

LTA Co., Ltd. Is approved to perform EMC testing by the following agencies:

| Agency | Country | Accreditation No. | Validity | Reference |
|--------|---------|-------------------------|------------|-----------------------|
| NVLAP | U.S.A | 200723-0 | 2017-09-30 | ECT accredited Lab. |
| RRA | KOREA | KR0049 | - | EMC accredited Lab. |
| FCC | U.S.A | 610755 | 2017-04-21 | FCC filing |
| FCC | U.S.A | 649054 | 2017-04-13 | FCC CAB |
| VCCI | JAPAN | R-2133(10 m), C-2307 | 2017-06-21 | VCCI registration |
| VCCI | JAPAN | T-2009 | 2017-12-23 | VCCI registration |
| VCCI | JAPAN | G-847 | 2018-12-13 | VCCI registration |
| IC | CANADA | 5799A-1 | 2019-11-07 | IC filing |
| KOLAS | KOREA | NO.551 | 2017-01-08 | KOLAS accredited Lab. |

Brief Information

1-1 Test Summary

| Parameter | Applied Standard | Status (note 1) |
|--|------------------|--------------------|
| I. Emission | | |
| Radiated disturbance | FCC Part 15.109 | C |
| Conducted disturbance | FCC Part 15.107 | NA |
| Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable | | |
| * The data in this test report are traceable to the national or international standards. | | |

Frequency range to be scanned:

0.15 MHz - 30 MHz as conducted measurement

5th harmonic of the highest frequency or 40 GHz, whichever is lower

Bandwidth:

Measured by the CISPR quasi-peak function Bandwidth is 9 kHz in the frequency 0.15 MHz to 30 MHz and 120 kHz in the frequency 30 MHz to 1,000 MHz.

Measured by the CISPR Peak function Bandwidth is 1MHz in the frequency 1 GHz to 40 GHz.

A sample calculation:

COR. F (correction factor)= Antenna factor + Cable loss- Amp.gain- Distance correction

Emission Level= meter reading + COR.F

1-2 Variant Model

- NONE

1-3 Zigbee Mode of the EUT

The tests have been conducted with the following operational mode(s) of the EUT.

| Name of mode in the report | : | Description |
|----------------------------|---|-------------|
| Zigbee Mode | : | Zigbee Mode |

1-4 Modification

None


1-5 List of EUT and accessory

| EUT | | | | |
|------------------|------------|------------|----------------|---------|
| Category | Model Name | Serial No. | Manufacturer | Remarks |
| PIR Multi Sensor | CIS-PM01 | N/A | COMMAX Co.,Ltd | - |
| ACCESSORY | | | | |
| Category | Model Name | Serial No. | Manufacturer | Remarks |
| Module | CMX-ZG03 | N/A | N/A | - |
| Notebook | HSTNN | N/A | HP | - |

1-6 Cable List

| Cable List (Zigbee Mode) | | | | |
|--------------------------|---------------|--------------------------------|---------|----|
| Type | Length (m) | Shielding (Cable/backshell) | Remarks | |
| | | | From | to |
| - | - | - | - | - |

1-7 Block diagram of the EUT test (Zigbee Mode)

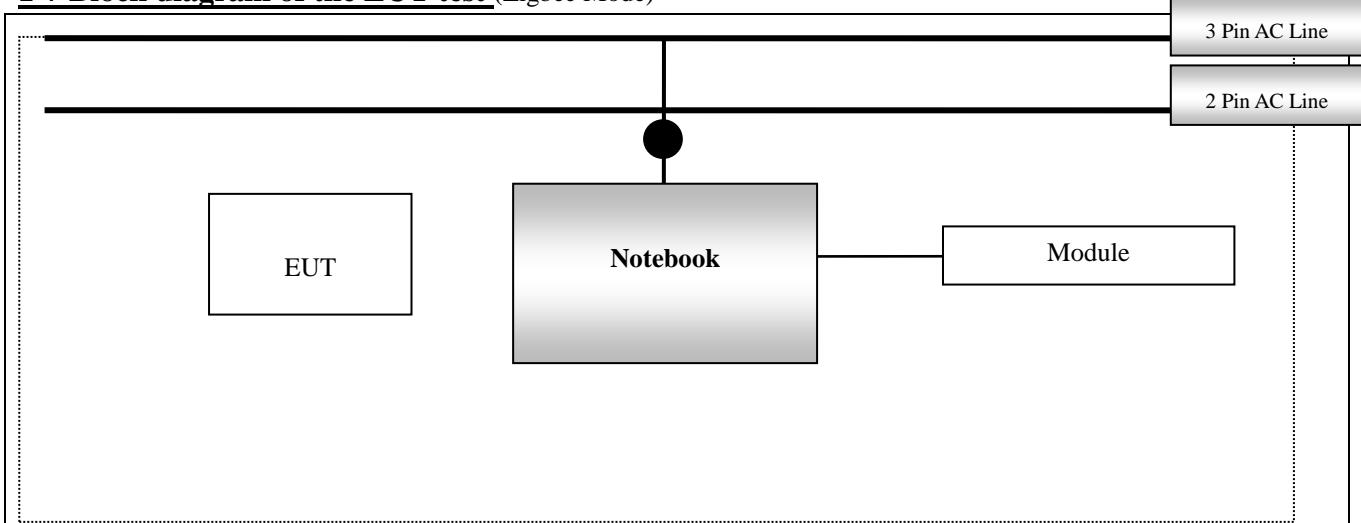

Note) refer to the Test setup photograph.


2- Test Site Description

1-Facility


All the testing facilities are periodically serviced as a daily check for equipment and cables systems, an every 6 months facility check for the facilities and a monthly check and annual calibration for testing equipment according to ISO/IEC 17025. All the testing facilities are used as the same specifications shown below. There are descriptions both for radiated disturbance measurement and conducted disturbance measurement conformed by ANSI C 63.4-2014.

The NSA measurement of the OATS was performed on July 01, 2015 according to ANSI C 63.4-2014.


2-1 Radiated Disturbance Measurement – Below 1GHz

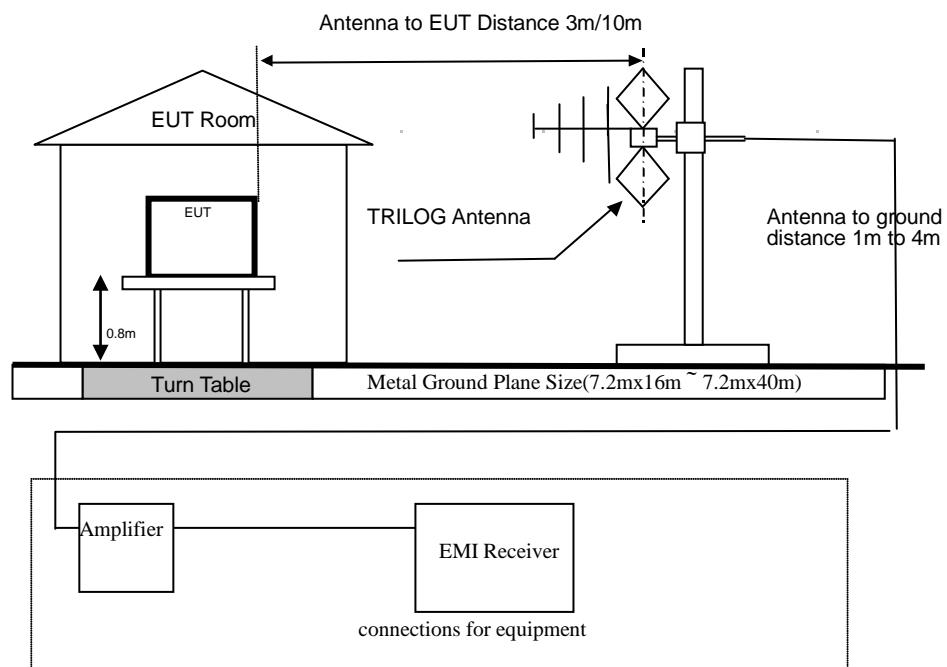

2-2 Conducted Disturbance Measurement

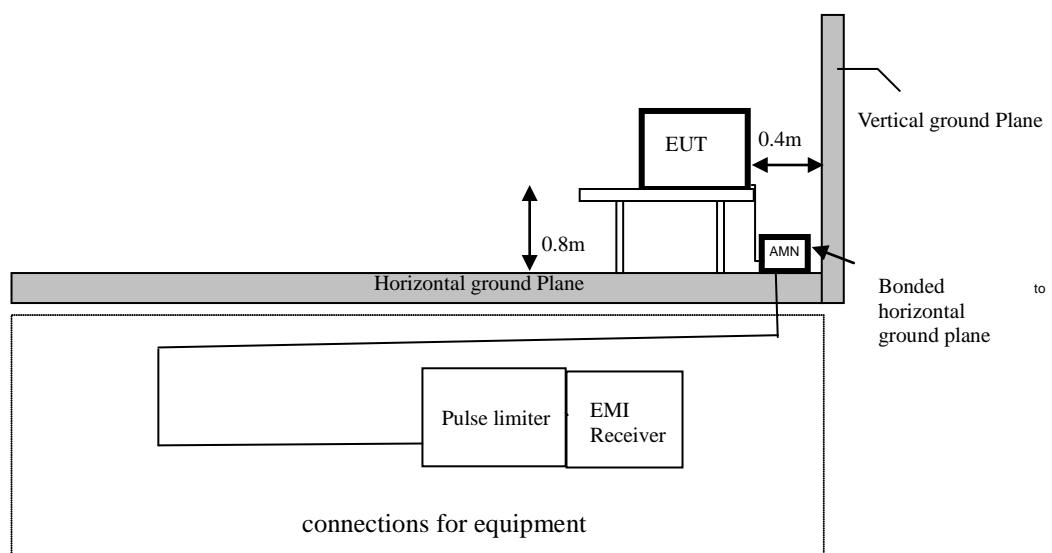

2-3 Radiated Disturbance Measurement – Above 1GHz

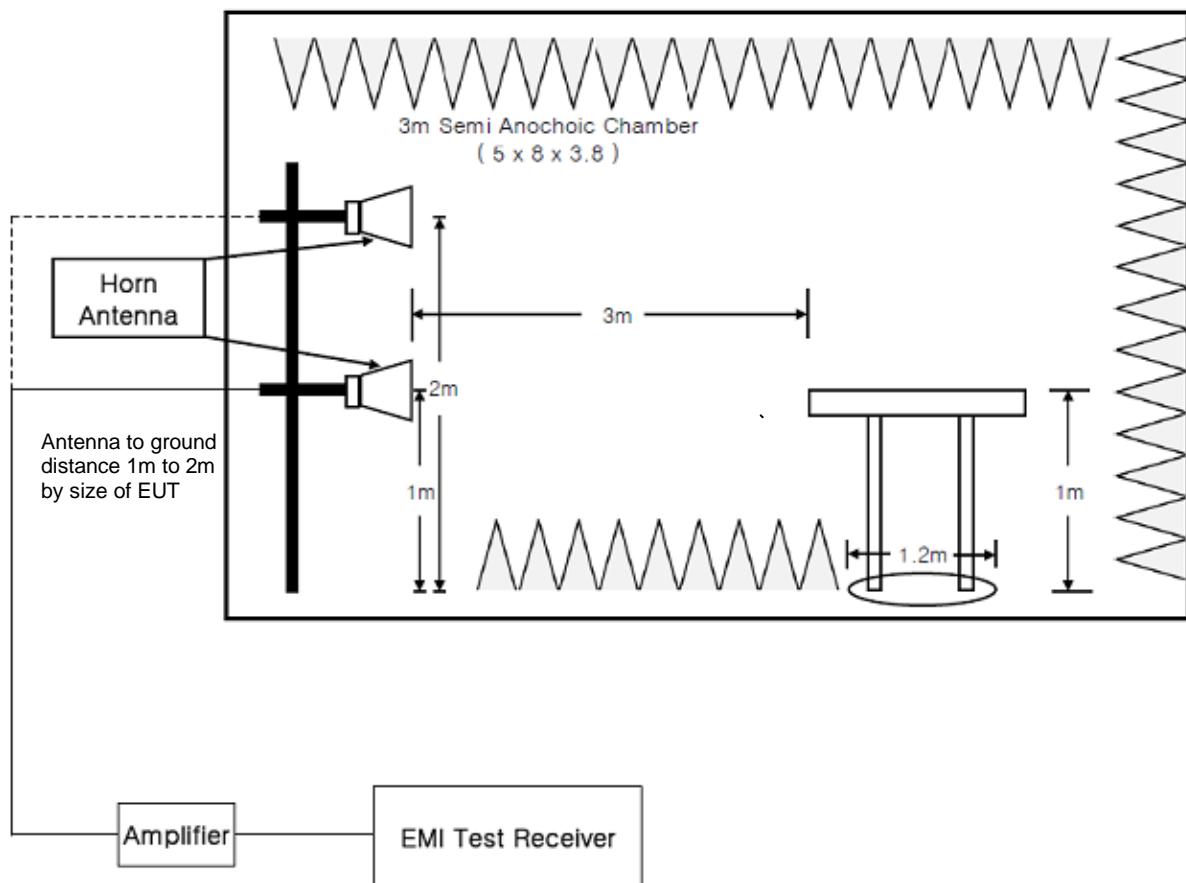

3- Test Procedure

3-1 Radiated Disturbance Measurements – Below 1GHz

- Test site is met the requirements of ANSI C 63.4-2014 and the distance between the EUT and the antenna is adjusted 3 m/10 m.
- The turntable can be rotated 360 degrees.
- The antenna can be adjusted between 1m and 4m in height above the ground.
- The EUT is placed on the non-conducting table with 0.8m height on the turntable.
- Measurements are carried out using a EMI test receiver with peak detectors (100 kHz bandwidth) and an EMI receiver with quasi-peak detectors(120 kHz bandwidth).
- Refer to the list of test equipment used for the test.
- TRILOG antenna are used as wideband antenna.
- The TRILOG antenna is used in the frequency range of 30 MHz to 1 000 MHz, the Horn antenna is used in the frequency range of 1GHz to 18 GHz.
- A variable attenuator is used for verifying amplifier's linearity.
- Rotating the turntable and adjusting the height of the antenna are carried out by control buttons on the console.
- Refer to "Brief Information"(page 7-8) about details of the EUT and configuration of the cables.

- Measurement is carried out by a LTA operator as manual operation.
 - searching for some of High disturbance frequency points than the other points with the following settings; bandwidth 100 kHz, frequency range 10 MHz between 30MHz and 300 MHz and frequency range 50 MHz between 300 MHz and 1 GHz.
 - searching the worst direction with the maximum level of the disturbance wave in rotating the turntable 360 degrees at each searched frequency point.
 - setting the height of the antenna with the maximum level of the disturbance wave from 1m to 4m.
 - reading the disturbance level by the EMI receiver with quasi-peak detectors (120 kHz bandwidth) according to ANSI C 63.4-2014.
 - measuring to vertical and horizontal polarization.
 - calculating the measurement result with the following formula or equation:
(Measurement result= measured value + antenna factor + antenna cable loss)

3-2 Conducted Disturbance Measurements

- The measurement is carried out on an open site with horizontal and metallic ground plane.
- An AMN(Artificial Mains Network) with a nominal impedance (50 Ω/50 µH) as defined in ANSI C 63.4-2014., shall be utilized.
- The AMN is grounded on a horizontal metal ground plane.
- Measurement is carried out using an EMI receiver with quasi-peak detectors and average detector.
(Refer to the List of test equipment used for the test.)
- The shortest distance between the EUT and the AMN is 0.8m.
- The EUT is placed on the non-conducting table with 0.8m height.
- A remote switch is used for changing phases between Line (L) and Neutral (N).
- Refer to "Brief Information"(page 5-8) about details of the EUT and configuration of the cables.

- Measurement is carried out as manual operation.
 - detecting the maximized emission level using the maxhold function after setting the spectrum analyzer bandwidth 1KHz and the frequency range from 150 kHz to 1 MHz , 1 MHz to 5 MHz and 5 MHz to 30 MHz.
 - searching the maximum frequency point of the disturbance wave in each frequency range.
 - reading the disturbance level of quasi-peak, average and Line (L) and Neutral (N) in 9 kHz bandwidth by the EMI receiver.
 - calculating the measurement result with the following formula or equation.
(Result = Reading + Cor.F.)
(Margin = Limit- Result)

3-3 Radiated Disturbance Measurements – Above 1GHz

- Test site is met the requirements of ANSI C 63.4-2014 and the distance between the EUT and the antenna is adjusted 3m.
- The turntable can be rotated 360 degrees.
- The antenna can be adjusted between 1m in height above the ground.
- The EUT is placed on the non-conducting table with 1m height on the turntable.
- Measurements are carried out using a EMI test receiver with peak detectors (1 MHz bandwidth) and an EMI receiver with peak and average detectors(1 MHz bandwidth).
- Refer to the list of test equipment used for the test.
- HORN antenna are used as wideband antenna.
- The HORN antenna is used in the frequency range of 1 GHz to 18 GHz.
- A variable attenuator is used for verifying amplifier's linearity.
- Rotating the turntable and adjusting the height of the antenna are carried out by control buttons on the console.
- Refer to "Brief Information"(page 7-8) about details of the EUT and configuration of the cables.
- Measurement is carried out by a LTA operator as manual operation.
 - searching the worst direction with the maximum level of the disturbance wave in rotating the turntable 360 degrees at each searched frequency point.
 - setting the height of the antenna with the maximum level of the disturbance wave from 1 m
 - reading the disturbance level by the EMI receiver with peak and average detectors (1MHz bandwidth) according to ANSI C 63.4-2014.
 - measuring to vertical and horizontal polarization.
 - calculating the measurement result with the following formula or equation:
(Measurement result= measured value + antenna factor + antenna cable loss)

4- List of Equipment Used For the Tests

| | Item | Model Name | Serial No. | Manufacturer | Inter val | Last Cal. |
|----|---------------------------------|-------------|-------------|---------------|-----------|-----------|
| 1 | EMI TEST Receiver | ESR | 101499 | R&S | 1 year | Jul-16 |
| 2 | Two-Line V-Network <MAIN> | ENV216 | 32031518210 | AFJ | 1 year | Oct-16 |
| 3 | LINE <SUB> | ESH3-Z5 | 893045/017 | R&S | 1 year | Mar-16 |
| 4 | TRILOG Antenna | VULB 9160 | 9160-3237 | SCHWARZBECK | 2 year | May-16 |
| 5 | HORN ANTENNA | 3115 | 00114105 | ETS | 2 year | Aug-16 |
| 6 | Amplifier (1 - 18GHz) | 8449B | 3008A02126 | Agilent | 1 year | Mar-16 |
| 7 | ABSORBING CLAMP | MDS21 | 3665 | SCHWARZBECK | 1 year | Sep-16 |
| 8 | One-Line V-NETWORK | ESH3-Z6 | 100378 | R&S | 1 year | Sep-16 |
| 9 | Pulse Limiter | ESH3-Z2 | 100710 | R&S | 1 year | Mar-16 |
| 10 | RF Amplifier(-1GHz) | 8447D | 2439A09058 | HP | 1 year | Sep-16 |
| 11 | e3 software | e3 | 5.5.201a | AUDIX | - | - |
| 12 | Impedance Stabilization Network | ISN T800 | 27109 | TESEQ | 1 year | Jan-17 |
| 13 | Impedance Stabilization Network | ENY81-CA6 | 101565 | R&S | 1 year | Feb-17 |
| 14 | EZ-17 RF-CURRENT PROBE | EZ-17 | 100508 | ROHDE&SCHWARZ | 1 year | Jan-16 |
| 15 | Attenuator (3dB) | 8491A | 37822 | HP | 1 year | Sep-16 |
| 16 | Attenuator (10dB) | 8491A | 63196 | HP | 1 year | Sep-16 |
| 17 | Hygro-Thermograph | THB-36 | 0041557-01 | ISUZU | 1 year | Sep-16 |
| 18 | Mini-Circuits Splitter | ZFSC-2-2500 | SF617800326 | Mini-Circuits | N/A | N/A |
| 19 | Mini-Circuits Splitter | ZFM-150 | 15542 | Mini-Circuits | N/A | N/A |
| 20 | Spectrum Analyzer (-2.9GHz) | 8594E | 3710A04074 | HP | 1 year | Mar-16 |
| 21 | Test Receiver(~30MHz) | ESHS10 | 828404/009 | R&S | 1 year | Mar-16 |
| 22 | DIGITAL THERMO HYGROMETER | TH-611 | NONE | BODYCOM | 1 year | Sep-16 |


5-1 Radiated Disturbance Measurements (Below 1GHz)

EUT/Model No.: CIS-PM01

TEST MODE: Zigbee mode

Temp Humi : 9 / 37

Tested by: SIN S U

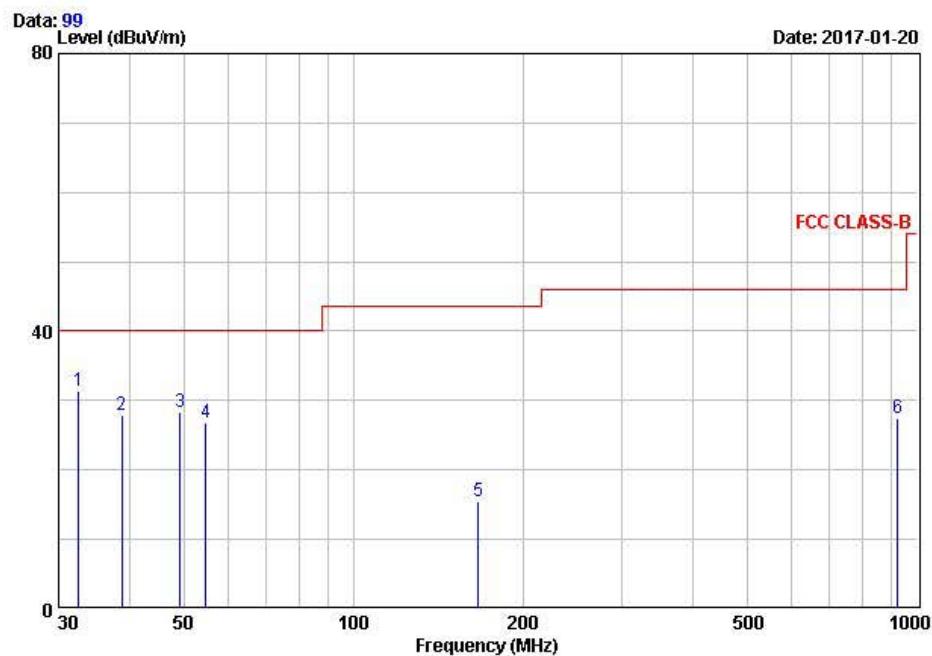

| Freq | Reading | C.F | Result | Limit | Margin | Height | Angle | Polarity |
|----------|---------|--------|--------|-------|--------|--------|-------|----------|
| MHz | dBuV | dB | dBuV/m | QP | dBuV/m | dB | cm | deg |
| 1 32.60 | 50.20 | -18.89 | 31.31 | 40.00 | 8.69 | 100 | 177 | VERTICAL |
| 2 38.80 | 46.20 | -18.24 | 27.96 | 40.00 | 12.04 | 100 | 230 | VERTICAL |
| 3 49.30 | 45.80 | -17.38 | 28.42 | 40.00 | 11.58 | 100 | 266 | VERTICAL |
| 4 54.80 | 43.90 | -17.02 | 26.88 | 40.00 | 13.12 | 100 | 316 | VERTICAL |
| 5 166.60 | 30.90 | -15.44 | 15.46 | 43.50 | 28.04 | 100 | 285 | VERTICAL |
| 6 923.30 | 25.90 | 1.53 | 27.43 | 46.00 | 18.57 | 100 | 349 | VERTICAL |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


(Ablow 1GHz)_ Bluetooth(LOW) Mode

EUT/Model No.: CIS-PM01

Test Mode: Zigbee mode

Tested by : SIN S U

Temp/Humi: 18 / 39

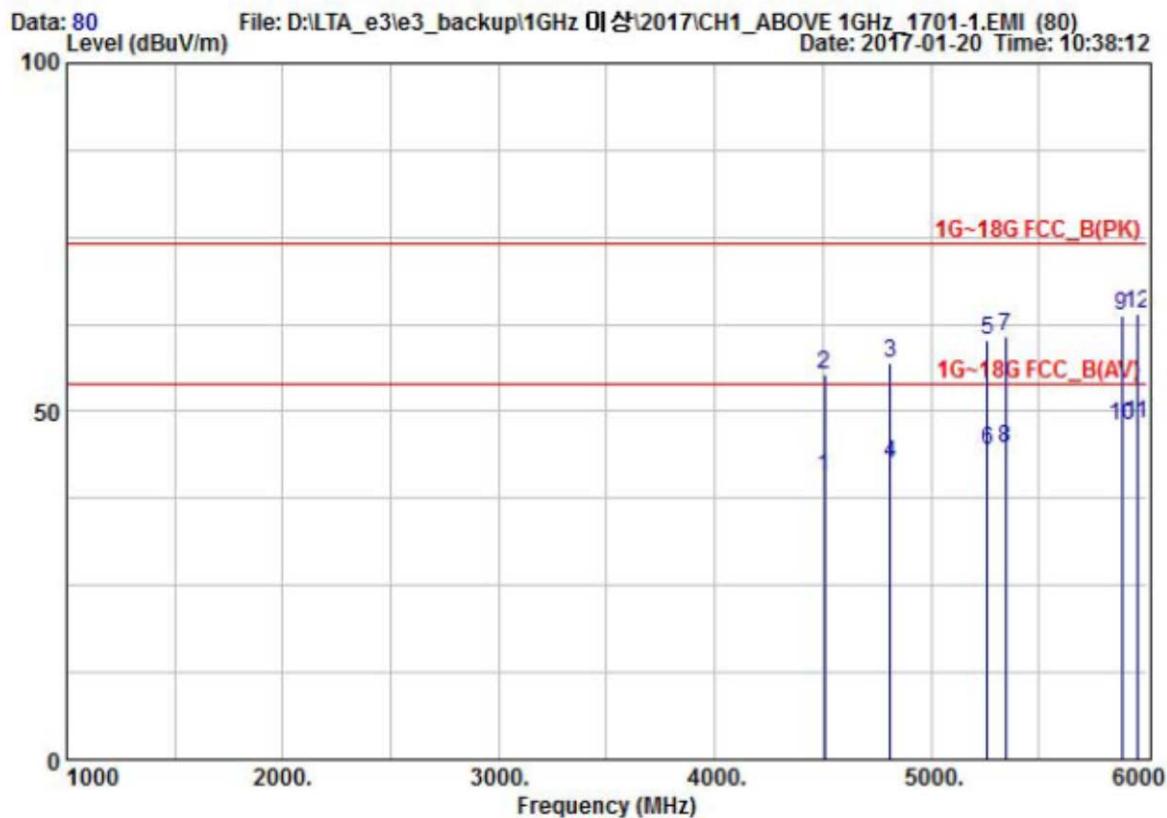

Manufacture : COMMAX

Test Date

2017/1/20

Temp.:

[°C]

18

Humidity:

[%]

39

Barometric:

[mbar]

Model : CIS-PM01

TEST mode : Zigbee mode

| Freq.(MHz) MHz | Reading(PK) dBuV | Reading(AV) dBuV | C.F dB | Result(PK) dBuV/m | Result(AV) dBuV/m | Limit(PK) dBuV/m | Limit(AV) dBuV/m | Margin(PK) dB | Margin(AV) dB | Height cm | Angle deg | Polarity Hor/Ver |
|-------------------|---------------------|---------------------|-----------|----------------------|----------------------|---------------------|---------------------|------------------|------------------|--------------|--------------|---------------------|
| 4505.4 | 40.3 | 25.5 | 15.1 | 55.40 | 40.60 | 74.0 | 54.0 | 18.60 | 13.40 | 100 | 251 | V |
| 4811.9 | 40.8 | 26.4 | 16.03 | 56.83 | 42.43 | | | 17.17 | 11.57 | 100 | 232 | V |
| 5260.0 | 42.5 | 26.7 | 17.71 | 60.21 | 44.41 | | | 13.79 | 9.59 | 100 | 188 | H |
| 5344.8 | 42.8 | 26.6 | 18.07 | 60.87 | 44.67 | | | 13.13 | 9.33 | 100 | 346 | H |
| 5882.6 | 43.2 | 27.4 | 20.68 | 63.88 | 48.08 | | | 10.12 | 5.92 | 100 | 25 | H |
| 5953.3 | 43.0 | 27.1 | 21.05 | 64.05 | 48.15 | | | 9.95 | 5.85 | 100 | 91 | H |

Conclusions

Product models "**CIS-PM01**" meets all of the Class B requirements of the FCC Part 15, Subpart B. Limits of radio disturbance characteristics of ITE).


(Refer to Test Specification and Test Results in the "LTA certification", page3 and 4.)

- Zigbee Mode: The highest internal source of an EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz.(The highest internal source of an EUT : 2.4 GHz)

Photograph of the Radiated Disturbance Measurements (Above 1GHz)



Photograph of the Radiated Disturbance Measurements (Below 1GHz)

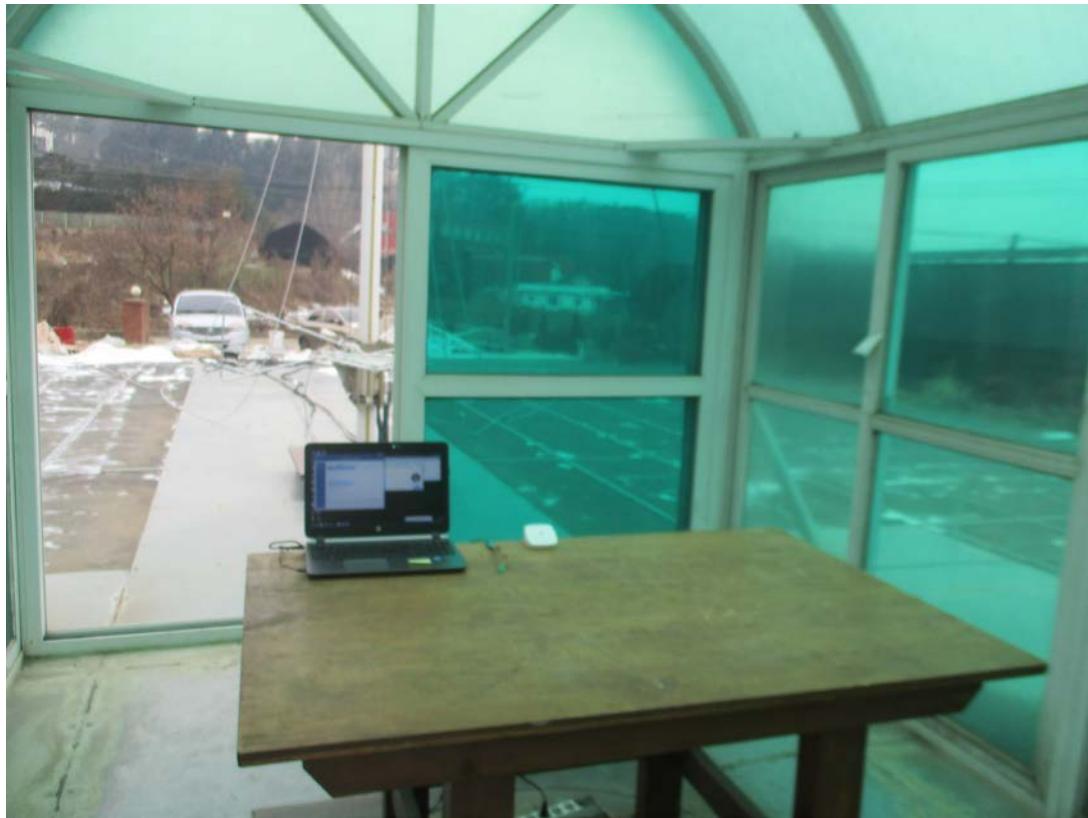

Photograph of the Equipment Under Test



Photograph of the Equipment Under Test



Photograph of the Equipment Under Test



Photograph of the Equipment Under Test

