

**TEST REPORT****Report No.: HK09071519-1****Sam Ash Music Corporation**

Application  
For  
Certification  
(Original Grant)  
**(FCC ID: CCRAG300)**

**Wireless Microphone**

Prepared and Checked by:



Terry Chan/sl  
Lead Engineer

Approved by:



Ho Wai Kin, Ben  
Senior Supervisor  
Date: August 28, 2009

- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

# INTERTEK TESTING SERVICES

---

## GENERAL INFORMATION

**Sam Ash Music Corporation**  
**BRAND NAME: Samson, MODEL: AG300**

**FCC ID: CCRAG300**

Grantee:	Sam Ash Music Corporation
Grantee Address:	262 Duffy Avenue, Hicksville, NY 11801, USA.
Contact Person:	Mr. Don Albanese
Tel:	631-784-2200
Fax:	631-784-2201
e-mail:	dalbanese@samsontech.com
Manufacturer:	N/A
Manufacturer Address:	N/A
Brand Name:	Samson
Model:	AG300
Type of EUT:	Transmitter
Description of EUT:	Wireless Guitar System
Serial Number:	N/A
FCC ID:	CCRAG300
Date of Sample Submitted:	July 30, 2009
Date of Test:	August 10, 2009
Report No.:	HK09071519-1
Report Date:	August 28, 2009
Environmental Coniditions:	Temperature: +10 to 40°C Humidity: 10 to 90%

# INTERTEK TESTING SERVICES

---

---

## SUMMARY OF TEST RESULT

**Sam Ash Music Corporation**  
**BRAND NAME: Samson, MODEL: AG300**

**FCC ID: CCRAG300**

TEST SPECIFICATION	REFERENCE	RESULTS
Power Output Measurement	74.861(e)(1)	Pass
Occupied Bandwidth	74.861(e)(3), 74.861(e)(5) and 74.861(e)(6)	Pass
Spurious Radiation Measurement	74.861(e)(6)	Pass
Frequency Tolerance	74.861(e)(4)	Pass
Modulation Characteristics Measurement	2.1047(a) and 2.1047(b)	Pass

Note: 1. The EUT uses a permanently attached antenna.

# INTERTEK TESTING SERVICES

---

## Table of Contents

<b>1.0</b>	<b><u>General Description</u></b>	1
1.1	Product Description	1
1.2	Related Submittal(s) Grants	1
1.3	Test Methodology	1
1.4	Test Facility	1
<b>2.0</b>	<b><u>System Test Configuration</u></b>	2
2.1	Justification	2
2.2	EUT Exercising Software	2
2.3	Special Accessories	2
2.4	Equipment Modification	2
2.5	Measurement Uncertainty	2
<b>3.0</b>	<b><u>RF Power Output</u></b>	3
<b>4.0</b>	<b><u>Occupied Bandwidth</u></b>	5
<b>5.0</b>	<b><u>Field Strength of Spurious Radiation</u></b>	7
<b>6.0</b>	<b><u>Frequency Stability - Voltage</u></b>	10
<b>7.0</b>	<b><u>Frequency Stability - Temperature</u></b>	12
<b>8.0</b>	<b><u>Modulation Characteristics - Audio Frequency Response</u></b>	14
<b>9.0</b>	<b><u>Modulation Characteristics - Modulation Limiting</u></b>	16
<b>10.0</b>	<b><u>Input Current and Voltage</u></b>	19
<b>11.0</b>	<b><u>Equipment Photographs</u></b>	20
<b>12.0</b>	<b><u>Product Labelling</u></b>	20
<b>13.0</b>	<b><u>Technical Specifications</u></b>	20
<b>14.0</b>	<b><u>Instruction Manual</u></b>	20
<b>15.0</b>	<b><u>Tune Up Procedure</u></b>	20
<b>16.0</b>	<b><u>Miscellaneous Information</u></b>	20
16.1	Discussion Pulse Desensitivity	20
16.2	Calculation of Average Factor	21
<b>17.0</b>	<b><u>Equipment List</u></b>	21

# INTERTEK TESTING SERVICES

---

## 1.0 General Description

### 1.1 Product Description

The Equipment Under Test (EUT) is a wireless guitar transmitter for its corresponding receiver. The main function of the EUT is used to transmit the audio signal via the AUX input to the corresponding receiver. And it can transmitting signal in 320 difference channels, from 639.025MHz to 647.000MHz with 0.025MHz channel spacing. It's powered by a 1.5VDC "AA" size battery, a battery low indicator, a power switch and one Mute switch on the side of the EUT's body are used to show the lower battery status, on/off the unit and mute the audio signal respectively.

Antenna Type : External, Integral

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

### 1.2 Related Submittal(s) Grants

The Certification procedure of receiver for this transmitter (with FCC ID: CCRA300) is being processed as the same time of this application.

### 1.3 Test Methodology

Radiated emission measurements was performed according to the procedures in ANSI C63.4 (2003) and ANSI/TIA/EIA-603-A-2004. Radiated measurements were performed in an Open Area Test Site. Preliminary scans were performed in the Open Area Test Site only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

### 1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located at Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong. This test facility and site measurement data have been placed on file with the FCC.

## INTERTEK TESTING SERVICES

---

### 2.0 **System Test Configuration**

#### 2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.4 (2003).

The device was powered from a 1.5VDC "AA" size battery.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The unit was operated standalone and placed in the center of the turntable.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

#### 2.2 EUT Exercising Software

There was no special software to exercise the device. Once the unit is powered up, it transmits the RF signal continuously.

#### 2.3 Special Accessories

There are no special accessories necessary for compliance of this product.

#### 2.4 Equipment Modification

Any modifications installed previous to testing by Sam Ash Music Corporation will be incorporated in each production model sold/leased in the United States.

No modifications were installed by Intertek Testing Services Hong Kong Ltd.

#### 2.5 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

## INTERTEK TESTING SERVICES

---

### 3.0 RF Power Output

#### Testing Procedures

1. The EUT shall be placed at 0.8m heights on a turntable vertically.
2. The test antenna shall be oriented initially for vertical polarization location 3m from the EUT to correspond to the frequency of the transmitter.
3. The output of the test antenna shall be connected to measuring receiver and the quasi-peak detector is used for the measurement.
4. The transmitter shall be switch on, if possible, without modulation and the measuring receiver shall be turned to the frequency of the transmitter under test.
5. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
6. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
7. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
8. The maximum signal level detected by the measuring receiver shall be noted.
9. The transmitter shall be replaced by a tuned dipole (substitution antenna).
10. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
11. The substitution antenna shall be connected to a calibrated signal generator.
12. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
13. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
14. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring received, that is equal to the level note input attenuator setting of the measuring receiver.
15. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
16. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
17. The measure of the effective radiated power is the larger of the two levels recorded, at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
18. Repeat above test procedures with the EUT placed horizontally.

# INTERTEK TESTING SERVICES

---

---

**Table 1**

**Transmission Power  
Pursuant to FCC Part 74.861(e)(1)**

Measured Frequency (MHz)	Measured Power (mW)	Limit (mW)	Margin (mW)
639.025	3.57	250	-246.43
643.000	2.47	250	-247.53
647.000	2.41	250	-247.59

Note: Negative sign in the margin column shows the value below limits.


## INTERTEK TESTING SERVICES

---

### 4.0 Occupied Bandwidth

#### Testing Procedures

1. Set-up the test equipment in the following configuration:

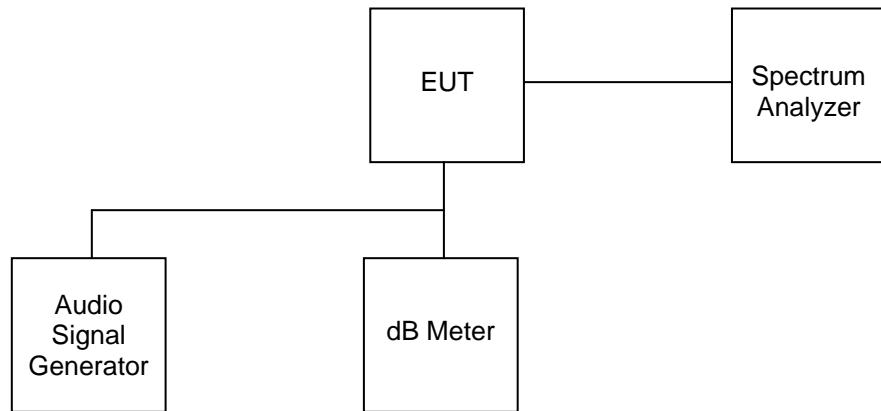

2. Other than single side band or independent sideband transmitters when modulated by a 2500Hz one at an input level 16dB greater than that necessary to produce 50 percent modulation. The input level shall be established at the frequency of maximum response of the audio modulation circuit.
3. The occupied bandwidth is measured with the spectrum analyzer set at 50kHz/div scan and 10dB/div.
4. The emission bandwidth shall not exceed the limit 200kHz.
5. The measured occupied bandwidth is 179.0kHz and 164.0kHz for carrier frequency of 643.025MHz and 647.000MHz respectively.

For electronic filing, the bandwidth plot is saved with filename: bw.pdf

## INTERTEK TESTING SERVICES

---

---

**Table 2 and Table 3**

**Occupied Bandwidth**

**Pursuant to FCC Section 74.861(e)(3), 74.861(e)(5) and 74.861(e)(6)**

1. Assigned Carrier Frequency: 639.025MHz
2. Measured Occupied Bandwidth in 26dB down: 179kHz

Mask Region	Attenuation from Unmodulated Carrier Emissions		
	Measured Result (dB)	Calculated Limit (dB)	Result
Carrier + 50.0kHz	-1.16	0	Pass
Carrier - 50.0kHz	-1.46	0	Pass
Carrier + 100.0kHz	-36.55	-25	Pass
Carrier - 100.0kHz	-30.35	-25	Pass
Carrier + 200.0kHz	-66.03	-35	Pass
Carrier - 200.0kHz	-66.25	-35	Pass

1. Assigned Carrier Frequency: 647.000MHz
2. Measured Occupied Bandwidth in 26dB down: 164kHz

Mask Region	Attenuation from Unmodulated Carrier Emissions		
	Measured Result (dB)	Calculated Limit (dB)	Result
Carrier + 50.0kHz	-6.31	0	Pass
Carrier - 50.0kHz	-0.17	0	Pass
Carrier + 100.0kHz	-41.92	-25	Pass
Carrier - 100.0kHz	-35.58	-25	Pass
Carrier + 200.0kHz	-61.95	-35	Pass
Carrier - 200.0kHz	-60.98	-35	Pass

## INTERTEK TESTING SERVICES

---

---

### 5.0 Field Strength of Spurious Radiation

#### Testing Procedures

Radiated emission measurements was performed according to the procedures in ANSI C63.4 (2003). All measurements were performed in Open Area Test Sites located at Roof Top of Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.

For electronic filing, the radiated emission configurations photograph is saved with filename: radiated photos.pdf

## INTERTEK TESTING SERVICES

---

**Table 4 and Table 5**

**Field Strength of Spurious Radiated  
Pursuant to FCC Section 74.861(e)(6)**

Assigned Frequency: 639.025MHz

Polarization	Frequency (MHz)	Net at 3m (dB $\mu$ V/m)	Attenuated below the Carrier Power (dB)	Minimum Attenuated below the Carrier Power Limit (dB)	Margin (dB)
V	1278.050	47.70	-55.20	-18.50	-36.70
V	1917.075	48.10	-54.80	-18.50	-36.30
V	2556.100	51.90	-51.00	-18.50	-32.50

Assigned Frequency: 643.000MHz

Polarization	Frequency (MHz)	Net at 3m (dB $\mu$ V/m)	Attenuated below the Carrier Power (dB)	Minimum Attenuated below the Carrier Power Limit (dB)	Margin (dB)
V	1286.000	47.30	-54.00	-16.90	-37.10
V	1929.000	47.80	-53.50	-16.90	-36.60
V	2572.000	51.80	-49.50	-16.90	-32.60

## INTERTEK TESTING SERVICES

---

**Table 6**

### **Field Strength of Spurious Radiated Pursuant to FCC Section 74.861(e)(6)**

Assigned Frequency: 647.000MHz

Polarization	Frequency (MHz)	Net at 3m (dB $\mu$ V/m)	Attenuated below the Carrier Power (dB)	Minimum Attenuated below the Carrier Power Limited (dB)	Margin (dB)
V	1294.000	47.40	-53.80	-16.80	-37.00
V	1941.000	47.50	-53.70	-16.80	-36.90
V	2588.000	51.40	-49.80	-16.80	-33.00

Notes: 1. Quasi-peak data for emission below 1000MHz.

2. Negative sign in margin column shows the value below the limit.

3. Any emissions and any other harmonics which are attenuated more than 20dB below the permissible value need not be recorded.

4. Horn antenna and average detector is used for emission over 1000MHz.

\* Calculated limit =  $43 + 10 \log_{10}$  (Mean Output Power in Watts) dB


## INTERTEK TESTING SERVICES

---

### 6.0 Frequency Stability - Voltage

#### Testing Procedures

1. Set-up the test equipment in the following configuration:

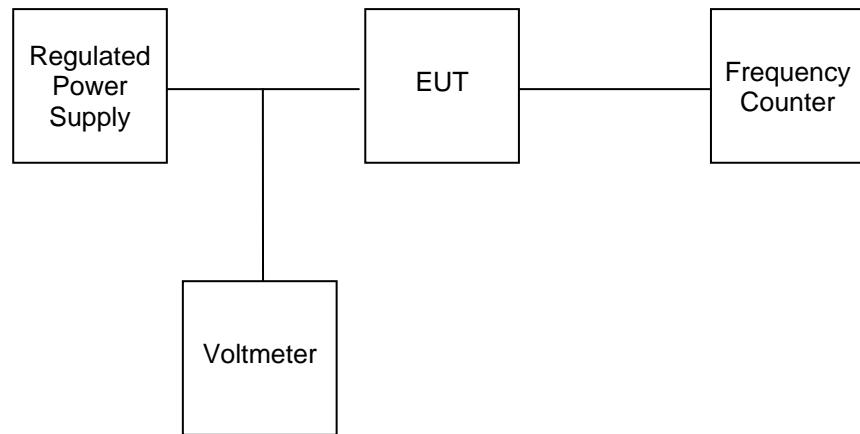

2. For battery powered equipment, reduce primary supply voltage to the battery operating end point voltage which is specified by the manufacturer.

## INTERTEK TESTING SERVICES

---

---

**Table 7**

### **Power Supply Voltage Stability Pursuant to FCC Section 2.1055**

Supply Voltage: 1.5VDC

The manufacturer specified battery end point: 1.1VDC

Limit: 0.005% or 50ppm

End Point Voltage (V)	Assigned Frequency (MHz)	Measured Frequency (MHz)	Deviation (kHz)	Deviation (ppm)
1.1	639.025	639.0230	-2.0	-3.11
1.1	647.000	647.0010	+1.0	+1.55

Note: Measurement were made from the battery operating voltage down to the battery's operating end point.


## INTERTEK TESTING SERVICES

---

### 7.0 Frequency Stability - Temperature

#### Testing Procedures

1. Set-up the test equipment in the following configuration:

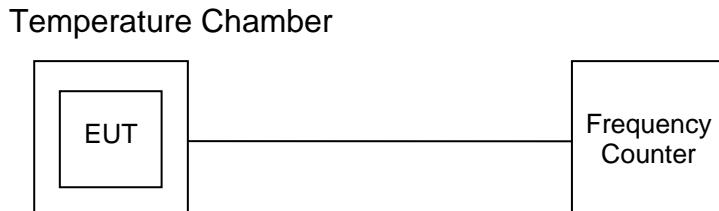

2. Set the Temperature Chamber to  $-30^{\circ}\text{C}$  and stabilize the EUT temperature for one hour. Turn the transmitter ON for two minutes.
3. Turn the EUT OFF.
4. Repeat the above procedure with  $10^{\circ}\text{C}$  intervals from  $-30^{\circ}\text{C}$  to  $50^{\circ}\text{C}$ .

---

---

## INTERTEK TESTING SERVICES

---

**Table 8**

**Temperature Stability  
Pursuant to FCC Section 2.1055**

Assigned Frequency (MHz)	Temperature (°C)	Measured Frequency (MHz)	Deviation (Hz)	Deviation (ppm)
639.025	-30	639.024214	-786	-1.23
	-20	639.024120	-880	-1.38
	-10	639.024056	-944	-1.48
	0	639.023970	-1030	-1.61
	10	639.023840	-1160	-1.82
	20	639.023710	-1290	-2.02
	30	639.023623	-1377	-2.15
	40	639.023540	-1460	-2.28
	50	639.023475	-1525	-2.39
643.025	-30	643.024216	-784	-1.22
	-20	643.024163	-837	-1.30
	-10	643.024075	-925	-1.44
	0	643.023956	-1044	-1.62
	10	643.023837	-1163	-1.81
	20	643.023742	-1258	-1.96
	30	643.023637	-1363	-2.12
	40	643.023561	-1439	-2.24
	50	643.023427	-1575	-2.45
647.000	-30	646.999610	-390	-0.60
	-20	646.999537	-463	-0.72
	-10	646.999480	-520	-0.80
	0	646.999372	-628	-0.97
	10	646.999225	-775	-1.20
	20	646.999184	-811	-1.26
	30	646.999103	-897	-1.39
	40	646.999017	-983	-1.52
	50	646.998910	-1090	-1.68

Note: Measurements are made between -30°C and +50°C at intervals not greater than 10°C. Sufficient time is allowed for temperature stabilization.  
Limit: 0.005% or 50ppm.


## INTERTEK TESTING SERVICES

---

### 8.0 Modulation Characteristics - Audio Frequency Response

#### Testing Procedures

1. Set-up the test equipment in the following configuration:

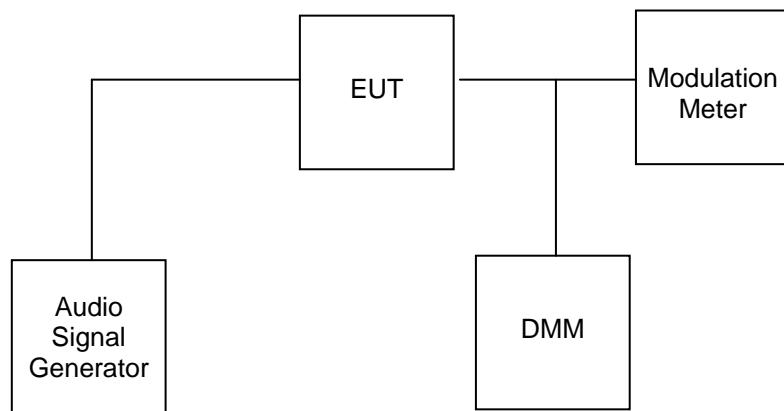

2. Apply a 1000Hz tone and adjust the audio frequency generator to produce 20% of the rated system deviation.
3. Set the meter to measure the deviation and record the deviation reading.
4. Record the DMM reading as  $V_{REF}$ .
5. Set the audio frequency generator to the desired test frequency between 100Hz to 5000Hz.
6. Vary the audio frequency generator output level until the deviation reading that was recorded in step 3 is obtained.
7. Record the DMM reading as  $V_{FREQ}$ .
8. Calculate the audio frequency response at the present frequency as:  
$$\text{audio frequency response} = 20\log_{10} (V_{FREQ}/V_{REF})$$
9. Repeat steps 5 through 9 for all the desired test frequencies.

For electronic filing, the plot is saved with filename: afr.pdf

---

---

## INTERTEK TESTING SERVICES

---

**Table 9 and Table 10**

**Audio Frequency Response  
Pursuant to FCC Section 2.1047(a)**

Assigned Frequency: 643.025MHz

Modulation Frequency (Hz)	Input Level (mV)	Audio Frequency Response
100	20.79	6.71
200	18.40	5.65
300	17.58	5.25
400	16.39	4.65
500	14.91	3.82
600	13.42	2.91
700	12.42	2.24
800	11.51	1.58
900	10.29	0.60
1000	9.60	0.00
1500	7.43	-2.23
2000	5.40	-5.00
2500	4.39	-6.80
3000	3.56	-8.62
3500	2.98	-10.16
4000	2.57	-11.45
4500	2.27	-12.52
5000	1.97	-13.76

Assigned Frequency: 647.000MHz

Modulation Frequency (Hz)	Input Level (mV)	Audio Frequency Response
100	25.27	6.52
200	22.04	5.33
300	18.43	3.78
400	17.79	3.47
500	16.31	2.72
600	15.23	2.12
700	14.36	1.61
800	13.21	0.89
900	12.30	0.27
1000	11.93	0.00
1500	9.00	-2.45
2000	6.43	-5.37
2500	5.33	-7.00
3000	4.43	-8.60
3500	3.70	-10.17
4000	3.07	-11.79
4500	2.68	-12.97
5000	2.40	-13.93


## INTERTEK TESTING SERVICES

---

### 9.0 Modulation Characteristics - Modulation Limiting

#### Testing Procedures

1. Set-up the test equipment in the following configuration:

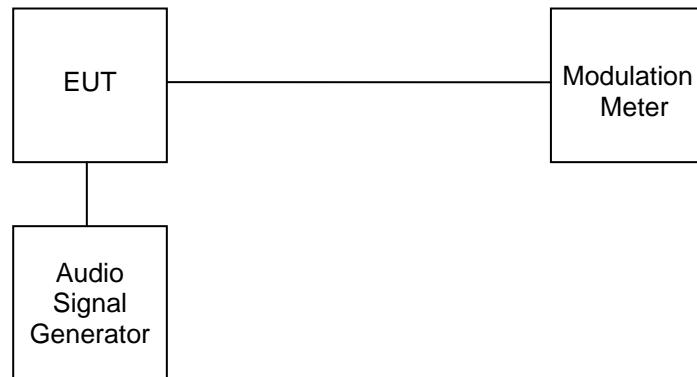

2. Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
3. Apply a 1000Hz modulating signal to the transmitter from the audio signal generator, and adjust the level to obtain 60% of full rated system deviation.
4. Increase the level from the audio frequency generator from 100mV to 4000mV.
5. Recording the maximum deviation.
6. Repeat the above procedures with frequency 500Hz, 1000Hz, 2500Hz and 5000Hz.

For electronic filing, the plot is saved with filename: ml.pdf

## INTERTEK TESTING SERVICES

---

**Table 11**

### **Modulation Limiting Characteristics Pursuant to FCC Section 2.1047(b)**

Assigned Frequency: 643.025MHz

Modulation Input (mV)	Peak Frequency Deviation (kHz)			
	at 500Hz	at 1000Hz	at 2500Hz	at 5000Hz
100	19.60	24.30	36.82	14.10
120	21.60	26.70	39.70	14.80
200	28.20	34.50	48.40	16.30
250	31.60	38.20	51.70	16.70
300	34.70	41.30	54.00	16.90
400	40.70	46.20	56.80	17.20
450	42.20	48.10	57.50	17.20
500	44.30	49.70	58.10	17.10
600	47.90	52.40	58.90	17.30
700	50.60	54.60	59.40	17.20
800	53.60	52.90	59.60	17.30
900	55.40	51.30	57.10	17.50
1000	56.20	50.30	52.90	17.40
1200	57.60	49.70	49.50	17.40
1500	64.30	48.10	47.30	17.40
2000	68.30	46.80	46.20	17.20
2500	71.60	44.00	46.10	17.10
3000	71.20	42.00	46.00	17.00
3500	70.60	41.50	45.00	16.50
4000	69.90	41.00	44.00	16.00

## INTERTEK TESTING SERVICES

---

**Table 12**

### **Modulation Limiting Characteristics Pursuant to FCC Section 2.1047(b)**

Assigned Frequency: 647.000MHz

Modulation Input (mV)	Peak Frequency Deviation (kHz)			
	at 500Hz	at 1000Hz	at 2500Hz	at 5000Hz
120	19.80	24.00	35.20	13.00
150	22.10	26.00	38.59	13.71
200	25.70	30.00	42.70	14.30
250	28.70	34.20	45.51	14.60
300	31.40	37.00	47.80	14.88
400	36.10	41.00	50.00	15.20
450	38.00	42.80	51.00	15.10
500	39.60	44.30	51.39	15.10
600	43.10	46.70	52.20	15.30
700	45.49	48.60	52.50	15.20
800	47.90	50.10	52.80	15.30
900	50.30	47.10	51.80	15.40
1000	51.80	44.67	46.80	15.40
1200	53.90	45.09	43.77	15.30
1500	57.17	44.51	41.87	15.30
2000	61.00	42.93	40.91	15.20
2500	63.00	42.10	40.10	15.10
3000	63.00	42.00	40.00	15.10
3500	63.10	41.50	40.00	15.00
4000	62.50	41.00	40.00	15.00

## INTERTEK TESTING SERVICES

---

---

### 10.0 Input Current and Voltage

Input Current & Voltage Pursuant to FCC Section 2.1033(c)(8)

The D.C. input current and voltage to final R.F. stage.

Assigned Frequency : 639.025MHz to 647.000MHz

Input DC Voltage : 1.2VDC

Input DC current : 120mA

## INTERTEK TESTING SERVICES

---

### 11.0 Equipment Photographs

For electronic filing, the photographs are saved with filename: external photos.pdf and internal photos.pdf.

### 12.0 Product Labelling

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

### 13.0 Technical Specifications

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

### 14.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

### 15.0 Tune Up Procedure

In order to satisfy the FCC Section 2.1033(c)(9) requirement, a preliminary copy of the tune up procedure is saved with filename: tuneup.pdf.

### 16.0 Miscellaneous Information

The miscellaneous information includes details of the test procedure.

#### 16.1 Discussion Pulse Desensitivity

Pulse desensitivity is not applicable for this device. Since the transmitter transmits the RF signal continuously.

## INTERTEK TESTING SERVICES

---

### 16.2 Calculation of Average Factor

The average factor is not applicable for this device as the transmitted signal is a continuously signal.

### 17.0 Equipment List

#### 1) Radiated Emissions Test

Equipment	EMI Test Receiver	Biconical Antenna	Log Periodic Antenna
Registration No.	EW-0014	EW-0954	EW-0446
Manufacturer	R&S	EMCO	EMCO
Model No.	ESVS30	3104C	3146
Calibration Date	Jun. 01, 2009	Sep. 30, 2008	Oct. 02, 2008
Calibration Due Date	Jun. 01, 2010	Mar. 30, 2010	Apr. 02, 2010

#### 2) Stability, Bandwidth and Modulation Testing

Equipment	Communication Service Monitor	Temperature & Humidity Chamber	Spectrum Analyzer
Registration No.	EW-1775	EW-2044	EW-2249
Manufacturer	R&S	YOUNGCHENN	R&S
Model No.	CMS54	LP-60H	FSP30
Calibration Date	Sep. 12, 2008	Jan. 14, 2009	Jun. 25, 2009
Calibration Due Date	Sep. 12, 2009	Jan. 18, 2010	Jun. 25, 2010