

Date : 2004-10-04 **TEST REPORT** Page 1 of 17

No.: HM152310

Applicant: Fisher Price Inc.

636 Girard Ave East Aurora, N.Y. USA, 14052

Description of Samples: Model name: Dual 900MHz Long Range Monitor

Model no.: G4594
Brand name: Fisher-Price
FCC ID: CCTB1474-05

Date Samples Received: 2004-08-18

Date Tested: 2004-09-14

Investigation Requested: FCC Part 15 Subpart C

Conclusions: The submitted product <u>COMPLIED</u> with the

requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on

Section 2.2 in this Test Report.

Remarks: For additional models details, see page 5.

K C Lee, EMC

for Chief Executive

This report shall not be reproduced unless with prior written approval from the Hong Kong Standards and Testing Centre.



Date : 2004-10-04 **TEST REPORT** Page 2 of 17

No.: HM152310

CONTENT:

	Cover Content	Page 1 of 17 Page 2-3 of 17
<u>1.0</u>	General Details	
1.1	Test Laboratory	Page 4 of 17
1.2	Applicant Details Applicant HKSTC Code Number for Applicant Manufacturer	Page 4 of 17
1.3	Equipment Under Test [EUT] Description of EUT operation	Page 5 of 17
1.4	Date of Order	Page 5 of 17
1.5	Submitted Sample	Page 5 of 17
1.6	Test Duration	Page 5 of 17
1.7	Country of Origin	Page 5 of 17
1.8	Additional Information of EUT	Page 6 of 17
<u>2.0</u>	Technical Details	
2.1	Investigations Requested	Page 7 of 17
2.2	Test Standards and Results Summary	Page 7 of 17
<u>3.0</u>	<u>Test Results</u>	
3.1	Emission	Page 8-14 of 17



Date : 2004-10-04 **TEST REPORT** Page 3 of 17

No.: HM152310

Appendix A

List of Measurement Equipment

Page 15 of 17

Appendix B

Photographs Page 16-17 of 17



No.: HM152310

1.0 General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd. EMC Laboratory 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

1.2 Applicant Details Applicant

Fisher Price Inc. 636 Girard Ave East Aurora, N.Y. USA, 14052

HKSTC Code Number for Applicant

EXE001

Manufacturer

Excel Engineering (HK) Co., Ltd. Unit 1101, 11/F., Lippo Sun Plaza, 28 Canton Road, Tsimshatsui, Kowloon, Hong Kong



No.: HM152310

1.3 Equipment Under Test [EUT] Description of Sample

Product: Dual 900MHz Long Range Monitor Manufacturer: Excel Engineering (HK) Co., Ltd.

Brand Name: Fisher-Price Model Number: G4594 Input Voltage: 120Va.c.

Additional Product Name: 900MHz Long-Range Monitor

Additional Model Number: B1474

The AC/DC Adaptor used for the tests was provided by the applicant with the following details: Model Number: DV-6050, Input: 120Vd.c. 60Hz 4W, Output: 6Vd.c.

50mA

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a Fisher Price Inc., Dual 900MHz Long Range Monitor. The transmitter is a 2 button transmitter. The EUT continues to transmit while button is being pressed, Modulation by LCR.

1.4 Date of Order

2004-08-18

1.5 Submitted Sample(s):

4 Samples per model

1.6 Test Duration

2004-09-14

1.7 Country of Origin

China



Kong Hong **Standards** and **Testing Centre**

TEST REPORT Date: 2004-10-04 Page 6 of 17

No.: HM152310

1.8 **Additional Information of EUT**

	Submitted	Not Available
User Manual		
Part List		
Circuit Diagram		
Printed Circuit Board [PCB] Layout		
Block diagram		
FCC ID Label	\boxtimes	



Date : 2004-10-04 **TEST REPORT** Page 7 of 17

No.: HM152310

2.0 Technical Details

2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15 and ANSI C63.4:2003 for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary								
Test Condition	Test Condition Test Requirement Test Method Class / Test Result							
			Severity	Pass	Failed	N/A		
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.249	ANSI C63.4:2003	N/A	\boxtimes				
Conducted Emissions on AC, 0.15MHz to 30MHz	FCC 47CFR 15.207	ANSI C63.4:2003	Class B	\boxtimes		1		

Note: N/A - Not Applicable



No.: HM152310

3.0 Test Results

3.1 Emission

3.1.1 Radiated Emissions


Test Requirement: FCC 47CFR 15.249
Test Method: ANSI C63.4:2003
Test Date: 2004-09-14
Mode of Operation: On mode

Test Method:

The sample was placed 0.8m above the ground plane on the OATS *. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

*: OATS [Open Area Test Site] located at HKSTC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 90657.

Test Setup:

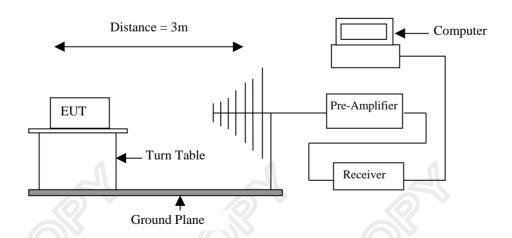



Date : 2004-10-04 **TEST REPORT** Page 9 of 17

No.: HM152310

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.249]:

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Millivolts/meter]	Field Strength of Fundamental Emission [microvolts/meter]
902-928	50	500
2400-2483.5	50	500
5725-5875	50	500
24000-22500	250	2500

Results: Channel A

	Field Strength of Fundamental Emissions Peak Value						
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field	
	Level @3m	Factor	Strength	Strength		Polarity	
MHz	dBµV/m	dBµV/m	dBµV/m	μV/m	μV/m		
906	61.4	26.0	87.4	23,442.3	50,000	Horizontal	
1812					5,000	Vertical	
2718					5,000	Vertical	
3624					5,000	Vertical	
4530					5,000	Vertical	
5436		No Emissi	on Detected		5,000	Vertical	
6342					5,000	Vertical	
7248					5,000	Vertical	
8154					5,000	Vertical	
9060					5,000	Vertical	

Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz ±4.1dB



Date : 2004-10-04 **TEST REPORT** Page 10 of 17

No.: HM152310

Results: Channel A

Field Strength of Fundamental Emissions						
			Average			
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field
	Level @3m	Factor	Strength	Strength		Polarity
MHz	dBµV/m	dBµV/m	dBµV/m	μV/m	μV/m	
906	61.3	26.0	87.3	23,173.9	50,000	Horizontal
1812					5,000	Vertical
2718					5,001	Vertical
3624					5,002	Vertical
4530					5,003	Vertical
5436		No Emissi	on Detected		5,004	Vertical
6342					5,005	Vertical
7248			5,006	Vertical		
8154					5,007	Vertical
9060					5,008	Vertical

Results: Channel B

	Field Strength of Fundamental Emissions						
			Peak Value				
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field	
	Level @3m	Factor	Strength	Strength		Polarity	
MHz	dBµV/m	dBµV/m	dBµV/m	μV/m	μV/m		
907	61.2	26.0	87.2	22,908.7	50,000	Horizontal	
1813					5,000	Vertical	
2720					5,000	Vertical	
3626					5,000	Vertical	
4533					5,000	Vertical	
5440		No Emissi	on Detected		5,000	Vertical	
6346					5,000	Vertical	
7253			5,000	Vertical			
8159					5,000	Vertical	
9066					5,000	Vertical	

Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz ±4.1dB



Date : 2004-10-04 **TEST REPORT** Page 11 of 17

No.: HM152310

Results: Channel B

	Field Strength of Fundamental Emissions						
			Average				
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field	
	Level @3m	Factor	Strength	Strength		Polarity	
MHz	dBµV/m	dBµV/m	dBµV/m	μV/m	μV/m		
907	61.0	26.0	87.0	22,387.2	50,000	Horizontal	
1813		_			5,000	Vertical	
2720					5,000	Vertical	
3626					5,000	Vertical	
4533					5,000	Vertical	
5440		No Emissi	on Detected		5,000	Vertical	
6346					5,000	Vertical	
7253			5,000	Vertical			
8159					5,000	Vertical	
9066					5,000	Vertical	

Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz ±4.1dB



Date : 2004-10-04 **TEST REPORT** Page 12 of 17

No.: HM152310


3.1.2 Conducted Emissions (0.15MHz to 30MHz)

Test Requirement: FCC 47CFR 15.207
Test Method: ANSI C63.4:2003
Test Date: 2004-09-14
Mode of Operation: Tx mode

Test Method:

The test was performed in accordance with ANSI C63.4:2003, with the following: an initial measurement was performed in peak and average detection mode on the live line. Any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

Test Setup:

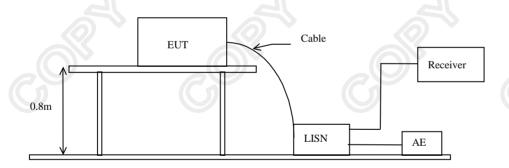



Date : 2004-10-04 **TEST REPORT** Page 13 of 17

No.: HM152310


Limits for Conducted Emissions (FCC 47 CFR 15.107):

Frequency Range	Quasi-Peak Limits	Average
[MHz]	[dBµV]	[dBµV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

^{*} Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi -Peak and Average) in the following diagram labelled as (QP and AV).

Results: Channel A

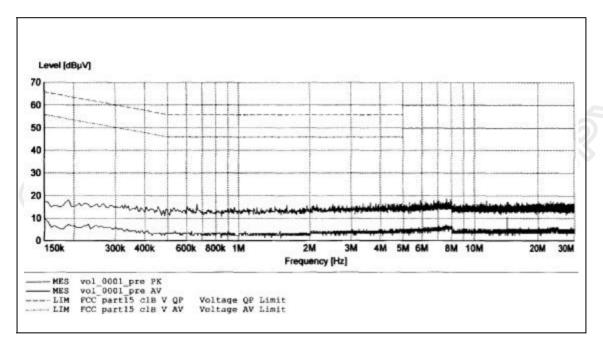

		Quasi-peak		Ave	rage		
Conductor	Frequency	Level	Limit	Level	Limit		
Live or Neutral	MHz	dBμV	dBμV	dΒμV	dBμV		
NO EMISSION DETECTED WITHIN 20dB OF THE FCC LIMITS.							

Remarks:

Calculated measurement uncertainty: ±2.8dB



Date : 2004-10-04 **TEST REPORT** Page 14 of 17

No.: HM152310


Limits for Conducted Emissions (FCC 47 CFR 15.107):

Frequency Range	Quasi-Peak Limits	Average
[MHz]	[dBµV]	[dBµV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

^{*} Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi -Peak and Average) in the following diagram labelled as (QP and AV).

Results: Channel B

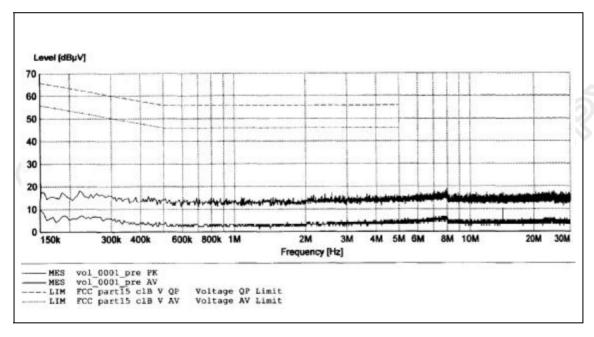

		Quasi-peak		Ave	rage	
Conductor	Frequency	Level	Limit	Level	Limit	
Live or Neutral	MHz	dΒμV	dBμV	dΒμV	dΒμV	
NO EMISSION DETECTED WITHIN 20dB OF THE FCC LIMITS.						

Remarks:

Calculated measurement uncertainty: ±2.8dB



Date : 2004-10-04 **TEST REPORT** Page 15 of 17

No. : HM152310

Appendix A

List of Measurement Equipment

Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL
EM007	SPECTRUM ANALYZER	HEWLETT PACKARD	HP85660B	3144A21192	15/06/04
EM008	SPECTRUM ANALYZER DISPLAY	HEWLETT PACKARD	HP85662A	3144A20514	15/06/04
EM009	QUASI PEAK ADAPTOR	HEWLETT PACKARD	HP85650A	3303A01702	15/06/04
EM010	RF PRESELECTOR	HEWLETT PACKARD	HP85685A	3221A01410	15/06/04
EM011	ATTENNUATOR/SWITCH	HEWLETT PACKARD	HP11713A	2508A10595	15/06/04
EM012	PRE-AMPLIFIER	HEWLETT PACKARD	HP8449B	3008A00262	15/06/04
EM013	CONTROLLER (COMPUTER), COLOR MONITOR, KEYBOARD & MOUSE FLOPPY DRIVE	HEWLETT PACKARD HEWLETT PACKARD HEWLETT PACKARD	HP9000 HP A1097C HP9133L	6226A60314 3151J39517 2623A02468	15/06/04
EM020	HORN ANTENNA	EMCO	3115	4032	15/06/04
EM022	LOOP ANTENNA	EMCO	6502	1189-2424	04/08/00
EM072	SIGNAL GENERATOR	HEWLETT PACKARD	8640B	1948A11892	N/A
EM083	HKSTC OPEN AREA TEST SITE	HKSTC	N/A	N/A	08/11/02
EM131	PORTABLE SPECTRUM ANALYSER	HEWLETT PACKARD	8595EM	3710A00155	13/01/04
EM145	EMI TEST RECEIVER	R&S	ESCS 30	830245/021	02/08/03
EM219	BICONILOG ANTENNA	EMCO	3142C	00029071	28/10/03
EM195	ANTENNA POSITIONING MAST	EMCO	2075	2368	N/A
EM196	MULTI-DEVICE CONTROLLER	EMCO	2090	1662	N/A

Conducted Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL
EM078	VARIAC	SHANGHAI VOLTAGE	TDGC-3/0.5	N/A	CM
EM081	SMALL SCREENED ROOM	MIKO INST HK	N/A	N/A	17/10/03
EM119	LISN	R&S	ESH3-Z5	0831.5518.52	01/10/02
EM127	ISOLATION TRANSFORMER 220 TO 300	WING SUN	N/A	N/A	CM
EM142	PULES LIMITER	R&S	ESH3Z2	357.8810.52	07/07/03
EM181	EMI TEST RECEIVER	R&S	ESIB7	100072	06/01/04
EM154	SHIELDING ROOM	SIEMENA MATSUSHITA COMPONENTS	N/A	803-740-057- 99A	17/10/03
EM197	LISN	EMCO	4825/2	1193	08/04/03

Remarks:

CM Corrective Maintenance N/A Not Applicable or Not Available

TBD To Be Determined



No.: HM152310

Appendix B

Photographs of EUT

Front View of the product



Rear View of the product



Inner Circuit Top View



Inner Circuit Bottom View





No.: HM152310

Photographs of EUT

Measurement of Radiated Emission Test Set Up



Measurement of Conducted Emission Test Set Up



**** End of Document ****

香港新界大埔工業村大宏街 10 號