


ALL INFORMATION CONTAINED HEREIN IS THE PROPERTY OF HONEYWELL AND IS CONSIDERED PROPRIETARY AND SUBJECT TO RETURN UPON DEMAND. ACCEPTANCE AND RETENTION HEREOF SIGNIFIES AGREEMENT BY THE RECIPIENT THAT THE INFORMATION WILL NOT BE DISCLOSED TO OTHERS OR USED CONTRARY TO THE INTERESTS OF HONEYWELL WITHOUT PRIOR WRITTEN PERMISSION.

REVISIONS							
EN	REV	DESCRIPTION	CHK	DATE	APVD	DATE	
13360	A	PILOT RELEASE	RS	03/02	RS	03/02	
13637	B	PRODUCTION RELEASE	RS	03/03	RS	03/03	
14627	C	REVISED PER ECN	RS	03/05	RS	03/05	
14704	D	REVISED PER ECN	TRP	05/05	TRP	05/05	
14788	E	REVISED PER ECN	RS	06/05	RS	06/05	
14908	F	REVISED PER ECN	TRP	10/05	RS	10/05	
16047	G	REVISED PER ECN	RS	06/07	RS	06/07	

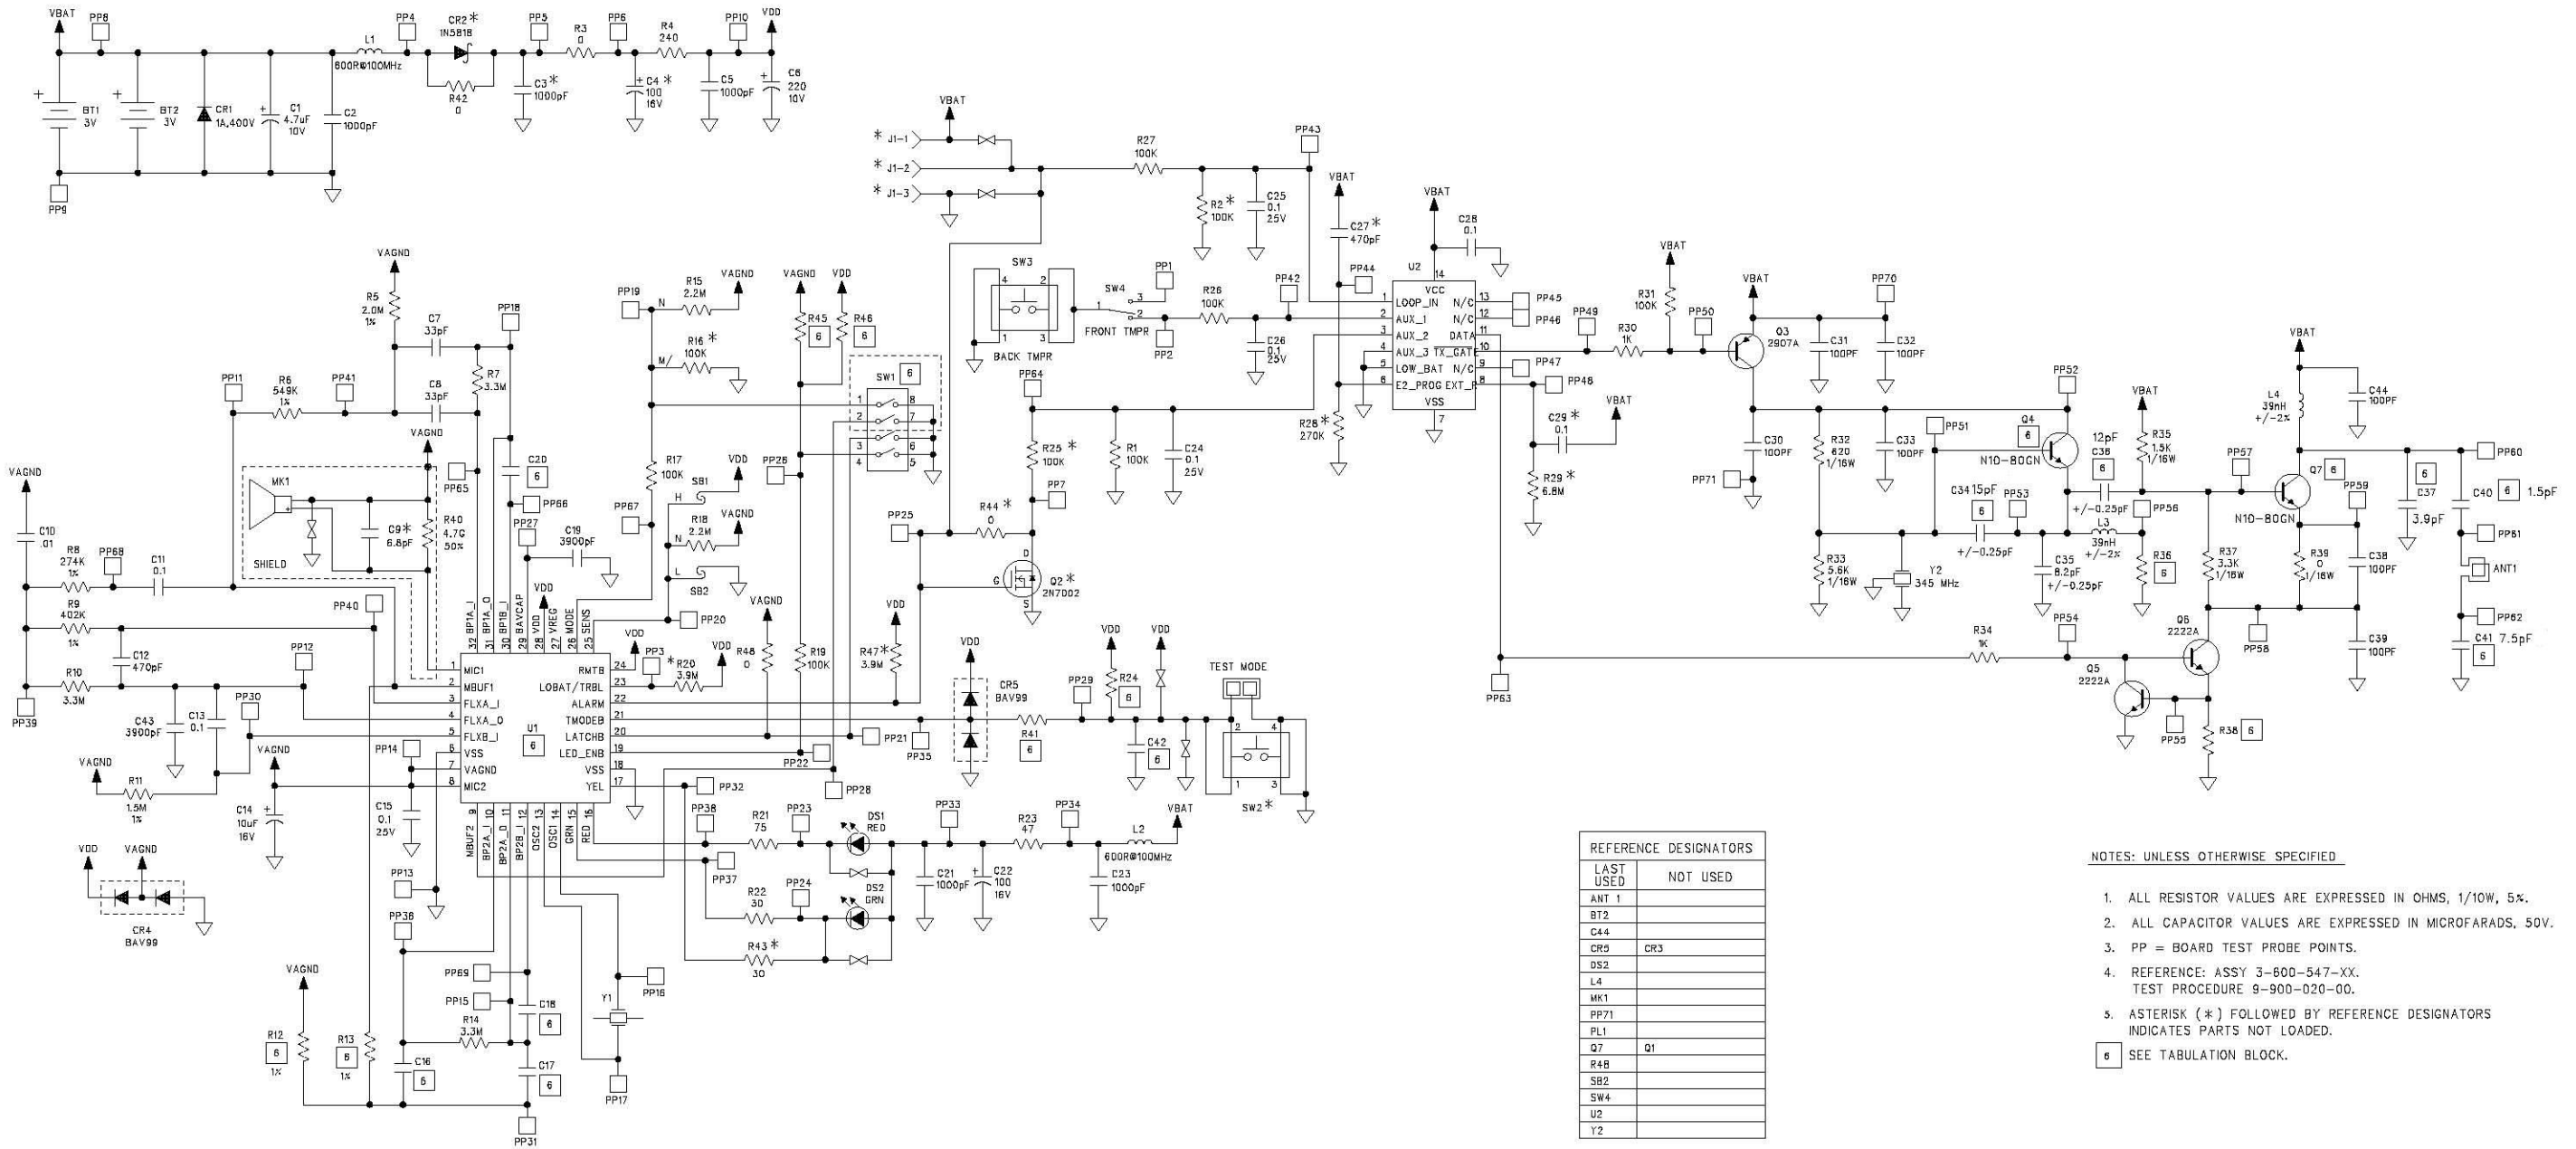

REFERENCE DESIGNATORS	
LAST USED	NOT USED
ANT 1	
BT2	
C44	
CR9	CR3
DS2	
L4	
MK1	
PP71	
PL1	
Q7	Q1
R4B	
SB2	
SW4	
U2	
Y2	

NOTES: UNLESS OTHERWISE SPECIFIED

- ALL RESISTOR VALUES ARE EXPRESSED IN OHMS, 1/10W, 5%.
 - ALL CAPACITOR VALUES ARE EXPRESSED IN MICROFARADS, 50V.
 - PP = BOARD TEST PROBE POINTS.
 - REFERENCE: ASSY 3-600-547-XX.
TEST PROCEDURE 9-900-020-00.
 - ASTERISK (*) FOLLOWED BY REFERENCE DESIGNATORS INDICATES PARTS NOT LOADED.
- 6 SEE TABULATION BLOCK.

6 TABULATION BLOCK																
ASSY	U1 (ASIC)	C16	C17	C18	C20	C42	R12	R13	R24	R41	R45	R46	SW1	Q4	Q7	R36
-01	5-428-006-01	68pF	68pF	680pF	680pF	1000pF	11K	59K	NL	1K	NL	3.9M	2 POS	MMBR911	MMBR911	82
-02	5-428-001-02	33pF	33pF	1000pF	1000pF	.1	33.2K	69.8K	10M	100K	2.2M	NL	2 POS	MMBR911	MMBR911	82
-03	5-428-001-02	33pF	33pF	1000pF	1000pF	.1	33.2K	69.8K	10M	100K	2.2M	NL	2 POS	N10-BOGN	N10-BOGN	220

NL = NOT LOADED
L = LOADED

U1-26 STATES	U1-25 STATES
N = NORMAL	H = +2dB
M/ = MED., SENS.	N = NORMAL
	L = -2dB

		FOLSOM, CA 95630	
SCHEMATIC, PCB, 5853			
APPROVALS	DATE	SIZE	CODE IDENT NO
DWN ROY V.K.	03/02	B	
CHK R. SMITH	03/02		
ENGR R. SMITH	03/02		
CONTRACT NO	SCALE NONE	DO NOT SCALE DRAWING	SHEET 1 OF 1