


§ 15.209.(e)
The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage.

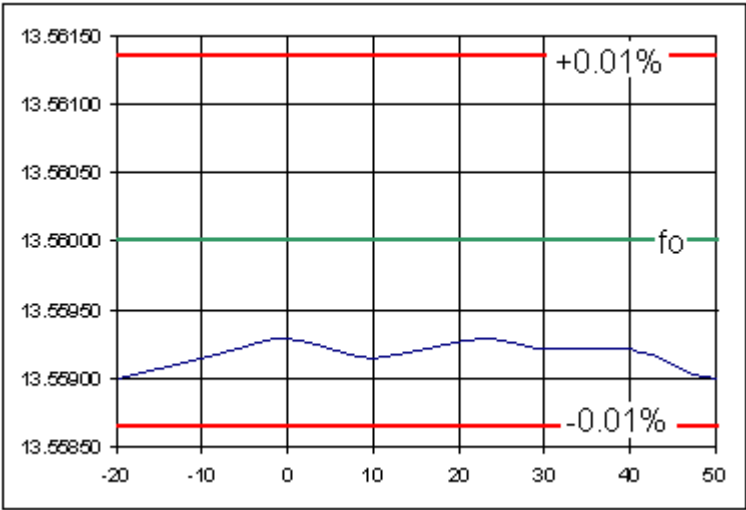

TEMP [°] C:	FREQ (MHz):
50	13.55900
40	13.55921
30	13.55921
20	13.55929
10	13.55914
0	13.55929
-10	13.55914
-20	13.55900

§ 15.209. (e) (cont.):
The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

	SUPPLY VOLT:	TEMP [°] C:	FREQ (MHz):
(85% NOMINAL)	10.625 VDC	20	13.55929
(NOMINAL)	12.500 VDC	20	13.55929
(115% NOMINAL)	14.375 VDC	20	13.55929