

Radio test report 20103449300

based on:

- FCC part 15; subpart C; section 15.209 and 15.249
(10-1-09 edition)

Wireless Intrusion Motion Detector
Interlogix
RCR-50
RCR-C
RCR-PET

Contents

MAIN MODULE.....	3
1.....INTRODUCTION	3
2.....PRODUCT	4
3.....TEST SCHEDULE	5
4.....PRODUCT DOCUMENTATION.....	5
5.....OBSERVATIONS AND COMMENTS	6
6.....MODIFICATIONS TO THE SAMPLE	6
7.....SUMMARY.....	6
8.....CONCLUSIONS	7
TEST RESULTS MODULE.....	8
1.....GENERAL INFORMATION	8
1.1 Equipment information	8
2.....EMISSION TESTS	9
2.1 Field strength of intentional signal.....	9
2.2 Field strength of unwanted emissions 30 - 1000 MHz.....	11
2.3 Field strength of unwanted emissions > 1000 MHz.....	13
USED TEST EQUIPMENT MODULE.....	18
REVISION HISTORY	20

This report comprises of three modules. The total number of pages is: 20

Main module

1 Introduction

This report contains the result of tests performed by:

Telefication B.V.
Edisonstraat 12a
6902 PK Zevenaar
The Netherlands

Telefication complies with the accreditation criteria for test laboratories as laid down in ISO/IEC 17025:2005. The accreditation covers the quality system of the laboratory as well as the specific activities as described in the authorized annex bearing the accreditation number L021 and is granted on 30 November 1990 by the Dutch Council For Accreditation (RvA: Raad voor Accreditatie). The contents of this test report, if reproduced, shall be copied in full, unless special consent in writing for reproduction in part is granted by Telefication. Copyright of this test report is reserved to Telefication.

Ordering party:

Company name : UTC Fire & Security B.V.
Address : Kelvinstraat 16
Zipcode : 6003 DH
City/town : Weert
Country : The Netherlands
Date of order : 3 June 2010

2 Product

A sample of the following product was submitted for testing:

Product description	:	Wireless Intrusion Motion Detector
Manufacturer	:	UTC Fire & Security B.V.
Trade mark	:	Interlogix
Type designation	:	RCR-50
FCC ID	:	CGGAA3
Hardware version	:	--
Serial number	:	--
Software release	:	--

Variant 1

Product description	:	Wireless Intrusion Motion Detector
Manufacturer	:	UTC Fire & Security B.V.
Trade mark	:	Interlogix
Type designation	:	RCR-C
FCC ID	:	CGGAA3
Hardware version	:	--
Serial number	:	--
Software release	:	--

Variant 2

Product description	:	Wireless Intrusion Motion Detector
Manufacturer	:	UTC Fire & Security B.V.
Trade mark	:	Interlogix
Type designation	:	RCR-PET
FCC ID	:	CGGAA3
Hardware version	:	--
Serial number	:	--
Software release	:	--

Remark:

The RCR-C, RCR-PET and RCR-50 are based on the same schematics and PCB lay-out.

They only differ in lens.

3 Test schedule

Tests were carried out in accordance with the specification detailed in chapter 7 “Summary” of this report.

Tests were carried out at the following location:

- Telefication, Zevenaar (registered as an accredited test laboratory with designation number NL0001 under the US-EU MRA)

The samples of the product were received on:

- 15 June 2010

Tests were carried out between:

- 15 June 2010 and 26 April 2011

4 Product documentation

For production of this report the following product documentation was used:

Description	Identification	Date
Manual	1036806-C_03-2010_RCR50_Manual.pdf	2010-12-07
Manual	1035261-E_03-2010_RCR_C_Manual.pdf	2010-12-07
Manual	1037946-D_03-2010_RCR_PET_Manual.pdf	2010-12-07
Block diagram	RCR block diagram 06-12-2010 Rev1_00.pdf	2011-12-07
Theory	RCR-50 Theory of Operation.pdf	2011-04-06
Schematics	RCR series schematic 2006753130-1A.pdf	2011-12-07
Label	1057196 Rev_B Label FCC ID RCR-50.pdf	2011-04-06
Label	1057202 Rev_B Label FCC ID RCR-C.pdf	2011-04-06
Label	1057194 Rev_B Label FCC ID RCR-PET.pdf	2011-04-06

The above-mentioned documentation will be filed at Telefication for a period of 10 years following the issue of this test report.

5 Observations and comments

None

6 Modifications to the sample

No modifications were made to the sample.

7 Summary

The product is intended for use in the following application area(s):

INTENTIONAL RADIATOR OPERATING IN THE FREQUENCY BAND 5725 - 5875 MHz

The sample was tested according to the following specification(s):

FCC part 15; subpart C; section 15.209 and 15.249 (10-1-09 edition)

8 Conclusions


The samples of the product showed **NO NON-COMPLIANCES** to the specifications stated in Chapter 7 of this report.

The results of the tests as stated in this report are exclusively applicable to the product item as identified in this test report. Telefication accepts no responsibility for any stated properties of product items in this test report, which are not supported by the tests as specified in Chapter 7 “Summary”.

All tests are performed by:

name : ing. J.C. le Clercq

function : Test Engineer

signature : 

Review of test report by:

name : G.J. Gort

function : Senior Test Engineer

signature : 

The above conclusions have been verified by the following signatory:

date : 28 April 2011

name : ing. A. van der Valk

function : Manager Laboratory a.i.

signature : 

Test results module

1 General information

1.1 Equipment information

Rated RF output power	n.a., integral antenna
Rated radiated RF power	10 mW
Operating frequency	5789 MHz
FCC ID	CGGAA3

2 Emission tests

2.1 Field strength of intentional signal

Compliance standard : FCC part 15, subpart C, section 15.249 (a) & (e)
Method of test : ANSI C63.4-2003, sections 5.5 & 8.2.4
Test results :

Peak field strength of fundamental:

Frequency (MHz)	Test result dBm (eirp)	Pulse Desensitisation Factor	Test result @ 3 m distance (dBμV/m)	Polarisation	Limit (dBμV/m)
5789	-0.9	1.6	94.3	V	114
5789	-18.9	1.6	76.3	H	114

Note: Only peak power was measured. The formula for conversion from power to field strength is:
 $FS \text{ (dB}\mu\text{V/m)} = \text{EIRP (dBm)} + 95.2 \text{ dB}$.



A Pulse Desensitisation Factor has been applied, because the duty cycle is very low, 3 %.

Average field strength of fundamental:

Frequency (MHz)	Test result @ 3 m distance (dBμV/m)	Polarisation	Limit (dBμV/m)
5789	79.1	V	94
5789	61.1	H	94

The average field strength can be calculated by the following formula:

$FS_{\text{average}} \text{ (dB}\mu\text{V/m)} = FS_{\text{peak}} \text{ (dB}\mu\text{V/m)} - 10\log(1/x)$ where x is the duty cycle (in this case 3 %).

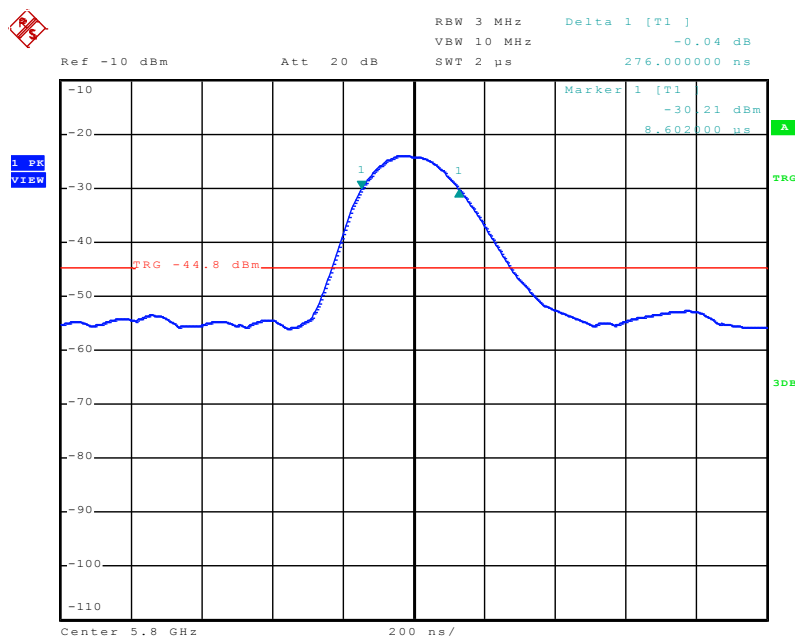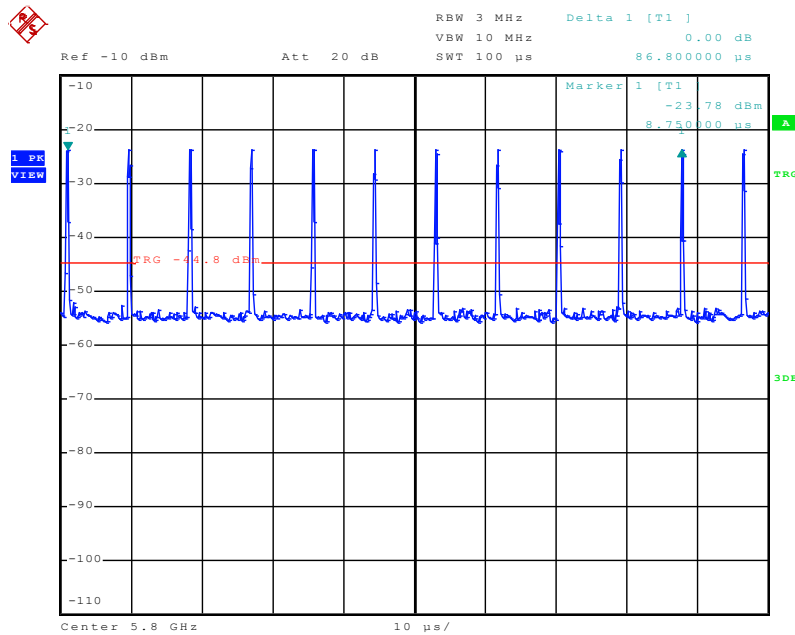

Measurement uncertainty	+4.5/-6.1 dB
Measurement equipment used (item numbers refer to section “used test equipment”)	2, 25, 26, 41, 50, 51


2.2 Field strength of unwanted emissions 30 - 1000 MHz

Compliance standard : FCC part 15, subpart C, section 15.205 (a), (b) & (c), 15.209 (a)
Method of test : ANSI C63.4-2003, sections 5.5, 8.2.3, 8.2.4 & 8.3.1.2;
FCC part 15, subpart A, section 15.31(m), 15.33, 15.35.


EUT condition : 5789 MHz transmission

Test results :

Polarisation: vertical

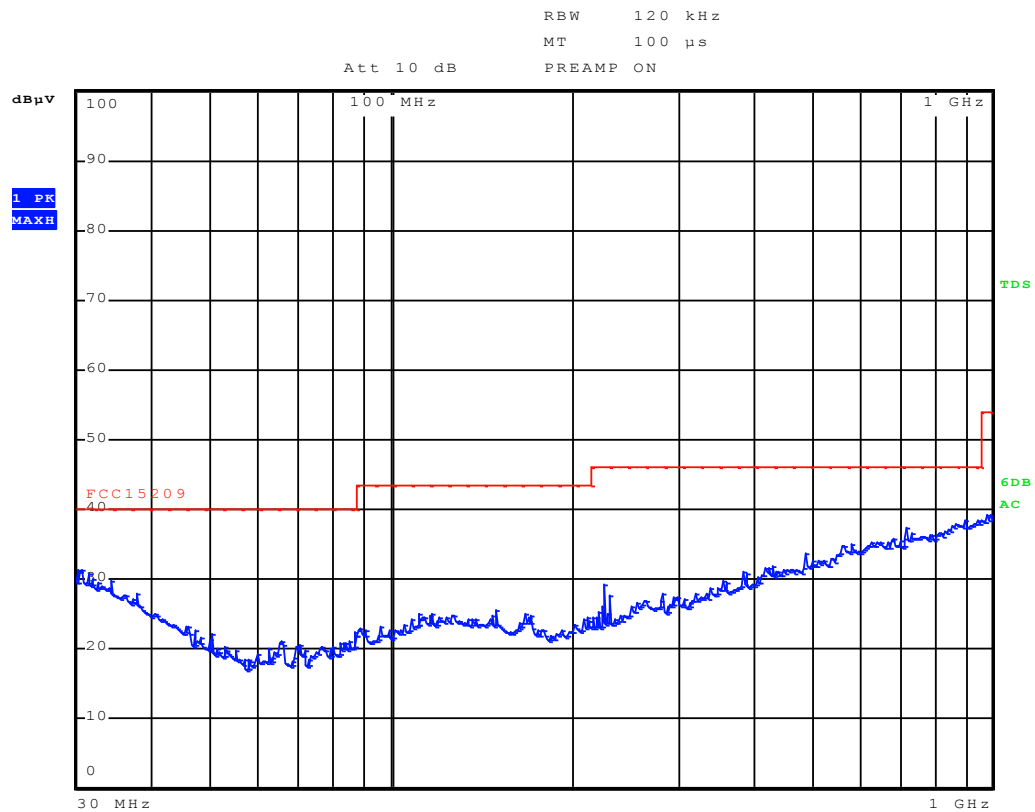

Polarisation: horizontal

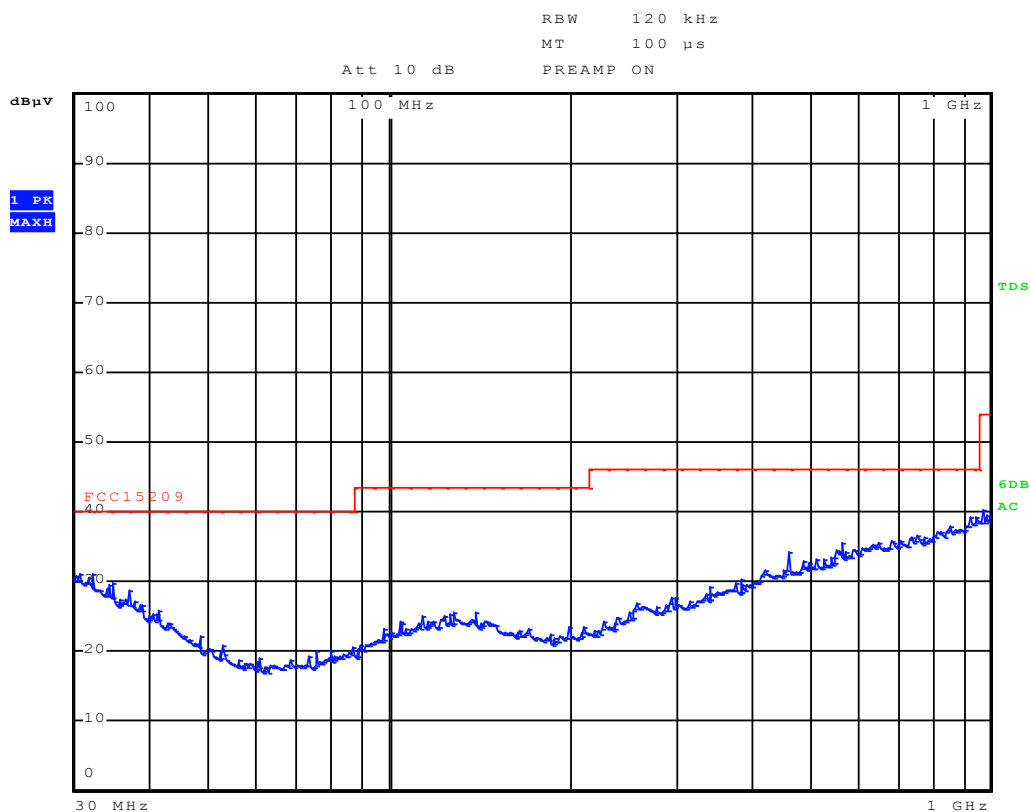

Measurement uncertainty	Vertical polarisation:	
	30 – 200 MHz	5.4 dB
	200 -1000 MHz	4.6 dB
	Horizontal polarisation:	
	30 – 200 MHz	4.5 dB
	200 -1000 MHz	3.6 dB


Measurement equipment used (item numbers refer to section “used test equipment”)	38, 36, 45, 52, 53
---	--------------------

2.3 Field strength of unwanted emissions > 1000 MHz

Compliance standard : FCC part 15, subpart C, section 15.205 (a), (b) & (c), 15.209 (a) & 15.249 (a) & (e)
Method of test : ANSI C63.4-2003, sections 5.5, 8.2.3, 8.2.4 & 8.3.1.2;
FCC part 15, subpart A, section 15.31(m), 15.33, 15.35.


Test results :

Polarisation: vertical

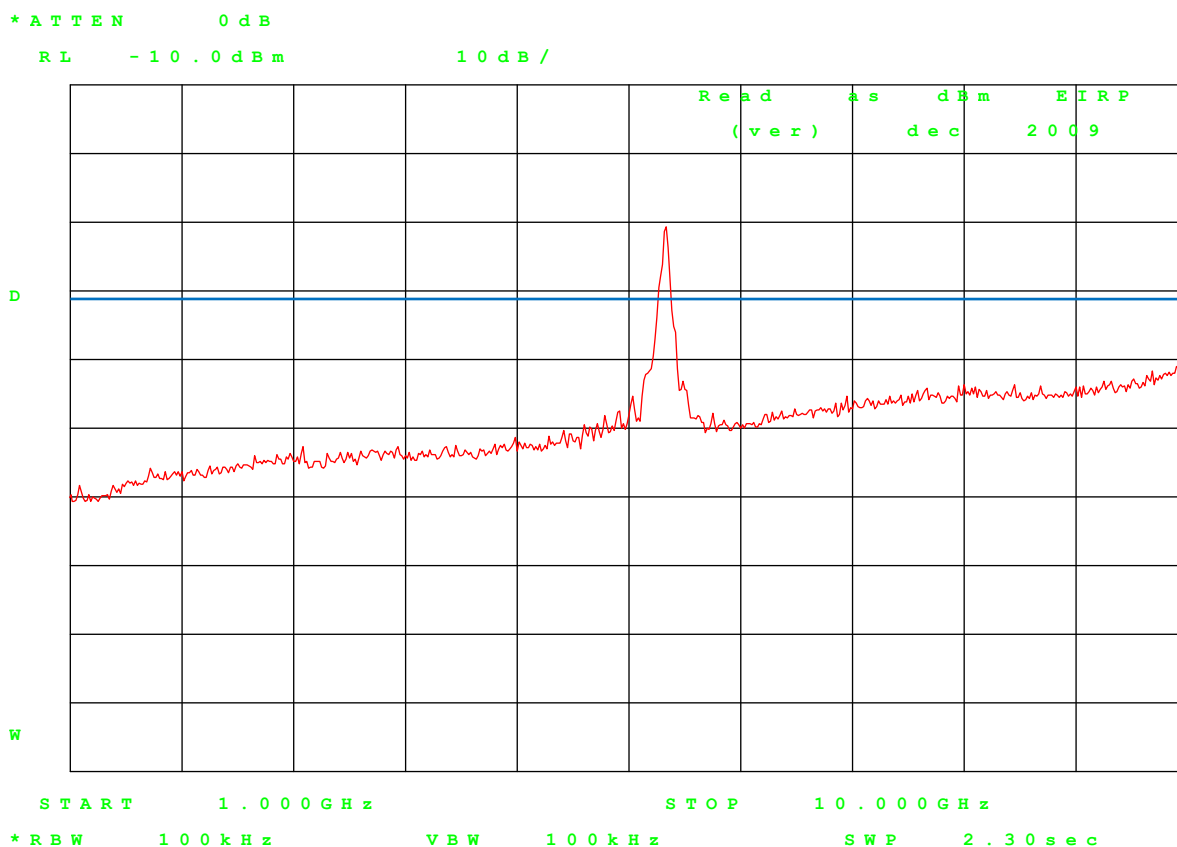


Note: The formula for conversion from power to field strength is:
FS (dBμV/m) = EIRP (dBm) + 95.2 dB.

Polarisation: horizontal

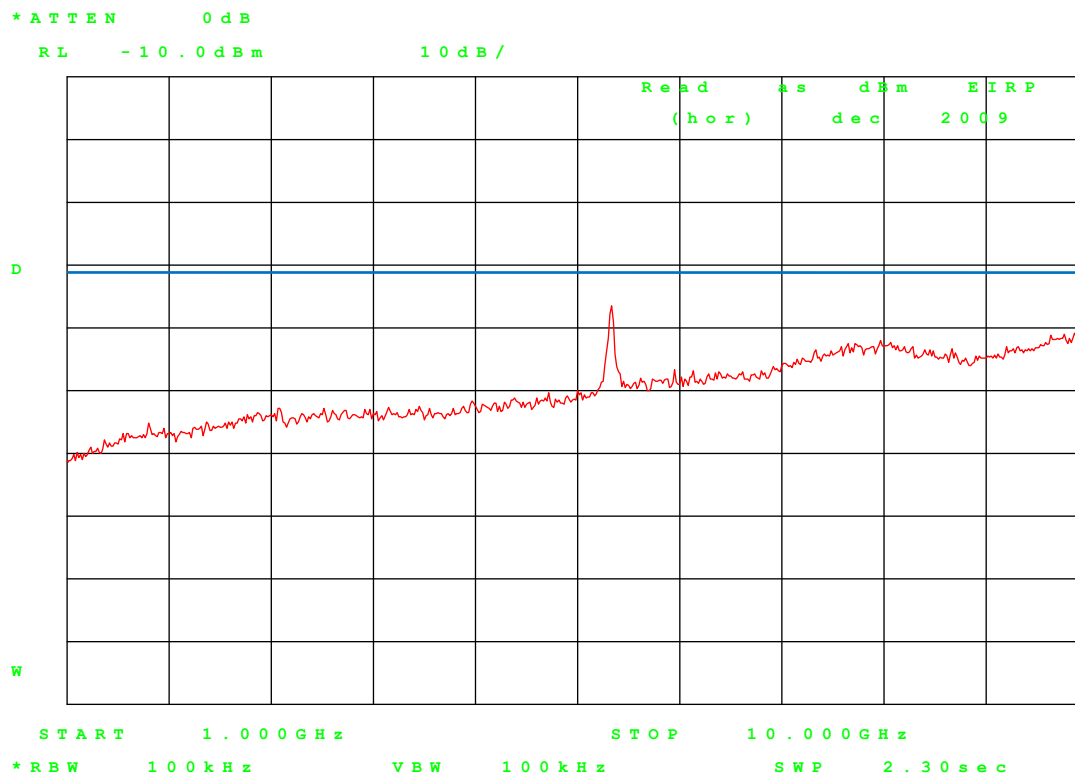

Note: The formula for conversion from power to field strength is:
 $FS \text{ (dB}\mu\text{V/m)} = EIRP \text{ (dBm)} + 95.2 \text{ dB.}$


Polarisation: vertical

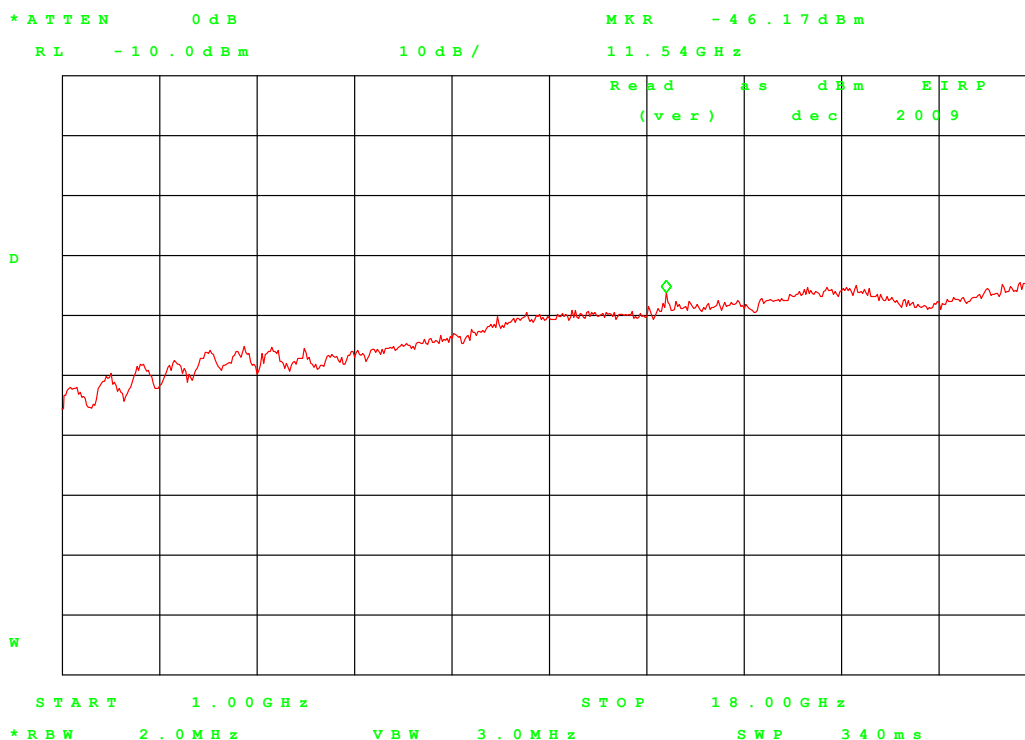

Note: The formula for conversion from power to field strength is:
 $FS \text{ (dB}\mu\text{V/m)} = EIRP \text{ (dBm)} + 95.2 \text{ dB.}$

Note: A low pass filter at 7 GHz has been used. Signals below 7 GHz have been attenuated and therefore measurements results above 10 GHz only are considered valid.

Polarisation: horizontal

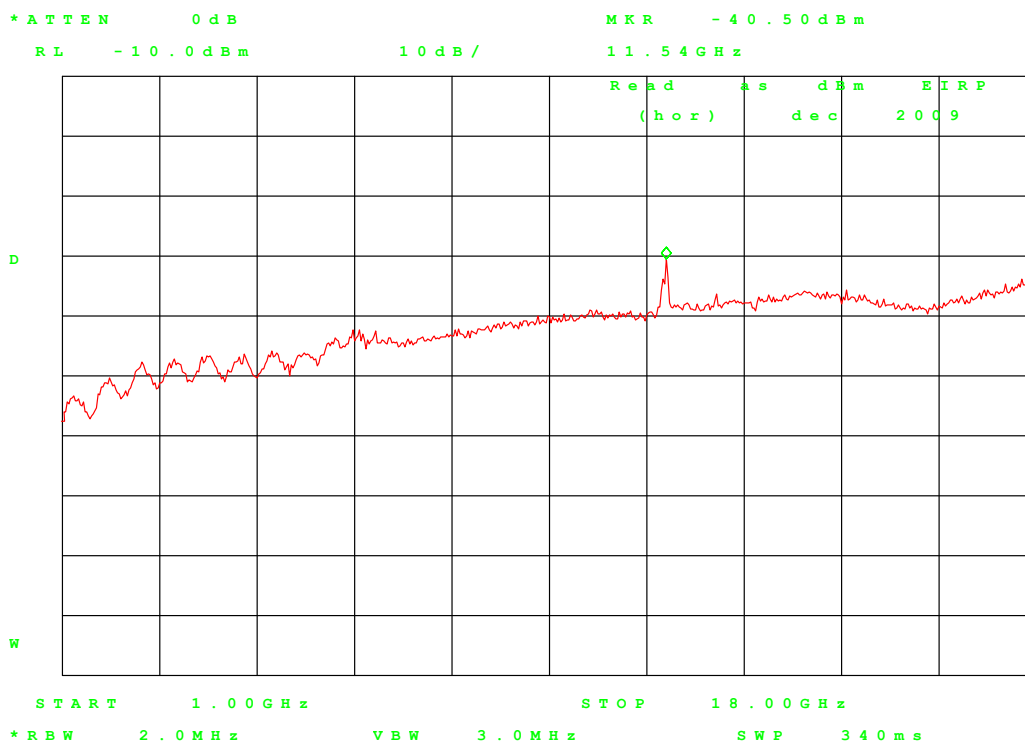

Note: The formula for conversion from power to field strength is:
FS (dBμV/m) = EIRP (dBm) + 95.2 dB.

Note: A low pass filter at 7 GHz has been used. Signals below 7 GHz have been attenuated and therefore measurements results above 10 GHz only are considered valid.

Peak field strength of harmonics:

Frequency (GHz)	Test result dBm (eirp)	Pulse Desensitization Factor	Test result @ 3 m distance (dBμV/m)	Polarisation	Limit (dBμV/m)
11.6	-44.6	1.6	50.6	V	74
11.6	-38.9	1.6	56.3	H	74
17.4	--	--	--	V	74
17.4	--	--	--	H	74

Note: The formula for conversion from power to field strength is:
 $FS \text{ (dB}\mu\text{V/m)} = EIRP \text{ (dBm)} + 95.2 \text{ dB}$.

A Pulse Desensitisation Factor has been applied, because the duty cycle is very low, 3 %.

Average field strength of harmonics:

Frequency (GHz)	Test result @ 3 m distance (dBμV/m)	Polarisation	Limit (dBμV/m)
11.6	35.4	V	54
11.6	41.1	H	54
17.4	--	V	54
17.4	--	H	54

The average field strength can be calculated by the following formula:

$FS_{\text{average}} \text{ (dB}\mu\text{V/m)} = FS_{\text{peak}} \text{ (dB}\mu\text{V/m)} - 10\log(1/x)$ where x is the duty cycle (in this case 3 %).

In the frequency range 12 - 40 GHz no spurious signals were found.

Measurement uncertainty	+4.5/-6.1 dB
-------------------------	--------------

Measurement equipment used (item numbers refer to section “used test equipment”)	2, 25, 26, 31, 33, 41, 47, 48, 50, 51, 53
---	---

Used test equipment module

Item	Description	Manufacturer	Type	ID
1	Signal generator	Marconi	2042	TE 00030
2	Preamplifier 1 – 26.5 GHz	HP	8449B	TE 00092
3	Preamplifier 1 – 26.5 GHz	HP	8449B	TE 00093
4	Pre-amplifier 10 dB	R & S	ESV-Z3	TE 00097
5	Pre-amplifier 10 dB	R & S	ESV-Z3	TE 00098
6	Spectrum analyser	HP	8562E	TE 00099
7	Microwave amplifier	HP	HP8349A	TE 00124
8	Digital multimeter	HP	34401A	TE 00143
9	Digital multimeter	HP	3438A	TE 00215
10	Step attenuator	HP	8494A	TE 00233
11	Step attenuator	HP	8496A	TE 00234
12	Power sensor	HP	8484A	TE 00245
13	Power meter	HP	435B	TE 00249
14	Power meter	HP	437B	TE 00354
15	Power sensor	HP	8481A	TE 00355
16	Spectrum analyser	HP	8563E	TE 00359
17	Audio analyzer	HP	8903A	TE 00373
18	Signal generator	Marconi	2042	TE 00379
19	Digital thermometer	Fluke	51	TE 00388
20	Step attenuator	HP	8491A	TE 00403
21	Signal generator	HP	8642B	TE 00424
22	Signal generator	Marconi	2042	TE 00427
23	Spectrum analyser	HP	8563E	TE 00481
24	Horn antenna	EMCO	3115	TE 00531
25	Horn antenna	EMCO	3116	TE 00533
26	Biconilog antenna	EMCO	3143	TE 00700
27	Climate chamber	CTS	C-40/350	TE 00741
28	Active loop antenna	R & S	HFH2-Z2	TE 00746

Item	Description	Manufacturer	Type	ID
29	Horn antenna	Quinstar	QWH-1900-AA	TE 00747
30	Step attenuator	HP	8491A	TE 00787
31	Standard gain horn	Flann	20240-25	TE 00818
32	Power supply for amplifier	R & S	HZ-9	TE 00830
33	Power supply	Delta Elektronika	E030-1	TE 00851
34	Semi Anechoic Room	Comtest	--	TE 00861
35	Power supply	Delta Elektronika	MST030-10	TE 00886
36	Biconilog antenna	Chase	CBL6112A	TE 00967
37	Anechoic chamber	Euroshield	RFB-F-100	TE 01064
38	Triple loop antenna	Telefication	--	TE 01066
39	Temp / RH logger	MicroLog	EC 650	TE 01114
40	Broadband resistive power divider	Weinschel	1506A	TE 01120
41	Broadband resistive power divider	Weinschel	1506A	TE 01122
42	Spectrum analyser	R & S	FSP 40	TE 11125
43	EMI test receiver	R & S	ESCI	TE 11128
44	Radio Communication Service Monitor	R & S	CMS54	TE 11129
45	Pre-amplifier	Miteq	JS4-18004000	TE 11131
46	Low noise amplifier	Miteq	AFS42-041001800	TE 11132
47	Antenna tower	Heinrich Deisel	AS 620P	ANEC
48	Turntable	Heinrich Deisel	DS-412	ANEC
49	Turntable controller	Heinrich Deisel	HD-050	ANEC
50	Antenna mast	EMCO	1070	SAR
51	Turn table	EMCO	1060-2M	SAR
52	Near field probe	--	--	--
53	Highpass Filter	Wainwright	WHKX 7.0/18G-8SS	TE 01141

Revision history

REVISION	DATE	REMARKS	REVISED BY
--	--	--	--
--	--	--	--