



Test Report - FCC Part 80 (Radar)

Applicant: HENSOLDT UK, a trading name of Kelvin
Hughes Limited

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA). This test report relates only to the items tested as identified and is not valid for any subsequent changes or modifications made to the equipment under test.

Table of Contents

1.	APPLICANT INFORMATION.....	5
1.1	PART 80 TEST RESULT SUMMARY	5
2.	LOCATION OF TESTING.....	6
2.1	TEST LABORATORY	6
2.2	TESTING WAS PERFORMED, REVIEWED BY	6
3.	TEST SAMPLE(S) (EUT/DUT).....	7
3.1	DESCRIPTION OF THE EUT.....	7
3.2	CONFIGURATION OF EUT.....	8
3.3	TEST SETUP OF EUT.....	8
4.	TEST METHODS & APPLICABLE REGULATORY LIMITS.....	9
4.1	TEST METHODS/STANDARDS/GUIDANCE:	9
4.2	APPLIED LIMITS AND REGULATORY LIMITS:.....	9
5.	MEASUREMENT UNCERTAINTY.....	9
6.	ENVIRONMENTAL CONDITIONS	9
6.1	TEMPERATURE & HUMIDITY.....	9
7.	LIST OF TEST EQUIPMENT AND TEST FACILITY.....	10
7.1	LIST OF TEST EQUIPMENT	10
8.	TEST RESULTS	11
8.1	POWER AT THE FINAL AMPLIFIER.....	12
8.2	RF OUTPUT POWER.....	13
8.2.1	RF Power Output Plot, 9180 MHz, High Power	14
8.2.2	RF Power Output Plot, 9180 MHz, Low Power.....	15
8.2.3	RF Power Output Plot, 9260 MHz, High Power	16
8.2.4	RF Power Output Plot, 9260 MHz, Low Power	17
8.2.5	RF Power Output Plot, 9340 MHz, High Power.....	18
8.2.6	RF Power Output Plot, 9340 MHz, Low Power	19
8.2.7	RF Power Output Plot, 9440 MHz, High Power.....	20
8.2.8	RF Power Output Plot, 9440 MHz, Low Power	21
8.3	BANDWIDTH & EMISSION.....	22
8.3.1	99% Bandwidth Plot, 9260 MHz, 6 nm.....	23
8.3.2	99% Bandwidth Plot, 9340 MHz, 6 nm	24
8.3.3	99% Bandwidth Plot, 9440 MHz, 6 nm.....	25
8.3.1	99% Bandwidth Plot, 9260 MHz, 12 nm.....	26
8.3.2	99% Bandwidth Plot, 9340 MHz, 12 nm.....	27
8.3.3	99% Bandwidth Plot, 9440 MHz, 12 nm.....	28
8.3.1	99% Bandwidth Plot, 9260 MHz, 24 nm.....	29
8.3.2	99% Bandwidth Plot, 9340 MHz, 24 nm	30

8.3.3	99% Bandwidth Plot, 9440 MHz, 24 nm	31
8.3.1	40dB Bandwidth Plot, 9260 MHz, 6 nm	32
8.3.2	40dB Bandwidth Plot, 9340 MHz, 6 nm	33
8.3.3	40dB Bandwidth Plot, 9440 MHz, 6 nm	34
8.3.1	40dB Bandwidth Plot, 9260 MHz, 12 nm	35
8.3.2	40dB Bandwidth Plot, 9340 MHz, 12 nm	36
8.3.3	40dB Bandwidth Plot, 9440 MHz, 12 nm	37
8.3.1	40dB Bandwidth Plot, 9260 MHz, 24 nm	38
8.3.2	40dB Bandwidth Plot, 9340 MHz, 24 nm	39
8.3.3	40dB Bandwidth Plot, 9440 MHz, 24 nm	40
8.4	EMISSION LIMITATIONS, IN-BAND	41
8.4.1	Emission Mask, 9260 MHz, 6 nm, Low Power	42
8.4.2	Emission Mask, 9260 MHz, 6 nm, High Power	43
8.4.3	Emission Mask, 9340 MHz, 6 nm Low Power	44
8.4.4	Emission Mask, 9340 MHz, 6 nm, High Power	45
8.4.5	Emission Mask, 9260 MHz, 12 nm, High Power	46
8.4.6	Emission Mask, 9260 MHz, 12 nm, Low Power	47
8.4.7	Emission Mask, 9340 MHz, 12 nm, High Power	48
8.4.8	Emission Mask, 9340 MHz, 12 nm Low Power	49
8.4.9	Emission Mask, 9440 MHz, 12 nm, High Power	50
8.4.10	Emission Mask, 9440 MHz, 12 nm, Low Power	51
8.4.11	Emission Mask, 9260 MHz, 24 nm, High Power	52
8.4.12	Emission Mask, 9260 MHz, 24 nm, Low Power	53
8.4.13	Emission Mask, 9340 MHz, 24 nm, High Power	54
8.4.14	Emission Mask, 9340 MHz, 24 nm Low Power	55
8.4.15	Emission Mask, 9440 MHz, 24 nm, High Power	56
8.4.16	Emission Mask, 9440 MHz, 24 nm, Low Power	57
8.5	EMISSION LIMITATIONS, OUT-OF-BAND	58
8.5.1	Conducted Emissions, Below 1GHz, 9260 MHz, 6 nm	59
8.5.2	Conducted Emissions, Above 1GHz, 9260 MHz, 6 nm	60
8.5.3	Conducted Emissions, Above 18GHz, 9260 MHz, 6 nm	61
8.5.4	Conducted Emissions, Above 26GHz, 9260 MHz, 6 nm	62
8.5.5	Conducted Emissions, Below 1GHz, 9340 MHz, 6 nm	63
8.5.6	Conducted Emissions, Above 1GHz, 9340 MHz, 6 nm	64
8.5.7	Conducted Emissions, Above 18GHz, 9340 MHz, 6 nm	65
8.5.8	Conducted Emissions, Above 26GHz, 9340 MHz, 6 nm	66
8.5.9	Conducted Emissions, Below 1GHz, 9440 MHz, 6 nm	67
8.5.10	Conducted Emissions, Above 1GHz, 9440 MHz, 6 nm	68
8.5.11	Conducted Emissions, Above 18GHz, 9440 MHz, 6 nm	69
8.5.12	Conducted Emissions, Above 26GHz, 9440 MHz, 6 nm	70
8.6	RADIATED EMISSIONS	71
8.6.1	Radiated Emissions, 9260 MHz	72
8.6.2	Radiated Emissions, 9340 MHz	73
8.6.1	Radiated Emissions, 9440 MHz	74
8.7	MODULATION CHARACTERISTICS	75
8.7.1	Audio Frequency Response	75

8.7.2	Low Pass Filter Response.....	75
8.7.3	Modulation Limiting	75
8.8	FREQUENCY STABILITY.....	76
8.8.1	Frequency Stability Data	77
8.8.2	Frequency Stability Plot	78
8.9	TRANSIENT FREQUENCY BEHAVIOR.....	79
8.10	ADJACENT CHANNEL POWER LIMITS.....	80
9.	ANNEX-A - PHOTOGRAPHS OF THE EUT.....	81
10.	ANNEX-B – TEST SETUP PHOTOGRAPHS.....	81
11.	HISTORY OF TEST REPORT CHANGES.....	81

1. Applicant Information

Applicant: HENSOLDT UK, a trading name of Kelvin Hughes Limited
Address: Voltage, Mollison Avenue
Enfield, ESSEX, EN3 7XQ
United Kingdom

1.1 Part 80 Test Result Summary

The following test procedure and guidance were used for measuring FCC PART 80 (STATIONS IN THE MARITIME SERVICES) known as Licensed Maritime Radiotelephone; ANSI C63.26-2015. Full test results are available in this report.

Applicable Clauses from Part 2		
FCC Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
2.202	Bandwidth & Emission	Pass
2.1033 (c)(8)	Power at the Final Amplifier	Reported
2.1046 (a)	RF Output Power	Pass
2.1047	Modulation characteristics	Pass
2.1049	Occupied Bandwidth	Pass
2.1051	Spurious emissions at antenna terminals	Pass
2.1053	Field strength of spurious radiation	Pass
2.1055	Frequency stability	Pass

Applicable Clauses from Part 80		
FCC Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
80.205 (a), (d)	Bandwidths & Emission designator	Reported
80.209 (c)	Transmitter Frequency Tolerance	Pass
80.211 (f)	Emission Limitations, In-band	Pass
80.211 (f)	Emission Limitations, Out-of-band	Pass
80.213 (g)	Modulation Requirements	Pass
80.215 (a) (3), (n) (3)	Transmitter Power	Pass

No additions to the test methods were needed. There were no deviations, or exclusions from the test methods. No test results are from external providers or from the customer. The test results relate only to the items tested. Timco does not offer opinions and interpretations, only a pass/fail statement.

2. Location of Testing

2.1 Test Laboratory

Timco Engineering Inc. is a subsidiary of Industrial Inspection & Analysis, Inc. ("IIA").

Testing was performed at Timco's permanent laboratory located at 13146 NW 86th Drive, Suite 400, Alachua, FL 32669

FCC test firm # 578780

FCC Designation # US1070

FCC site registration is under A2LA certificate # 0955.01

ISED Canada test site registration # 2056A

EU Notified Body # 1177

For all designations see A2LA scope # 0955.01

2.2 Testing was performed, reviewed by

Dates of Testing: 01/16/2023 – 03/23/2023

Signature:



Sr. EMC Engineer
EMC-003838-NE




Name & Title:

Tim Royer, EMC Engineer

Date of Signature

04/26/2023

Signature:



Name & Title:

Terri Allen, Project Specialist

Date of Signature

04/26/2023

3. Test Sample(s) (EUT/DUT)

The test sample was received: 01/16/2023

3.1 Description of the EUT

A description as well as unambiguous identification of the EUT(s) tested. Where more than one sample is required for technical reasons (such as the use of connected units for the purpose of conducted output power testing where the product units will have integral antennas), each specific test shall identify which unit was tested.

Identification	
FCC ID:	CICPCV-A1
Brief Description	Mk5 Sharp Eye Radar
Model(s) #	Mk5 Sharp Eye
Firmware version	n/a
Software version	ZM-2924 Version 1.3

Technical Characteristics	
Frequency Range	9.2 – 9.5 GHz
RF O/P Power (Max.)	62.8 W/ Nominal peak output power into the antenna of 80 W
Modulation	FM Pulse/FM Chirp
Bandwidth & Emission Class	53M5PON
Number of Channels	14
Duty Cycle	6NM 4.26%, 12NM 7.90%, 24NM 7.59%
Antenna Connector	Flange
Voltage Rating (AC or Batt.)	28V DC

Antenna Characteristics			
Antenna	Frequency Range	Mode / BW	Antenna Gain
1	n/a	n/a	0 dBi

- Note: Information such as antenna gain, firmware/software numbers are provided by manufacturer and cannot be validated by the test lab.

3.2 Configuration of EUT

There are 3 different range modes:

P0N Emission, 6NM (SR) mode

P0N Emission, 12NM (MR) mode

P0N Emission, 24NM (LR) mode

Operating conditions during Testing:

The device was operated without the provided antenna(s).

No other modifications of the device under test (including firmware, specific software settings, and input/output signal levels to the EUT) were made.

Peripherals used during Testing:

A laptop was used to program the EUT.

3.3 Test Setup of EUT

Equipment, antenna, and cable arrangement. The setup of the equipment and cable or wire placement on the test site that produces the highest radiated and the highest ac power line conducted emissions shall be shown clearly and described. Information on the orientation of portable equipment during testing shall be included. Drawings or photographs may be used for this purpose.

Test Setups are included in the test report.

4. Test methods & Applicable Regulatory Limits

4.1 Test methods/Standards/Guidance:

Test procedures and guidance for measuring Licensed Part 80, 87, & 90 Licensed device:

- 1) ANSI C63.26-2015
- 2) ITU-R M.1177-3 (per 80.273 (a) (6))

4.2 Applied Limits and Regulatory Limits:

- 1) FCC CFR 47 Part 80

5. Measurement Uncertainty

Parameter	Uncertainty (dB)
Conducted Emissions	± 3.14 dB
Radiated Emissions (9kHz – 30 MHz)	± 3.08 dB
Radiated Emissions (30 – 200 MHz)	± 2.16 dB
Radiated Emissions (200 – 1000 MHz)	± 2.15 dB
Radiated Emissions (1 GHz – 18 GHz)	± 2.14 dB
Radiated Emissions (18 GHz – 40 GHz)	± 2.31 dB
Note: The uncertainties provided in this table represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of K=2.	

6. Environmental Conditions

6.1 Temperature & Humidity

Measurements performed at the test site did not exceed the following:

Parameter	Measurement
Temperature	23 C +/- 5%
Humidity	55% +/- 5%
Barometric Pressure	30.05 in Hg
Note: Specific environmental conditions that are applicable to a specific test are available in the test result section.	

7. List of Test Equipment and Test Facility

The test equipment used identified by type, manufacturer, serial number, or other identification and the date on which the next calibration or service check is due.

Description of the firmware or software used to operate EUT for testing purposes.

A complete list of all test equipment used shall be included with the test report. The manufacturer's model and serial numbers, and date of last calibration, and calibration interval shall be included. Measurement cable loss, measuring instrument bandwidth and detector function, video bandwidth, if appropriate, and antenna factors shall also be included where applicable.

7.1 List of Test Equipment

Type	Device	Manufacturer	Model	SN#	Current Cal	Cal Due
Antenna	Biconical 1057	Eaton	94455-1	1057	10/16/20	10/16/2023
Antenna, NSA	Log-Periodic 1243	Eaton	96005	1243	05/04/21	05/3/2024
Antenna	Double-Ridged Horn/ETS Horn.1	ETS-Lindgren	3117	00035923	04/25/20	04/25/2023
CHAMBER	CHAMBER	Panashield	3M	N/A	03/12/19	12/21/2023
Pre-amp	Pre-amp	RF-LAMBDA	RLNA00M4 5GA	NA	02/27/19	07/26/2025
Receiver	EMI Test Receiver R&S ESU 40	Rohde & Schwarz	ESU 40	100320	05/27/21	05/26/2024
Function Generator	Function Generator	Standford	DS340	25200	01/13/21	01/13/2024
Signal Generator	Signal Generator HP 8648C	HP	8648C	35537A01679	03/29/19	8/03/2025
Thermometer	Type K J Thermometer	Martel	303	080504494	01/16/23	01/15/2026

Software			
Software	Author	Version	Validation on
ESU Firmware	Rohde & Schwarz	4.43 SP3; BIOS v5.1-24-3	2018
RSCCommander	Rohde & Schwarz	1.6.4	2014
ScopeExplorer	LeCroy	v2.25.0.0	2009
Field Strength	Timco	v4.10.7.0	2016

8. Test Results

The results of the test are usually indicated in the form of tables, spectrum analyzer plots, charts, sample calculations, as appropriate for each test procedure.

A description and/or a block diagram of the test setup is usually provided.

The measurement results, along with the appropriate limits for comparison, may be presented in tabular or graphical form. In addition, any variation in the measurement environment may be reported if applicable (e.g., a significant change of temperature that could affect the cable loss and amplifier response).

Unless noted otherwise in the referenced standard, the measurements of **ac power-line conducted emissions** and **conducted power output** will be reported in units of dB μ V. Unless noted otherwise in the referenced standard, the measurements of **radiated emissions** will be reported in units of decibels, referenced to one microvolt per meter (dB μ V/m) for electric fields, or to one ampere per meter (dBA/m) for magnetic fields, at the distance specified in the appropriate standards or requirements. The measurements of antenna-conducted power for receivers may be reported in units of dB μ V if the impedance of the measuring instrument is also reported. Otherwise, antenna-conducted power will be reported in units of decibels referenced to one milliwatt (dBm). All formulas for data conversions and conversion factors, if used, will be included in this measurement report.

Example:

Freq (MHz)	Meter Reading	+ ACF	+CL	= FS
33	20 dB μ V	+ 10.36 dB/m	+0.40 dB	=30.36 dB μ V/m @ 3m

EIRP = Pcond (dBm) + dBi

8.1 Power at the Final Amplifier


Limits from FCC Part 2.1033 (c)(8).

No method of measurement is specified. The result has been calculated based on all available information.

Test Results		
EUT Operating Voltage (V)	EUT Current (A)	Power at the Final Amplifier
24	10	240

8.2 RF Output Power

Limits from FCC Parts 2.1046(a), 80.215 (a) (3), (n) (3), 87.131 footnote 4, and 90.205 (r); and test procedure from ANSI C63.26-2015.

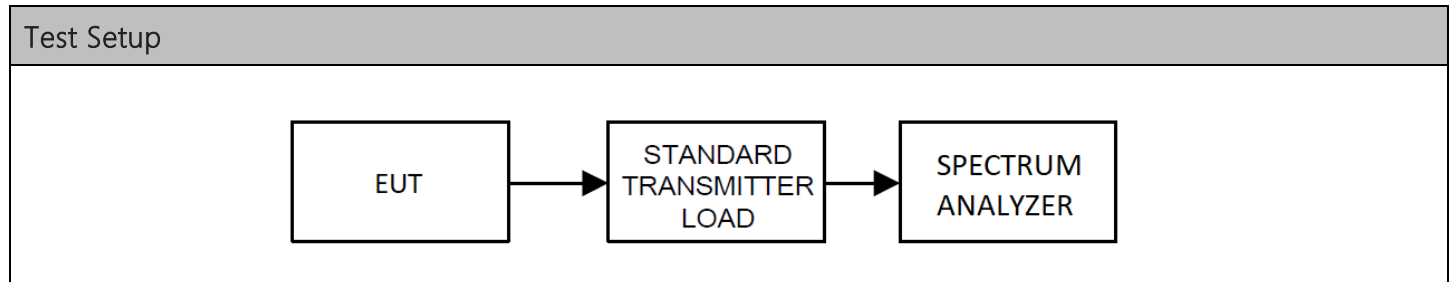

Test Results						
Tuned Frequency (MHz)	Method	Measured Peak Power Output (dBm)	Measured Peak Power Output (W)	Duty Cycle Correction	Average Power Output (dBm)	Average Power Output (W)
9180	Conducted	47.89	61.52	7.214	36.47	4.438
9180	Conducted	41.08	12.82	7.214	29.66	0.925
9260	Conducted	47.98	62.8	7.214	36.56	4.530
9260	Conducted	40.91	12.33	7.214	29.49	0.889
9340	Conducted	47.57	57.15	7.214	36.15	4.123
9340	Conducted	40.35	10.84	7.214	28.93	0.782
9440	Conducted	47.35	54.32	7.214	35.93	3.919
9440	Conducted	40.77	11.94	7.214	29.35	0.861


Note: The mean power was calculated based on formula:

$$P_a = P_m * DC$$

Maximum Average Power: 62.8 W


Maximum Peak Power: 4.438 W

8.2.1 RF Power Output Plot, 9180 MHz, High Power

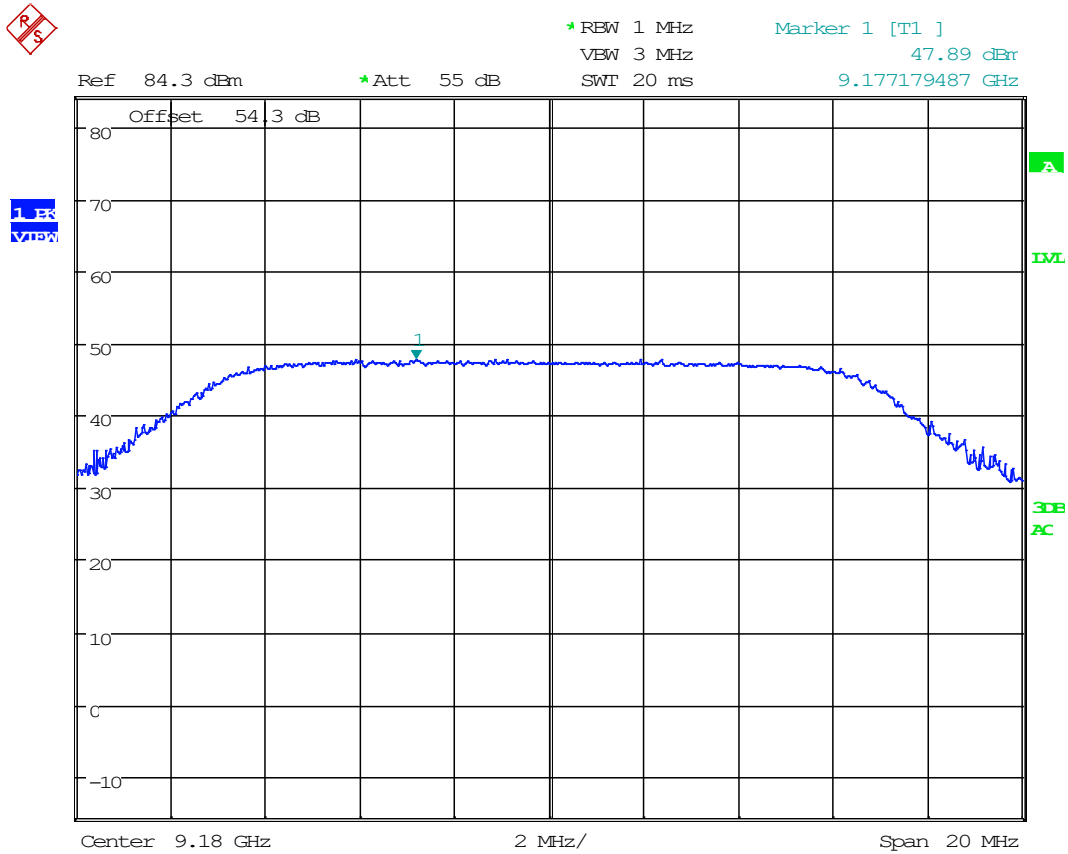


Date: 17.MAR.2023 09:43:13

8.2.2 RF Power Output Plot, 9180 MHz, Low Power

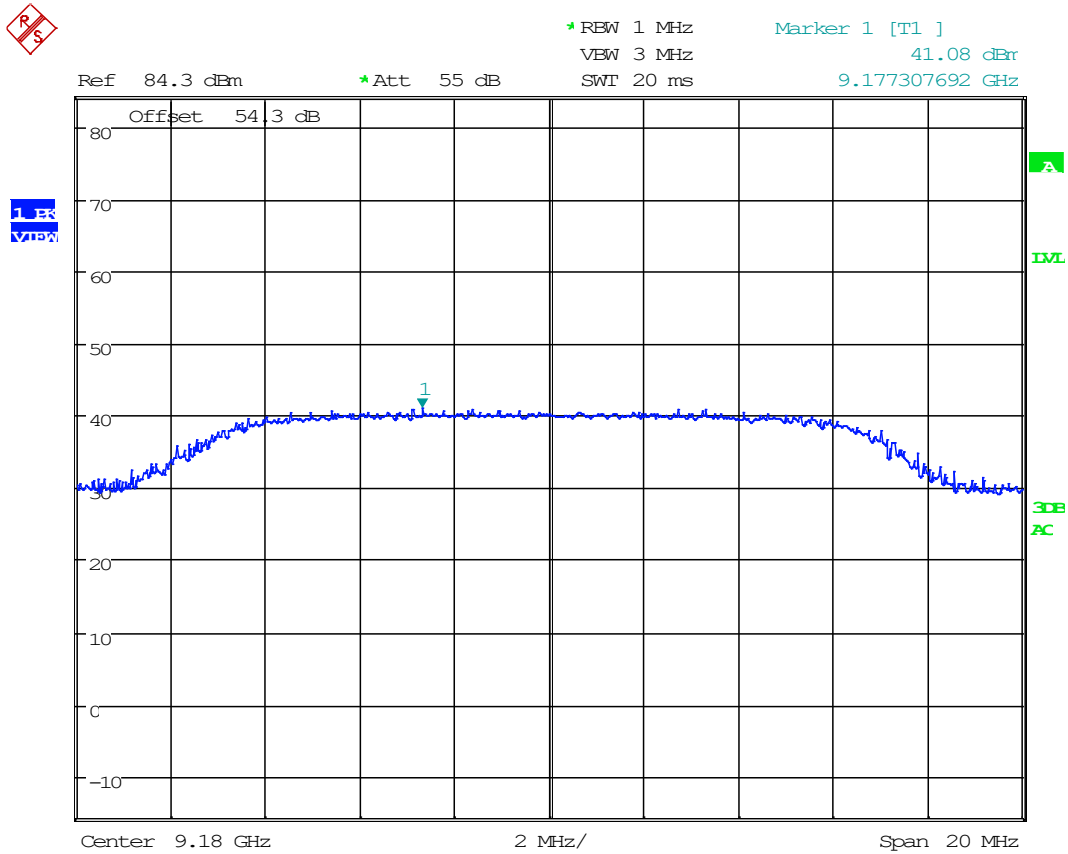


Date: 17.MAR.2023 09:42:51

8.2.3 RF Power Output Plot, 9260 MHz, High Power

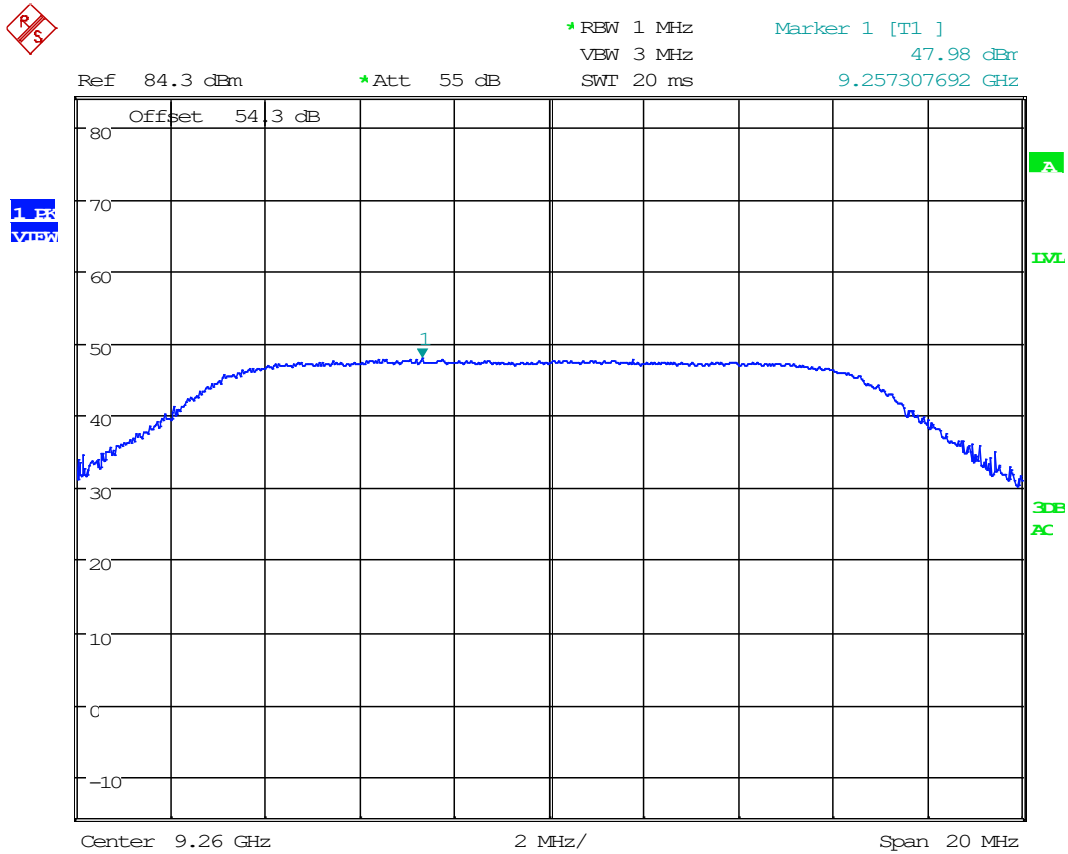


Date: 17.MAR.2023 09:43:56

8.2.4 RF Power Output Plot, 9260 MHz, Low Power

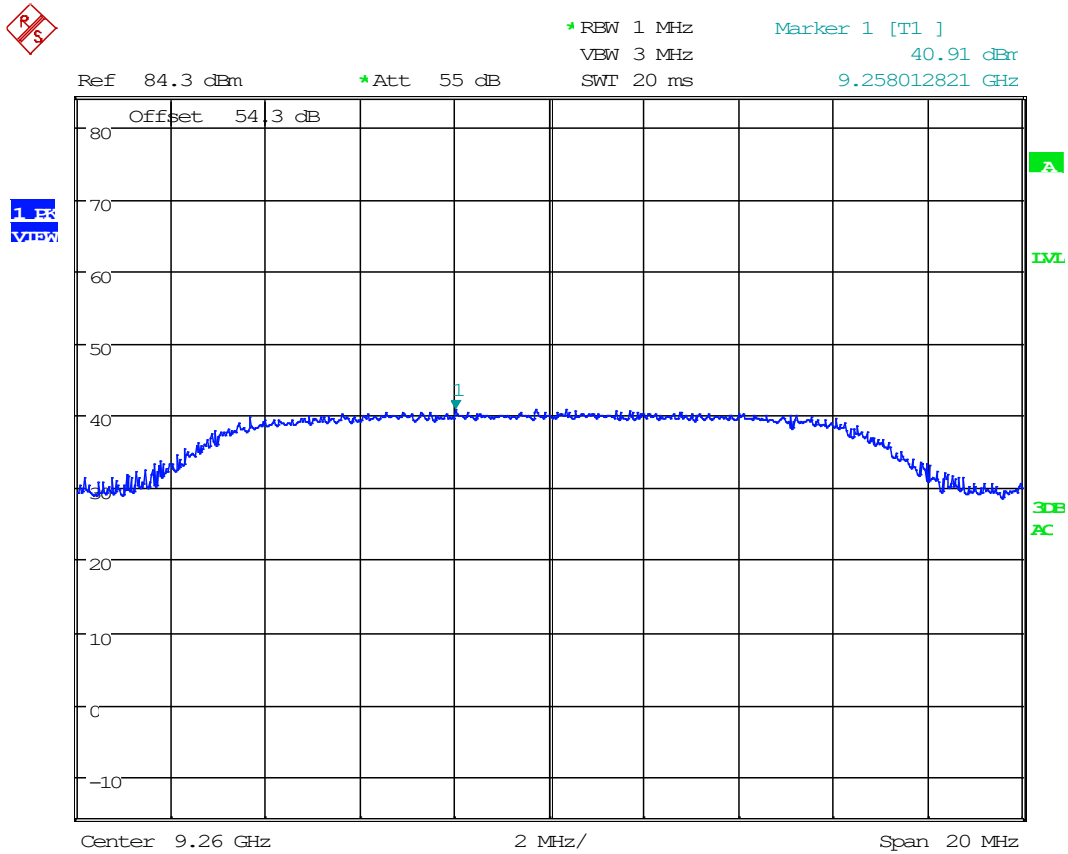

Date: 17.MAR.2023 09:43:39

8.2.5 RF Power Output Plot, 9340 MHz, High Power

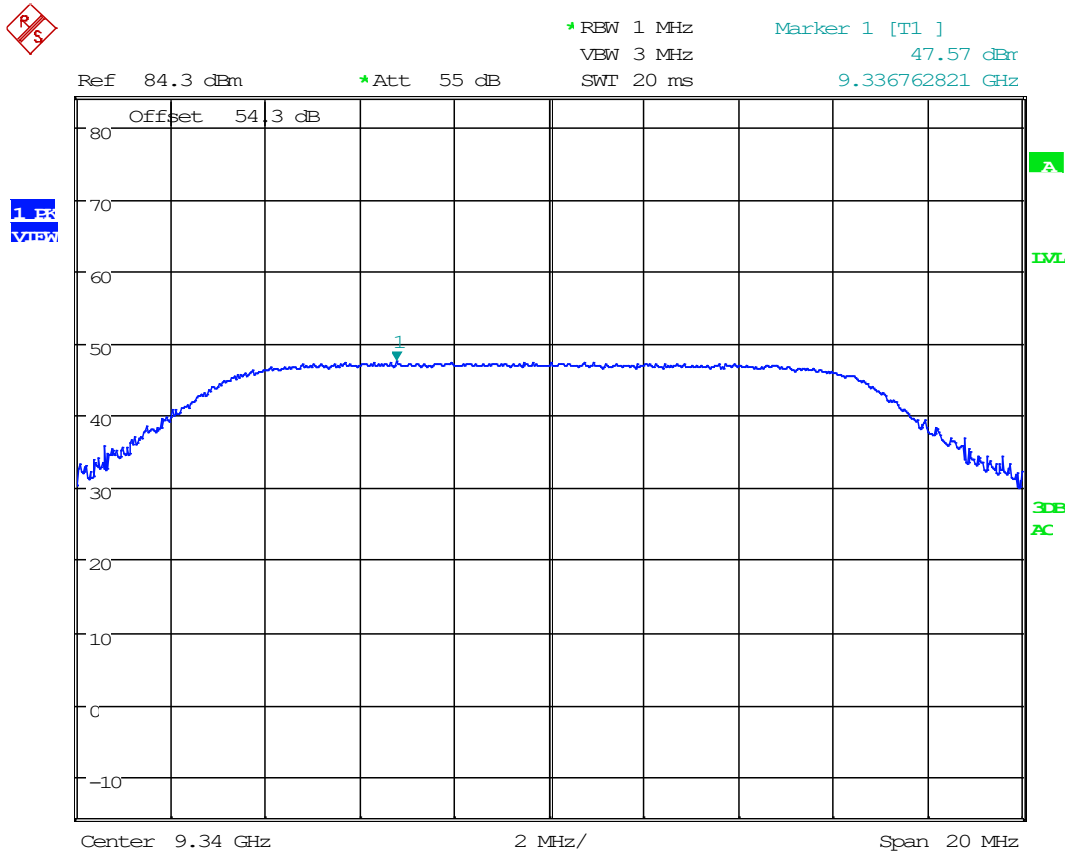


Date: 17.MAR.2023 09:44:57

8.2.6 RF Power Output Plot, 9340 MHz, Low Power




1.03
V192

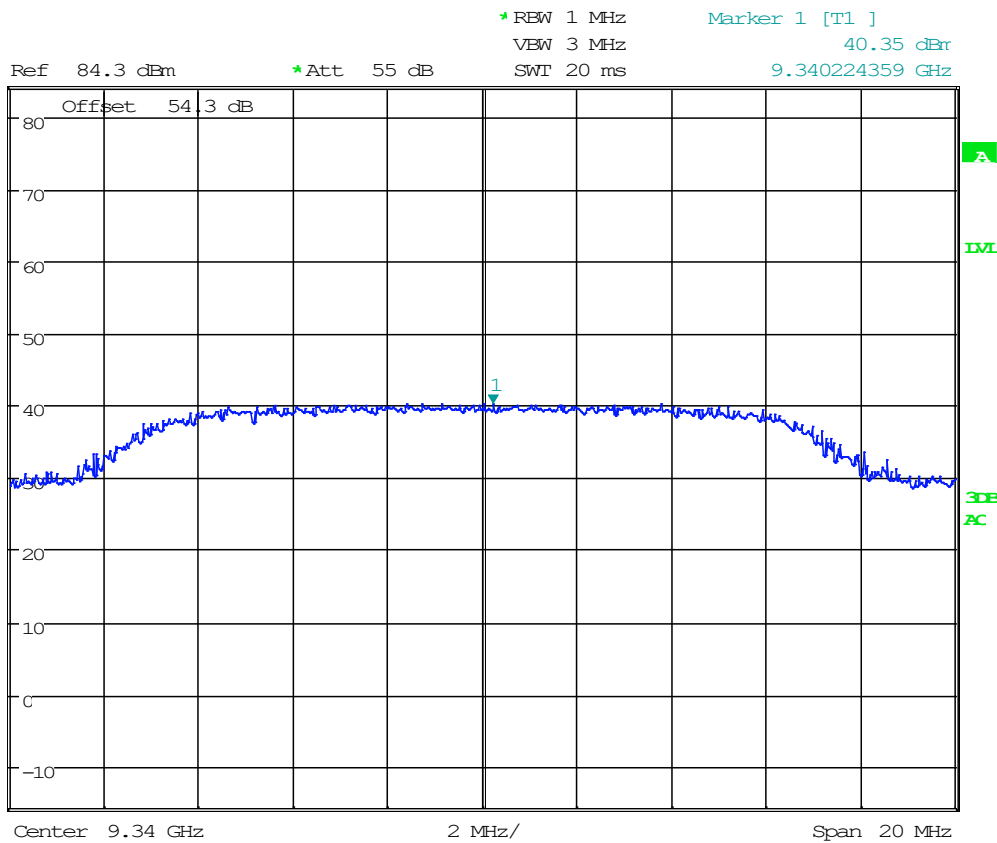

Date: 17.MAR.2023 09:44:25

8.2.7 RF Power Output Plot, 9440 MHz, High Power

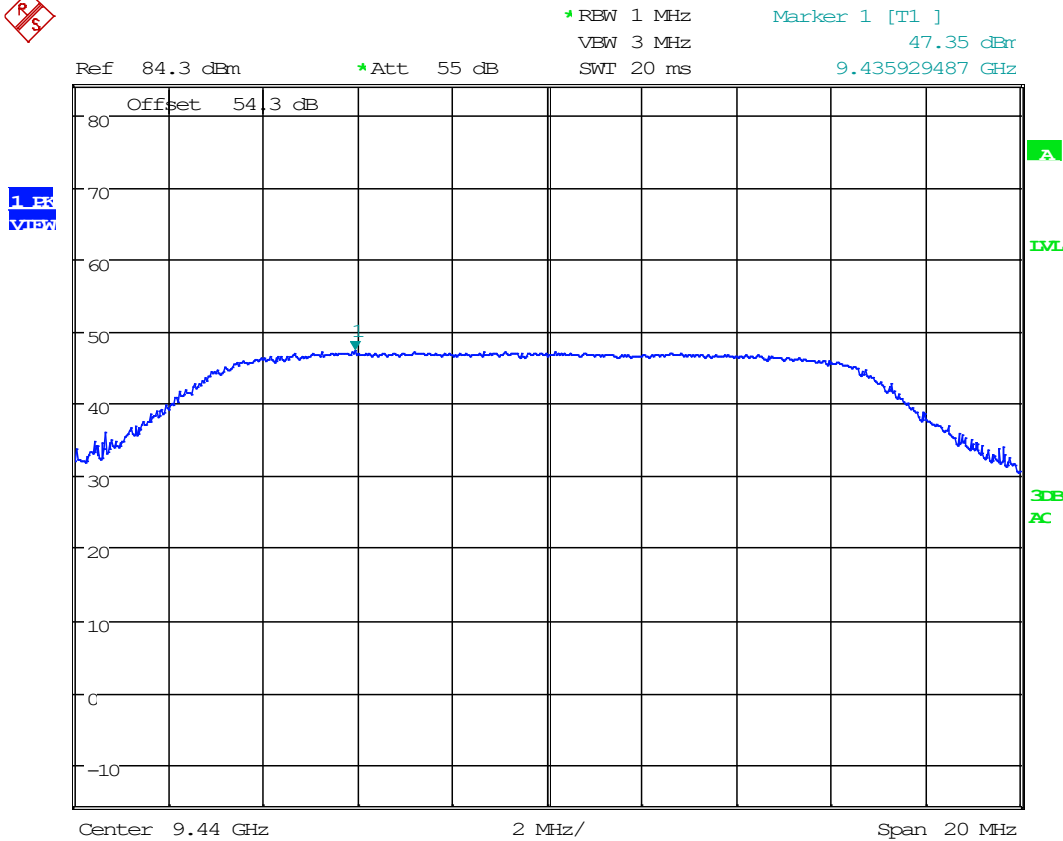


Date: 17.MAR.2023 09:45:43

8.2.8 RF Power Output Plot, 9440 MHz, Low Power




1.03
V192

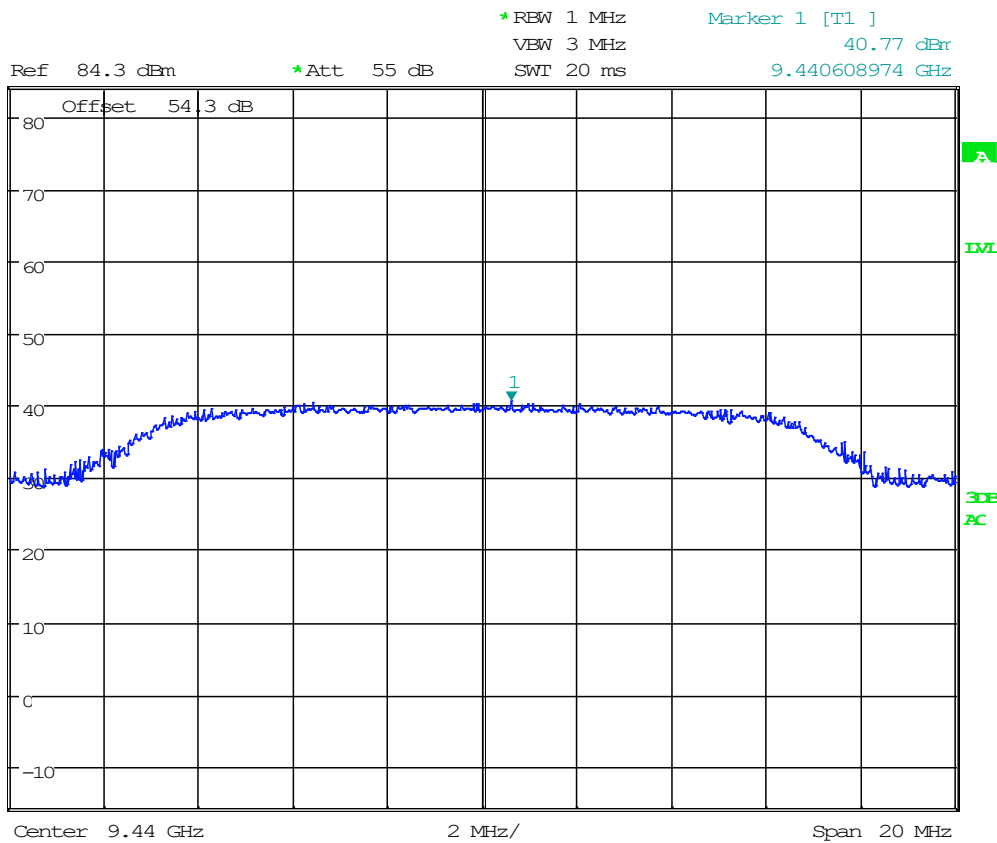

Date: 17.MAR.2023 09:45:22

8.3 Bandwidth & Emission


Limits from FCC Parts 2.1049, 80.205 (a) and test procedure from ANSI C63.26-2015.

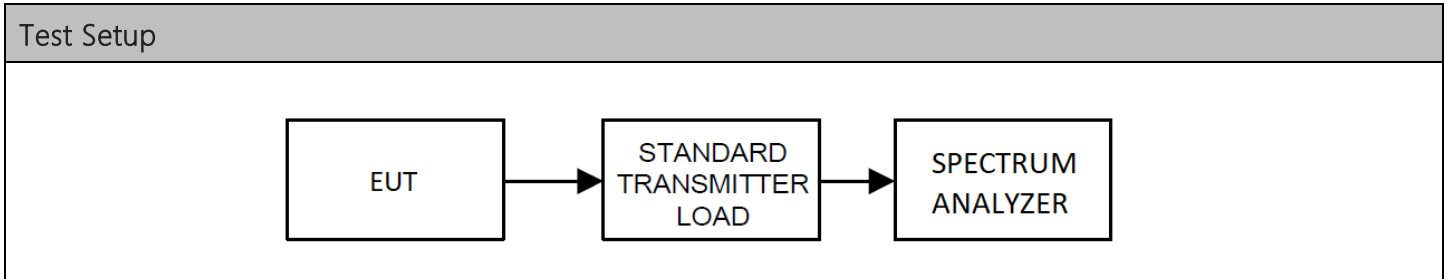

Test Results, Authorized Bandwidth		
Rule Part	Operating Range	Authorized Bandwidth
Part 80	9.3 – 9.5 GHz	200 MHz


Occupied Bandwidth				
Mode (Type)	Test Frequency (MHz)	99% BW (nominal) (MHz)	40dB BW (nominal) (kHz)	Emission Designator
6nm	9260	15.95	53.54	PON
12 nm		13.89	32.05	PON
24 nm		13.7	30.1	PON
6nm	9340	15.93	41.14	PON
12 nm		13.87	32.05	PON
24 nm		13.73	29.68	PON
6nm	9440	16.08	41.14	PON
12 nm		13.88	32.91	PON
24 nm		13.73	29.8	PON

8.3.1 99% Bandwidth Plot, 9260 MHz, 6 nm

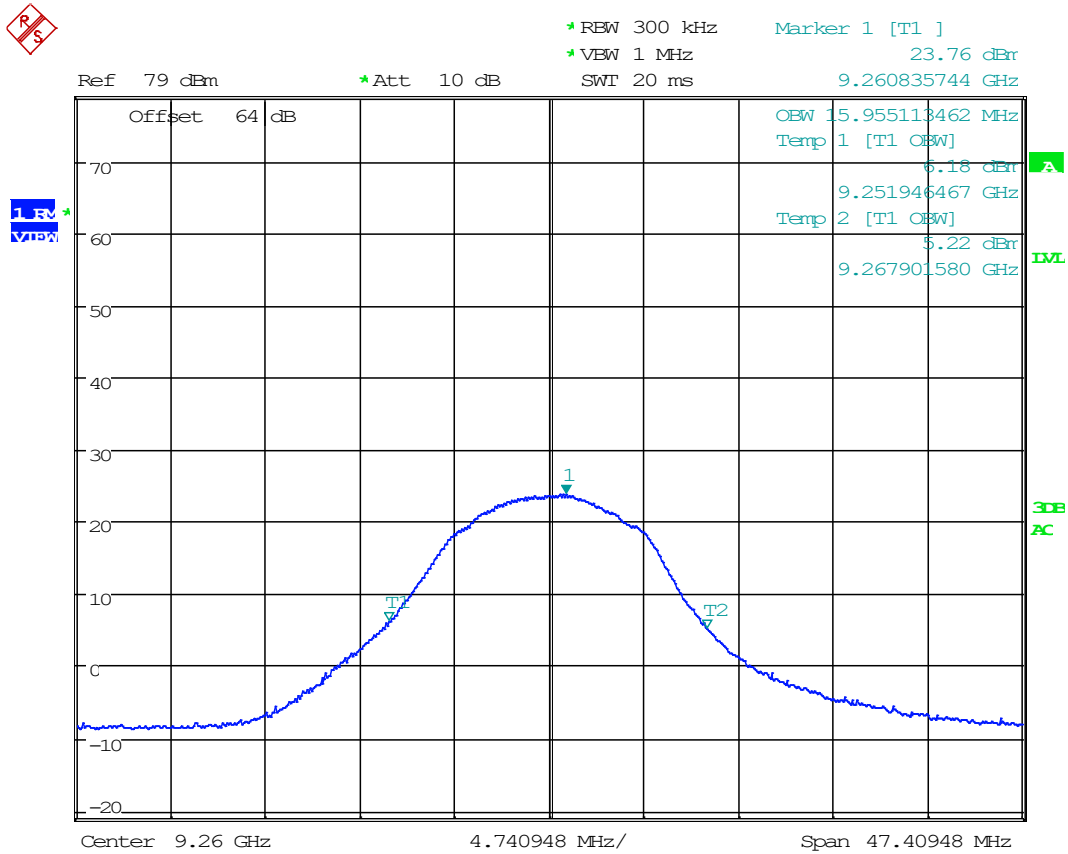


Date: 23.JAN.2023 15:47:43

8.3.2 99% Bandwidth Plot, 9340 MHz, 6 nm

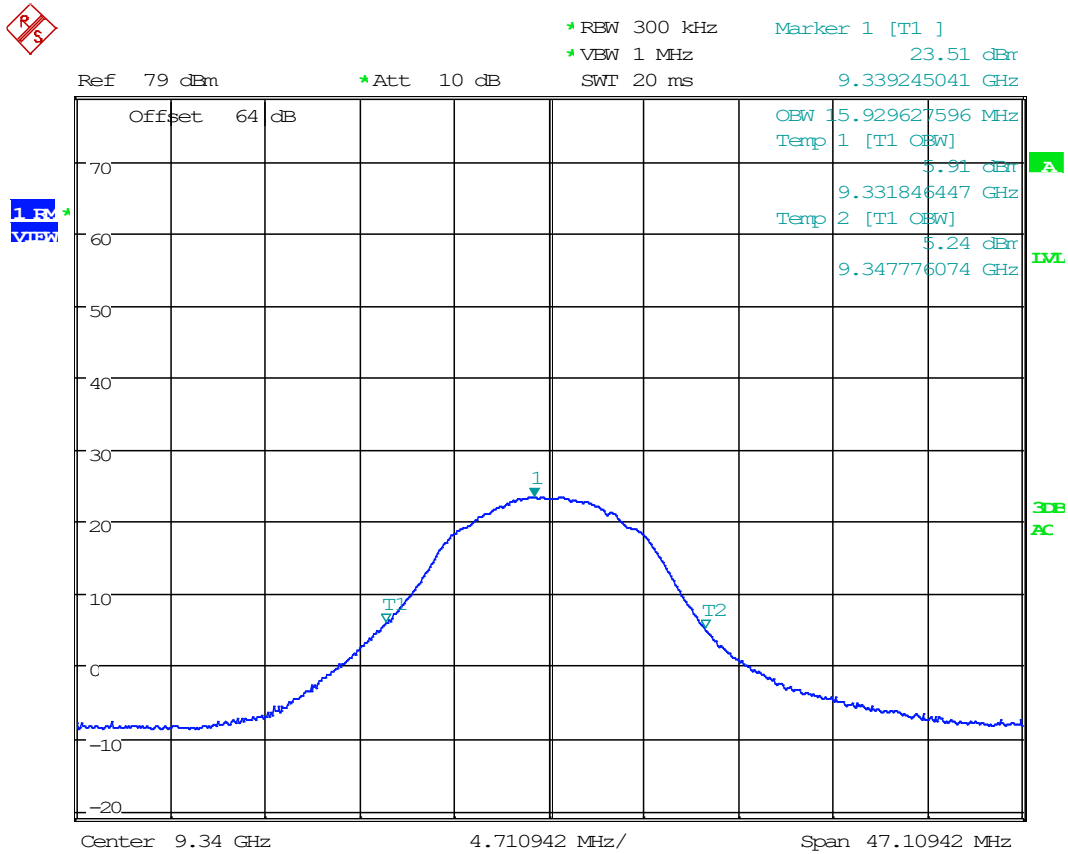


Date: 23.JAN.2023 15:49:06

8.3.3 99% Bandwidth Plot, 9440 MHz, 6 nm

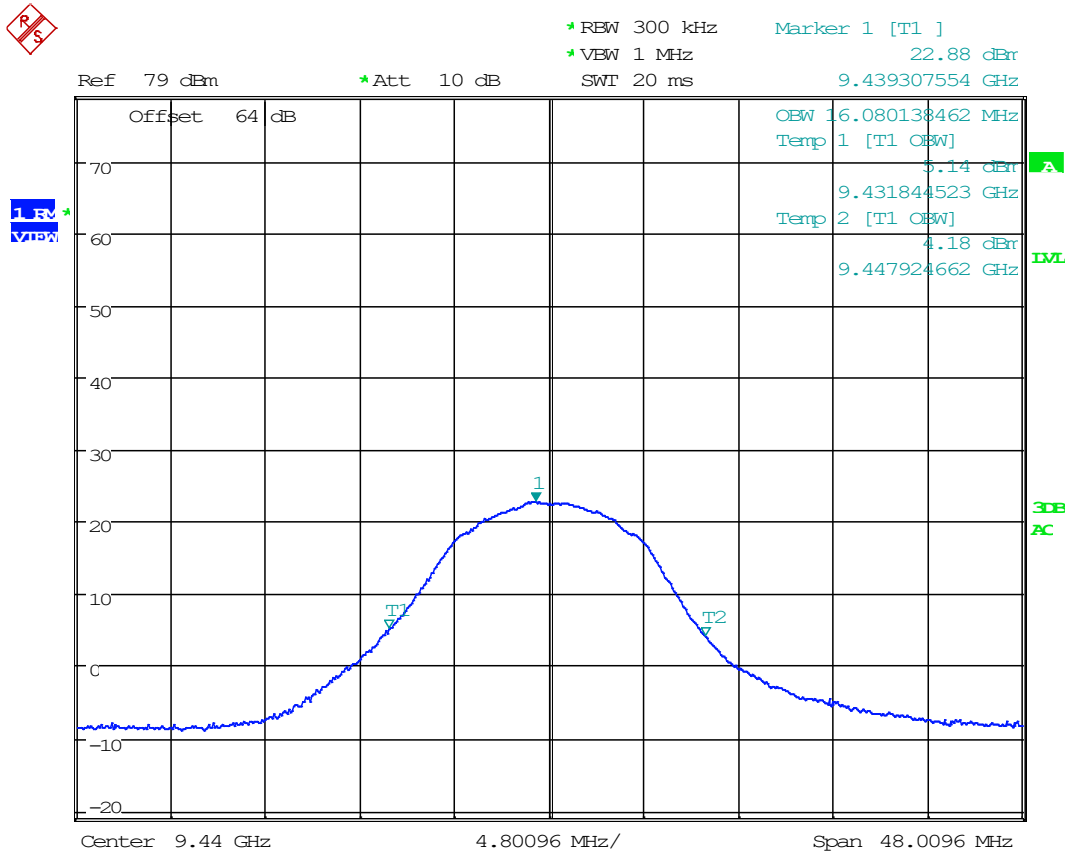


Date: 23.JAN.2023 15:50:28

8.3.1 99% Bandwidth Plot, 9260 MHz, 12 nm

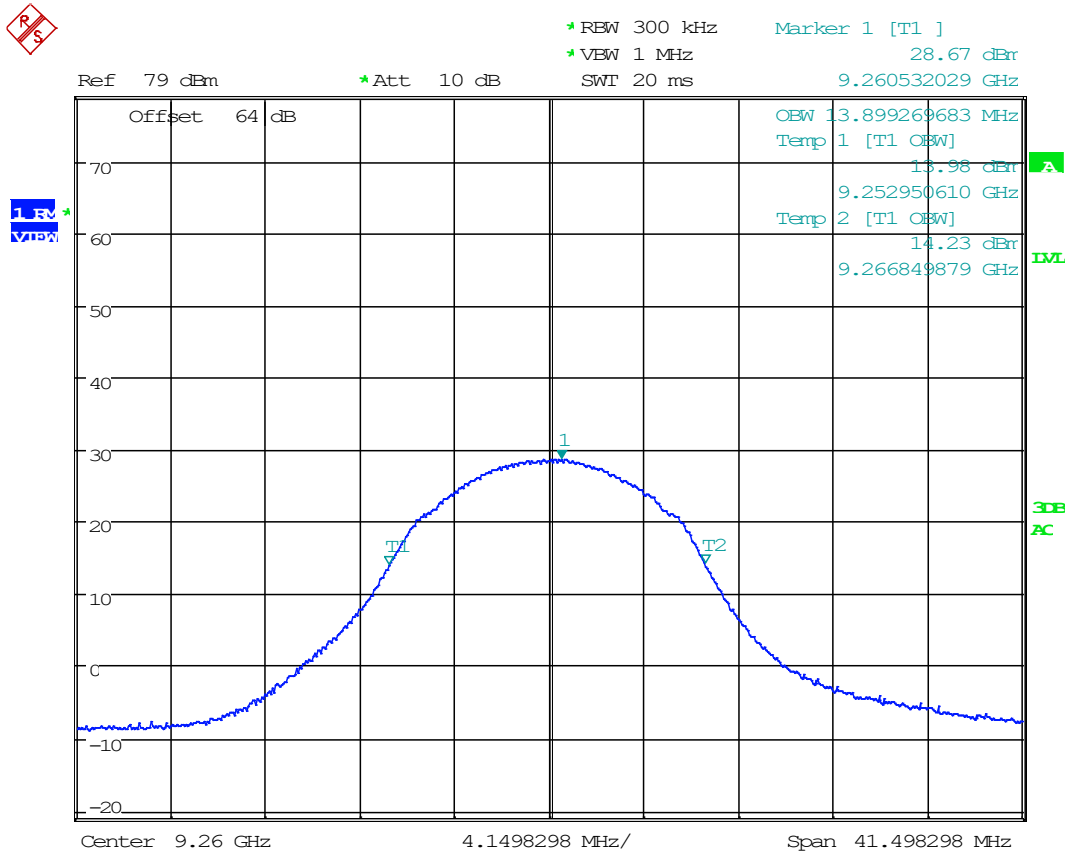


Date: 23.JAN.2023 15:57:26

8.3.2 99% Bandwidth Plot, 9340 MHz, 12 nm

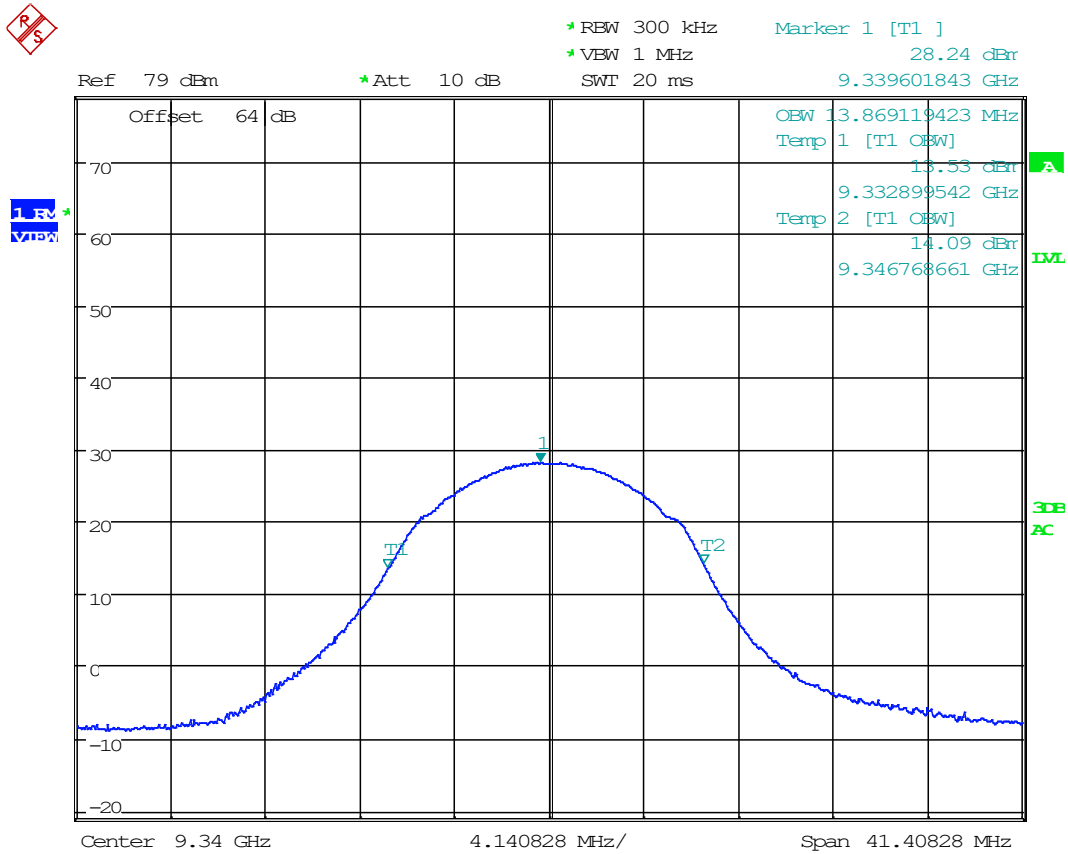


Date: 23.JAN.2023 15:58:24

8.3.3 99% Bandwidth Plot, 9440 MHz, 12 nm

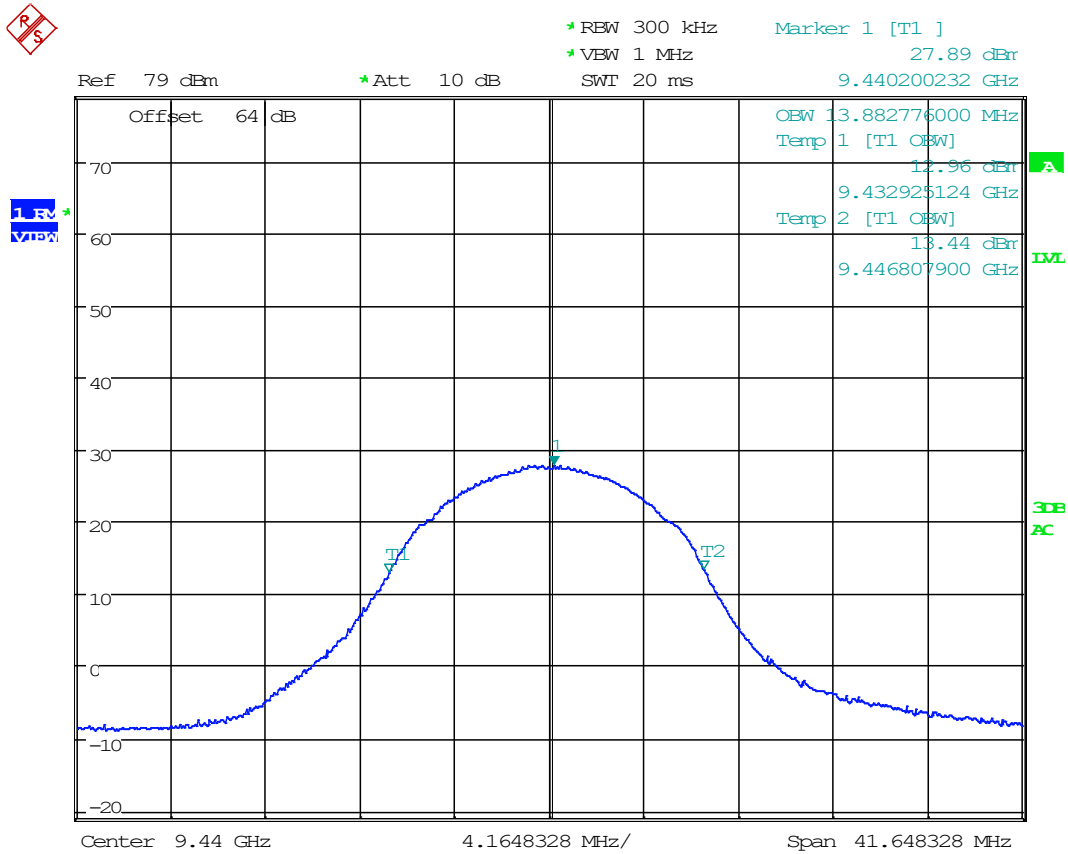


Date: 23.JAN.2023 15:59:33

8.3.1 99% Bandwidth Plot, 9260 MHz, 24 nm

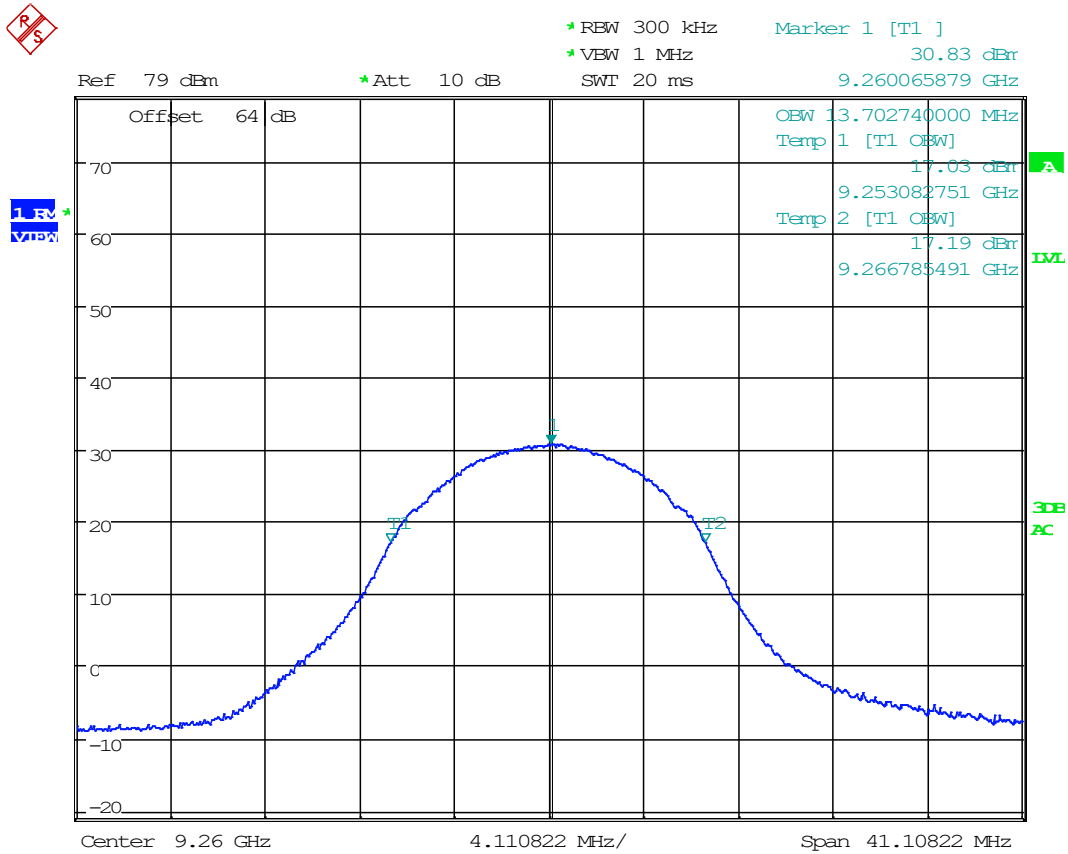


Date: 23.JAN.2023 16:03:08

8.3.2 99% Bandwidth Plot, 9340 MHz, 24 nm

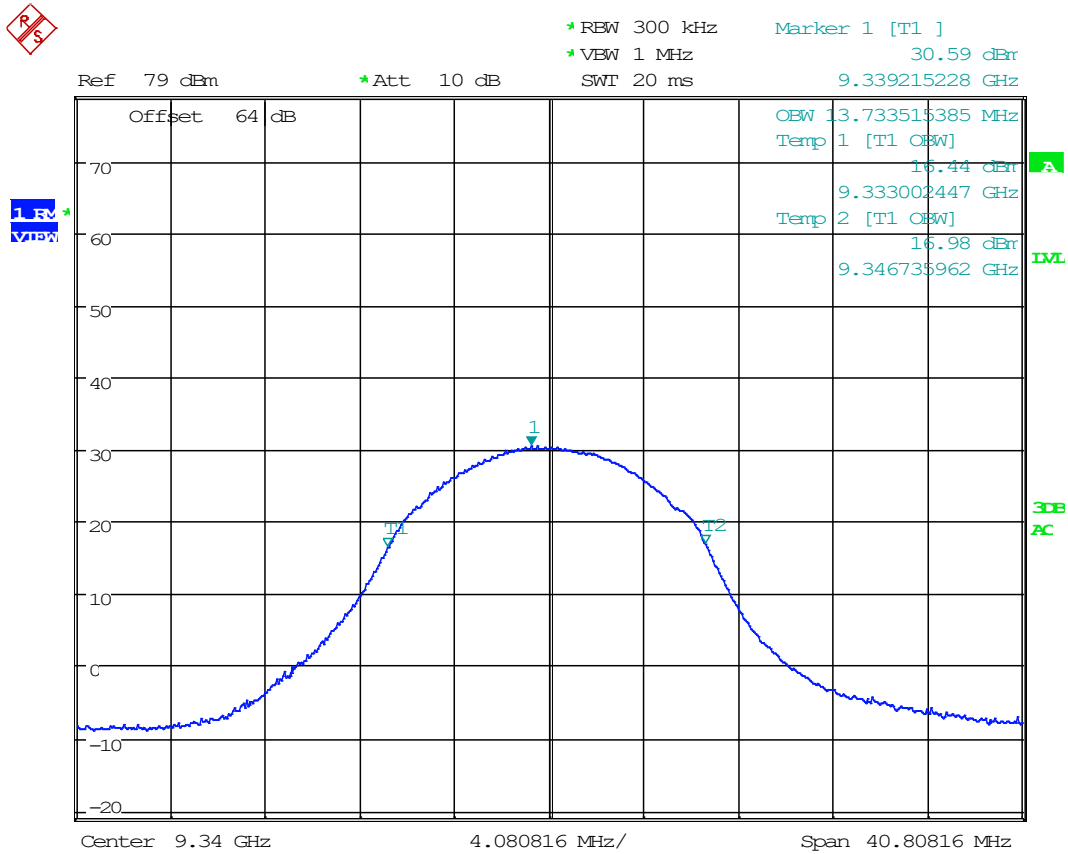


Date: 23.JAN.2023 16:03:51

8.3.3 99% Bandwidth Plot, 9440 MHz, 24 nm

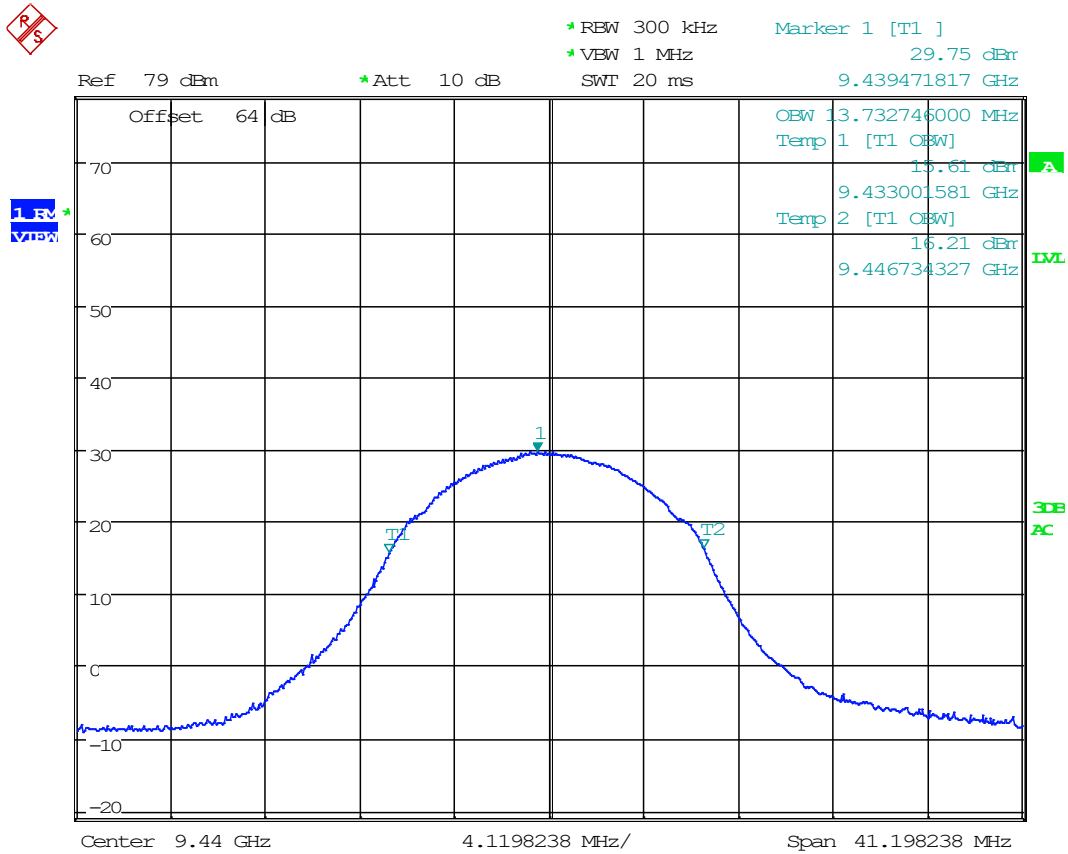


Date: 23.JAN.2023 16:04:34

8.3.1 40dB Bandwidth Plot, 9260 MHz, 6 nm

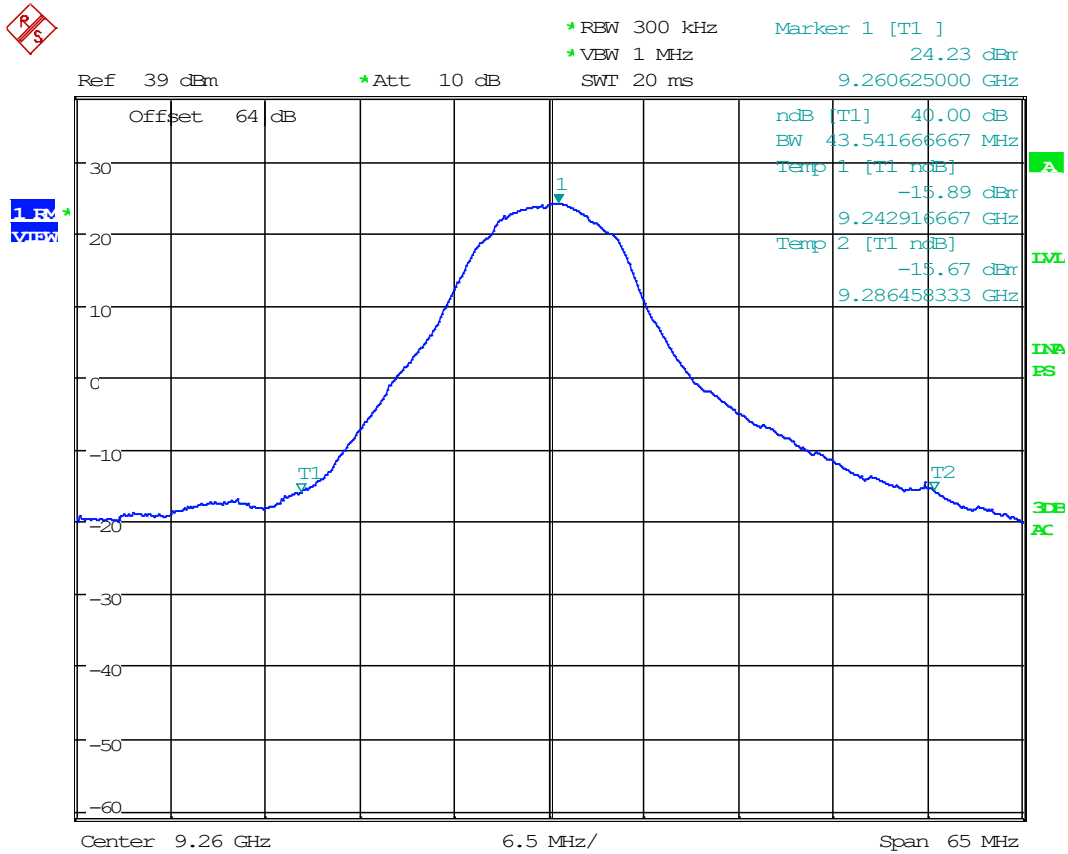


Date: 23.JAN.2023 16:23:03

8.3.2 40dB Bandwidth Plot, 9340 MHz, 6 nm

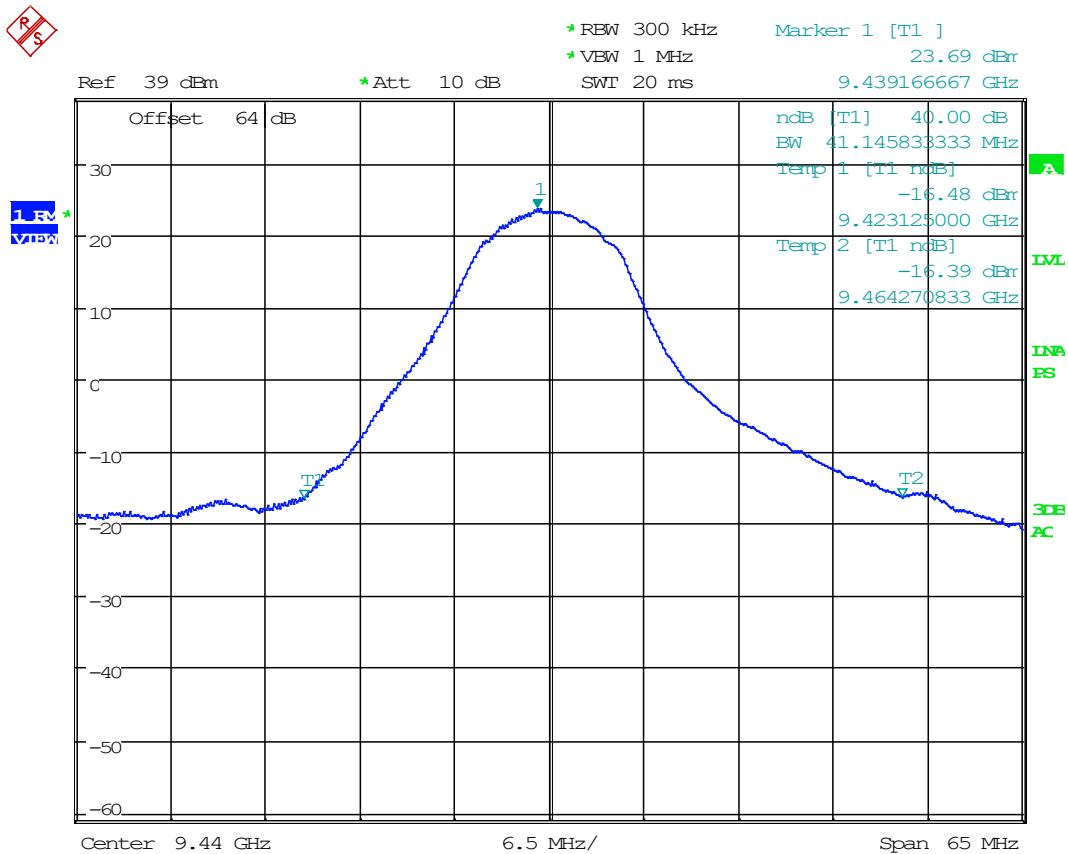


Date: 23.JAN.2023 16:26:48

8.3.3 40dB Bandwidth Plot, 9440 MHz, 6 nm

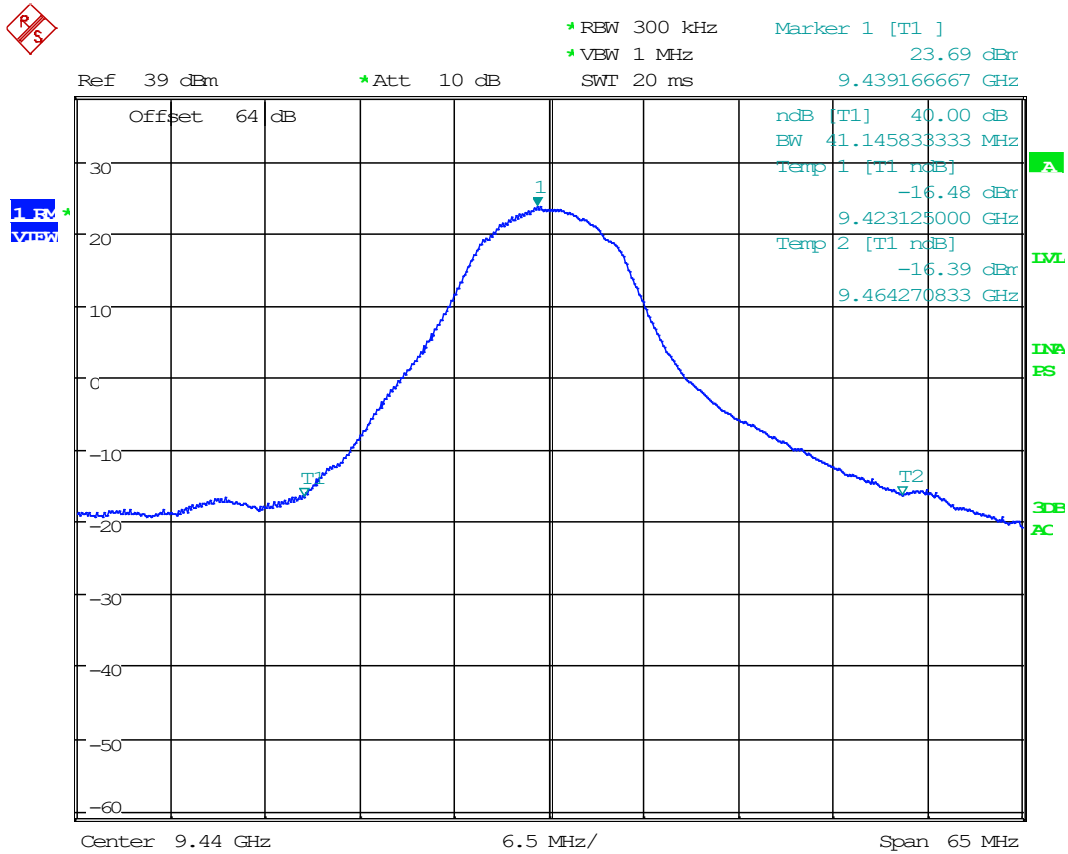


Date: 23.JAN.2023 16:26:48

8.3.1 40dB Bandwidth Plot, 9260 MHz, 12 nm

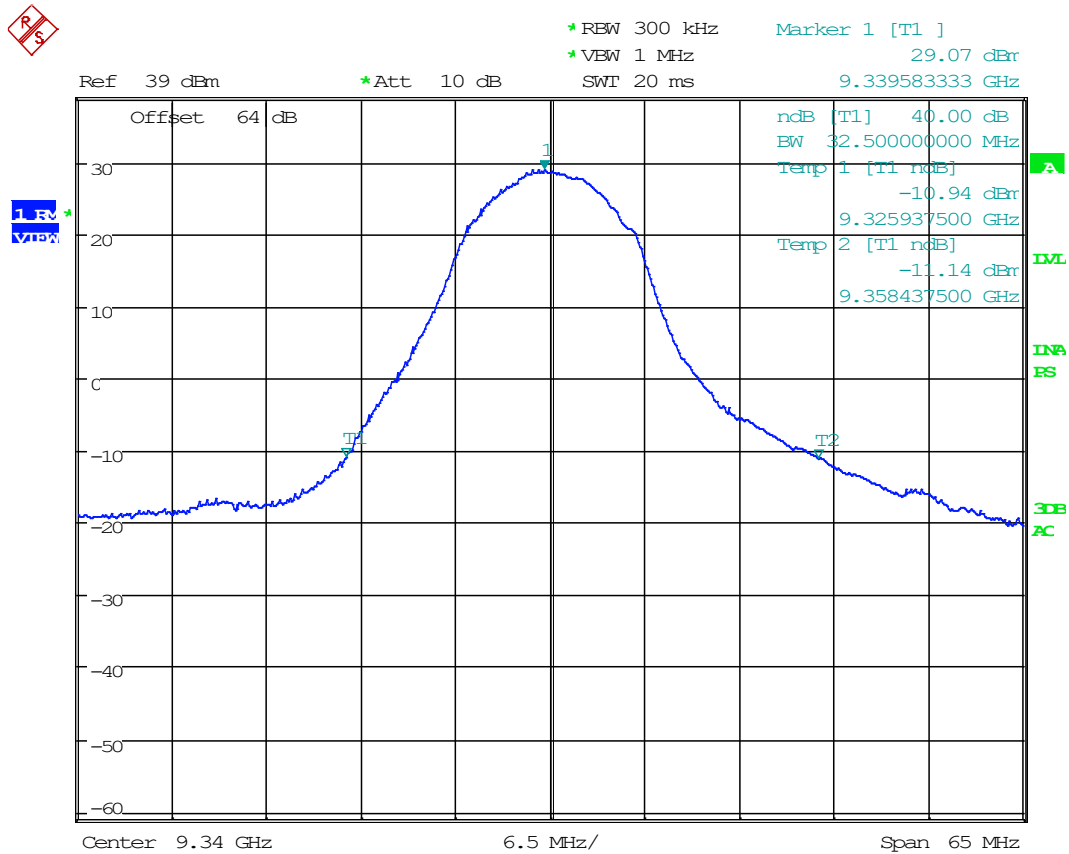


Date: 23.JAN.2023 16:31:53

8.3.2 40dB Bandwidth Plot, 9340 MHz, 12 nm

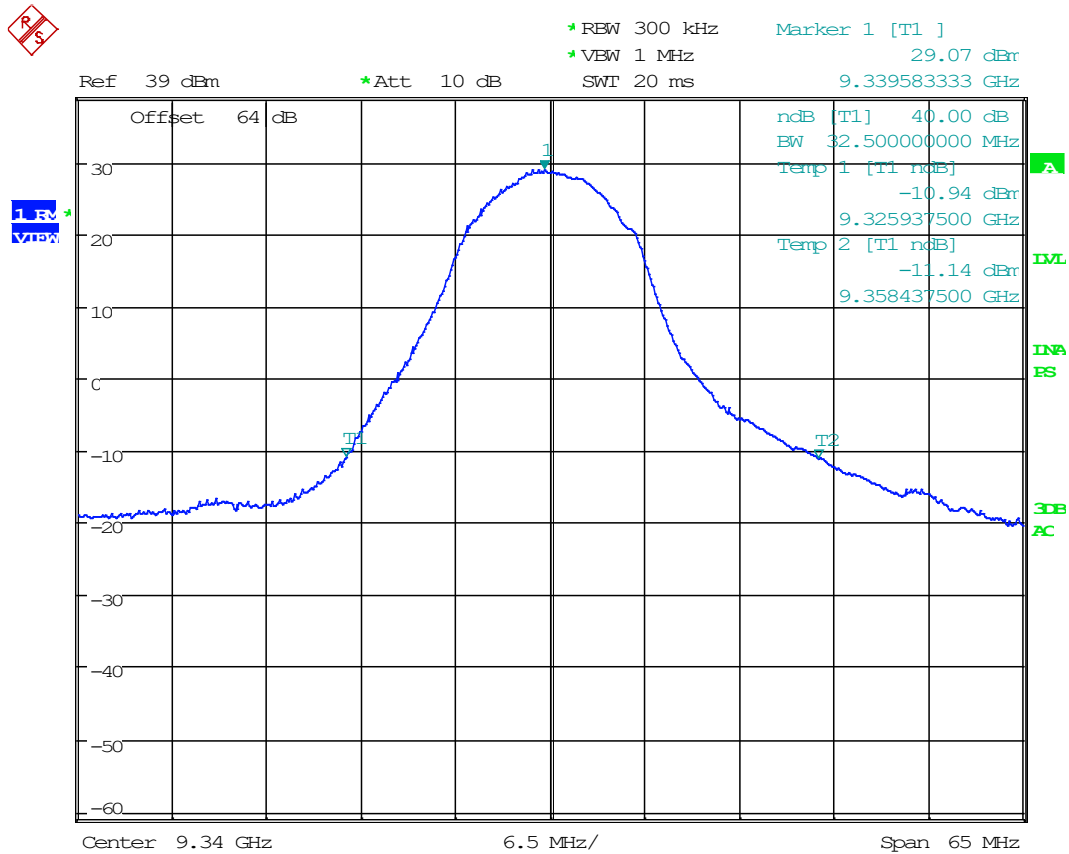


Date: 23.JAN.2023 16:31:53

8.3.3 40dB Bandwidth Plot, 9440 MHz, 12 nm

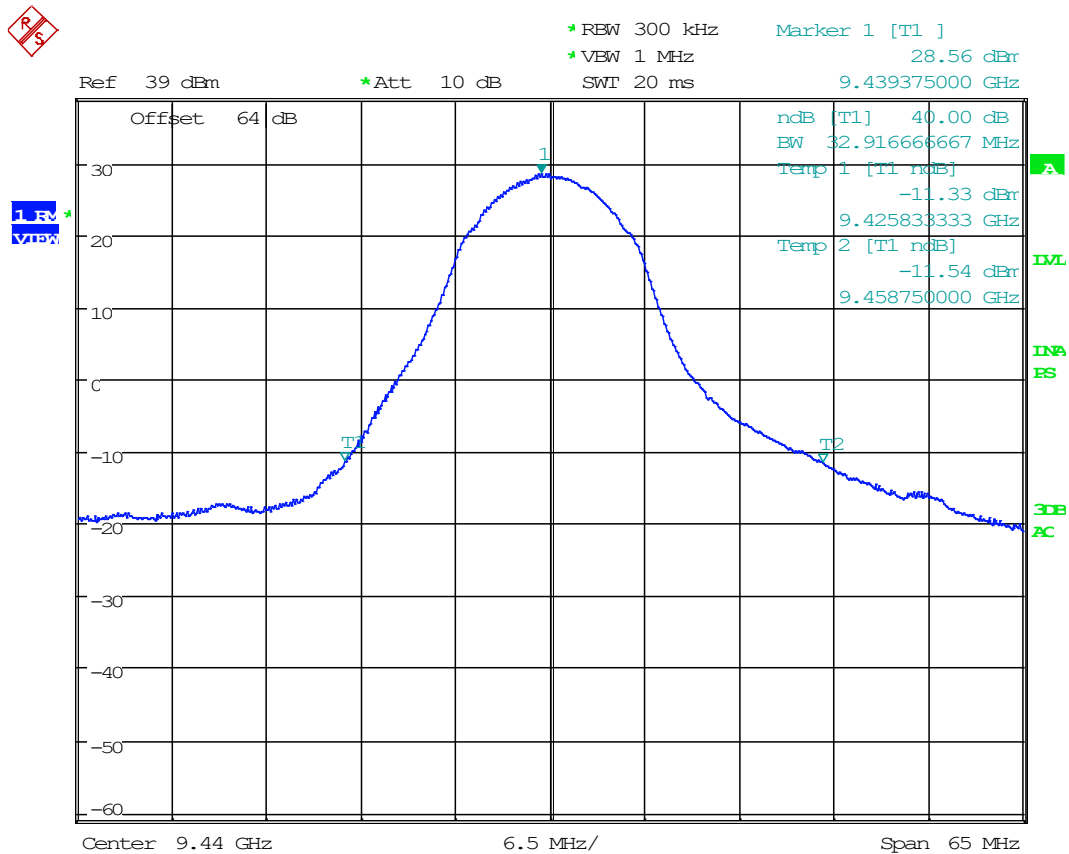


Date: 23.JAN.2023 16:32:50

8.3.1 40dB Bandwidth Plot, 9260 MHz, 24 nm

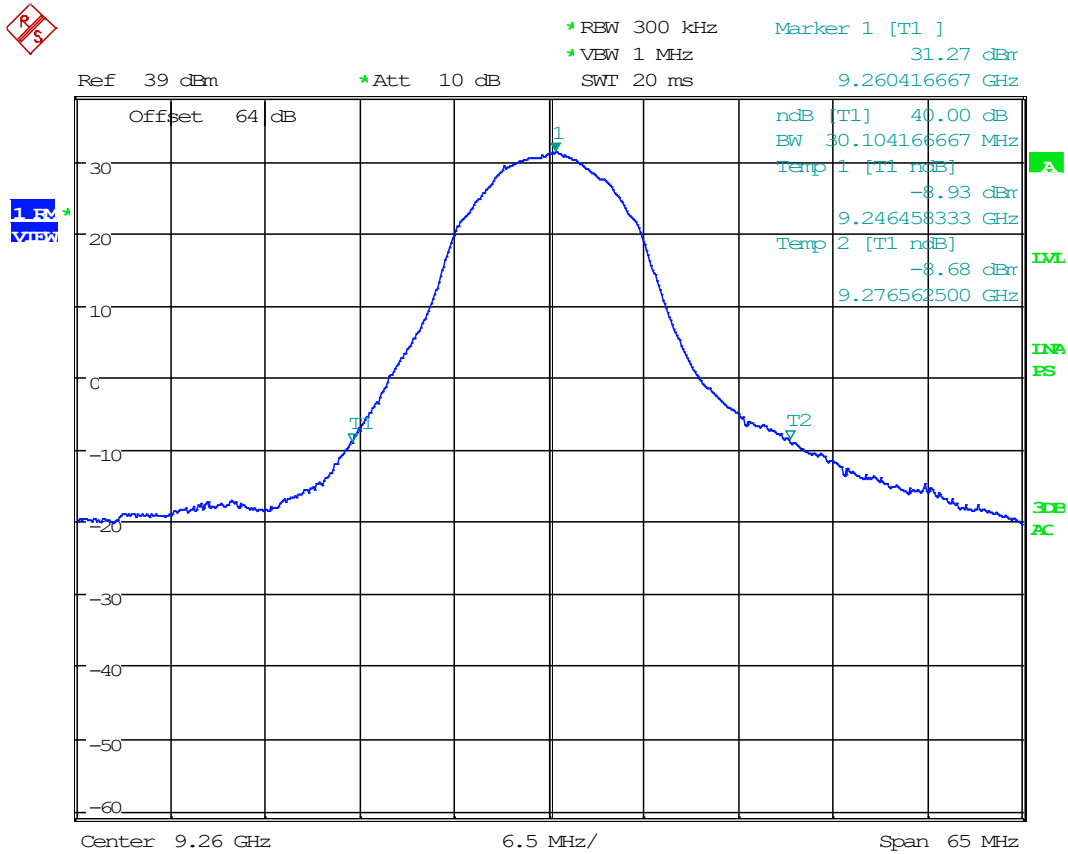


Date: 23.JAN.2023 16:35:12

8.3.2 40dB Bandwidth Plot, 9340 MHz, 24 nm

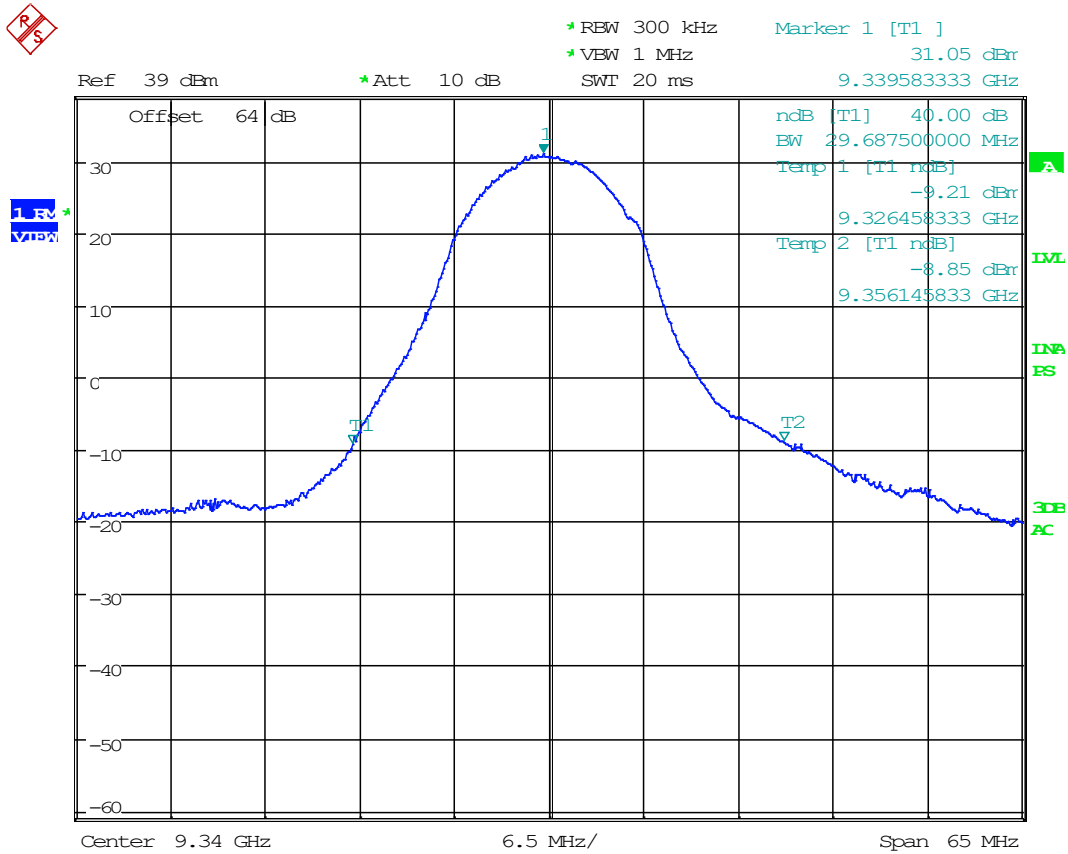

Date: 23.JAN.2023 16:35:48

8.3.3 40dB Bandwidth Plot, 9440 MHz, 24 nm

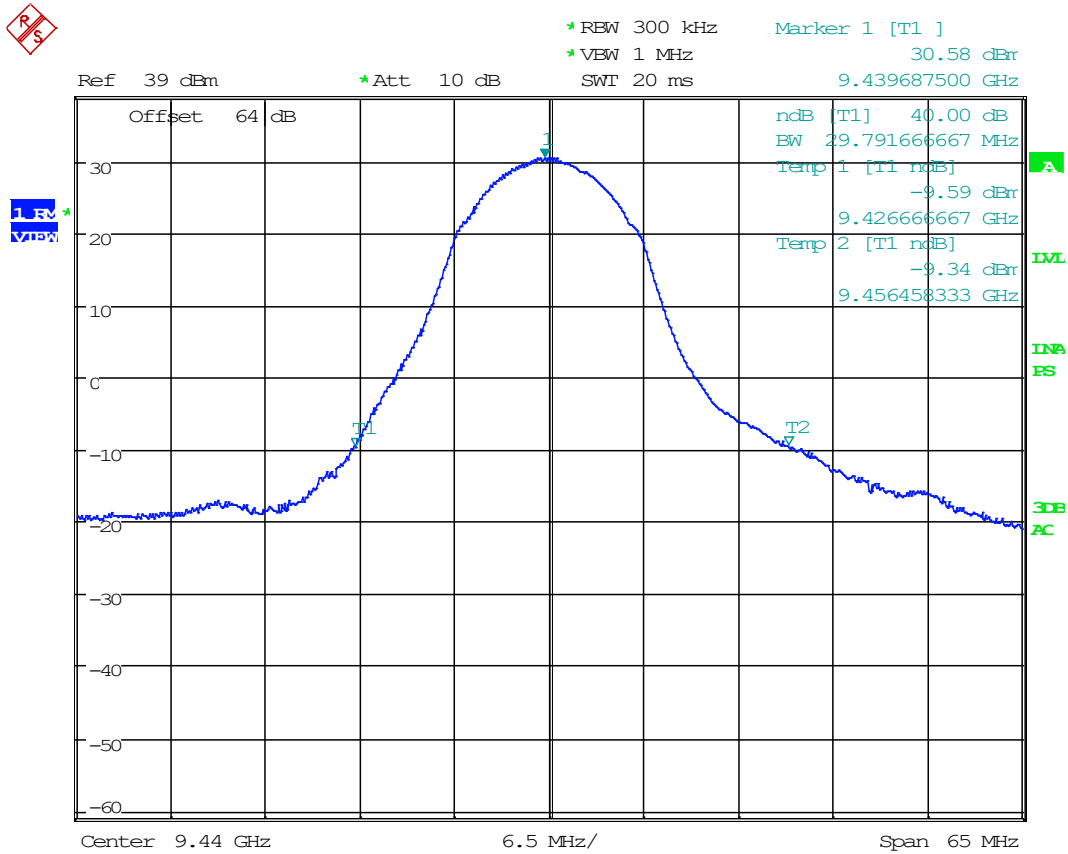


Date: 23.JAN.2023 16:36:26


8.4 Emission Limitations, In-Band

Limits from FCC Parts 80.211 (f) and test procedure from ANSI C63.26-2015.

Conducted Test Setup




8.4.1 Emission Mask, 9260 MHz, 6 nm, Low Power

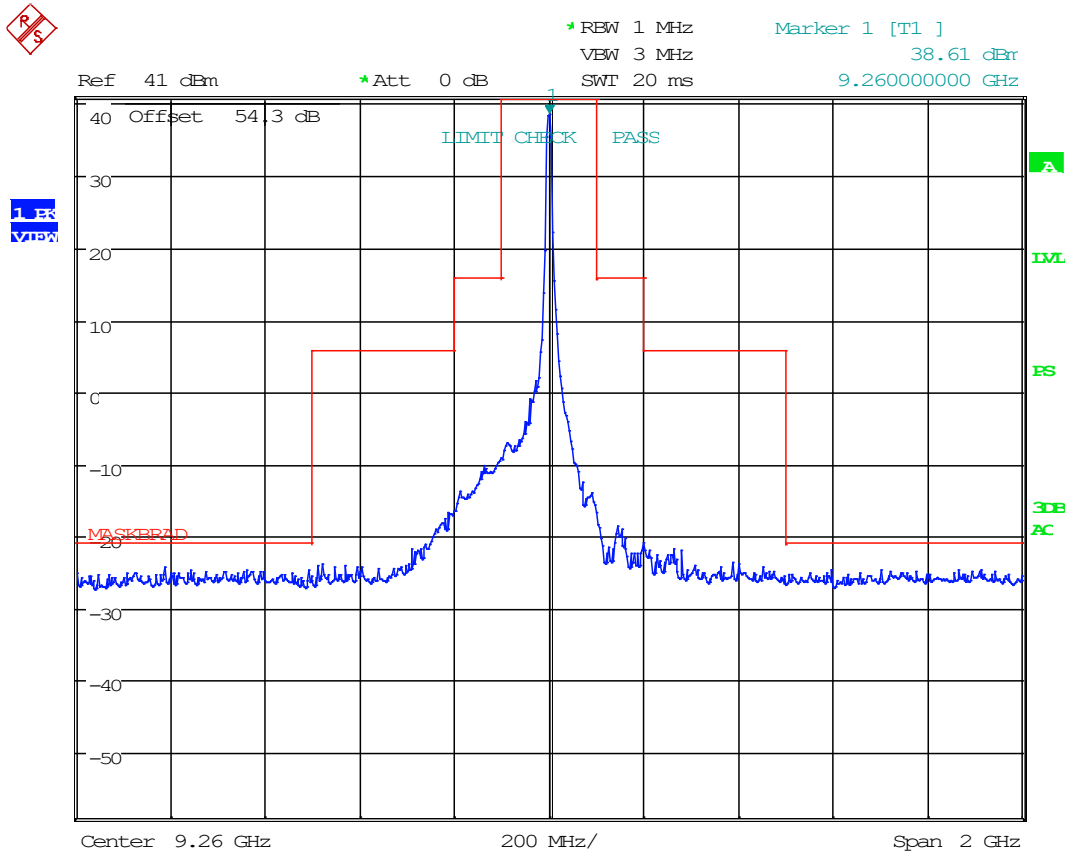


Date: 17.MAR.2023 11:28:08

8.4.2 Emission Mask, 9260 MHz, 6 nm, High Power

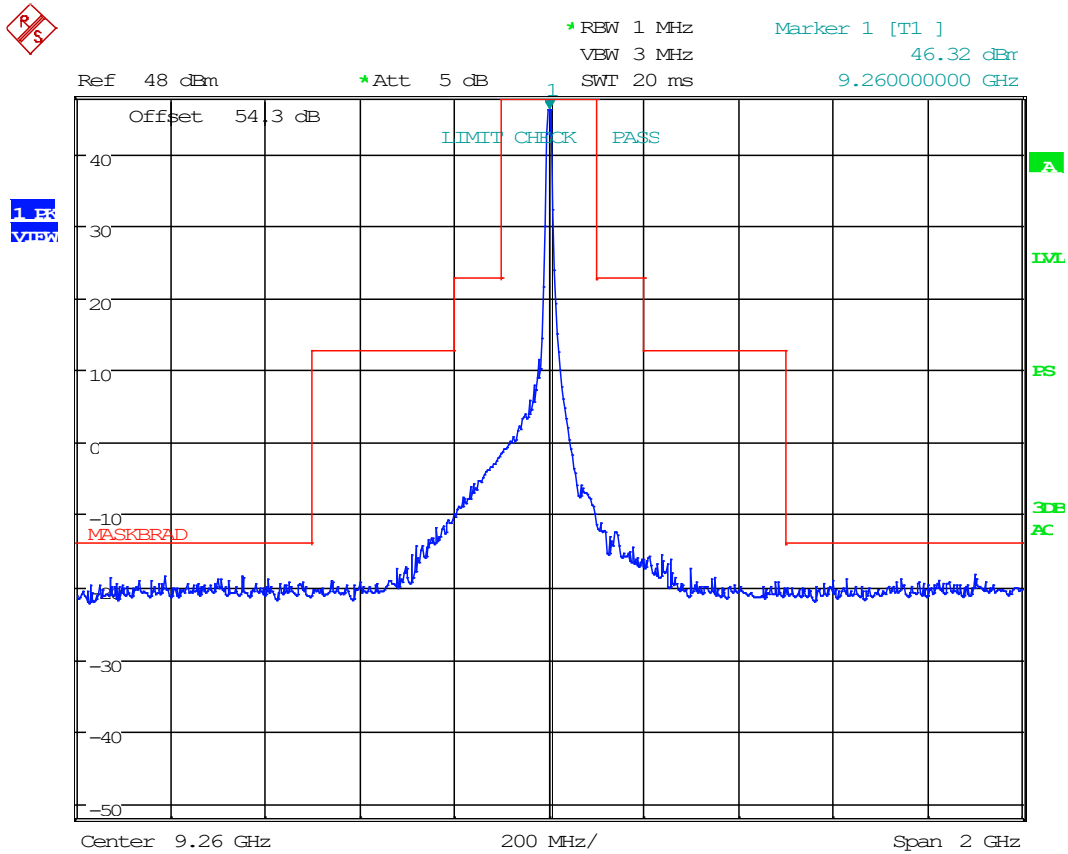


Date: 17.MAR.2023 11:18:48

8.4.3 Emission Mask, 9340 MHz, 6 nm Low Power

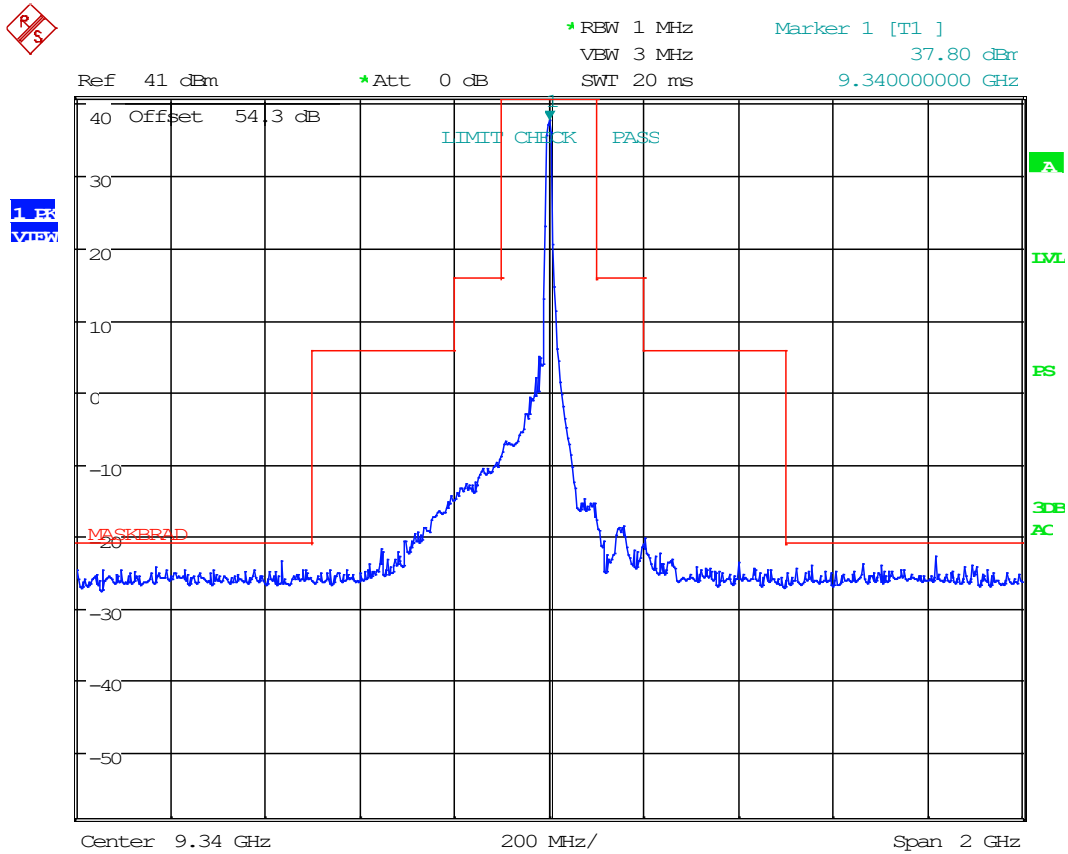

Date: 17.MAR.2023 11:26:06

8.4.4 Emission Mask, 9340 MHz, 6 nm, High Power

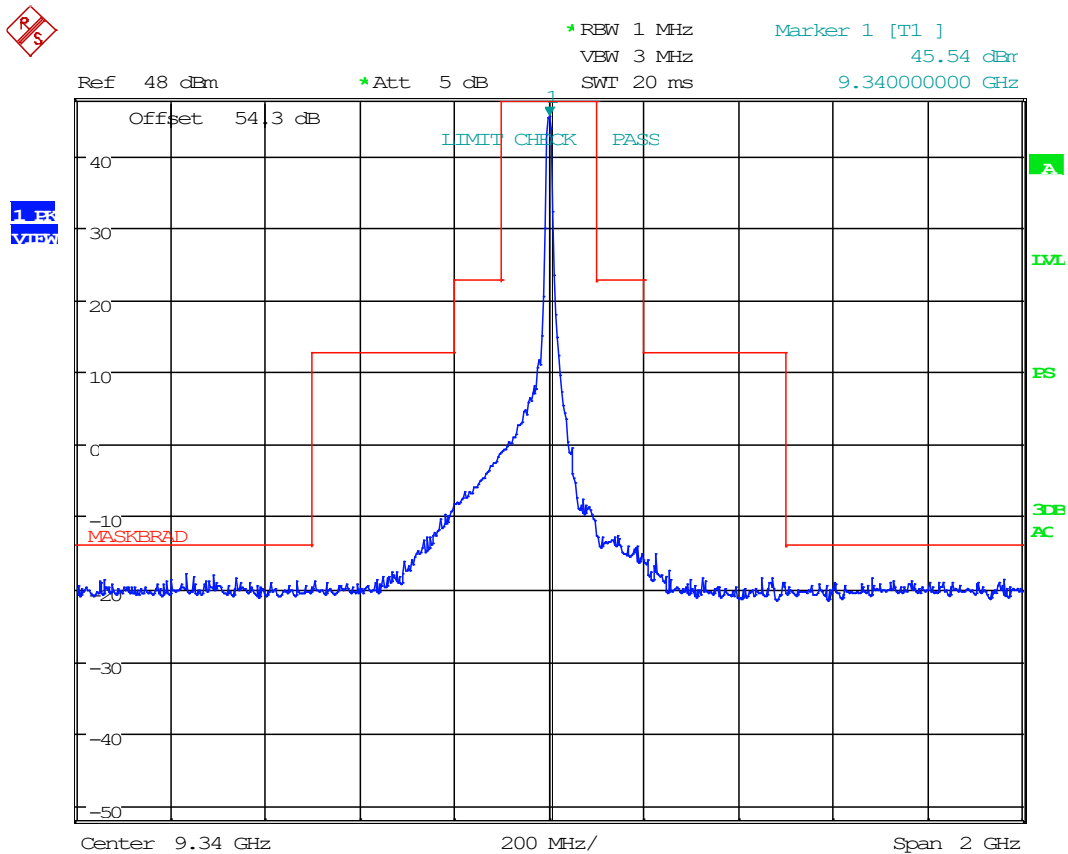


Date: 17.MAR.2023 11:21:42

8.4.5 Emission Mask, 9260 MHz, 12 nm, High Power




1.08
V192

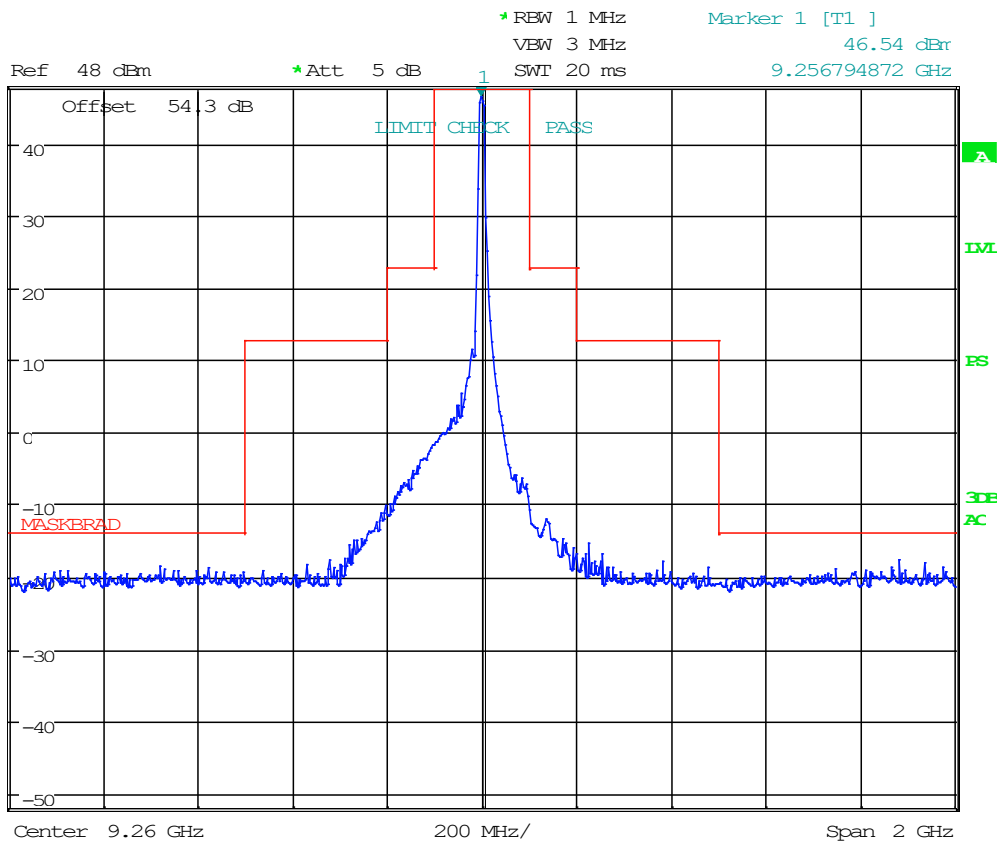


Date: 17.MAR.2023 11:19:33

8.4.6 Emission Mask, 9260 MHz, 12 nm, Low Power

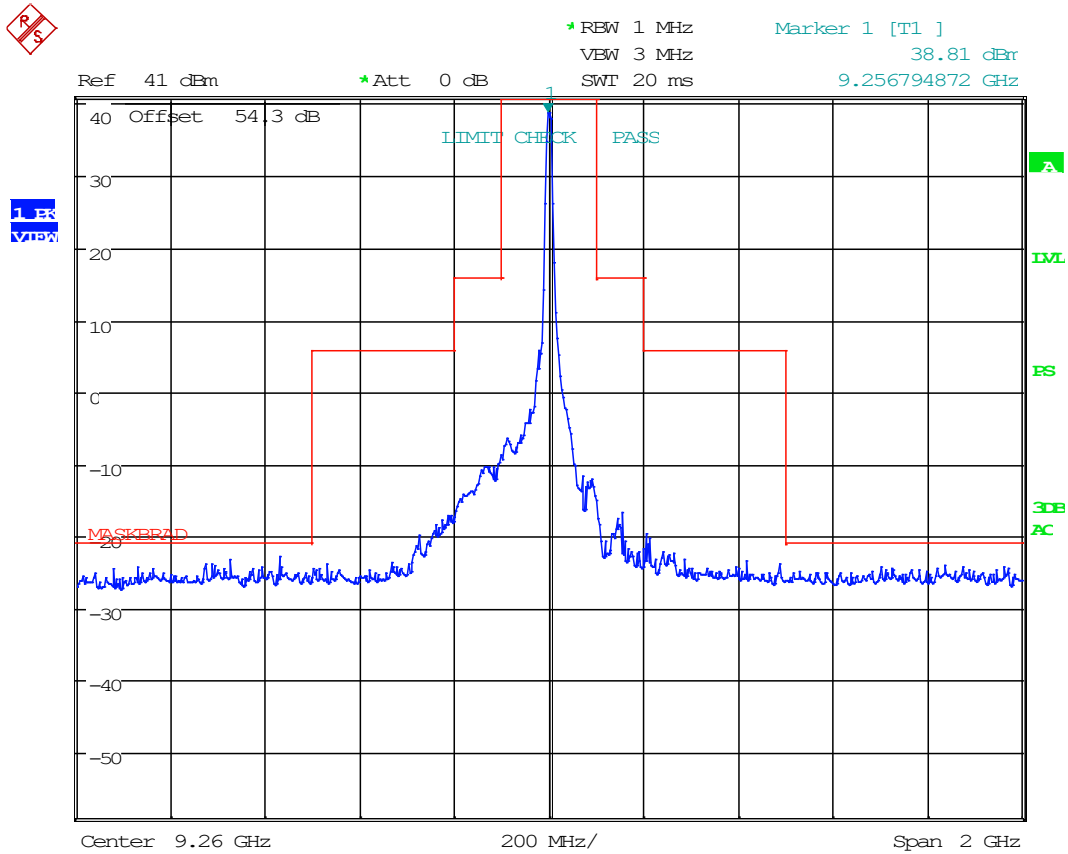


Date: 17.MAR.2023 11:27:44

8.4.7 Emission Mask, 9340 MHz, 12 nm, High Power

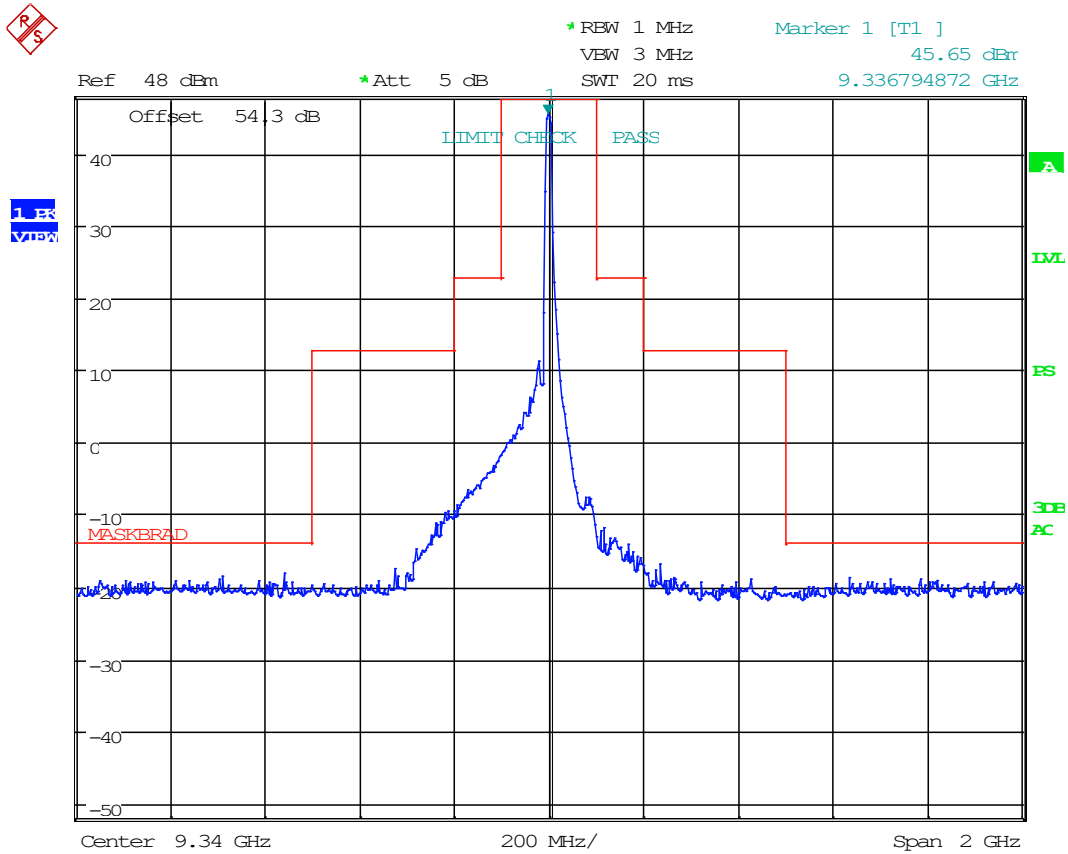


Date: 17.MAR.2023 11:21:09

8.4.8 Emission Mask, 9340 MHz, 12 nm Low Power

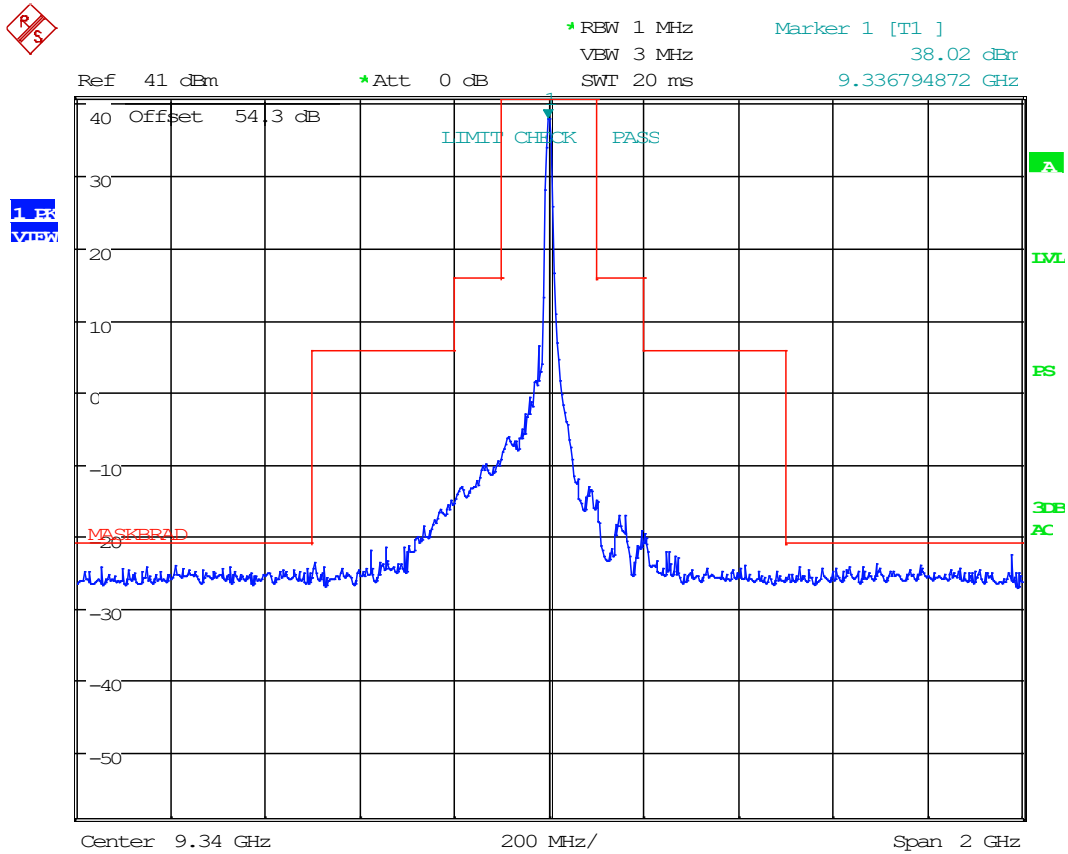


Date: 17.MAR.2023 11:26:29

8.4.9 Emission Mask, 9440 MHz, 12 nm, High Power

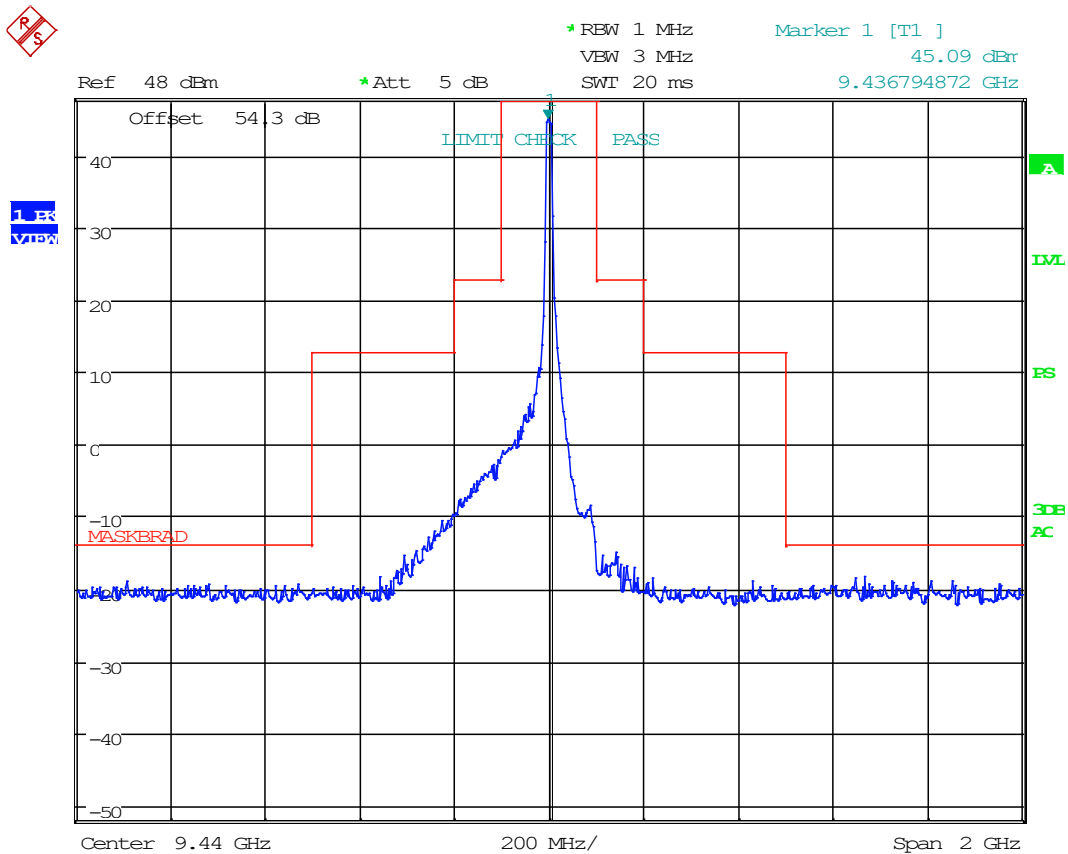


Date: 17.MAR.2023 11:22:44

8.4.10 Emission Mask, 9440 MHz, 12 nm, Low Power

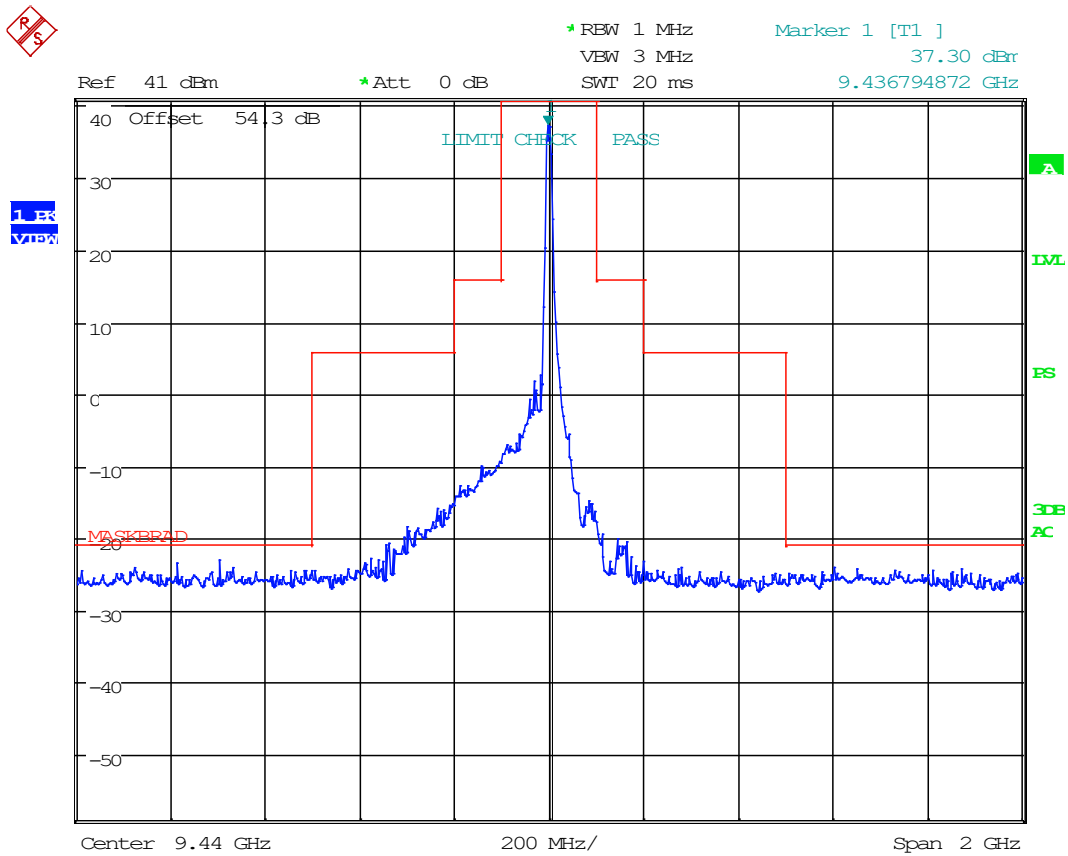


Date: 17.MAR.2023 11:25:07

8.4.11 Emission Mask, 9260 MHz, 24 nm, High Power

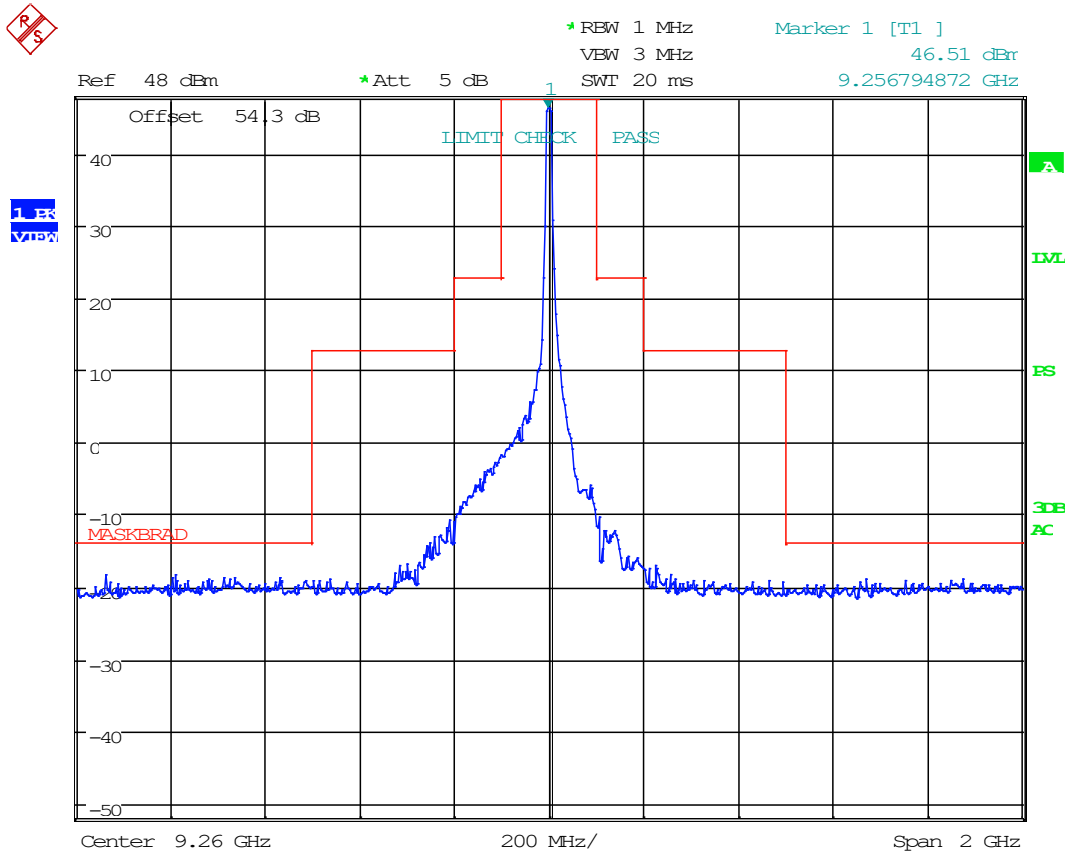


Date: 17.MAR.2023 11:20:02

8.4.12 Emission Mask, 9260 MHz, 24 nm, Low Power

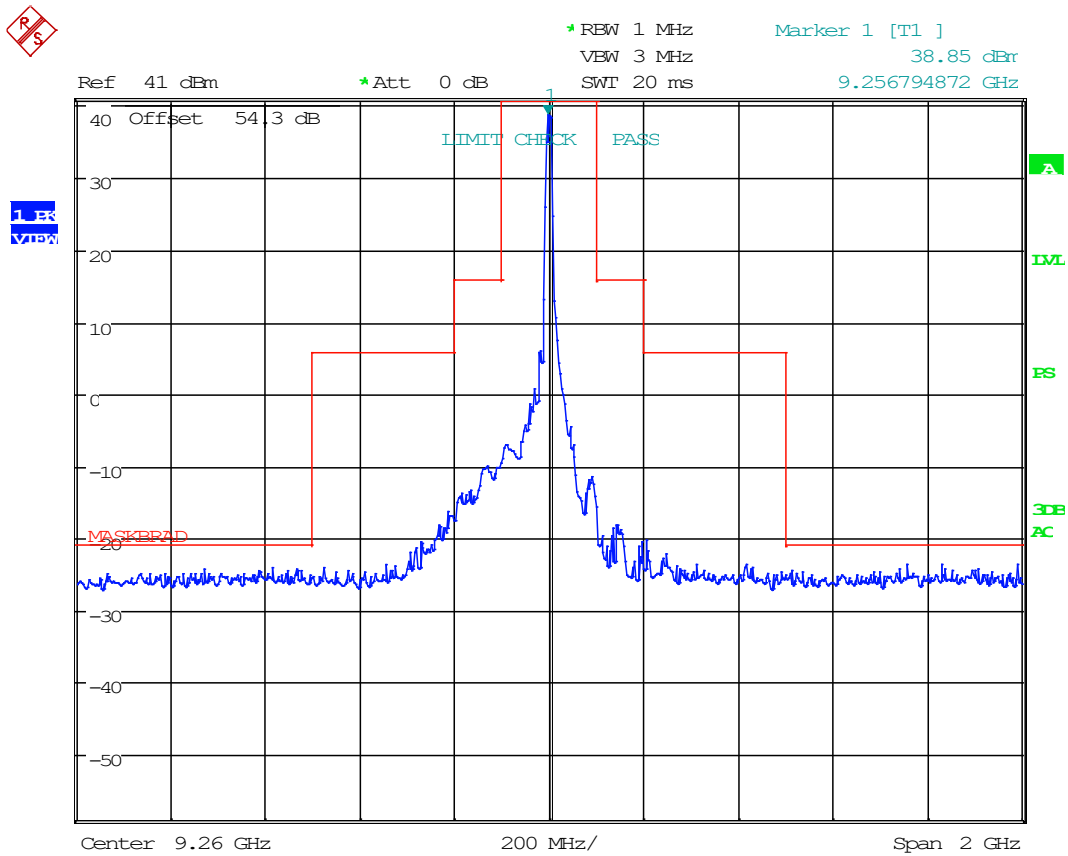


Date: 17.MAR.2023 11:27:23

8.4.13 Emission Mask, 9340 MHz, 24 nm, High Power

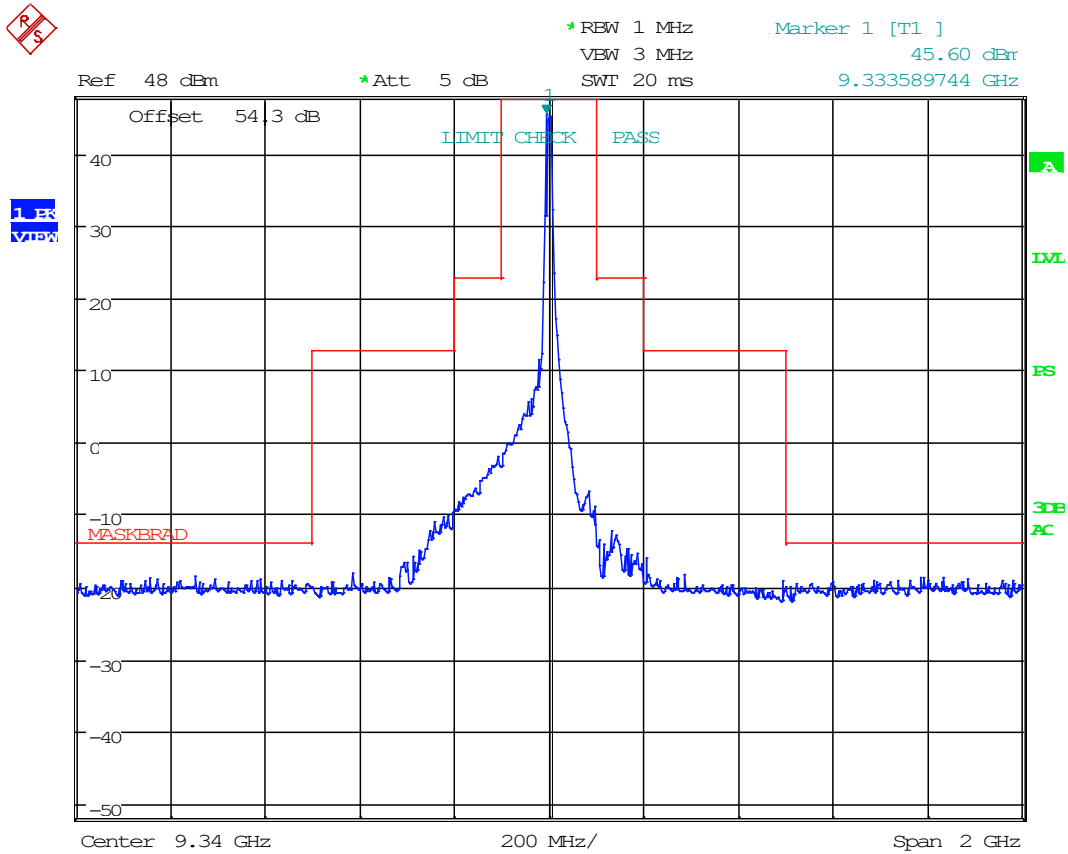


Date: 17.MAR.2023 11:20:41

8.4.14 Emission Mask, 9340 MHz, 24 nm Low Power

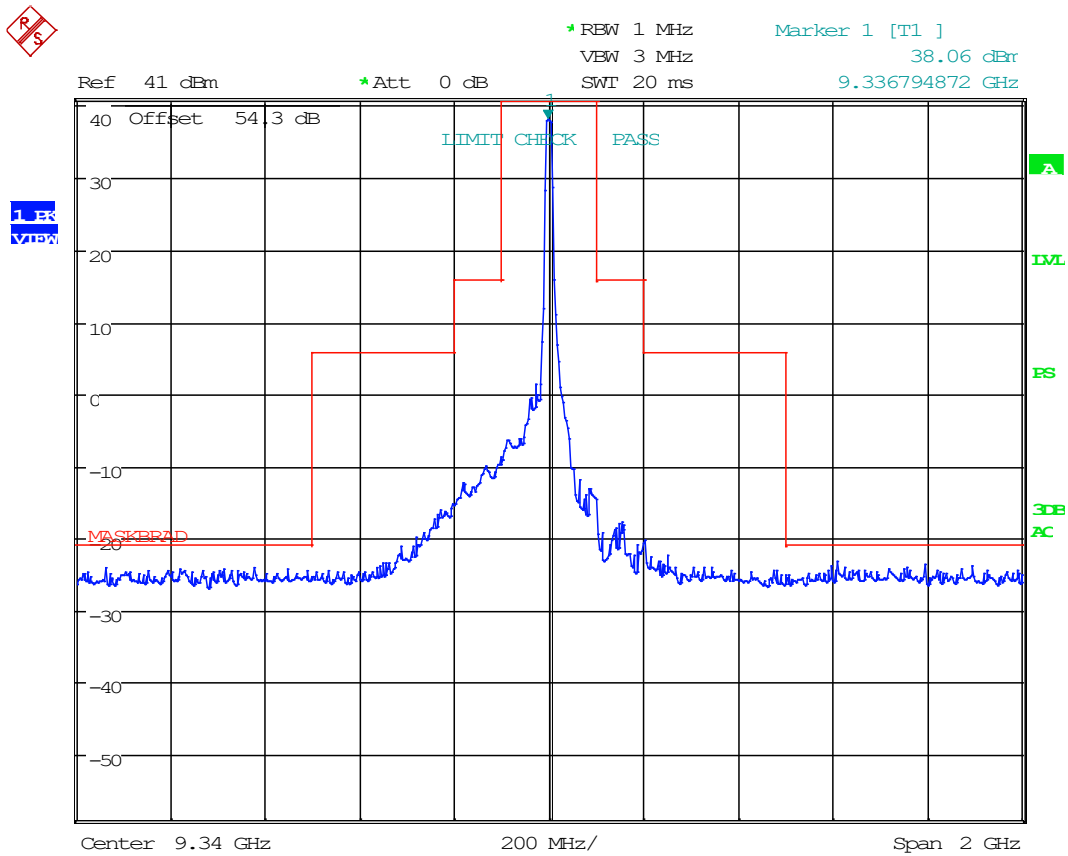


Date: 17.MAR.2023 11:26:55

8.4.15 Emission Mask, 9440 MHz, 24 nm, High Power

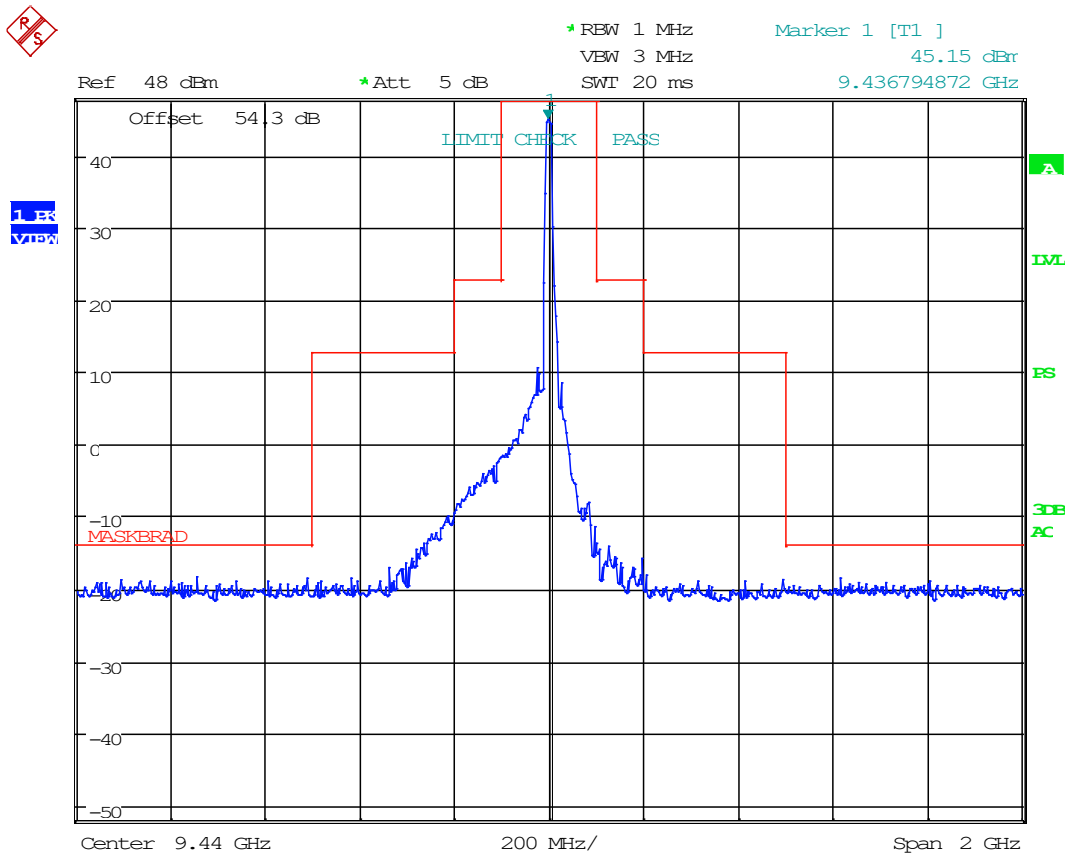

Date: 17.MAR.2023 11:23:21

8.4.16 Emission Mask, 9440 MHz, 24 nm, Low Power

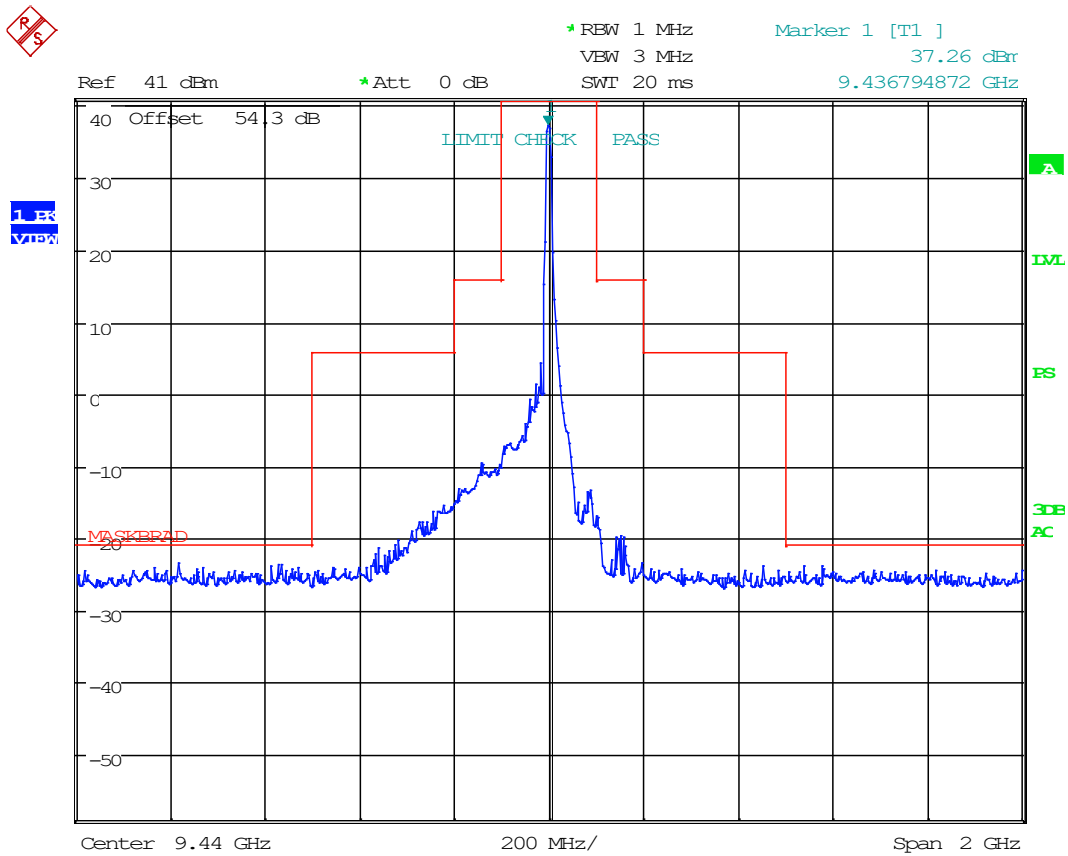


Date: 17.MAR.2023 11:24:36


8.5 Emission Limitations, Out-of-Band

Limits from FCC Parts 2.1051, 80.211 (f) and test procedure from ANSI C63.26-2015.

Conducted Test Setup




8.5.1 Conducted Emissions, Below 1GHz, 9260 MHz, 6 nm

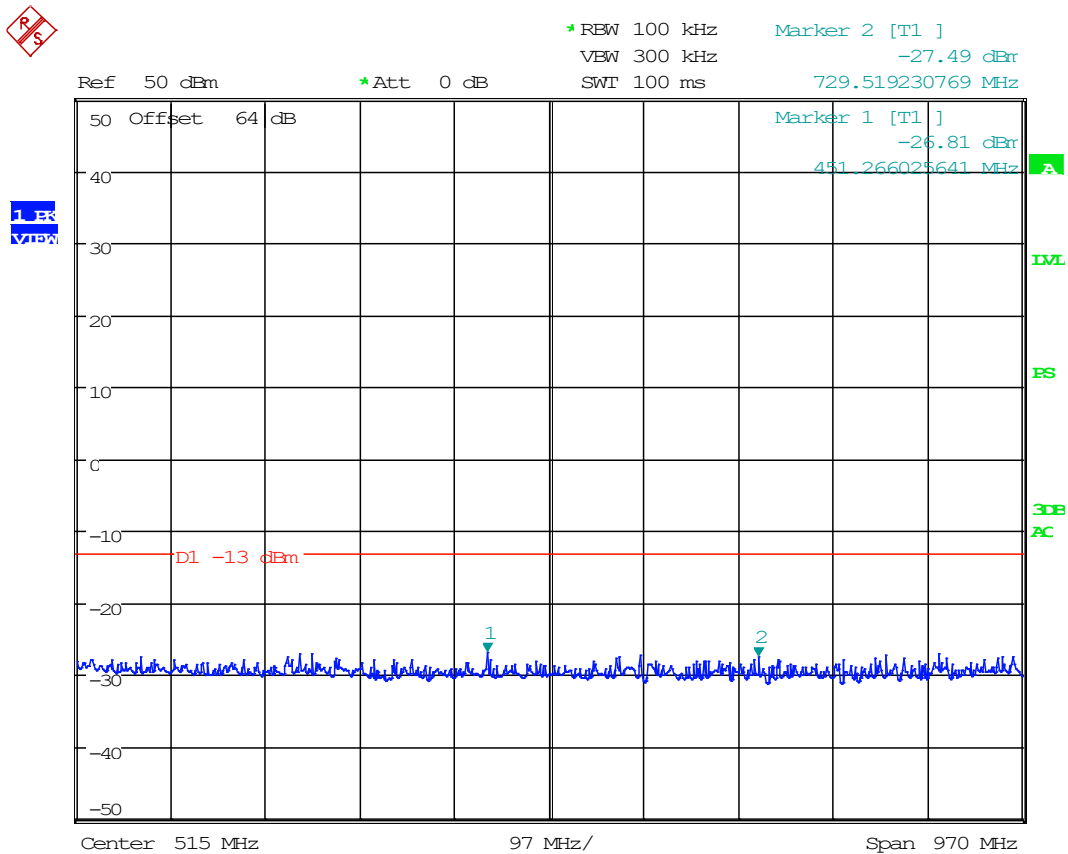


Date: 23.JAN.2023 16:48:41

8.5.2 Conducted Emissions, Above 1GHz, 9260 MHz, 6 nm

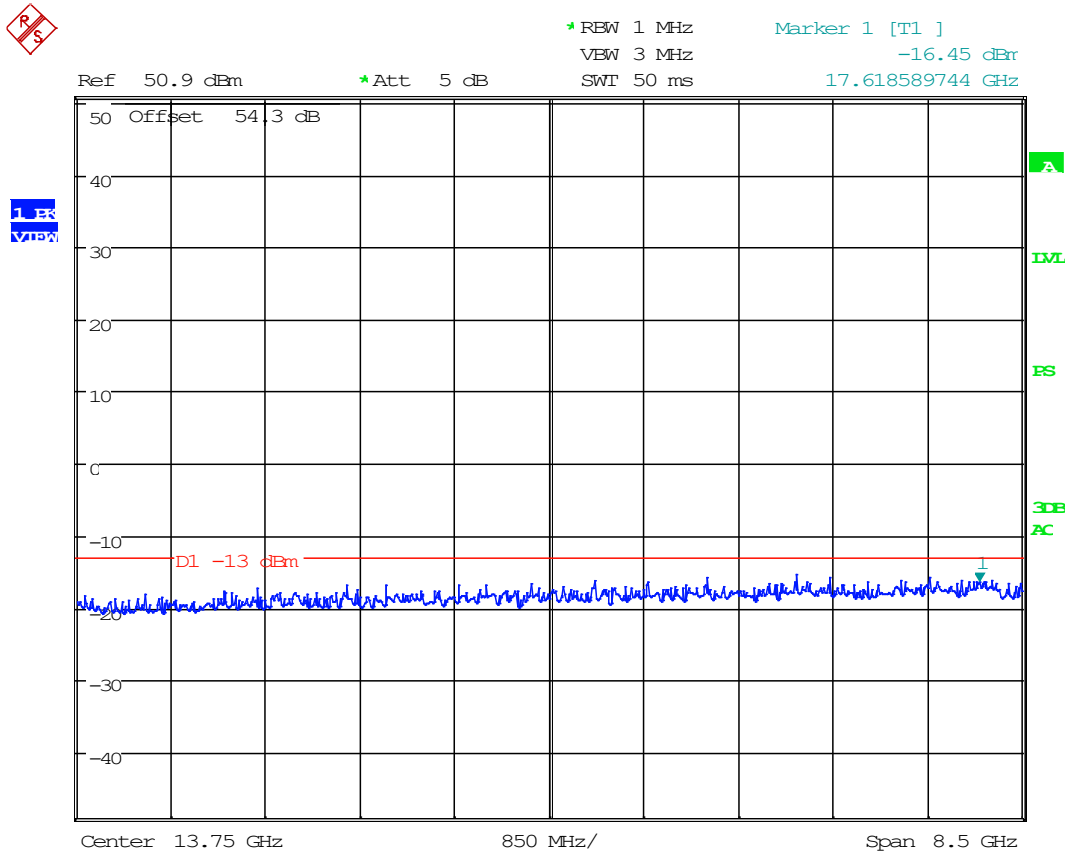


Date: 17.MAR.2023 09:59:51

8.5.3 Conducted Emissions, Above 18GHz, 9260 MHz, 6 nm

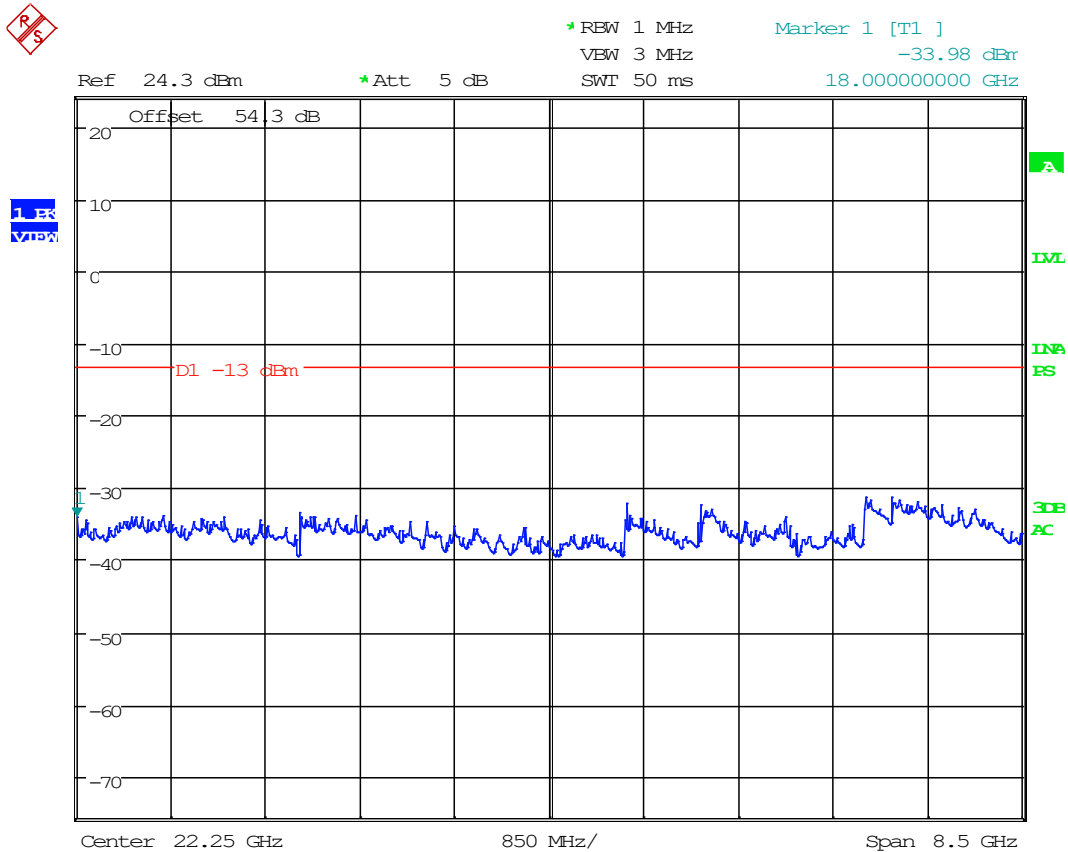


Date: 17.MAR.2023 10:17:10

8.5.4 Conducted Emissions, Above 26GHz, 9260 MHz, 6 nm

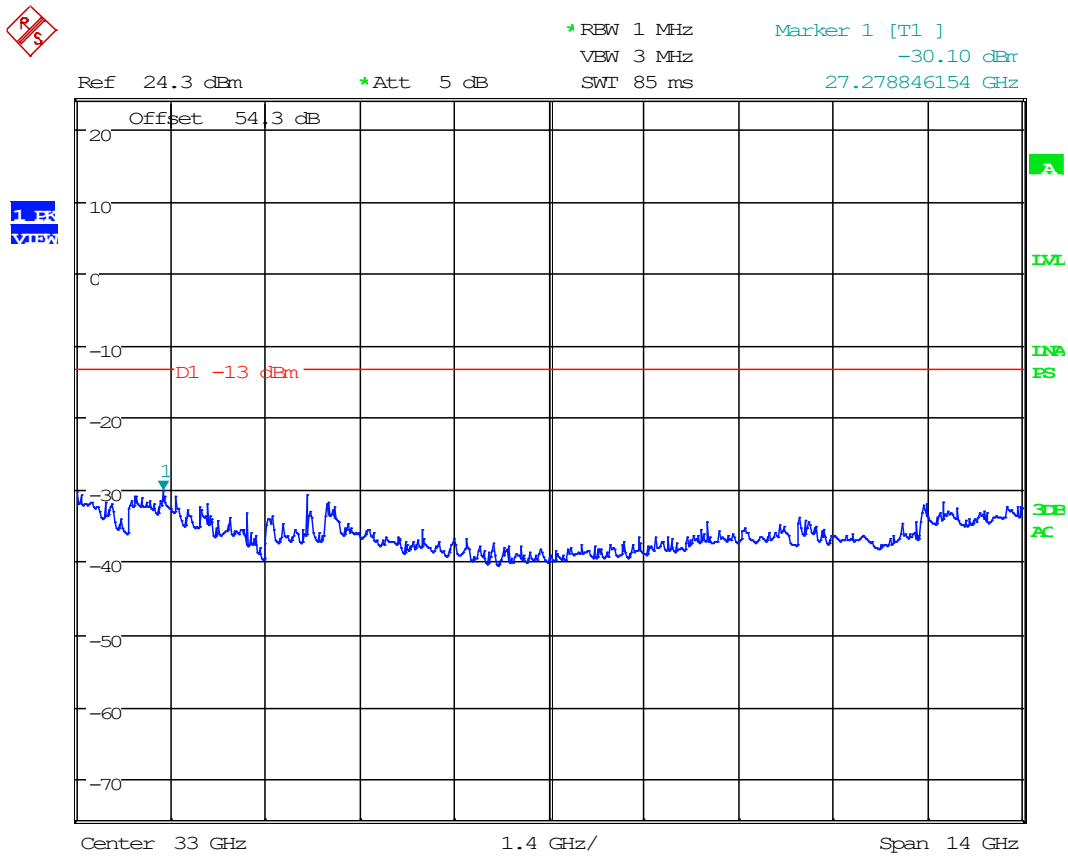


Date: 17.MAR.2023 11:07:08

8.5.5 Conducted Emissions, Below 1GHz, 9340 MHz, 6 nm

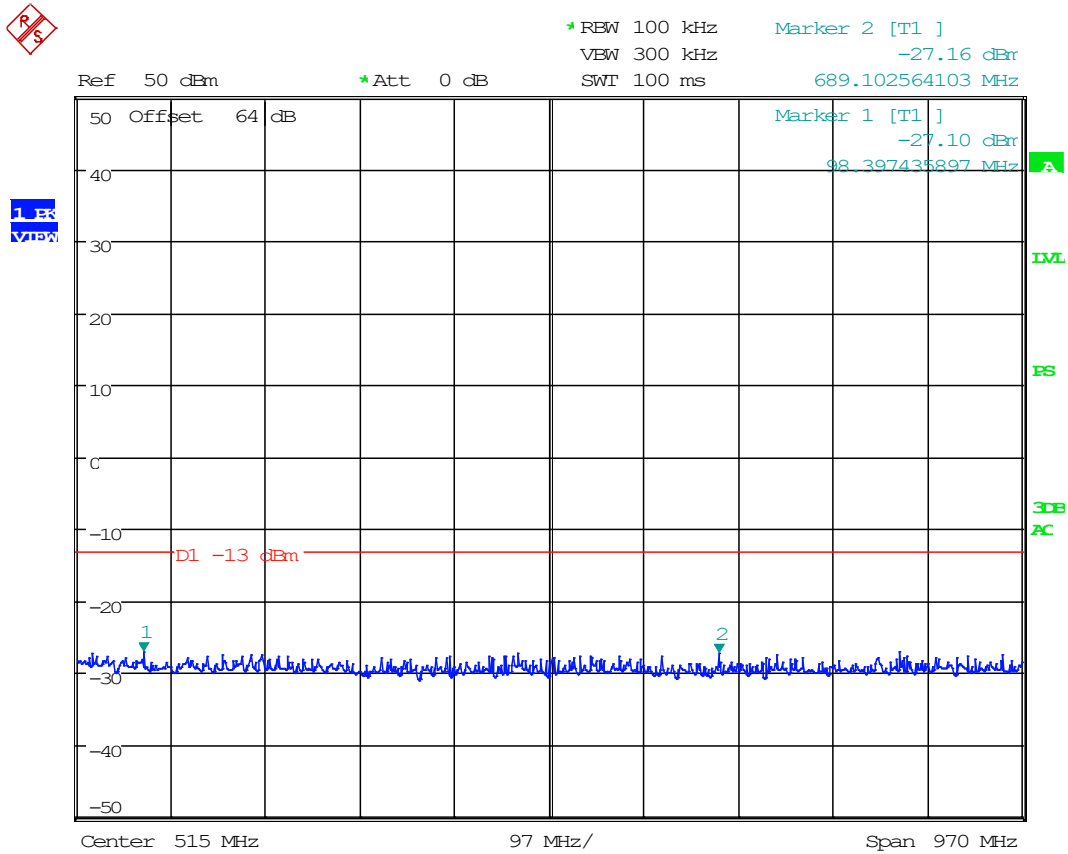


Date: 23.JAN.2023 16:49:58

8.5.6 Conducted Emissions, Above 1GHz, 9340 MHz, 6 nm

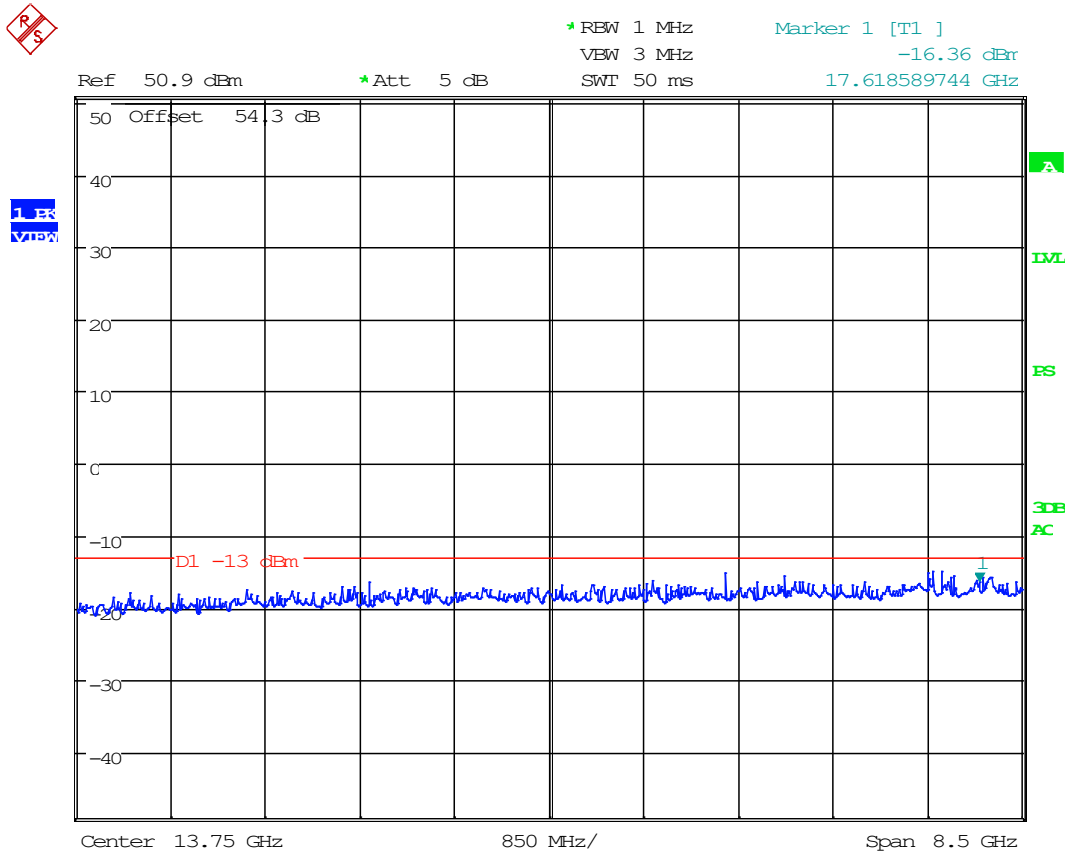


Date: 17.MAR.2023 09:56:37

8.5.7 Conducted Emissions, Above 18GHz, 9340 MHz, 6 nm

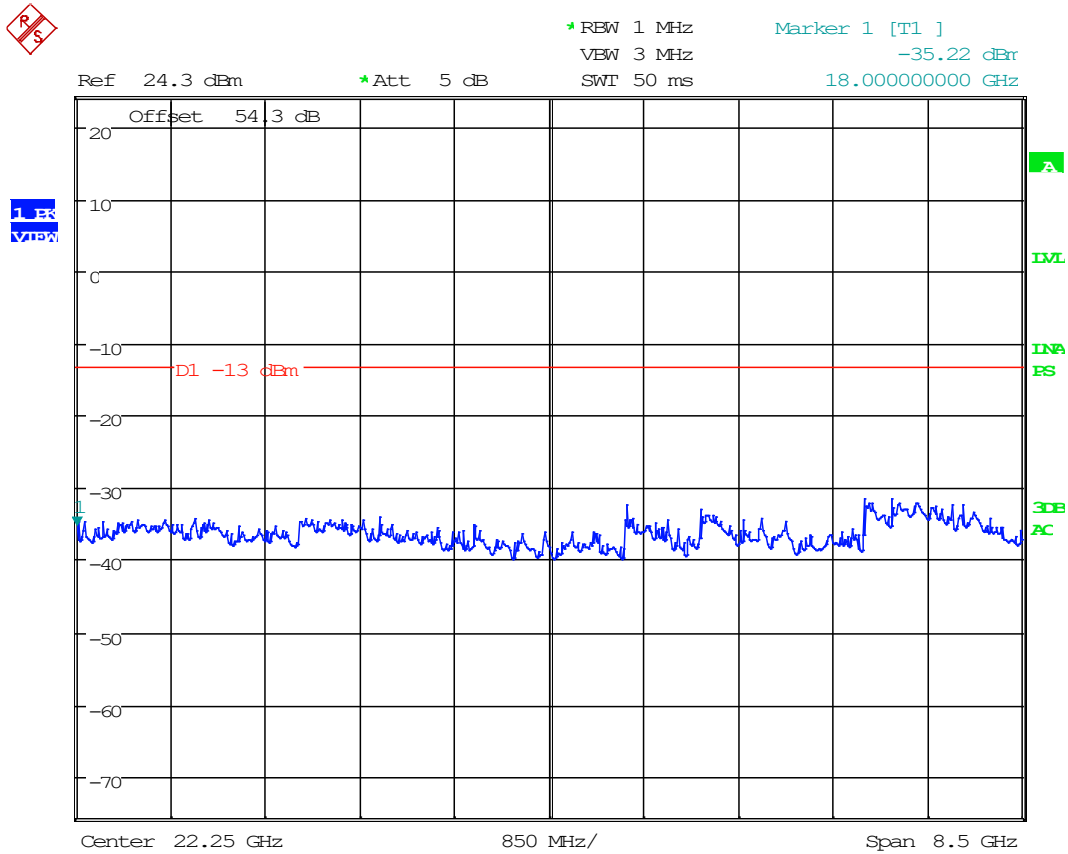


Date: 17.MAR.2023 10:17:43

8.5.8 Conducted Emissions, Above 26GHz, 9340 MHz, 6 nm

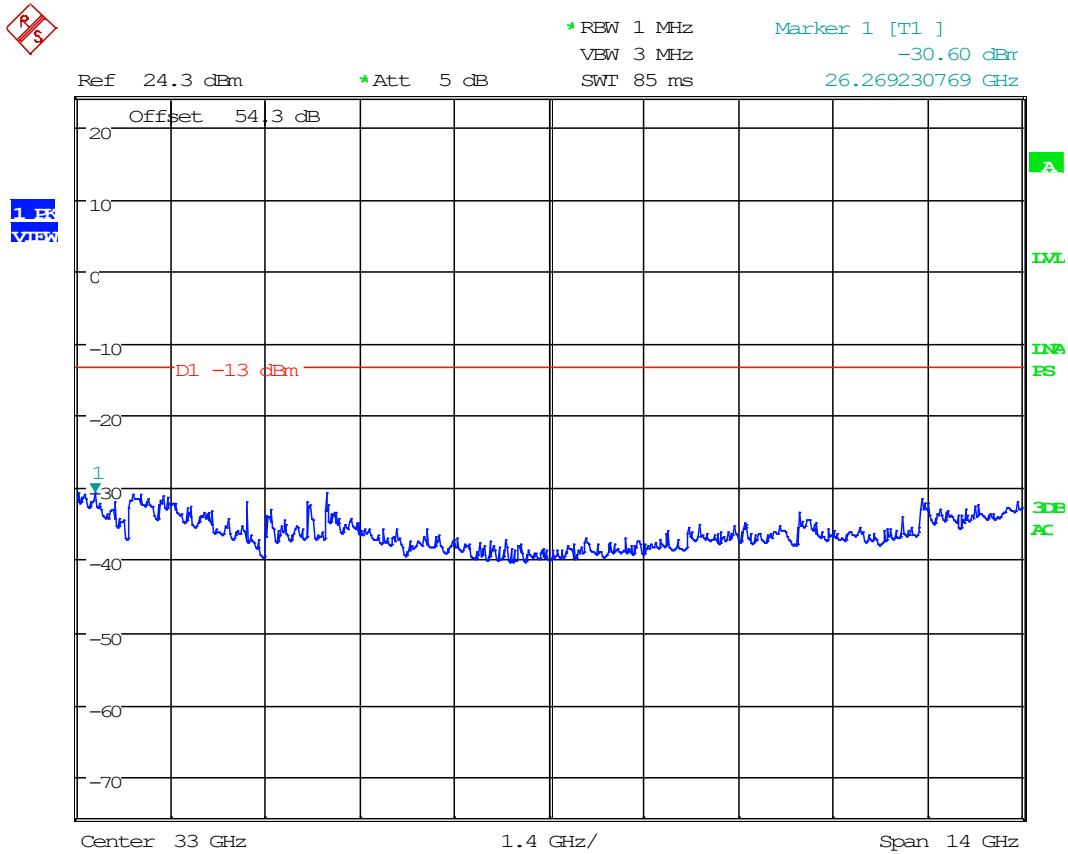


Date: 17.MAR.2023 11:06:45

8.5.9 Conducted Emissions, Below 1GHz, 9440 MHz, 6 nm

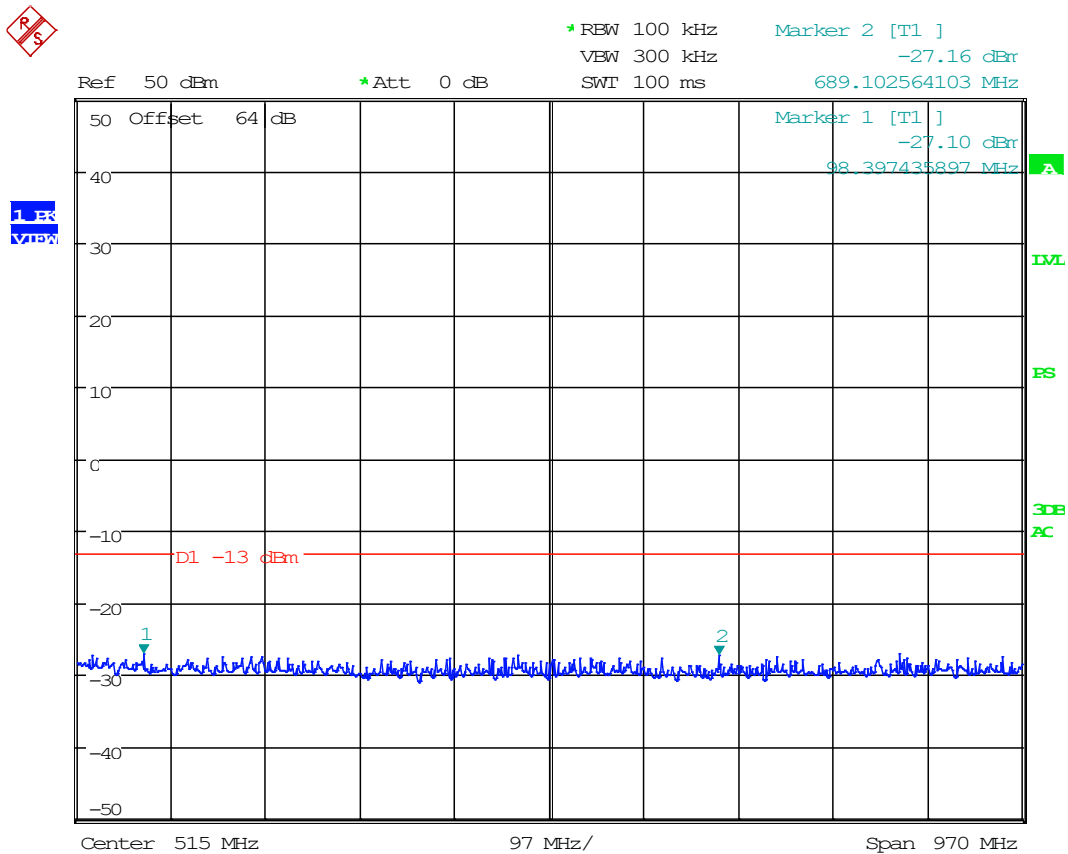


Date: 23.JAN.2023 16:49:58

8.5.10 Conducted Emissions, Above 1GHz, 9440 MHz, 6 nm

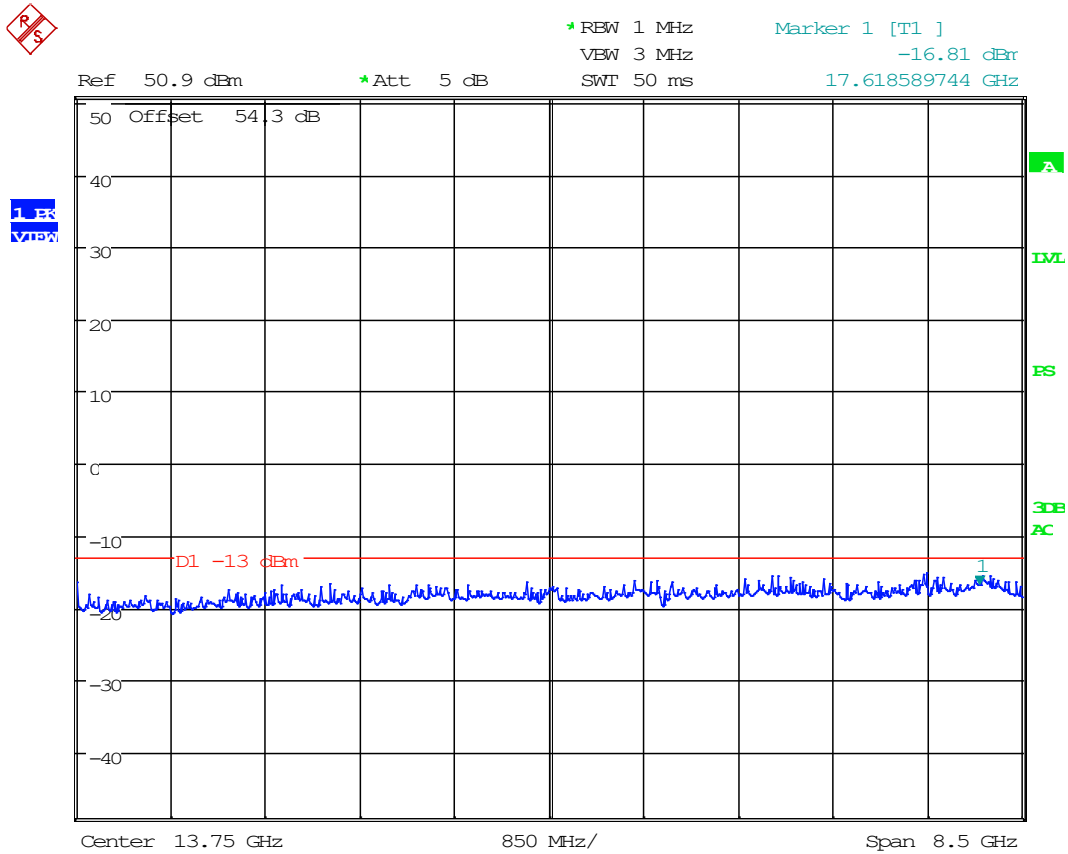


Date: 17.MAR.2023 09:55:50

8.5.11 Conducted Emissions, Above 18GHz, 9440 MHz, 6 nm

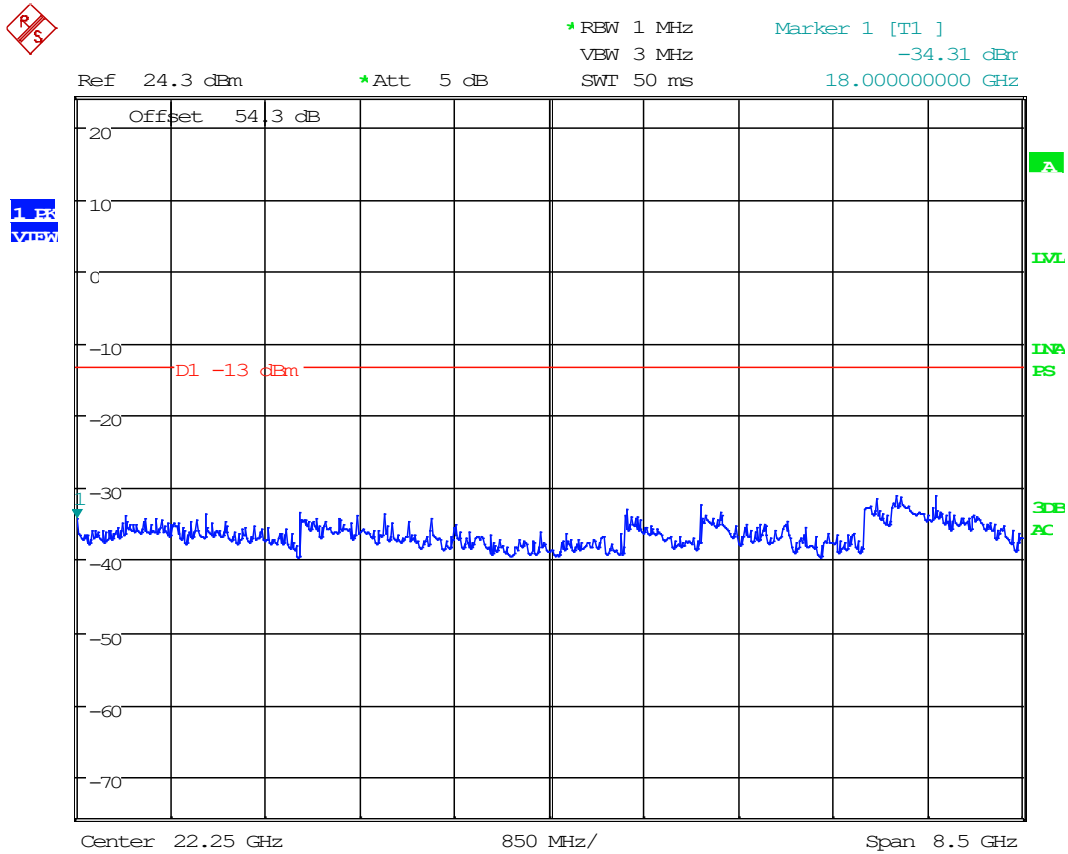

Date: 17.MAR.2023 10:18:09

8.5.12 Conducted Emissions, Above 26GHz, 9440 MHz, 6 nm

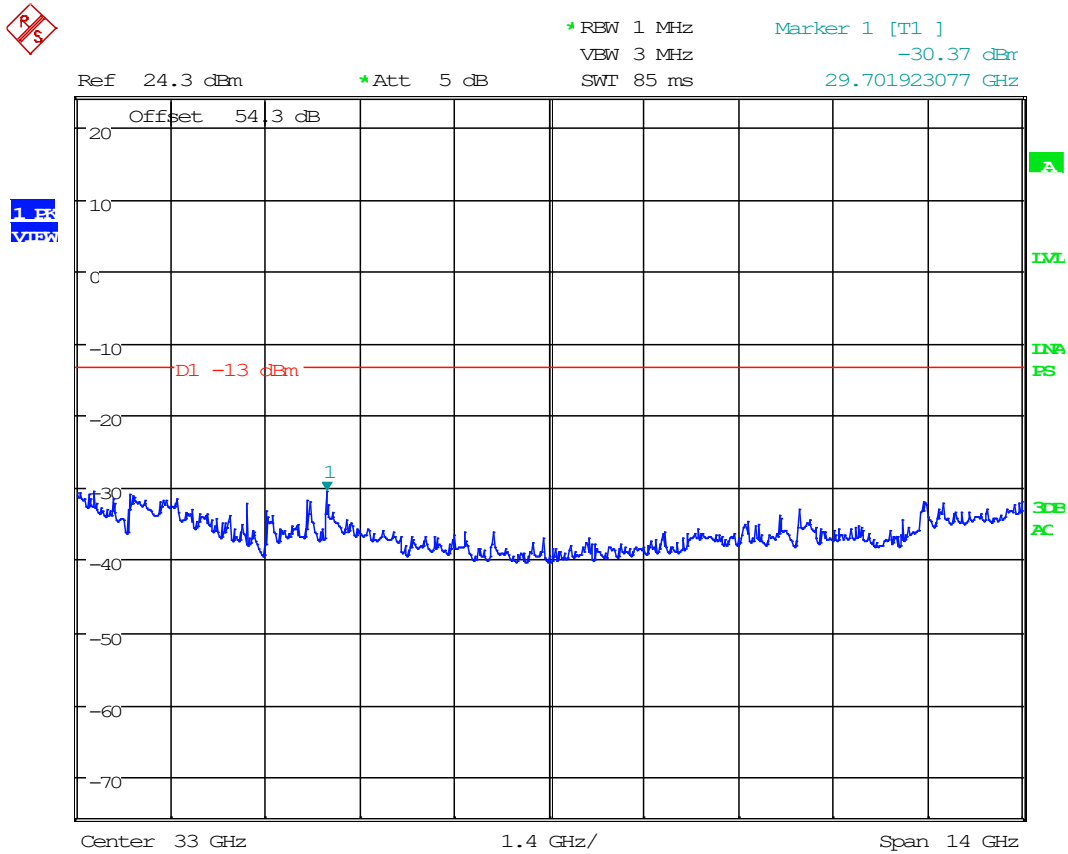


Date: 17.MAR.2023 11:06:15


8.6 Radiated Emissions

Limits from FCC Parts 2.1053, 80.211 (f) and test procedure from ANSI C63.26-2015.

Radiated Test Setup, 30 – 1000 MHz

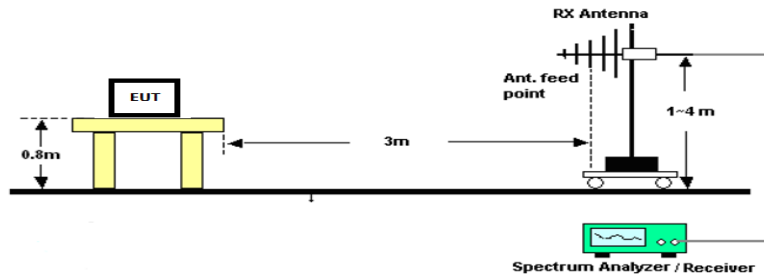

Radiated Test Setup, Above 1000 MHz

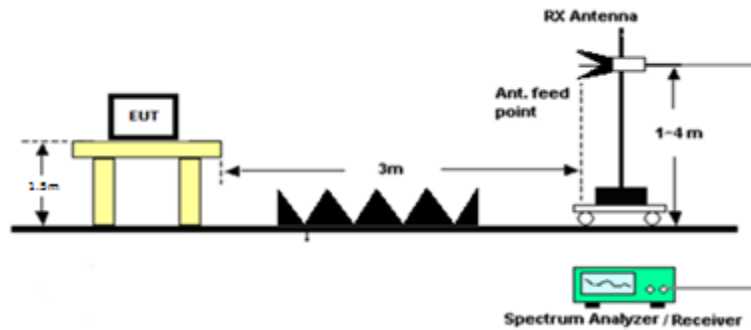

Radiated Emissions Tabular Data

8.6.1 Radiated Emissions, 9260 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
9260.00	18520.00	PK	7.91	H	15.45	44.73	3.00	68.09	-29.28	-13.00	16.28
9260.00	18520.00	PK	7.32	V	15.45	44.73	3.00	67.50	-29.87	-13.00	16.87
9260.00	27780.00	PK	7.27	H	19.46	46.80	3.00	73.53	-23.85	-13.00	10.85
9260.00	27780.00	PK	6.23	V	19.46	46.80	3.00	72.49	-24.89	-13.00	11.89
9260.00	37040.00	PK	9.26	H	22.49	46.19	3.00	77.94	-19.44	-13.00	6.44
9260.00	37040.00	PK	10.20	V	22.49	46.19	3.00	78.88	-18.50	-13.00	5.50

8.6.2 Radiated Emissions, 9340 MHz


Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
9340.00	18680.00	PK	6.23	H	15.49	44.74	3.00	66.46	-30.92	-13.00	17.92
9340.00	18680.00	PK	0.89	V	15.49	44.74	3.00	61.12	-36.26	-13.00	23.26
9340.00	28020.00	PK	7.86	H	19.38	46.91	3.00	74.15	-23.23	-13.00	10.23
9340.00	28020.00	PK	6.43	V	19.38	46.91	3.00	72.72	-24.66	-13.00	11.66
9340.00	37360.00	PK	9.61	H	22.08	45.91	3.00	77.60	-19.78	-13.00	6.78
9340.00	37360.00	PK	10.81	V	22.08	45.91	3.00	78.80	-18.58	-13.00	5.58

8.6.1 Radiated Emissions, 9440 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
9440.00	18880.00	PK	11.00	H	15.33	44.74	3.00	71.07	-26.30	-13.00	13.30
9440.00	18880.00	PK	9.41	V	15.33	44.74	3.00	69.48	-27.89	-13.00	14.89
9440.00	28320.00	PK	15.96	H	19.19	46.78	3.00	81.93	-15.45	-13.00	2.45
9440.00	28320.00	PK	6.52	V	19.19	46.78	3.00	72.49	-24.89	-13.00	11.89
9440.00	37760.00	PK	9.00	H	22.61	45.68	3.00	77.29	-20.09	-13.00	7.09
9440.00	37760.00	PK	10.39	V	22.61	45.68	3.00	78.68	-18.70	-13.00	5.70

8.7 Modulation Characteristics

Limits from FCC Parts 2.1047 and 80.213 (g) and test procedure from ANSI C63.26-2015

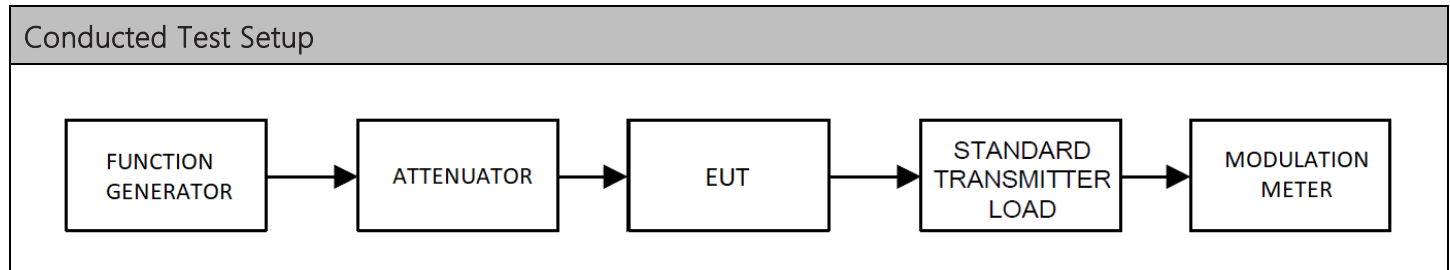

FCC 80.213(g) – Device is allowed any modulation type.

8.7.1 Audio Frequency Response

N/A. Device does not carry Audio.

8.7.2 Low Pass Filter Response


N/A. Device does not carry Audio.

8.7.3 Modulation Limiting

N/A. Device does not need to limit modulation.

8.8 Frequency Stability

Limits from FCC Parts 2.1055, 80.209 (c) and test procedure from ANSI C63.26-2015.

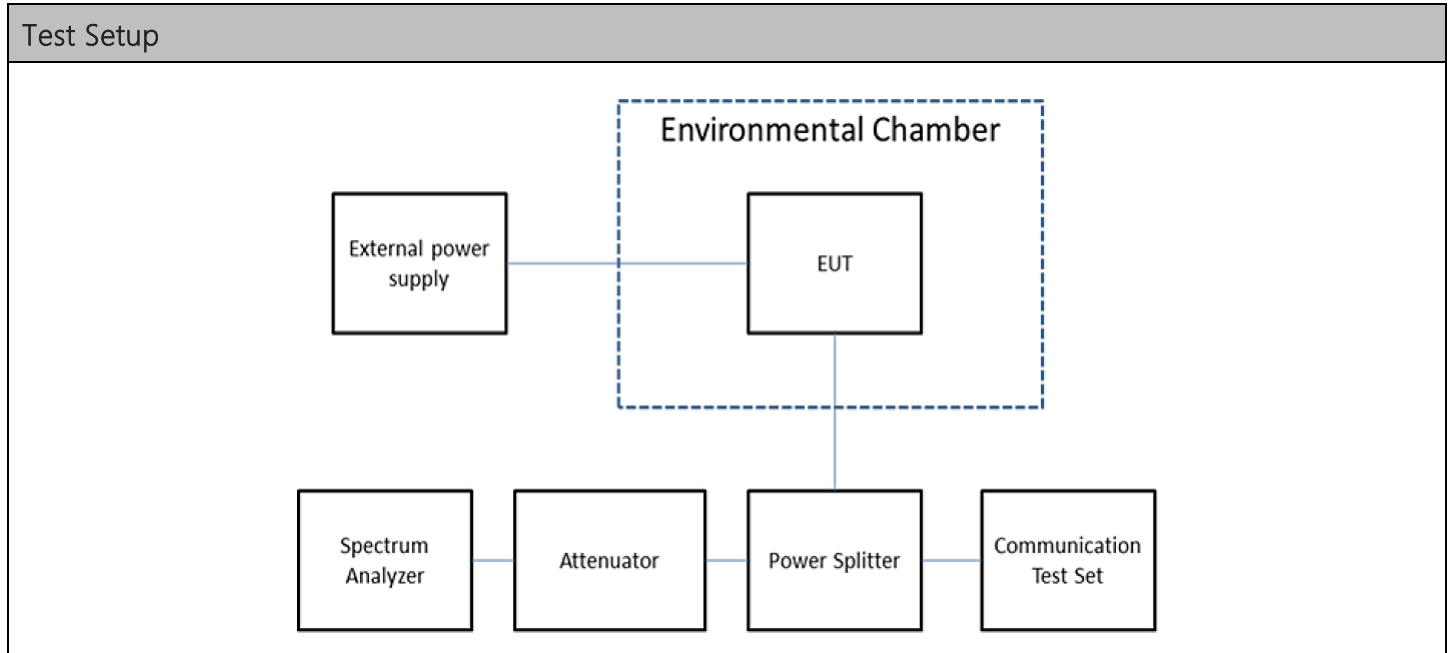

Test Results, Mode 1		
Tuned Frequency (MHz)	Max Deviation (ppm)	Limit (ppm)
9340	0.0000172	1250

kHz	Hz	Percent	ppm
160.360	160360.000	0.002%	0.0000172

Note: This EUT is designed to operate within FCC Parts 80 and in accordance with ISSED RSS-238.

Note: The frequency determining element is the same component for both low and high ranges. The Frequency Stability testing was not repeated for both bands.


Note: The operational range of the EUT is -10 degrees C to +45 degrees C. Operation outside this range is not possible, due to the EUT's built-in limitation. The EUT has been tested to show compliance within this temperature range.

Note: The EUT's built-in power supply is designed to run stable and eliminated voltage differences from AC Mains. Input voltage variation was found to have no effect on the result.

8.8.1 Frequency Stability Data


Limit (ppm)	1250.00		
Limit (Hz)	11675000.000		
Lower Limit (MHz)	9328.325000	☒ AC	☐ DC
Upper Limit (MHz)	9351.675000		
Rated Supply Voltage	26.0		
Temperature / Voltage Variation			
Temperature (°C)	Supplied Voltage (V)	Frequency (MHz)	Deviation (kHz)
-30	26.0	9340.128205	-128.205
-20	26.0	9339.871795	128.205
-10	26.0	9340.000000	0.000
0	26.0	9340.160360	-160.360
+10	26.0	9340.160360	-160.360
+20 (reference)	26.0	9340.000000	0.000
+20	22.1	9340.000000	0.000
+20	29.9	9340.000000	0.000
+30	26.0	9340.128205	-128.205
+40	26.0	9340.000000	0.000
+50	26.0	9340.000000	0.000

8.8.2 Frequency Stability Plot

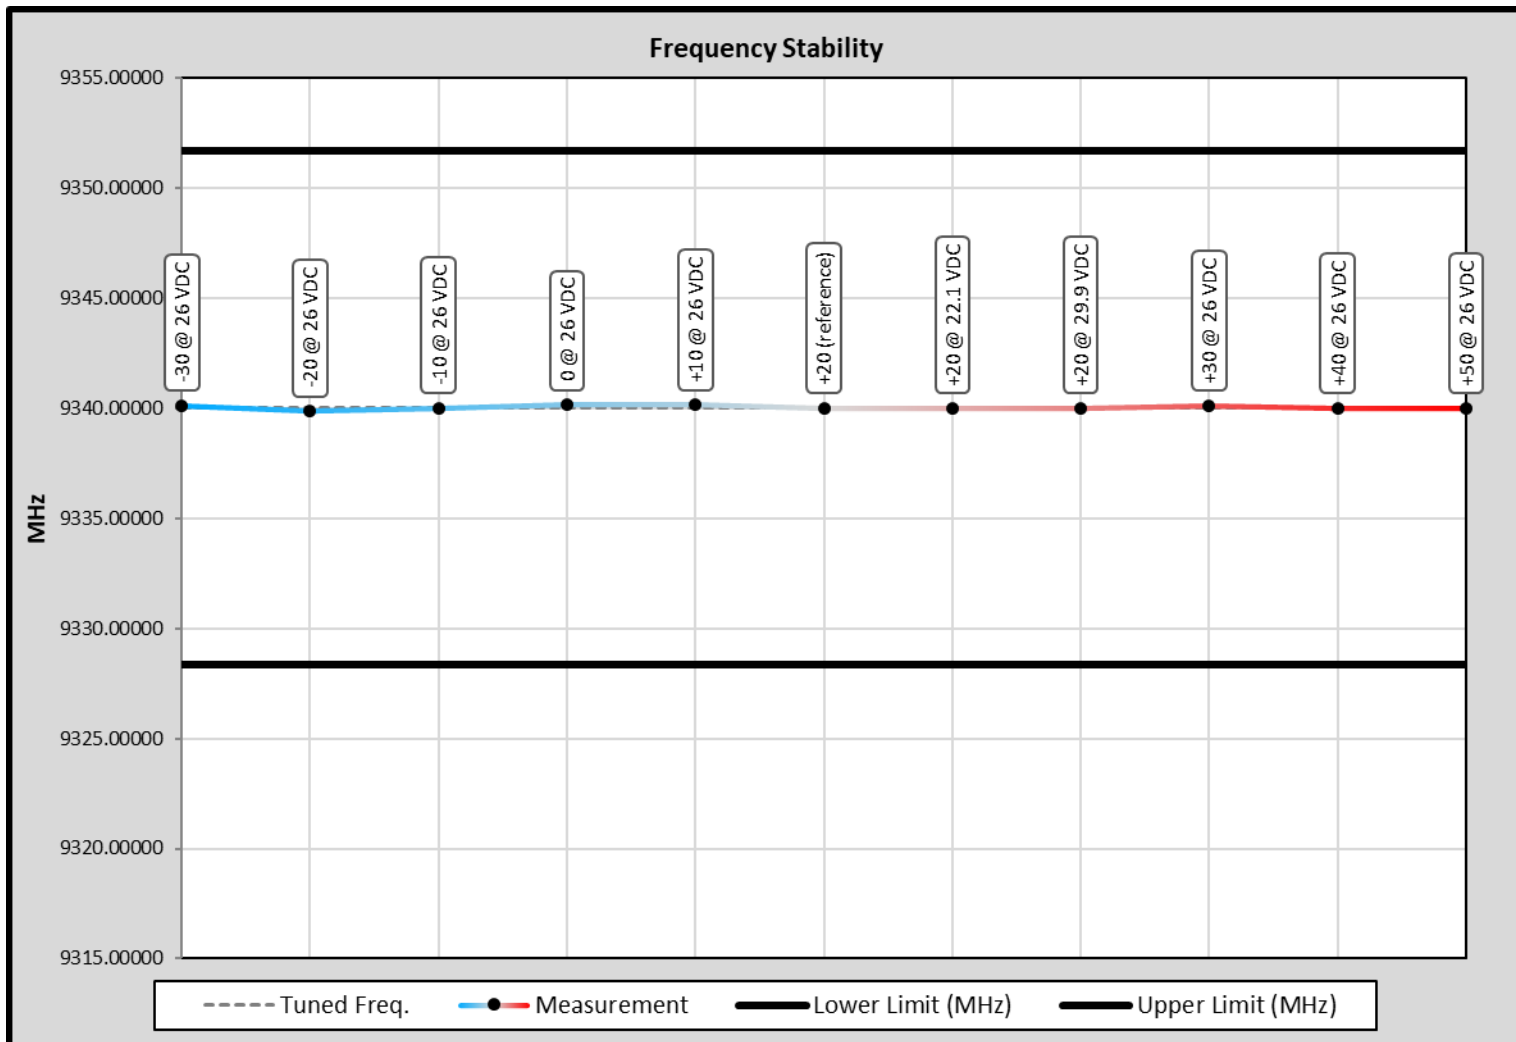

8.9 Transient Frequency Behavior

Limits from FCC Part 90.214; and test procedure from ANSI C63.26-2015.

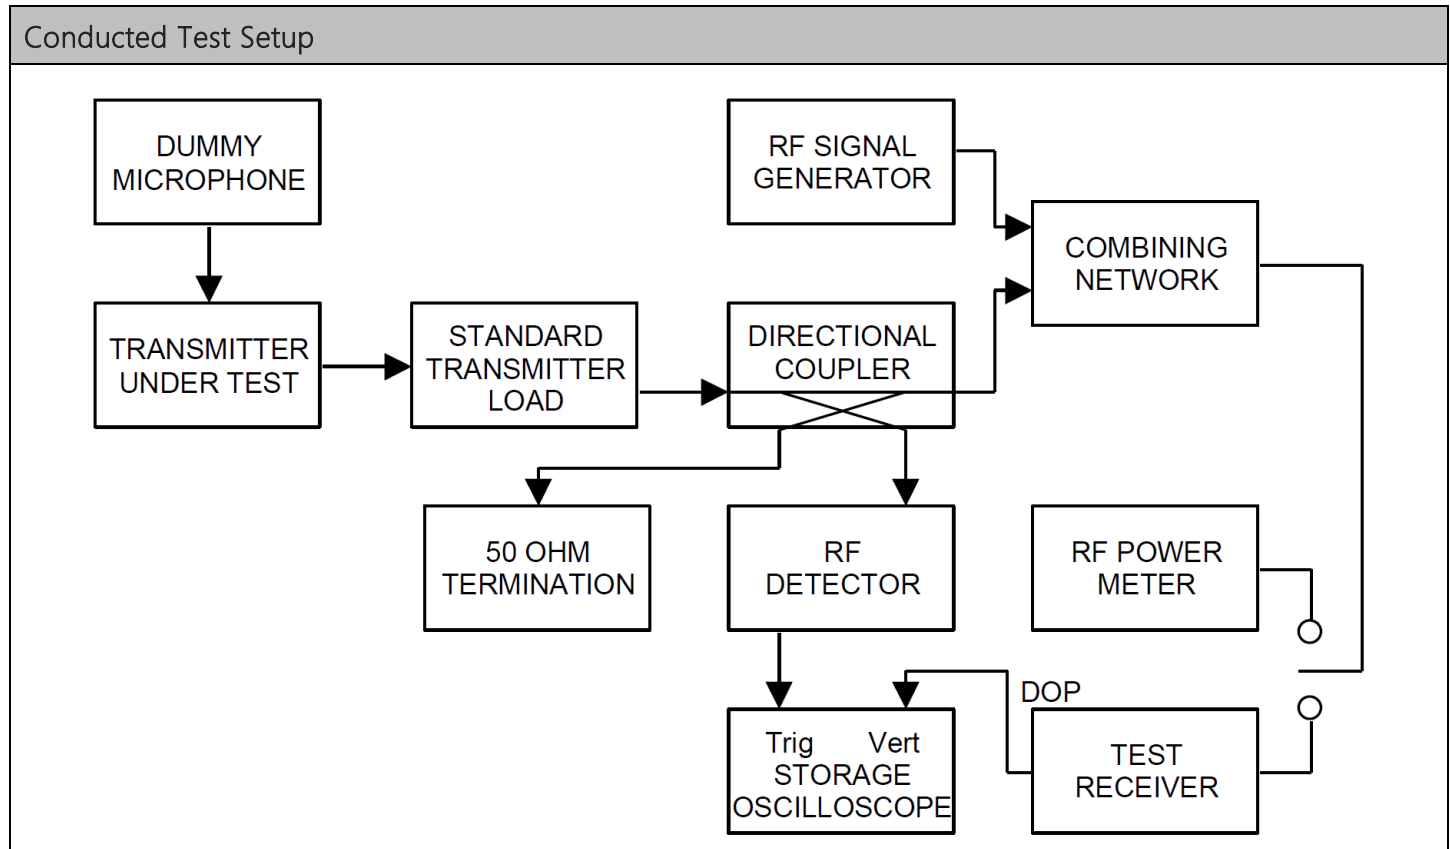


N/A. Device does not operate in a band requiring TFR measurement.

8.10 Adjacent channel power limits

Limits from FCC Part 90.221, and test procedure from ANSI C63.26-2015.

Conducted Test Setup



N/A. Device does not operate in a band requiring ACP measurement.

9. ANNEX-A - Photographs of the EUT

Photographs of the EUT and any manufacturer supplied accessories to be used with the EUT are in separate supplementary documents labelled EXTERNAL PHOTOS and INTERNAL PHOTOS.

10. ANNEX-B – Test Setup Photographs

Test setup photographs are located in a separate supplementary ANNEX-B document.

11. History of Test Report Changes

Test Report #	Revision #	Description	Date of Issue
TR_6172-23_FCC 80_Radar_	1	Initial release	04/17/2023
	2	Updated Page 1	09/09/2024

END OF TEST REPORT
