

## Belt-Pack Transmitter

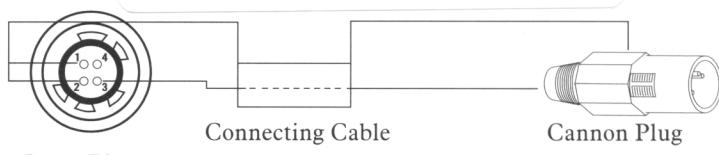


Fig. 9

### ■ LOW IMPEDANCE INPUT FOR DYNAMIC MICROPHONE

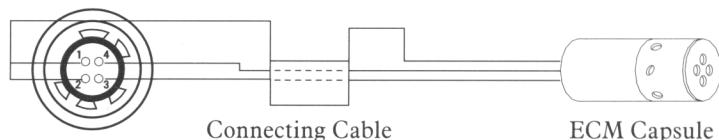


Fig. 10

### ■ HIGH IMPEDANCE INPUT FOR ELECTRIC GUITAR

8. After switching on, the RF signal indicator LED(s) of matching receiver will light up, indicating the microphone signal transmission is in normal operation.

9. Switch off the power when the microphone is not in use, meanwhile remove the battery out of microphone if it is not in use for an extended periods.

Caution : The audio cable serves as antenna for this VHF system. Please stretch the cable to its maximum to get the most efficient transmission power.

## HAND-HELD Microphone

1. The microphone is shown in Fig 1.

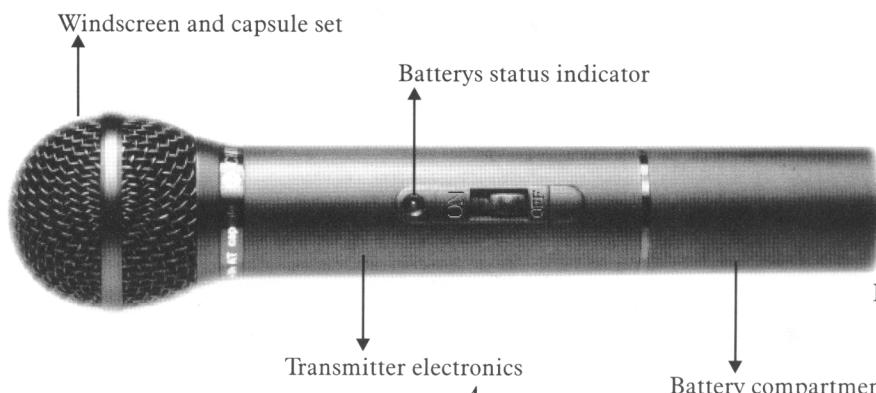


Fig. 1