

Bluetooth

Frequency: 2480 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.839$ S/m; $\epsilon_r = 38.16$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2021/6/1
- Probe: EX3DV4 - SN7369; ConvF(7.62, 7.62, 7.62) @ 2480 MHz; Calibrated: 2021/6/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Aux Ant/Edge 4/Bluetooth_Ch78/Area Scan (6x8x1): Measurement grid:

dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.673 W/kg

Tablet/Aux Ant/Edge 4/Bluetooth_Ch78/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.888 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.381 W/kg; SAR(10 g) = 0.128 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 32.5%

Maximum value of SAR (measured) = 0.867 W/kg

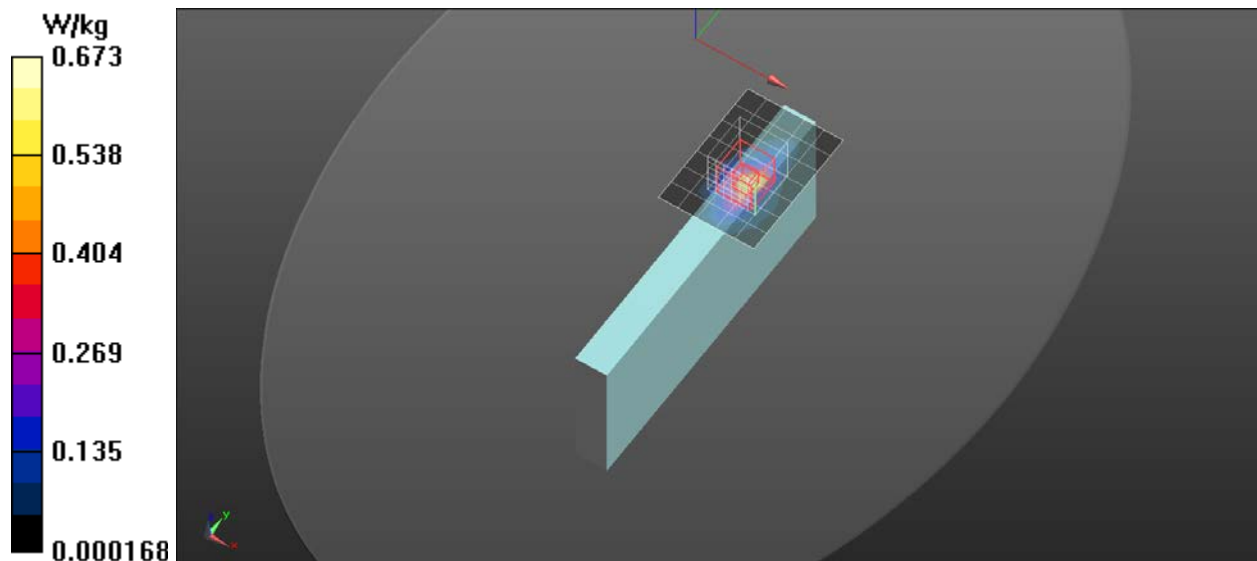

Bluetooth

Frequency: 2480 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.839$ S/m; $\epsilon_r = 38.16$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2021/6/1
- Probe: EX3DV4 - SN7369; ConvF(7.62, 7.62, 7.62) @ 2480 MHz; Calibrated: 2021/6/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Aux Ant/Edge 4/BLE_Ch39/Area Scan (6x8x1): Measurement grid:

dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.265 W/kg

Tablet/Aux Ant/Edge 4/BLE_Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement

grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.721 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.694 W/kg

SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.079 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 35.9%

Maximum value of SAR (measured) = 0.475 W/kg

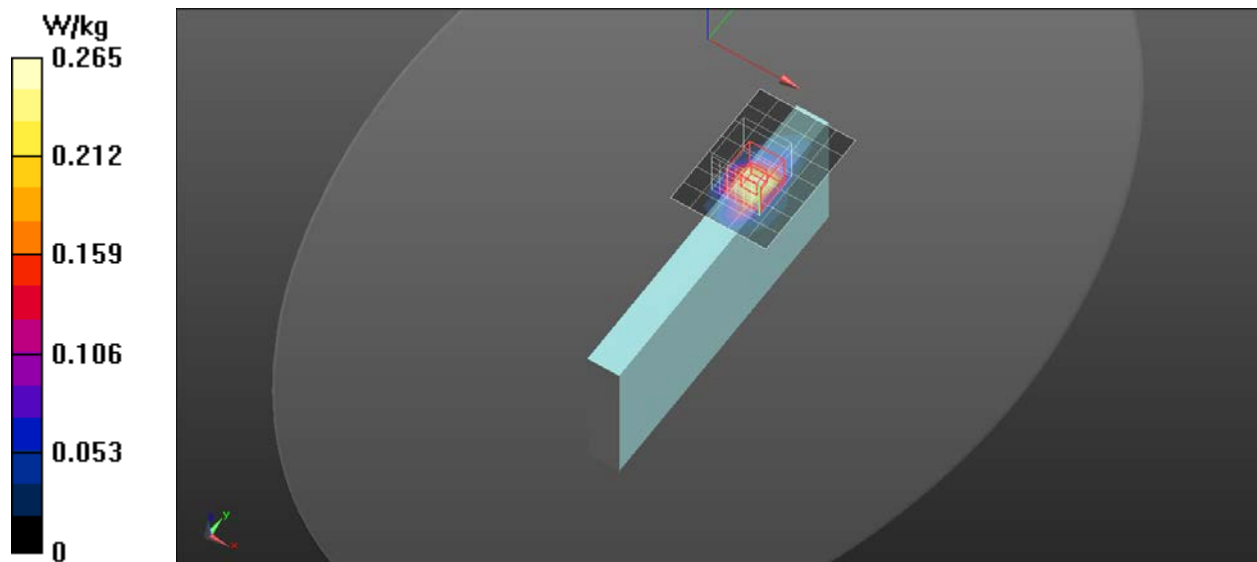

WiFi-2.4GHz

Frequency: 2437 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid

Temperature: 22.0°C

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.792$ S/m; $\epsilon_r = 38.326$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2021/6/1
- Probe: EX3DV4 - SN7369; ConvF(7.62, 7.62, 7.62) @ 2437 MHz; Calibrated: 2021/6/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Main Ant/Edge 2/802.11b_Ch6/Area Scan (6x8x1): Measurement grid:

dx=12mm, dy=12mm

Maximum value of SAR (measured) = 2.12 W/kg

Tablet/Main Ant/Edge 2/802.11b_Ch6/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.74 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 3.46 W/kg

SAR(1 g) = 1.17 W/kg; SAR(10 g) = 0.400 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 38.4%

Maximum value of SAR (measured) = 2.42 W/kg

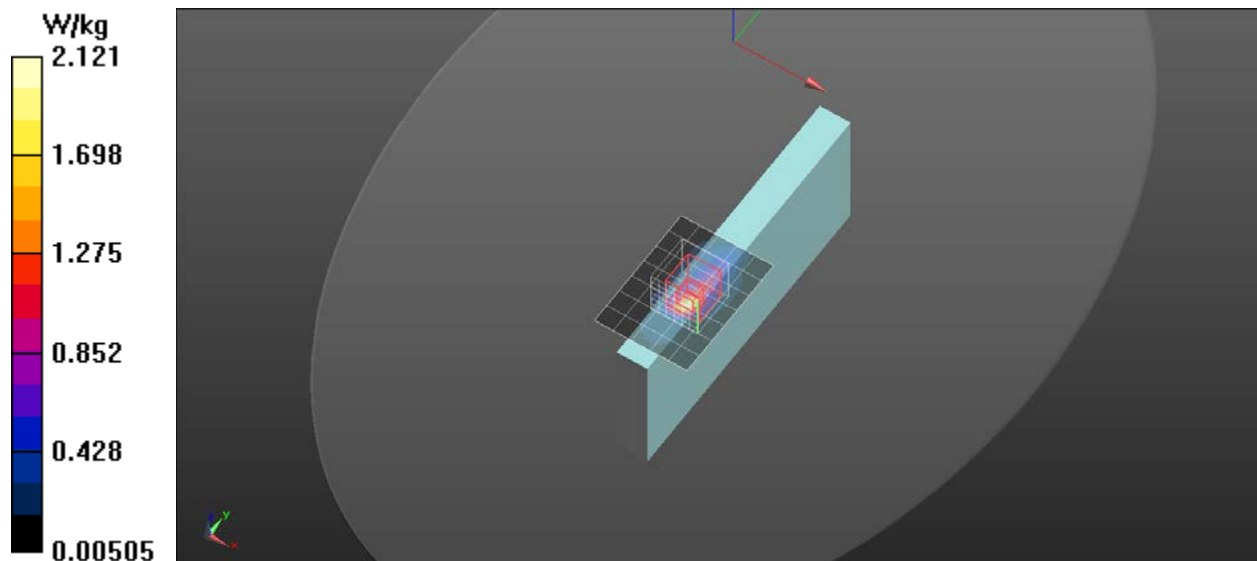

WiFi-2.4GHz

Frequency: 2462 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid

Temperature: 22.0°C

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.819$ S/m; $\epsilon_r = 38.231$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2021/6/1
- Probe: EX3DV4 - SN7369; ConvF(7.62, 7.62, 7.62) @ 2462 MHz; Calibrated: 2021/6/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Aux Ant/Edge 4/802.11b_Ch11/Area Scan (6x8x1): Measurement grid:

dx=12mm, dy=12mm

Maximum value of SAR (measured) = 2.14 W/kg

Tablet/Aux Ant/Edge 4/802.11b_Ch11/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.214 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 3.87 W/kg

SAR(1 g) = 1.2 W/kg; SAR(10 g) = 0.412 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 32.8%

Maximum value of SAR (measured) = 2.68 W/kg

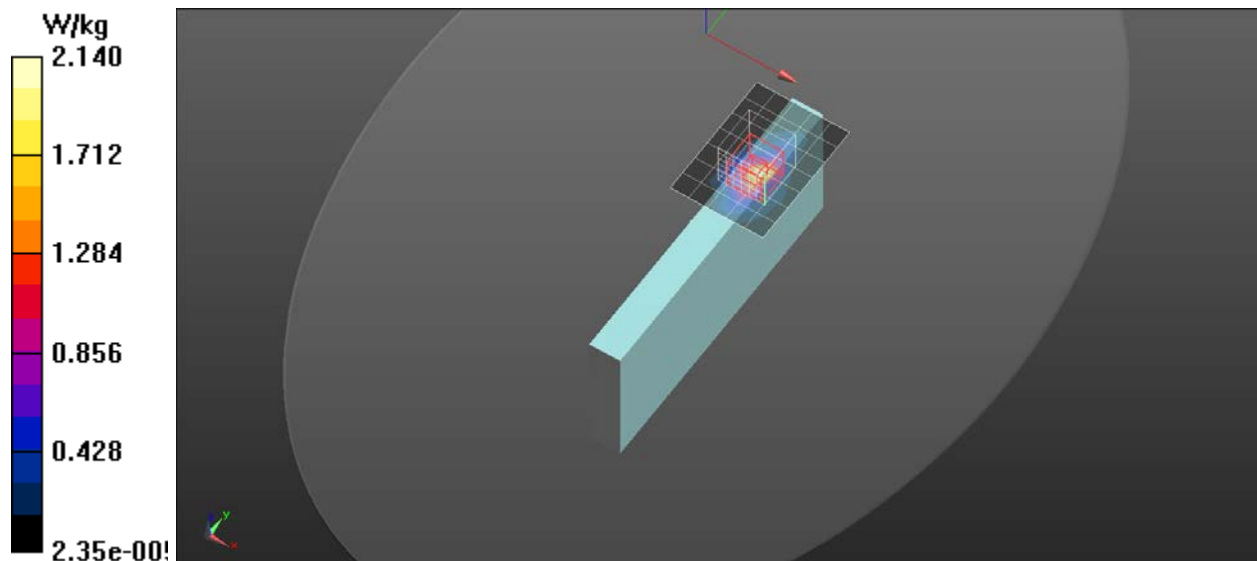

WiFi-5GHz

Frequency: 5290 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid

Temperature: 22.0°C

Medium parameters used (interpolated): $f = 5290$ MHz; $\sigma = 4.888$ S/m; $\epsilon_r = 35.275$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2021/6/1
- Probe: EX3DV4 - SN7369; ConvF(5, 5, 5) @ 5290 MHz; Calibrated: 2021/6/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Main Ant/Edge2/802.11ac80_Ch58/Area Scan (5x7x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.97 W/kg

Tablet/Main Ant/Edge2/802.11ac80_Ch58/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.3570 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 7.15 W/kg

SAR(1 g) = 1.24 W/kg; SAR(10 g) = 0.266 W/kg

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 49.2%

Maximum value of SAR (measured) = 3.87 W/kg

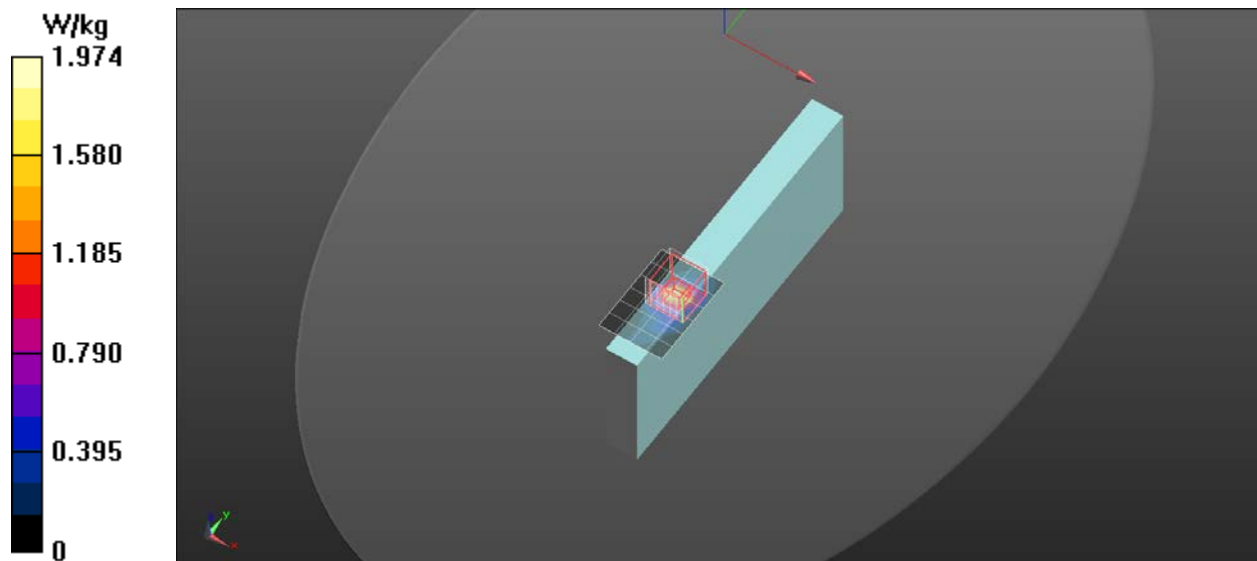

WiFi-5GHz

Frequency: 5210 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid

Temperature: 22.0°C

Medium parameters used (interpolated): $f = 5210$ MHz; $\sigma = 4.79$ S/m; $\epsilon_r = 35.482$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2021/6/1
- Probe: EX3DV4 - SN7369; ConvF(5.15, 5.15, 5.15) @ 5210 MHz; Calibrated: 2021/6/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Aux Ant/Edge 4/802.11ac80_Ch42/Area Scan (5x7x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 3.18 W/kg

Tablet/Aux Ant/Edge 4/802.11ac80_Ch42/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.097 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 7.11 W/kg

SAR(1 g) = 1.24 W/kg; SAR(10 g) = 0.275 W/kg

Smallest distance from peaks to all points 3 dB below = 4.3 mm

Ratio of SAR at M2 to SAR at M1 = 49.2%

Maximum value of SAR (measured) = 3.38 W/kg

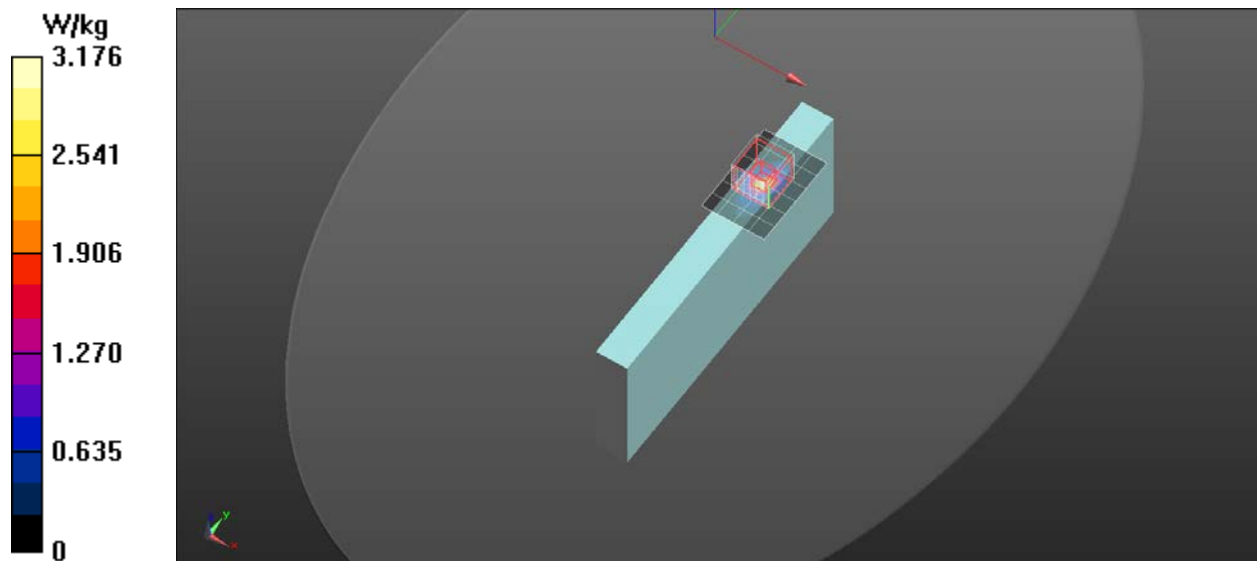

WiFi-5GHz

Frequency: 5610 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid

Temperature: 22.0°C

Medium parameters used (interpolated): $f = 5610$ MHz; $\sigma = 5.277$ S/m; $\epsilon_r = 34.47$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2021/6/1
- Probe: EX3DV4 - SN7369; ConvF(4.66, 4.66, 4.66) @ 5610 MHz; Calibrated: 2021/6/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Main Ant/Edge2/802.11ac80_Ch122/Area Scan (5x7x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.22 W/kg

Tablet/Main Ant/Edge2/802.11ac80_Ch122/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 7.64 W/kg

SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.255 W/kg

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 44.4%

Maximum value of SAR (measured) = 3.90 W/kg

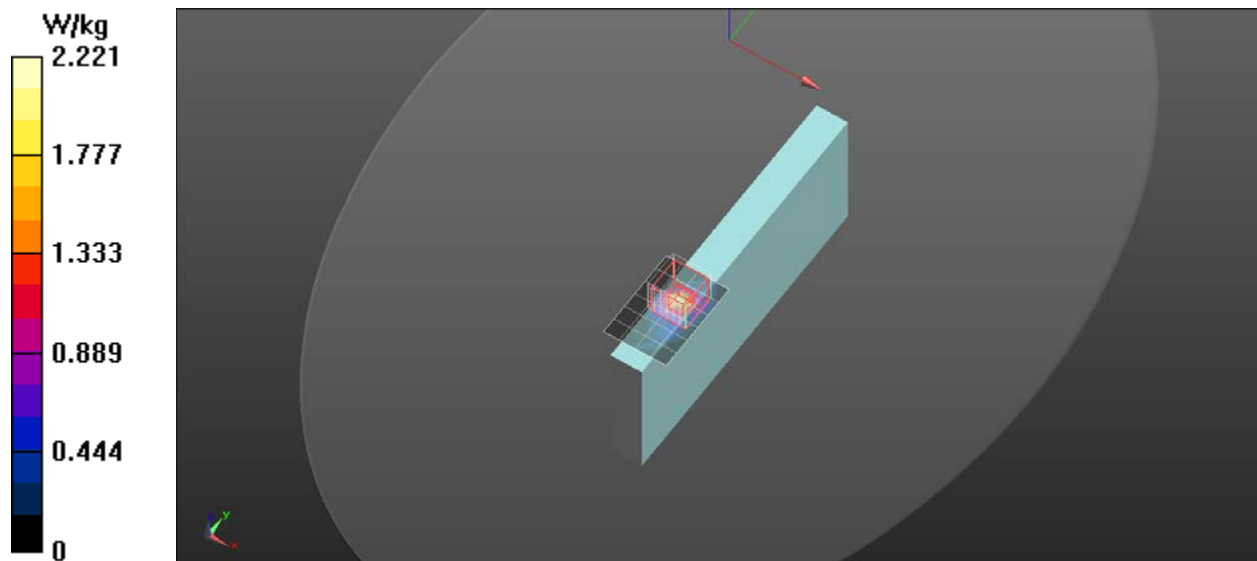

WiFi-5GHz

Frequency: 5530 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid

Temperature: 22.0°C

Medium parameters used (interpolated): $f = 5530$ MHz; $\sigma = 5.18$ S/m; $\epsilon_r = 34.669$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2021/6/1
- Probe: EX3DV4 - SN7369; ConvF(4.66, 4.66, 4.66) @ 5530 MHz; Calibrated: 2021/6/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Aux Ant/Edge 4/802.11ac80_Ch106/Area Scan (5x7x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 3.26 W/kg

Tablet/Aux Ant/Edge 4/802.11ac80_Ch106/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.173 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 8.07 W/kg

SAR(1 g) = 1.35 W/kg; SAR(10 g) = 0.299 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 46.8%

Maximum value of SAR (measured) = 3.96 W/kg

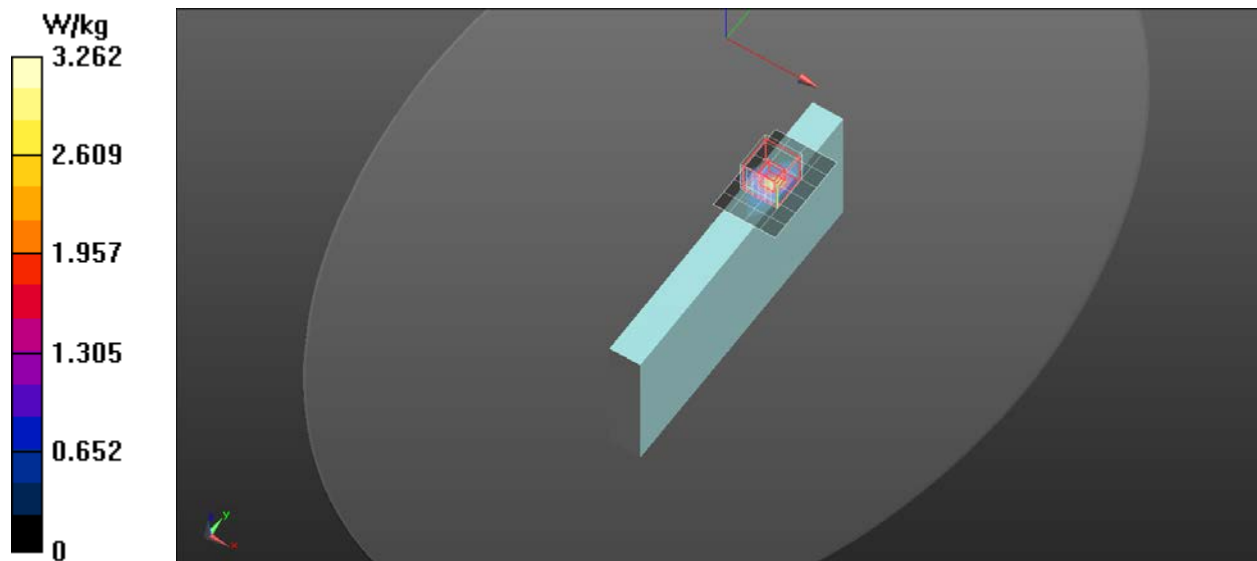

WiFi-5GHz

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid

Temperature: 22.0°C

Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 5.473$ S/m; $\epsilon_r = 34.061$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2021/6/1
- Probe: EX3DV4 - SN7369; ConvF(4.61, 4.61, 4.61) @ 5775 MHz; Calibrated: 2021/6/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Main Ant/Edge2/802.11ac80_Ch155/Area Scan (5x7x1): Measurement

grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.75 W/kg

Tablet/Main Ant/Edge2/802.11ac80_Ch155/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 8.45 W/kg

SAR(1 g) = 1.29 W/kg; SAR(10 g) = 0.274 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 45%

Maximum value of SAR (measured) = 4.20 W/kg

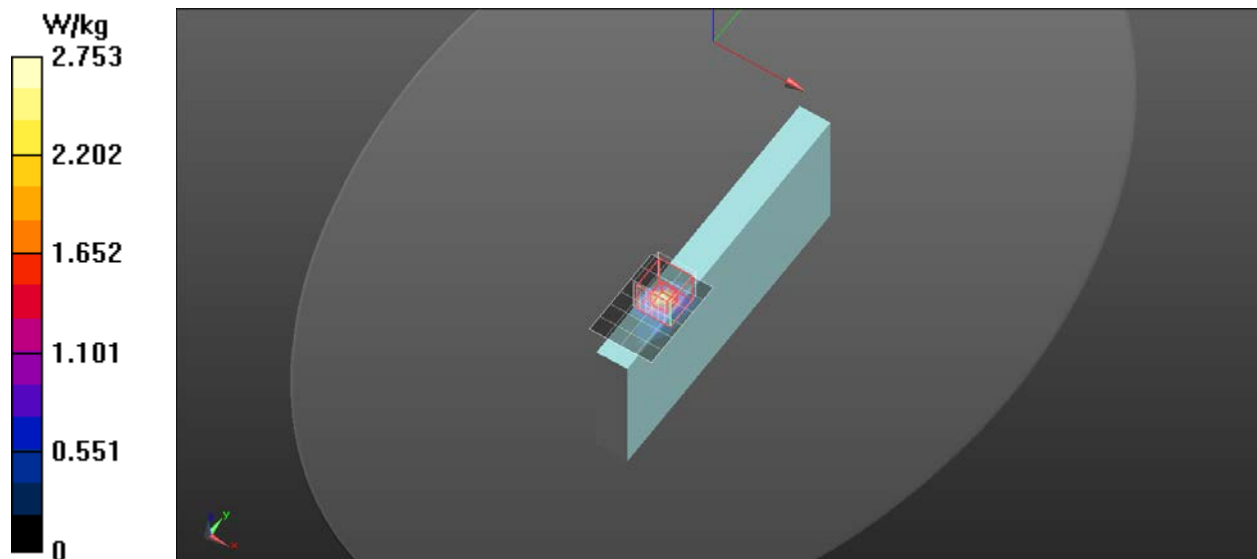

WiFi-5GHz

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid

Temperature: 22.0°C

Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 5.473$ S/m; $\epsilon_r = 34.061$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2021/6/1
- Probe: EX3DV4 - SN7369; ConvF(4.61, 4.61, 4.61) @ 5775 MHz; Calibrated: 2021/6/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Aux Ant/Edge 4/802.11ac80_Ch155/Area Scan (5x7x1): Measurement grid: dx=10mm, dy=10mm.

Maximum value of SAR (measured) = 2.59 W/kg

Tablet/Aux Ant/Edge 4/802.11ac80_Ch155/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.088 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 8.19 W/kg

SAR(1 g) = 1.25 W/kg; SAR(10 g) = 0.270 W/kg

Smallest distance from peaks to all points 3 dB below = 4.3 mm

Ratio of SAR at M2 to SAR at M1 = 44.8%

Maximum value of SAR (measured) = 3.75 W/kg

