


PCTEST Engineering Lab., Inc.

SUBJECT: Modulation Characteristics
FCC Part 24/22

Test Report No.: 24/22.211001572.CJ6
Test Date: 10.01.2001

EUT: TOSHIBA Dual-Band Analog/PCS Phone (AMPS/CDMA)
Model: CDM-9200
FCC ID: CJSDC45202A

REFERENCE: 1 kHz = 0 dB

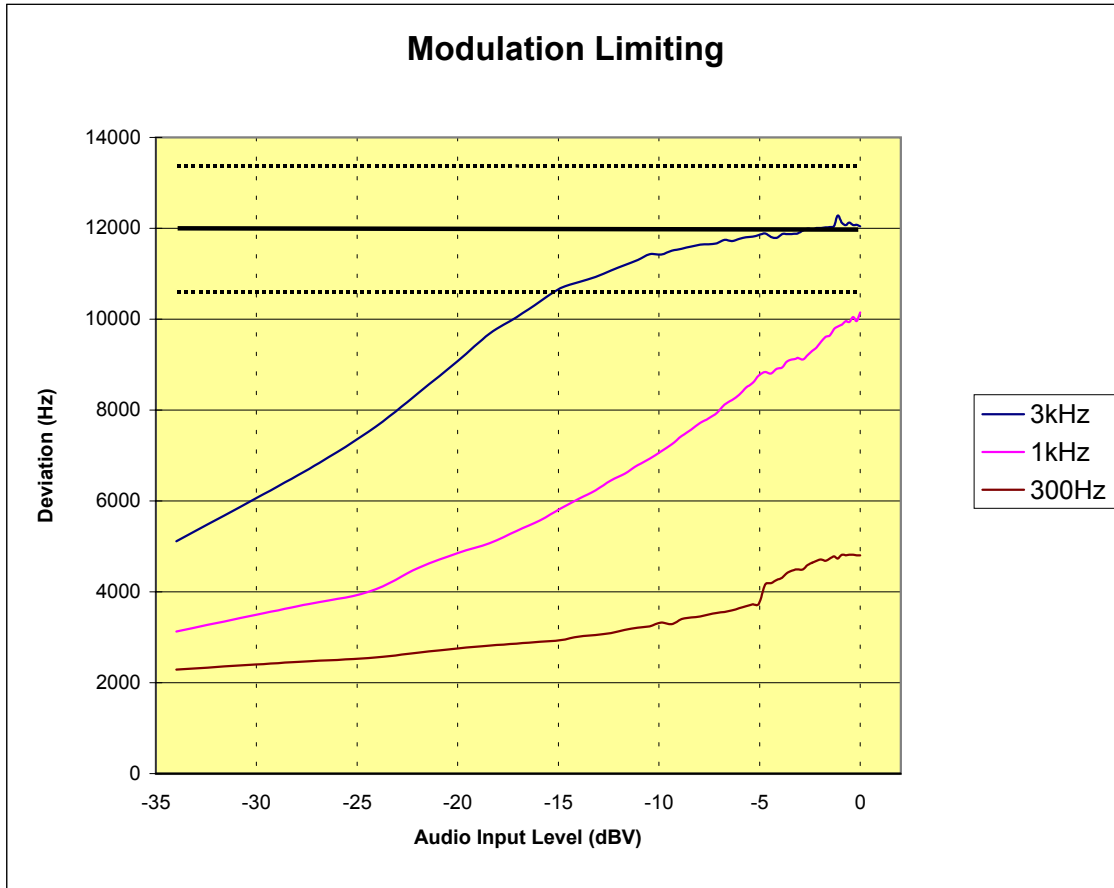


PCTEST Engineering Lab., Inc.

SUBJECT: Modulation Characteristics
FCC Part 24/22

Test Report No.: 24/22.211001572.CJ6
Test Date: 10.01.2001

EUT: TOSHIBA Dual-Band Analog/PCS Phone (AMPS/CDMA)
Model: CDM-9200
FCC ID: CJSDE45202A

REFERENCE: 1 kHz = 0 dB

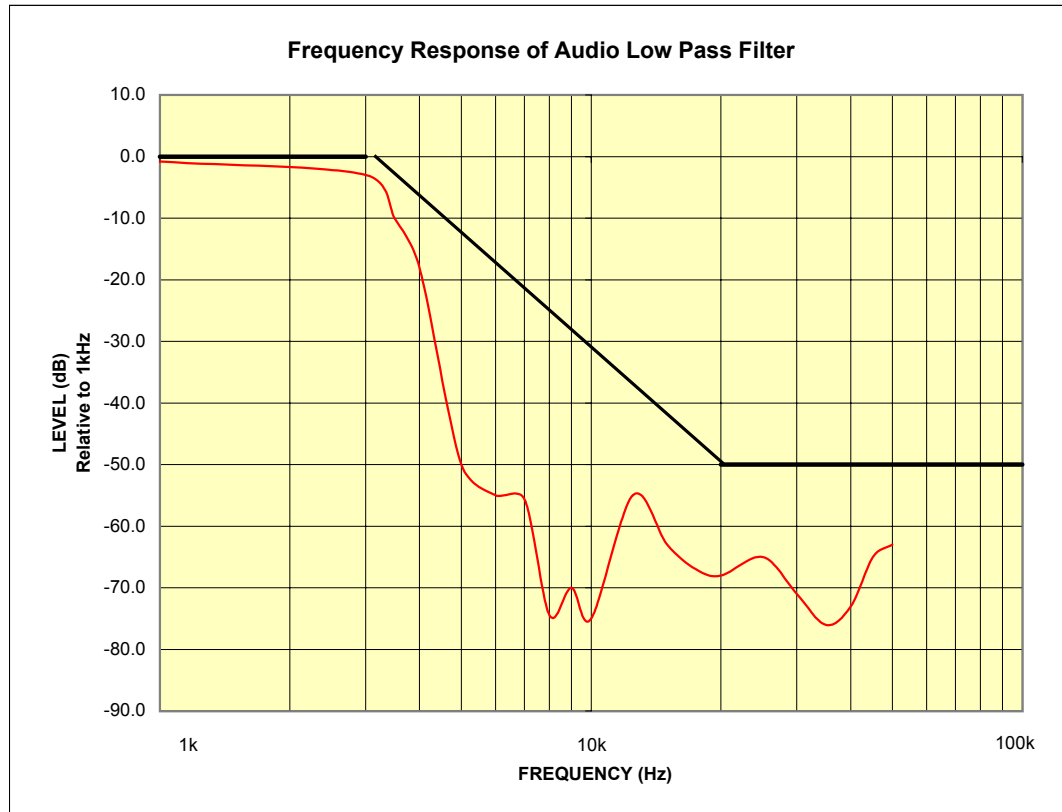


PCTEST Engineering Lab., Inc.

SUBJECT: Modulation Characteristics
FCC Part 24/22

Test Report No.: 24/22.211001572.CJ6
Test Date: 10.01.2001

EUT: TOSHIBA Dual-Band Analog/PCS Phone (AMPS/CDMA)
Model: CDM-9200
FCC ID: CJSDC45202A

REFERENCE: 1 kHz = 0 dB

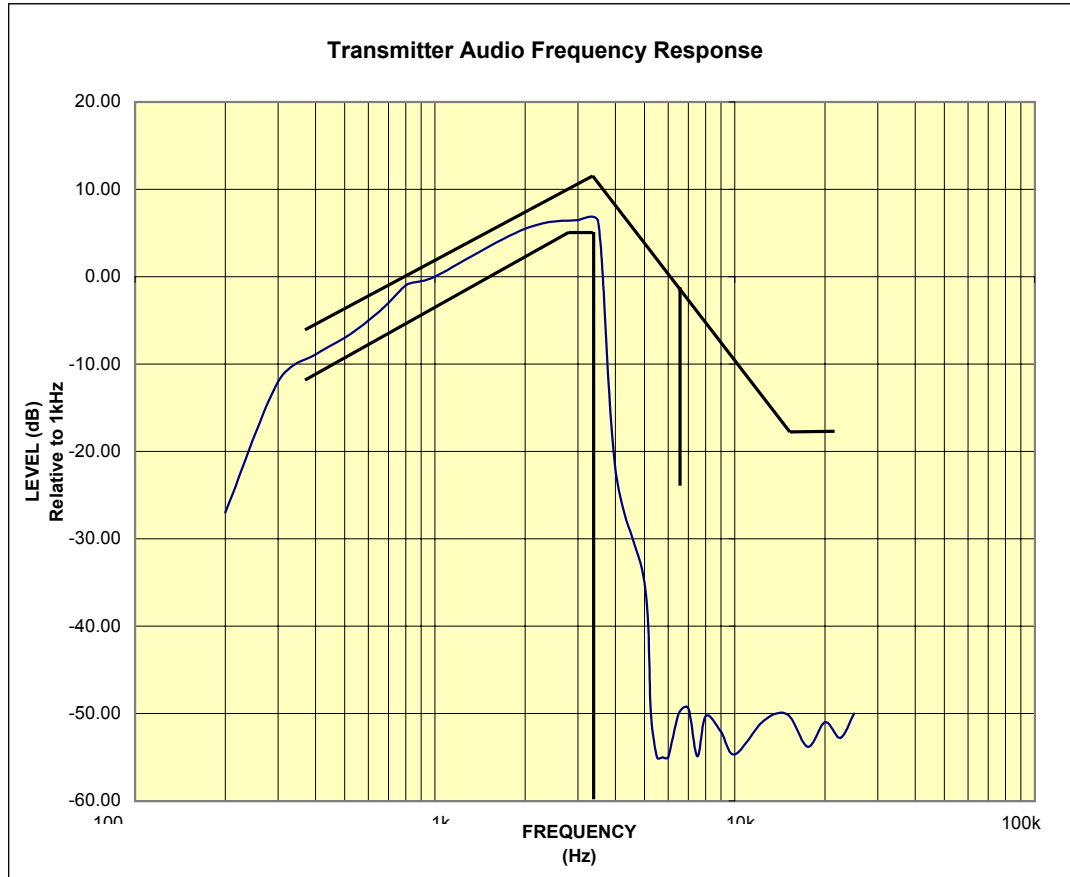

PCTEST Engineering Lab., Inc.

Raw Data					
	mV	dBV	3000	1000	300
	0.02	-33.979	5110	3129	2289
	0.04	-27.959	6560	3686	2455
	0.06	-24.437	7520	4000	2545
	0.08	-21.938	8380	4530	2660
	0.1	-20	9080	4850	2754
	0.12	-18.416	9680	5070	2819
	0.14	-17.077	10040	5340	2857
	0.16	-15.918	10390	5570	2904
	0.18	-14.895	10680	5830	2936
	0.2	-13.979	10820	6050	3017
	0.22	-13.152	10930	6230	3050
	0.24	-12.396	11070	6450	3093
	0.26	-11.701	11190	6600	3159
	0.28	-11.057	11300	6790	3212
	0.3	-10.458	11430	6930	3241
	0.32	-9.897	11420	7090	3323
	0.34	-9.37	11510	7250	3291
	0.36	-8.874	11550	7430	3398
	0.38	-8.404	11600	7570	3436
	0.4	-7.959	11640	7720	3459
	0.42	-7.535	11650	7820	3499
	0.44	-7.131	11670	7940	3535
	0.46	-6.745	11750	8120	3557
	0.48	-6.375	11720	8220	3591
	0.5	-6.021	11770	8340	3643
	0.52	-5.68	11800	8490	3681
	0.54	-5.352	11820	8600	3723
	0.56	-5.036	11850	8760	3731
	0.58	-4.731	11890	8840	4160
	0.6	-4.437	11810	8800	4190
	0.62	-4.152	11790	8910	4260
	0.64	-3.876	11870	8940	4310
	0.66	-3.609	11870	9080	4420
	0.68	-3.22	11880	9130	4490
	0.7	-3.098	11890	9150	4490
	0.72	-2.853	11950	9110	4490
	0.74	-2.615	11990	9210	4590
	0.76	-2.384	11970	9300	4640
	0.78	-2.158	12010	9380	4680

PCTEST Engineering Lab., Inc.

0.8	-1.938	12010	9510	4710
0.82	-1.724	12020	9610	4680
0.84	-1.514	12030	9640	4730
0.86	-1.31	12050	9780	4780
0.88	-1.11	12280	9840	4730
0.9	-0.915	12120	9880	4820
0.92	-0.724	12070	9960	4800
0.94	-0.537	12130	9940	4820
0.96	-0.355	12070	10050	4820
0.98	-0.175	12080	9960	4800
1	0	12040	10150	4800

SUBJECT: Modulation Characteristics
FCC Part 24

Test Repo
Test Date

EUT: HYUNDAI Dual Band Analog/PCS Phone
Model: CM-B1200
FCC ID: L5ACMDB3

Deviation (kHz)	(dB)	ENTER DATA HERE!!!
0.10	0.0	-0.8
0.30	0.0	-3
0.35		-10
0.40		-18
0.50		-50
0.60		-55
0.70		-55.7
0.80		-74.4
0.90		-70
1.00		-75
1.25		-55
1.50		-63
1.75		-67
2.00	-50.0	-68
2.50	-50.0	-65
3.00	-50.0	-71
3.50	-50.0	-76
4.00	-50.0	-73

PCTEST Engineering Lab., Inc.

4.50	-50.0	-65
5.00	-50.0	-63
5.50	-50.0	
6.00	-50.0	
6.50	-50.0	
7.00	-50.0	
8.00	-50.0	
9.00	-50.0	
10.00	-50.0	

ENTER DATA				
UPPER		HERE!!!	LOWER	
LIMIT	LEVEL	LEVEL (dB)	LIMIT	
	dB	dB		
0.010				0.01
0.02		-27.00		0.02
0.03		-12.00	-14.00	0.03
0.04		-8.90	-11.00	0.04
0.05		-7.00	-9.00	0.05
0.06		-5.00	-7.00	0.06
0.07		-3.00	-6.00	0.07
0.08		-1.00	-5.00	0.08
0.09		-0.50	-4.00	0.09
0.10	1.0	0.00	-3.00	0.10
0.20	7.0	5.50	2.50	0.20
0.30	11.0	6.50	5.00	0.30
0.35		6.30		
0.40		-22.00		
0.50		-35.00		
0.525		-50.00		
0.550		-55.00		
0.575		-55.00		
0.60	5.5	-55.00		
0.65	1.0	-50.00		
0.70	-2.0	-49.40		
0.75	-5.0	-54.90		
0.80	-8.0	-50.30		
0.90	-10.0	-52.10		
1.00	-12.0	-54.70		
1.25	-15.5	-50.80		
1.50	-18.0	-50.10		
1.75	-18.0	-53.80		
2.00	-18.0	-51.00		
2.25	-18.0	-52.80		
2.50	-18.0	-50.00		
2.75	-18.0			
3.00				
3.25				
3.50				
3.75				
4.00				
4.50				
5.00				
5.50				
6.00				
6.50				

PCTEST Engineering Lab., Inc.

[illegible][illegible]

PCTEST Engineering Lab., Inc.

10800	12000	13200
10800	12000	13200
10800	12000	13200
10800	12000	13200
10800	12000	13200
10800	12000	13200
10800	12000	13200
10800	12000	13200
10800	12000	13200
10800	12000	13200
10800	12000	13200
10800	12000	13200

ort No.: 24.980813577.L5A
: 08.20.1998

PCTEST Engineering Lab., Inc.