


FCC Radio Test Report

FCC ID: CJ6PYT0XPC

Report No. : BTL-FCCP-1-2103T163
Equipment : Notebook Computer
Model Name : dynabook E10-S, SATELLITE PRO E10-S, dynabook E10W-S, SATELLITE PRO E10W-S
Brand Name : dynabook
Applicant : Dynabook Inc.
Address : 6-15, Toyosu 5-chome, Koto-ku, Tokyo 135-8505, Japan
Radio Function : Bluetooth EDR
FCC Rule Part(s) : FCC Part15, Subpart C (15.247)
Measurement Procedure(s) : ANSI C63.10-2013
Date of Receipt : 2021/3/30
Date of Test : 2021/3/30 ~ 2021/4/21
Issued Date : 2021/4/26

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by

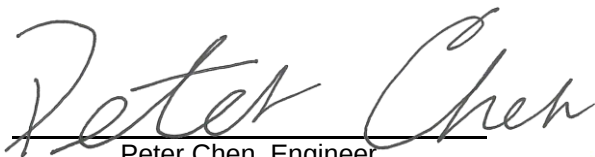
Peter Chen, Engineer

**Approved by**


Scott Hsu, Manager

BTL Inc.

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299

Fax: +886-2-2657-3331

Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

REVISION HISTORY	5
1 SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	8
1.4 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	8
1.5 DUTY CYCLE	9
2 GENERAL INFORMATION	10
2.1 DESCRIPTION OF EUT	10
2.2 TEST MODES	12
2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
2.4 SUPPORT UNITS	13
3 AC POWER LINE CONDUCTED EMISSIONS TEST	14
3.1 LIMIT	14
3.2 TEST PROCEDURE	14
3.3 DEVIATION FROM TEST STANDARD	14
3.4 TEST SETUP	15
3.5 TEST RESULT	15
4 RADIATED EMISSIONS TEST	16
4.1 LIMIT	16
4.2 TEST PROCEDURE	17
4.3 DEVIATION FROM TEST STANDARD	17
4.4 TEST SETUP	17
4.5 EUT OPERATING CONDITIONS	18
4.6 TEST RESULT – 30 MHZ TO 1 GHZ	19
4.7 TEST RESULT – ABOVE 1 GHZ	19
5 NUMBER OF HOPPING CHANNEL	20
5.1 APPLIED PROCEDURES	20
5.2 TEST PROCEDURE	20
5.3 DEVIATION FROM STANDARD	20
5.4 TEST SETUP	20
5.5 EUT OPERATION CONDITIONS	20
5.6 TEST RESULTS	20
6 AVERAGE TIME OF OCCUPANCY	21
6.1 APPLIED PROCEDURES / LIMIT	21
6.2 TEST PROCEDURE	21
6.3 DEVIATION FROM STANDARD	21
6.4 TEST SETUP	21
6.5 EUT OPERATION CONDITIONS	21
6.6 TEST RESULTS	21
7 HOPPING CHANNEL SEPARATION MEASUREMENT	22
7.1 APPLIED PROCEDURES / LIMIT	22
7.2 TEST PROCEDURE	22
7.3 DEVIATION FROM STANDARD	22
7.4 TEST SETUP	22
7.5 TEST RESULTS	22
8 BANDWIDTH TEST	23

8.1	APPLIED PROCEDURES	23
8.2	TEST PROCEDURE	23
8.3	DEVIATION FROM STANDARD	23
8.4	TEST SETUP	23
8.5	EUT OPERATION CONDITIONS	23
8.6	TEST RESULTS	23
9	OUTPUT POWER TEST	24
9.1	APPLIED PROCEDURES / LIMIT	24
9.2	TEST PROCEDURE	24
9.3	DEVIATION FROM STANDARD	24
9.4	TEST SETUP	24
9.5	EUT OPERATION CONDITIONS	24
9.6	TEST RESULTS	24
10	ANTENNA CONDUCTED SPURIOUS EMISSION	25
10.1	APPLIED PROCEDURES / LIMIT	25
10.2	TEST PROCEDURE	25
10.3	DEVIATION FROM STANDARD	25
10.4	TEST SETUP	25
10.5	EUT OPERATION CONDITIONS	25
10.6	TEST RESULTS	25
11	LIST OF MEASURING EQUIPMENTS	26
12	EUT TEST PHOTO	28
13	EUT PHOTOS	28
APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS	29
APPENDIX B	RADIATED EMISSIONS - 30 MHZ TO 1 GHZ	34
APPENDIX C	RADIATED EMISSIONS - ABOVE 1 GHZ	37
APPENDIX D	NUMBER OF HOPPING CHANNEL	54
APPENDIX E	AVERAGE TIME OF OCCUPANCY	56
APPENDIX F	HOPPING CHANNEL SEPARATION MEASUREMENT	59
APPENDIX G	BANDWIDTH	62
APPENDIX H	OUTPUT POWER	65
APPENDIX I	ANTENNA CONDUCTED SPURIOUS EMISSION	67

REVISION HISTORY

Report No.	Version	Description	Issued Date
BTL-FCCP-1-2103T163	R00	Original Report.	2021/4/26

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

FCC Part 15, Subpart C (15.247)				
Standard(s) Section	Description	Test Result	Judgement	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	Pass	-----
15.205 15.209 15.247(d)	Radiated Emissions	APPENDIX B APPENDIX C	Pass	-----
15.247 (a)(1)(iii)	Number of Hopping Frequency	APPENDIX D	Pass	-----
15.247 (a)(1)(iii)	Average Time of Occupancy	APPENDIX E	Pass	-----
15.247 (a)(1)	Hopping Channel Separation	APPENDIX F	Pass	-----
15.247 (a)(1)	Bandwidth	APPENDIX G	Pass	-----
15.247 (b)(1)	Output Power	APPENDIX H	Pass	-----
15.247(d)	Antenna conducted Spurious Emission	APPENDIX I	Pass	-----
15.203	Antenna Requirement	-----	Pass	-----

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is TP.1.1.1.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report:

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

The test sites and facilities are covered under FCC RN: 674415 and DN: TW0659.

☒ C05 ☐ CB08 ☐ CB11 ☒ CB15 ☐ CB16
☒ SR05

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately **95 %**. The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U (dB)
C05	CISPR	150 kHz ~ 30 MHz	3.44

B. Radiated emissions test :

Test Site	Measurement Frequency Range	U,(dB)
CB15	0.03 GHz ~ 0.2 GHz	4.17
	0.2 GHz ~ 1 GHz	4.72
	1 GHz ~ 6 GHz	5.21
	6 GHz ~ 18 GHz	5.51
	18 GHz ~ 26 GHz	3.69
	26 GHz ~ 40 GHz	4.23

C. Conducted test :

Test Item	U,(dB)
Number of Hopping Frequency	0.00
Average Time of Occupancy	1.20
Hopping Channel Separation	1.20
Bandwidth	1.13
Peak Output Power	1.06
Antenna conducted Spurious Emission	1.14
Conducted Band edges	1.13

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Environment Condition	Test Voltage	Tested by
AC Power Line Conducted Emissions	24 °C, 62 %	AC 120V	William Wei
Radiated emissions below 1 GHz	22 °C, 61 %	AC 120V	Hunter Chiang
Radiated emissions above 1 GHz	22 °C, 61 %	AC 120V	Hunter Chiang
Number of Hopping Frequency	23 °C, 51 %	AC 120V	Connor Xie
Average Time of Occupancy	23 °C, 51 %	AC 120V	Connor Xie
Hopping Channel Separation	23 °C, 51 %	AC 120V	Connor Xie
Bandwidth	23 °C, 51 %	AC 120V	Connor Xie
Output Power	23 °C, 51 %	AC 120V	Connor Xie
Antenna conducted Spurious Emission	23 °C, 51 %	AC 120V	Connor Xie

1.4 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING


Test Software	Realtek MP v0.0001.12.20161226			
Modulation Mode	2402 MHz	2441 MHz	2480 MHz	Data Rate
GFSK	26	26	25	1 Mbps
$\pi/4$ -DQPSK	26	26	27	2 Mbps
8DPSK	28	26	25	3 Mbps

1.5 DUTY CYCLE


If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.


Remark	Delta 1			Delta 2	On Time/Period	10 log(1/Duty Cycle)
Mode	ON (ms)	Numbers (ON)	On Time (B) (ms)	Period (ON+OFF) (ms)	Duty Cycle (%)	Duty Factor (dB)
BT (1 Mbps)	2.860	1	2.860	3.080	92.86%	0.32
BT (2 Mbps)	2.880	1	2.880	3.100	92.90%	0.32
BT (3 Mbps)	2.900	1	2.900	3.100	93.55%	0.29

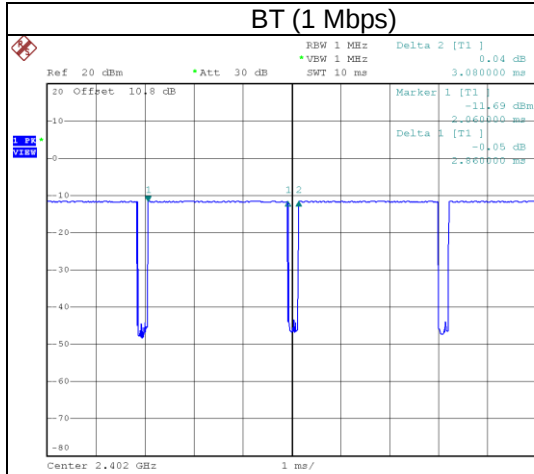

Date: 16.APR.2021 12:51:52

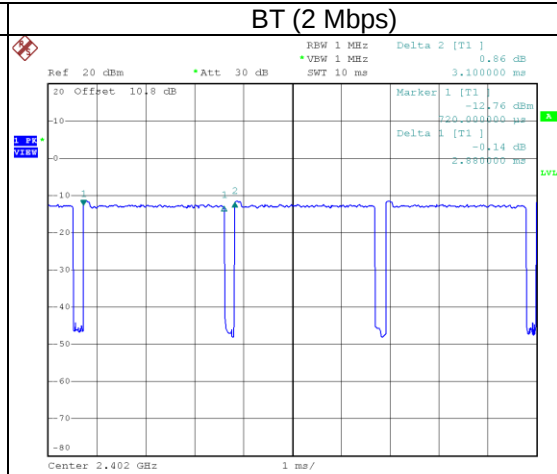

Date: 16.APR.2021 12:52:51

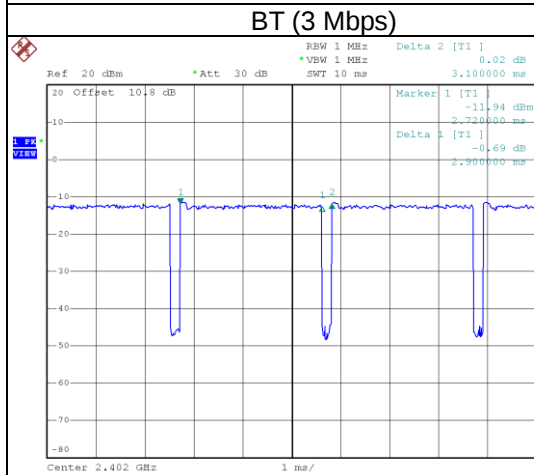

Date: 16.APR.2021 12:54:04

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	Notebook Computer
Model Name	dynabook E10-S, SATELLITE PRO E10-S, dynabook E10W-S, SATELLITE PRO E10W-S
Brand Name	dynabook
Model Difference	Different model distribute to different area.
Power Source	(1) DC Voltage supplied from AC/DC adapter. (2) Battery supplied.
Power Rating	(1) I/P: 100-240V~50 / 60Hz, 1.5A, O/P:19V---2.1A , 39.9W (2) I/P: DC 7.6V, 6000mAh, 45.6Wh
Products Covered	1 * Power Adapter: BSY / BSY065T1902102D 1 * Battery: 4588105-2S
Operation Band	2400 MHz ~ 2483.5 MHz
Operation Frequency	2402 MHz ~ 2480 MHz
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8DPSK
Modulation Technology	FHSS
Transfer Rate	1 Mbps, 2 Mbps, 3Mbps
Output Power Max.	1 Mbps: 7.97 dBm (0.0063 W) 2 Mbps: 7.94 dBm (0.0062 W) 3 Mbps: 9.68 dBm (0.0093 W)
Test Model	dynabook E10-S
Sample Status	Engineering Sample
EUT Modification(s)	N/A

NOTE:

- (1) For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

(2) Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

(3) Table for Filed Antenna:

Antenna	Manufacture	Antenna Part Number	Type	Connector	Frequency (MHz)	Gain (dBi)
Main	SLEing	SLEingB222060295	PIFA	MHF Plug(IV)	2400-2500	1.95
					5150-5250	1.64
					5725-5850	1.48
Aux	SLEing	SLEingB222070515	PIFA	MHF Plug(IV)	2400-2500	1.79
					5150-5250	1.63
					5725-5850	1.96

NOTE: The EUT only support SISO mode.

2.2 TEST MODES

Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal/Idle	-	-
Transmitter Radiated Emissions (below 1GHz)	1 Mbps	78	-
Transmitter Radiated Emissions (above 1GHz)	1/3 Mbps	00/78	Bandedge
	1/3 Mbps	00/39/78	Harmonic
Number of Hopping Frequency	1/3 Mbps	00~78	-
Average Time of Occupancy	1/3 Mbps	00/39/78	-
Hopping Channel Separation	1/3 Mbps	00/39/78	-
Bandwidth	1/3 Mbps	00/39/78	-
Peak Output Power	1/2/3 Mbps	00/39/78	-
Antenna conducted Spurious Emission	1/3 Mbps	00/39/78	-

NOTE:

- (1) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Horizontal) is recorded.
- (2) All X, Y and Z axes are evaluated, but only the worst case (Y axis) is recorded.
- (3) There were no emissions found below 30 MHz within 20 dB of the limit.


2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

AC power line conducted emissions



Radiated Emissions

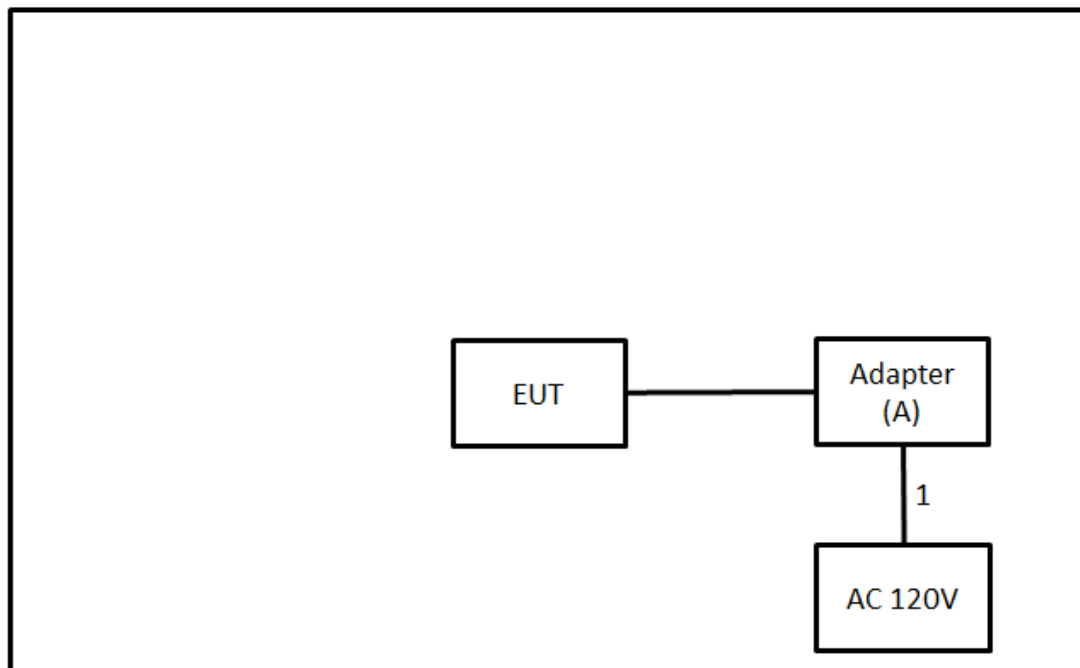

2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	Adapter	BSY	BYS065T1902102 D	N/A	Supplied by test requester

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	N/A	N/A	1.8m	Power Cord	Supplied by test requester

3 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56 *	56 - 46 *
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value
 Calculation example:

Reading Level		Correct Factor		Measurement Value
38.22	+	3.45	=	41.67

Measurement Value		Limit Value		Margin Level
41.67	-	60	=	-18.33

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
 All other support equipment were powered from an additional LISN(s).
 The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
 The end of the cable will be terminated, using the correct terminating impedance.
 The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item - EUT TEST PHOTO.


NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.
 BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

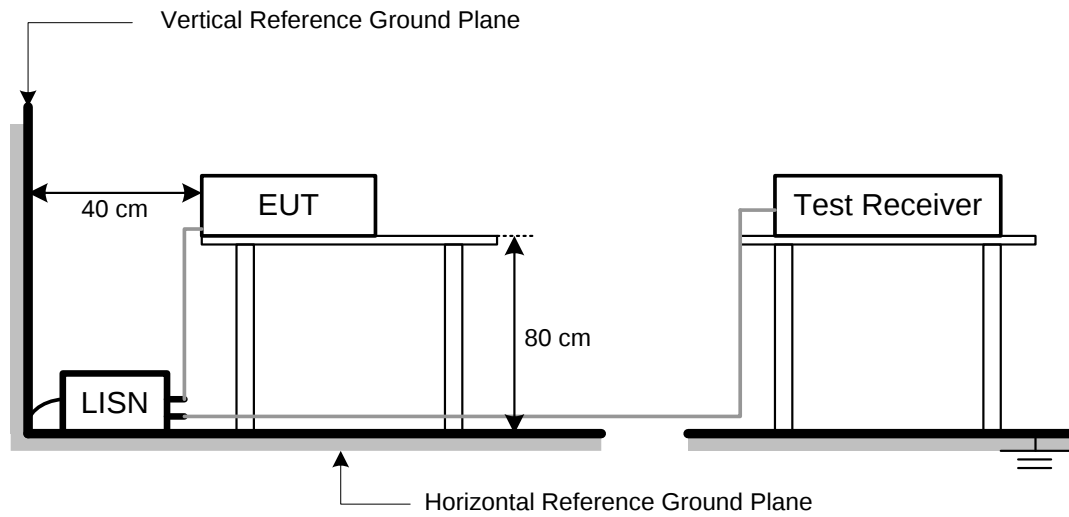

3.5 TEST RESULT

Please refer to the APPENDIX A.

4 RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205, then the 15.209 limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSIONS MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Radiated Emissions (dBuV/m)		Measurement Distance (meters)
	Peak	Average	
Above 1000	74	54	3

NOTE:

- The limit for radiated test was performed according to FCC Part 15, Subpart C.
- The tighter limit applies at the band edges.
- Emission level (dBuV/m)=20log Emission level (uV/m).
- The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level		Correct Factor		Measurement Value
35.45	+	-11.37	=	24.08

Measurement Value		Limit Value		Margin Level
24.08	-	40	=	-15.92

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector


4.2 TEST PROCEDURE

- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.


4.3 DEVIATION FROM TEST STANDARD

No deviation.


4.4 TEST SETUP

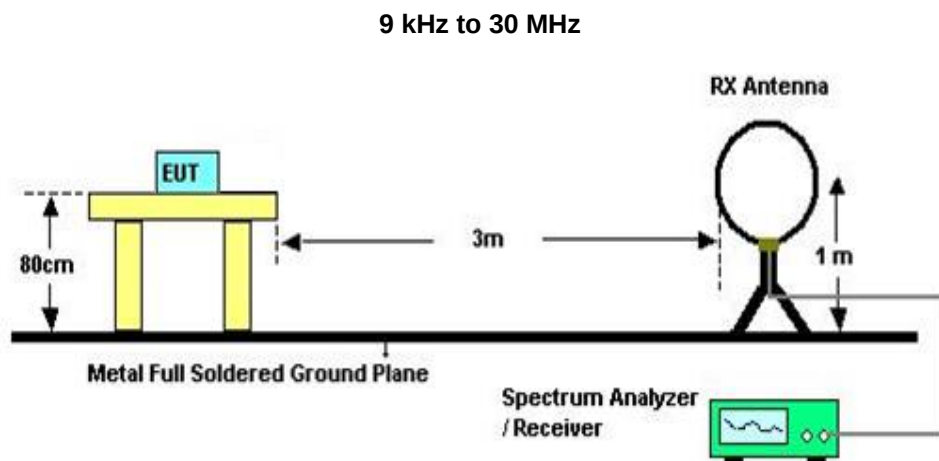

30 MHz to 1 GHz

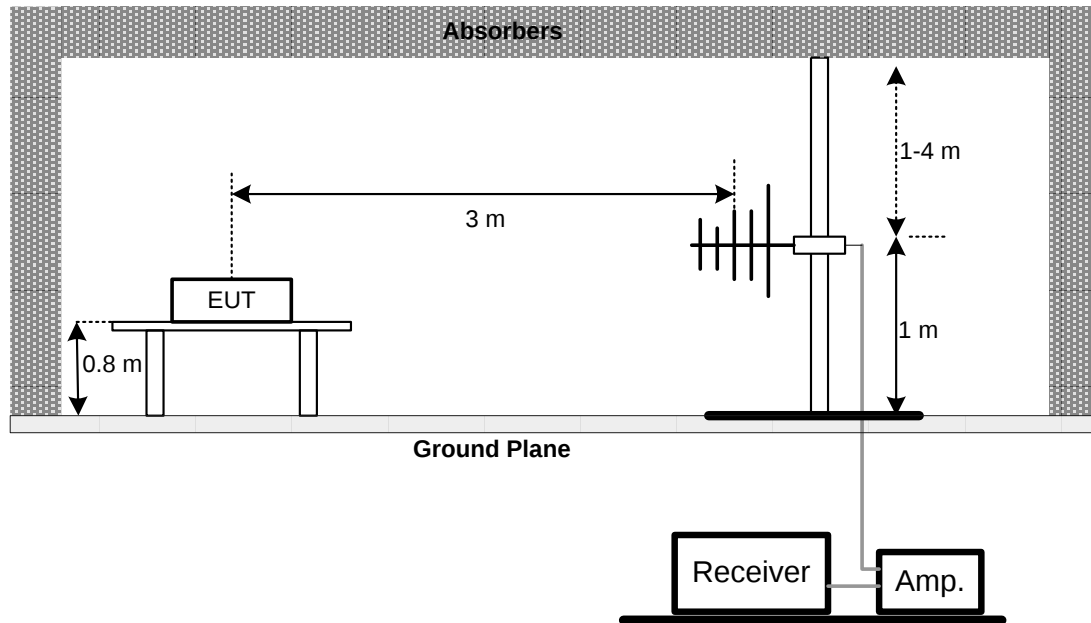

Above 1 GHz

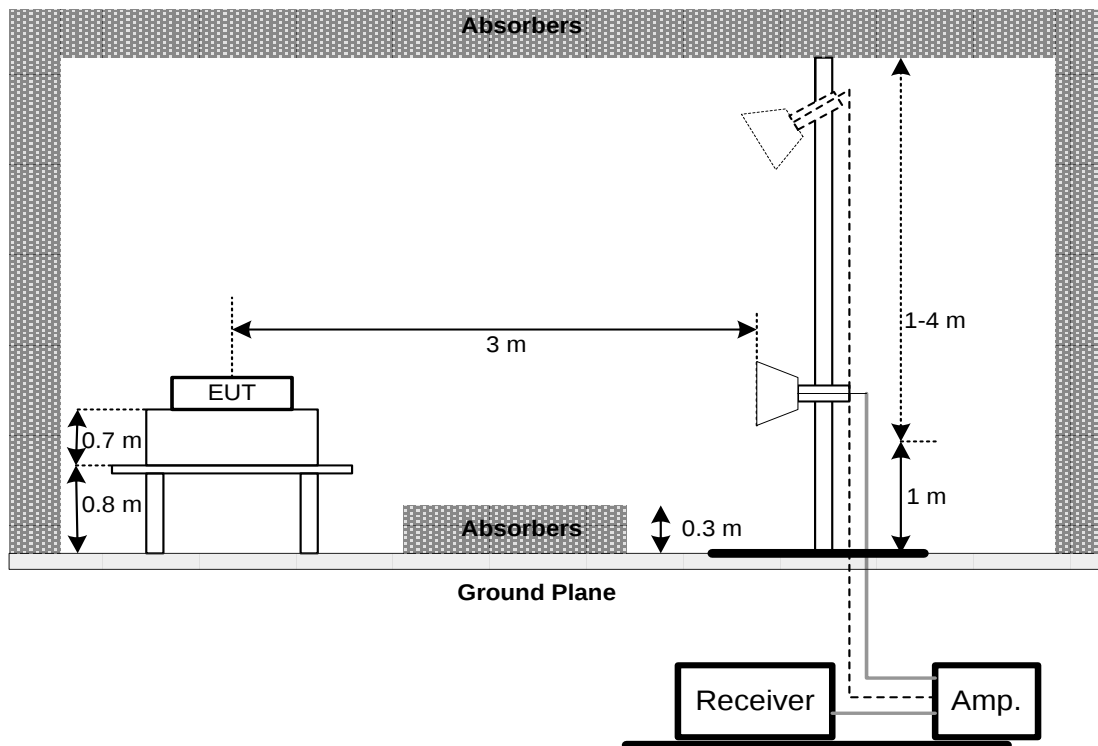

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT – 30 MHZ TO 1 GHZ

Please refer to the APPENDIX B.

4.7 TEST RESULT – ABOVE 1 GHZ

Please refer to the APPENDIX C.

NOTE:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5 NUMBER OF HOPPING CHANNEL

5.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(1)(iii)	Number of Hopping Channel	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RBW	100 KHz
VBW	100 KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW=100KHz, VBW=100KHz, Sweep time = Auto.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS

Please refer to the APPENDIX D.

6 AVERAGE TIME OF OCCUPANCY

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

6.2 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyzer
- Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- Use a video trigger with the trigger level set to enable triggering only on full pulses.
- Sweep Time is more than once pulse time.
- Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- Measure the maximum time duration of one single pulse.
- Set the EUT for DH5, DH3 and DH1 packet transmitting.
- Measure the maximum time duration of one single pulse.
- Measure the maximum time duration of one single pulse.
A Period Time = (channel number)*0.4

For Normal Mode (79 Channel):

DH1 Time Solt: Reading * (1600/2)*31.6/(channel number)

DH3 Time Solt: Reading * (1600/2)*31.6/(channel number)

DH5 Time Solt: Reading * (1600/2)*31.6/(channel number)

For AFH Mode (20 Channel):

DH1 Time Solt: Reading * (1600/2)*8/(channel number)


DH3 Time Solt: Reading * (1600/4)*8/(channel number)

DH5 Time Solt: Reading * (1600/6)*8/(channel number)

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

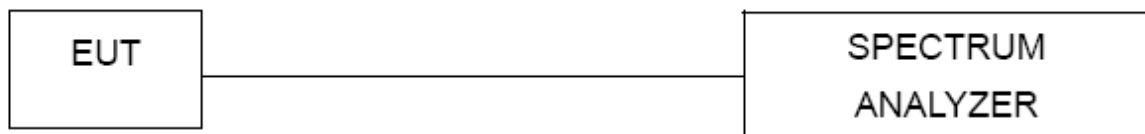

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7 Hopping Channel Separation Measurement

7.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 KHz
VBW	100 KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


7.2 TEST PROCEDURE

- a. The EUT must have its hopping function enabled
- b. Span = wide enough to capture the peaks of two adjacent channels
Resolution (or IF) Bandwidth (RBW) $\geq$ 1% of the span
Video (or Average) Bandwidth (VBW) $\geq$ RBW
Sweep = Auto
Detector function = Peak
Trace = Max Hold

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

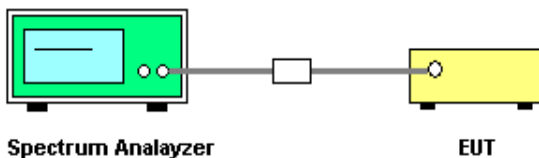

7.5 TEST RESULTS

Please refer to the APPENDIX F.

8 BANDWIDTH TEST

8.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C		
Section	Test Item	Frequency Range (MHz)
15.247(a)(2)	Bandwidth	2400-2483.5

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 KHz (20dB Bandwidth) / 30 KHz (Channel Separation)
VBW	100 KHz (20dB Bandwidth) / 100 KHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 30KHz, VBW=100KHz, Sweep Time = Auto.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9 OUTPUT POWER TEST

9.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(1)	Peak Output Power	0.125Watt or 21dBm	2400-2483.5	PASS


9.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 3MHz, VBW= 3MHz, Sweep time = Auto.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP

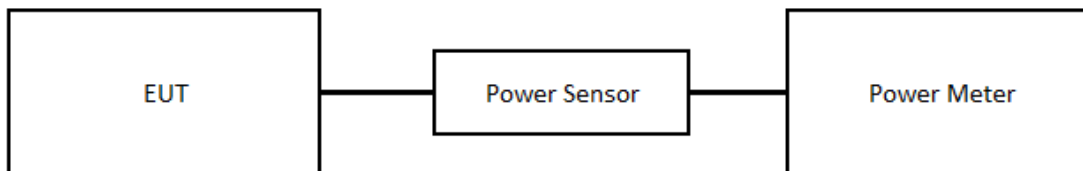

9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

9.6 TEST RESULTS

Please refer to the APPENDIX H.

10 ANTENNA CONDUCTED SPURIOUS EMISSION

10.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.


10.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.
- Offset=antenna gain+cable loss

10.3 DEVIATION FROM STANDARD

No deviation.

10.4 TEST SETUP

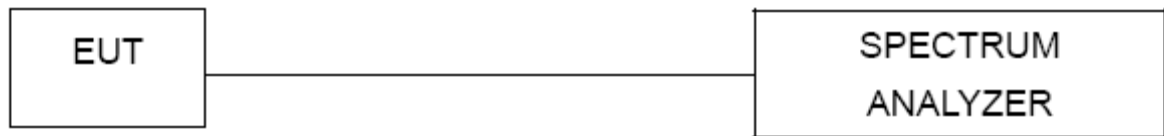

10.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

10.6 TEST RESULTS

Please refer to the APPENDIX I.

11 LIST OF MEASURING EQUIPMENTS

AC Power Line Conducted Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	TWO-LINE V-NETWORK	R&S	ENV216	101050	2020/6/11	2021/6/10
2	Test Cable	EMCI	EMC400-BM-BM-5000	170501	2020/6/8	2021/6/7
3	EMI Test Receiver	R&S	ESCI	100080	2020/6/15	2021/6/14
4	Measurement Software	EZ	EZ EMC (Version NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Preamplifier	EMCI	EMC02325B	980217	2021/4/8	2022/4/7
2	Preamplifier	EMCI	EMC012645B	980267	2021/4/8	2022/4/7
3	Test Cable	EMCI	EMC-SM-SM-1000	180809	2021/4/8	2022/4/7
4	Test Cable	EMCI	EMC104-SM-SM-3000	151205	2021/4/8	2022/4/7
5	Test Cable	EMCI	EMC-SM-SM-7000	180408	2021/4/8	2022/4/7
6	MXE EMI Receiver	Agilent	N9038A	MY554200087	2020/6/10	2021/6/9
7	Signal Analyzer	Agilent	N9010A	MY56480554	2020/8/25	2021/8/24
8	Horn Ant	SCHWARZBECK	BBHA 9120D	9120D-1342	2020/6/12	2021/6/11
9	Horn Ant	Schwarzbeck	BBHA 9170	BBHA 9170340	2020/7/9	2021/7/8
10	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	VULB 9168-352	2020/7/24	2021/7/23
11	5dB Attenuator	EMCI	EMCI-N-6-05	AT-N0625	2020/7/24	2021/7/23
12	Measurement Software	EZ	EZ EMC (Version NB-03A1-01)	N/A	N/A	N/A

Number of Hopping Frequency						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 40	100129	2020/6/15	2021/6/14

Average Time of Occupancy						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 40	100129	2020/6/15	2021/6/14

Hopping Channel Separation						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 40	100129	2020/6/15	2021/6/14

Bandwidth						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 40	100129	2020/6/15	2021/6/14

Output Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 40	100129	2020/6/15	2021/6/14
2	Power Meter	Anritsu	ML2487A	6K00004714	2020/9/3	2021/9/2
3	Power Sensor	Anritsu	MA2491A	034138	2020/9/3	2021/9/2

Antenna conducted Spurious Emission						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 40	100129	2020/6/15	2021/6/14

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

12 EUT TEST PHOTO


Please refer to document Appendix No.: TP-2103T163-FCCP-1 (APPENDIX-TEST PHOTOS).

13 EUT PHOTOS

Please refer to document Appendix No.: EP-2103T163-1 (APPENDIX-EUT PHOTOS).

APPENDIX A AC POWER LINE CONDUCTED EMISSIONS

Test Mode	Normal	Tested Date	2021/4/23
Test Frequency	-	Phase	Line

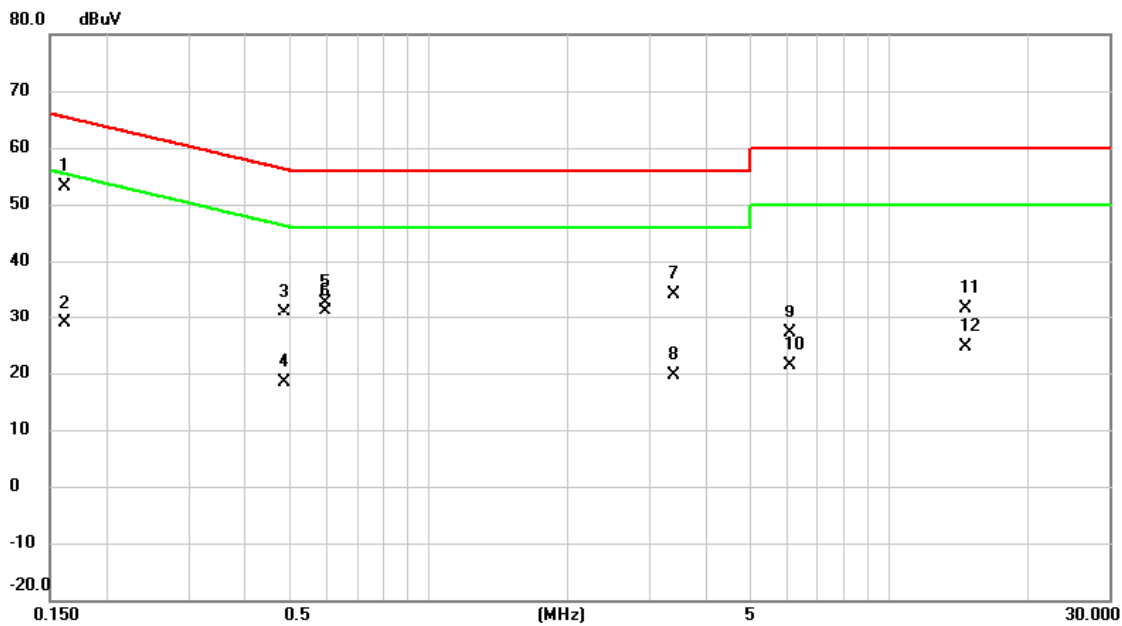


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1613	43.42	9.68	53.10	65.40	-12.30	QP	
2		0.1613	19.19	9.68	28.87	55.40	-26.53	AVG	
3		0.4875	21.13	9.68	30.81	56.21	-25.40	QP	
4		0.4875	8.82	9.68	18.50	46.21	-27.71	AVG	
5		0.5977	22.91	9.68	32.59	56.00	-23.41	QP	
6		0.5977	21.44	9.68	31.12	46.00	-14.88	AVG	
7		3.3990	24.42	9.77	34.19	56.00	-21.81	QP	
8		3.3990	9.85	9.77	19.62	46.00	-26.38	AVG	
9		6.1192	17.37	9.85	27.22	60.00	-32.78	QP	
10		6.1192	11.42	9.85	21.27	50.00	-28.73	AVG	
11		14.6355	21.81	9.94	31.75	60.00	-28.25	QP	
12		14.6355	14.80	9.94	24.74	50.00	-25.26	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2021/4/23
Test Frequency	-	Phase	Neutral

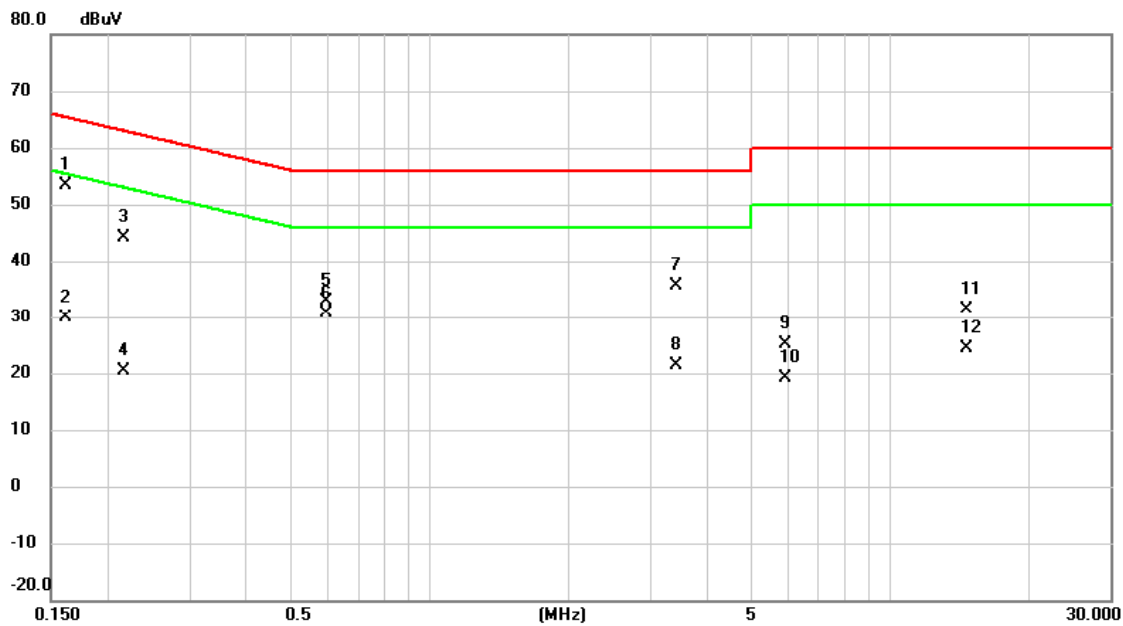


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1612	43.70	9.68	53.38	65.40	-12.02	QP	
2		0.1612	20.21	9.68	29.89	55.40	-25.51	AVG	
3		0.2152	34.46	9.67	44.13	63.00	-18.87	QP	
4		0.2152	10.60	9.67	20.27	53.00	-32.73	AVG	
5		0.5954	23.15	9.68	32.83	56.00	-23.17	QP	
6		0.5954	21.03	9.68	30.71	46.00	-15.29	AVG	
7		3.4237	25.85	9.77	35.62	56.00	-20.38	QP	
8		3.4237	11.53	9.77	21.30	46.00	-24.70	AVG	
9		5.9122	15.27	9.84	25.11	60.00	-34.89	QP	
10		5.9122	9.31	9.84	19.15	50.00	-30.85	AVG	
11		14.6692	21.52	9.94	31.46	60.00	-28.54	QP	
12		14.6692	14.37	9.94	24.31	50.00	-25.69	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2021/4/23
Test Frequency	-	Phase	Line

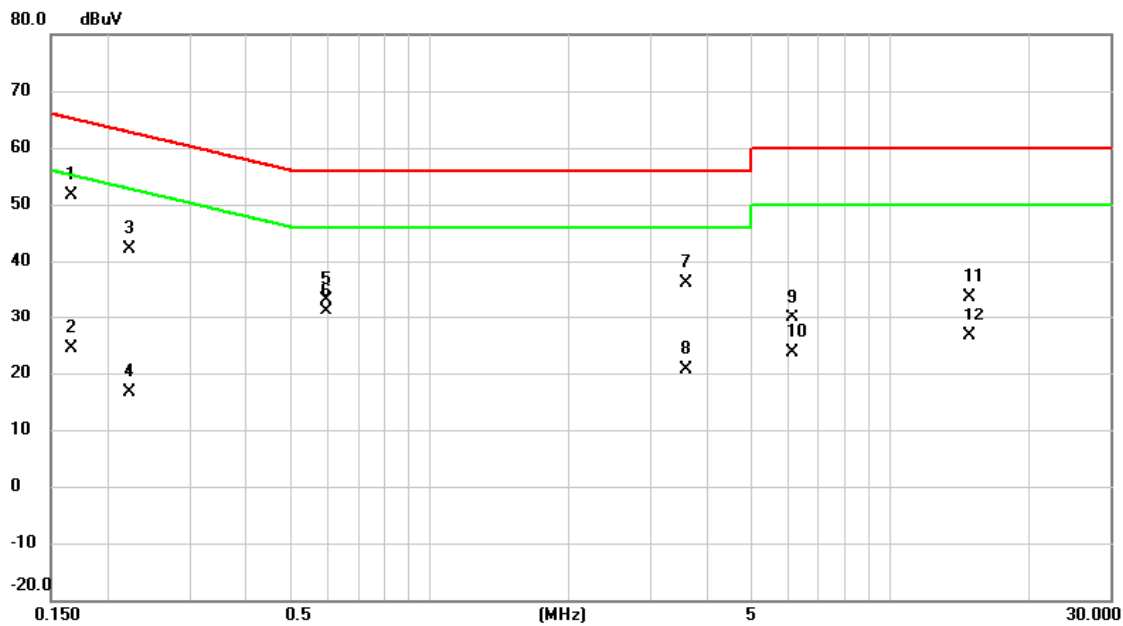


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1658	41.92	9.68	51.60	65.17	-13.57	QP	
2		0.1658	14.77	9.68	24.45	55.17	-30.72	AVG	
3		0.2220	32.56	9.67	42.23	62.74	-20.51	QP	
4		0.2220	6.94	9.67	16.61	52.74	-36.13	AVG	
5		0.5977	23.41	9.68	33.09	56.00	-22.91	QP	
6		0.5977	21.56	9.68	31.24	46.00	-14.76	AVG	
7		3.5993	26.28	9.78	36.06	56.00	-19.94	QP	
8		3.5993	10.90	9.78	20.68	46.00	-25.32	AVG	
9		6.1260	20.10	9.85	29.95	60.00	-30.05	QP	
10		6.1260	13.82	9.85	23.67	50.00	-26.33	AVG	
11		14.8178	23.75	9.94	33.69	60.00	-26.31	QP	
12		14.8178	16.67	9.94	26.61	50.00	-23.39	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2021/4/23
Test Frequency	-	Phase	Neutral

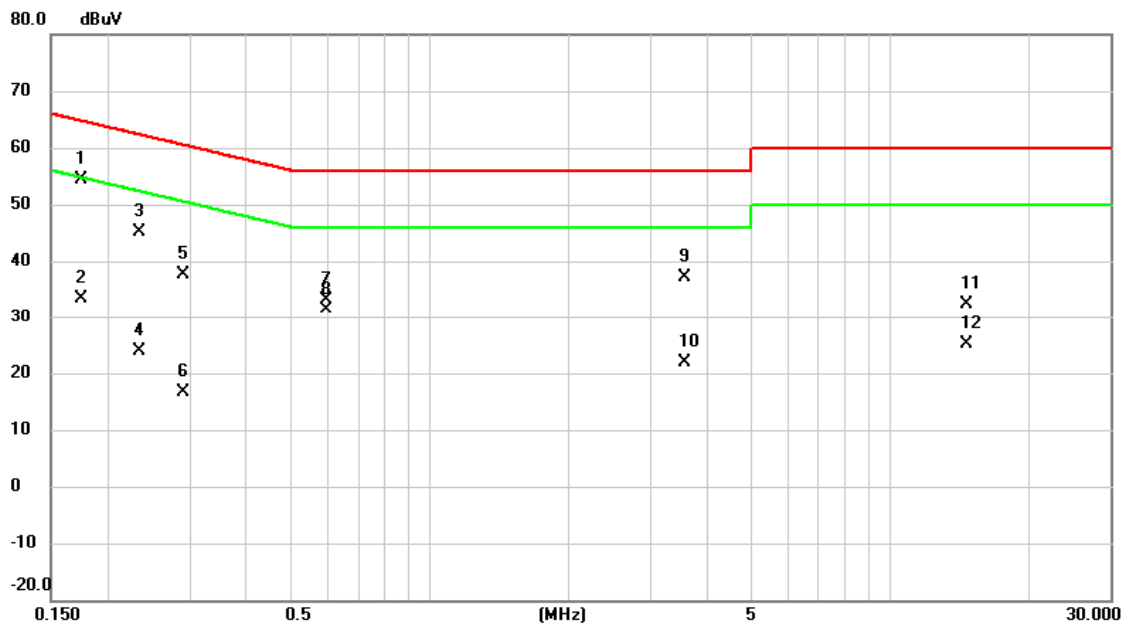

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1747	44.71	9.68	54.39	64.73	-10.34	QP	
2		0.1747	23.67	9.68	33.35	54.73	-21.38	AVG	
3		0.2332	35.33	9.68	45.01	62.33	-17.32	QP	
4		0.2332	14.25	9.68	23.93	52.33	-28.40	AVG	
5		0.2894	28.06	9.69	37.75	60.54	-22.79	QP	
6		0.2894	6.90	9.69	16.59	50.54	-33.95	AVG	
7		0.5977	23.35	9.68	33.03	56.00	-22.97	QP	
8		0.5977	21.66	9.68	31.34	46.00	-14.66	AVG	
9		3.5677	27.32	9.78	37.10	56.00	-18.90	QP	
10		3.5677	12.18	9.78	21.96	46.00	-24.04	AVG	
11		14.6602	22.51	9.94	32.45	60.00	-27.55	QP	
12		14.6602	15.30	9.94	25.24	50.00	-24.76	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX B RADIATED EMISSIONS - 30 MHZ TO 1 GHZ

Test Mode	BT(1Mbps)	Test Date	2021/4/14
Test Frequency	2480MHz	Polarization	Vertical
Temp	22°C	Hum.	61%

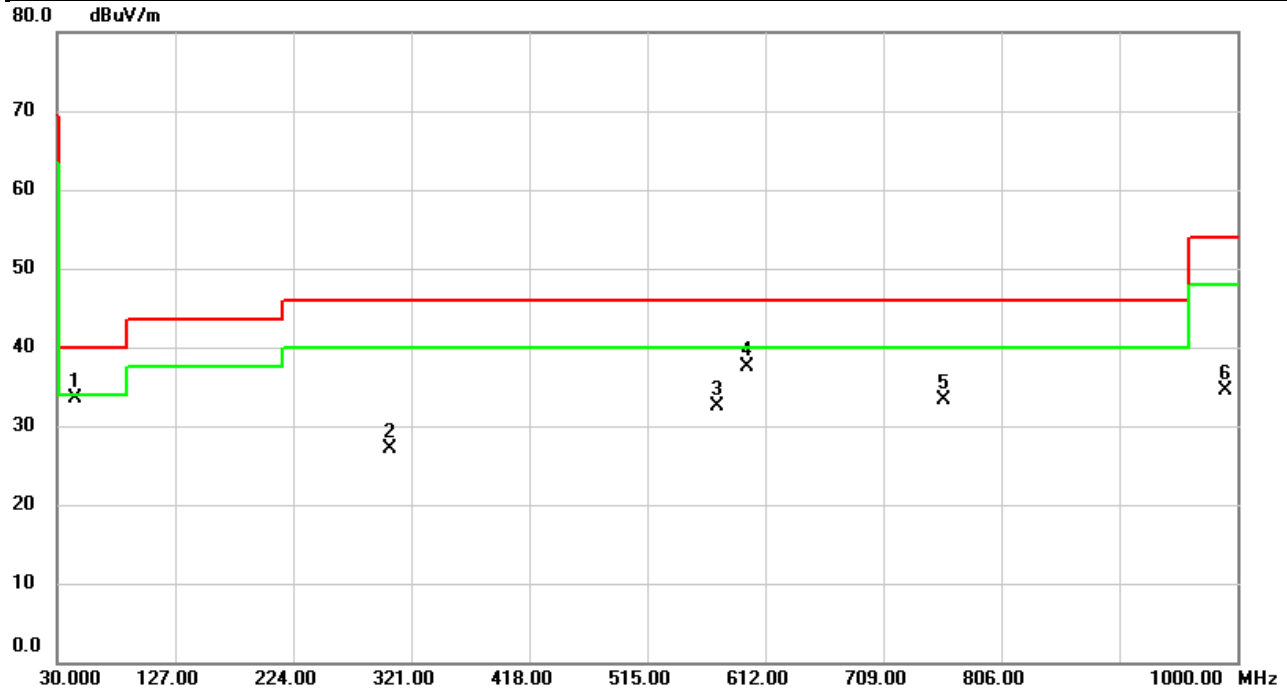


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	45.4553	41.66	-8.22	33.44	40.00	-6.56	peak	
2		303.4107	34.39	-7.28	27.11	46.00	-18.89	peak	
3		571.9713	33.79	-1.28	32.51	46.00	-13.49	peak	
4		597.7733	38.20	-0.68	37.52	46.00	-8.48	peak	
5		758.6640	31.18	2.04	33.22	46.00	-12.78	peak	
6		989.8150	28.95	5.59	34.54	54.00	-19.46	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(1Mbps)	Test Date	2021/4/14
Test Frequency	2480MHz	Polarization	Horizontal
Temp	22°C	Hum.	61%

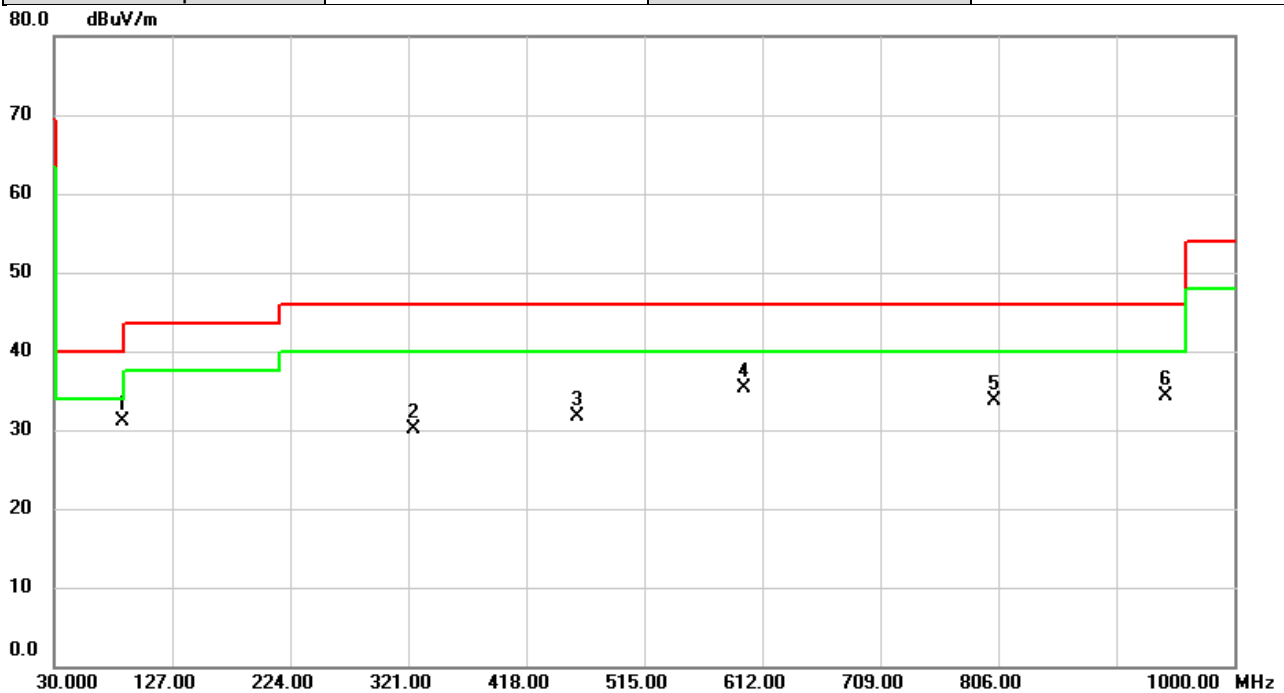


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	86.4216	45.23	-14.04	31.19	40.00	-8.81	peak	
2		325.7206	36.80	-6.74	30.06	46.00	-15.94	peak	
3		460.3890	35.12	-3.49	31.63	46.00	-14.37	peak	
4		597.4823	36.08	-0.69	35.39	46.00	-10.61	peak	
5		802.5726	31.14	2.60	33.74	46.00	-12.26	peak	
6		943.5460	29.36	4.97	34.33	46.00	-11.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C RADIATED EMISSIONS - ABOVE 1 GHZ

Test Mode	BT(1Mbps)	Test Date	2021/4/14
Test Frequency	2402MHz	Polarization	Horizontal
Temp	22°C	Hum.	61%

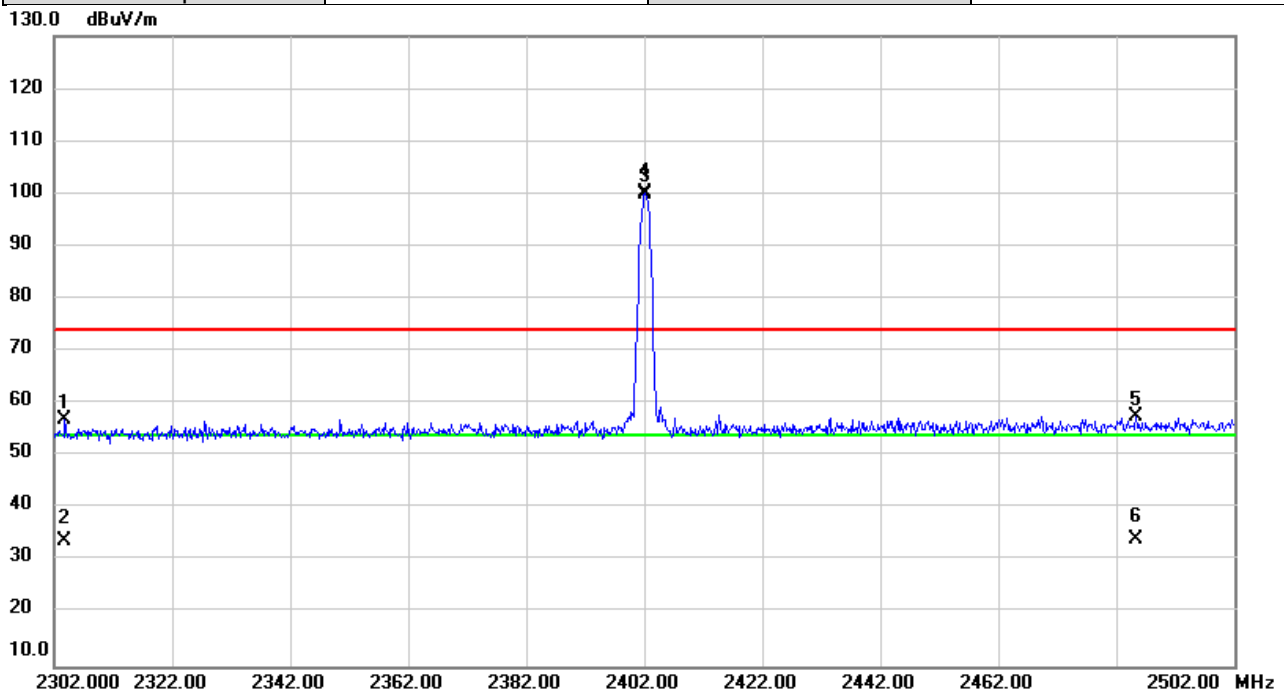


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2303.833	26.55	30.44	56.99	74.00	-17.01	peak	
2		2303.833	3.41	30.44	33.85	54.00	-20.15	AVG	
3	X	2402.000	69.30	30.84	100.14	74.00	26.14	peak	NoLimit
4	*	2402.000	69.02	30.84	99.86	54.00	45.86	AVG	NoLimit
5		2485.307	26.35	31.17	57.52	74.00	-16.48	peak	
6		2485.307	2.88	31.17	34.05	54.00	-19.95	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(1Mbps)	Test Date	2021/4/14
Test Frequency	2480MHz	Polarization	Horizontal
Temp	22°C	Hum.	61%

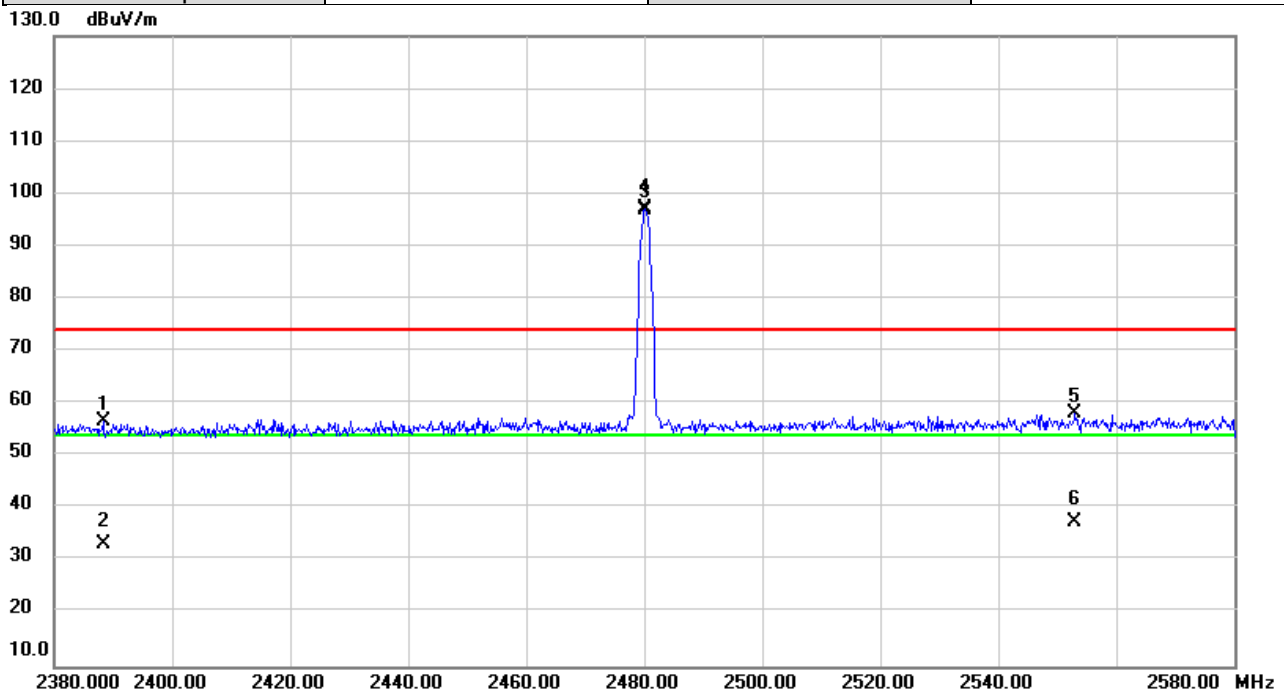


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2388.380	25.77	30.78	56.55	74.00	-17.45	peak	
2		2388.380	2.59	30.78	33.37	54.00	-20.63	AVG	
3	X	2480.000	65.96	31.15	97.11	74.00	23.11	peak	NoLimit
4	*	2480.000	65.81	31.15	96.96	54.00	42.96	AVG	NoLimit
5		2553.027	26.61	31.45	58.06	74.00	-15.94	peak	
6		2553.027	6.10	31.45	37.55	54.00	-16.45	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(3Mbps)	Test Date	2021/4/14
Test Frequency	2402MHz	Polarization	Horizontal
Temp	22°C	Hum.	61%

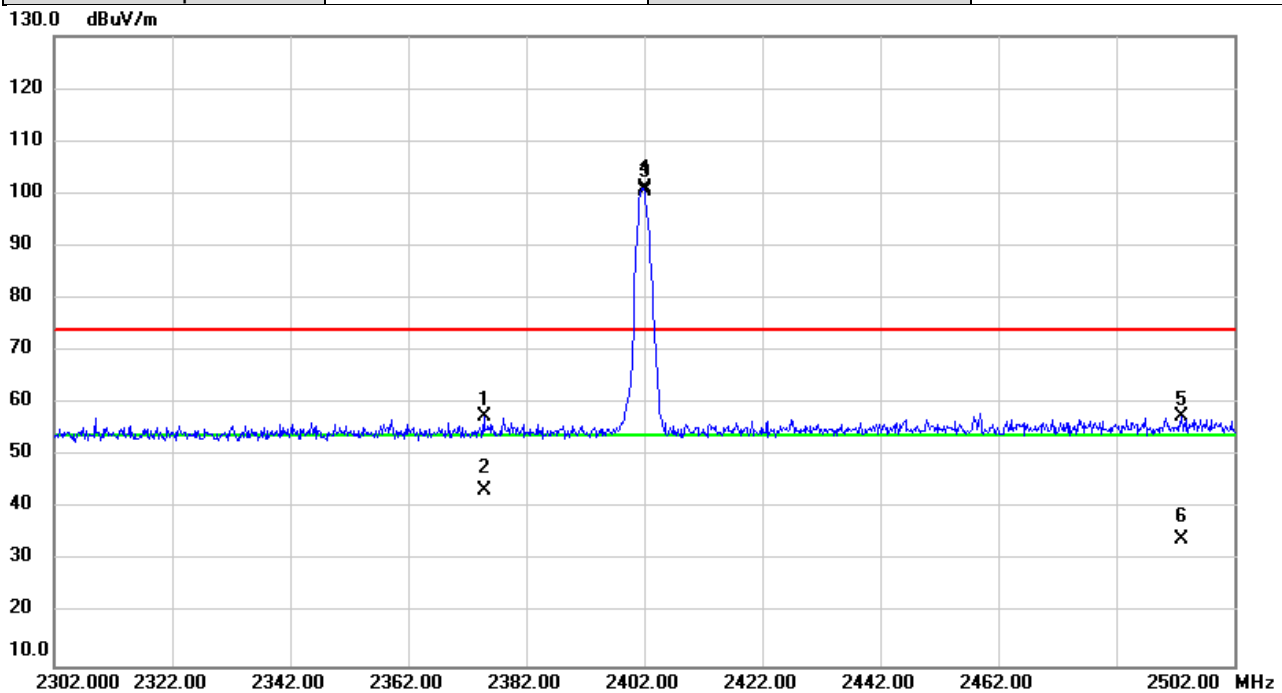


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2374.940	26.81	30.72	57.53	74.00	-16.47	peak	
2		2374.940	12.75	30.72	43.47	54.00	-10.53	AVG	
3	X	2402.000	70.27	30.84	101.11	74.00	27.11	peak	NoLimit
4	*	2402.000	69.53	30.84	100.37	54.00	46.37	AVG	NoLimit
5		2493.000	26.25	31.21	57.46	74.00	-16.54	peak	
6		2493.000	2.88	31.21	34.09	54.00	-19.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(3Mbps)	Test Date	2021/4/14
Test Frequency	2480MHz	Polarization	Horizontal
Temp	22°C	Hum.	61%

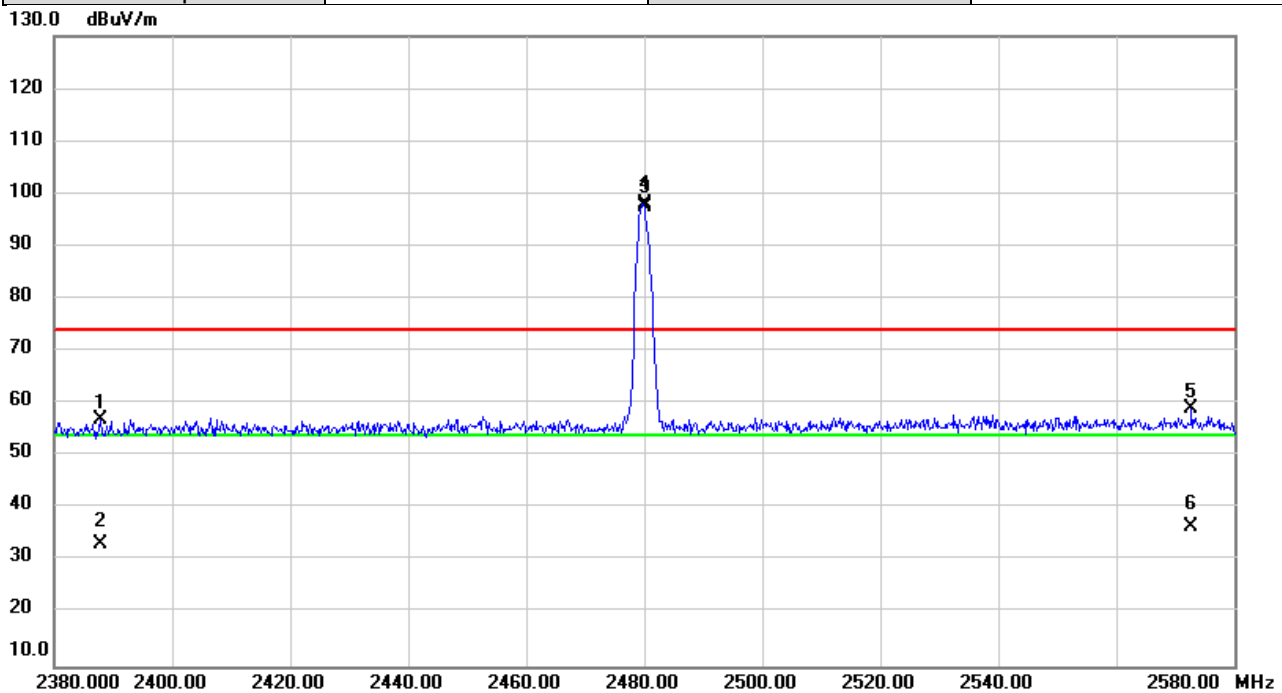


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2387.860	26.18	30.78	56.96	74.00	-17.04	peak	
2		2387.860	2.62	30.78	33.40	54.00	-20.60	AVG	
3	X	2480.000	66.84	31.15	97.99	74.00	23.99	peak	NoLimit
4	*	2480.000	66.20	31.15	97.35	54.00	43.35	AVG	NoLimit
5		2572.627	27.39	31.53	58.92	74.00	-15.08	peak	
6		2572.627	4.90	31.53	36.43	54.00	-17.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(1Mbps)	Test Date	2021/4/14
Test Frequency	2402MHz	Polarization	Vertical
Temp	22°C	Hum.	61%

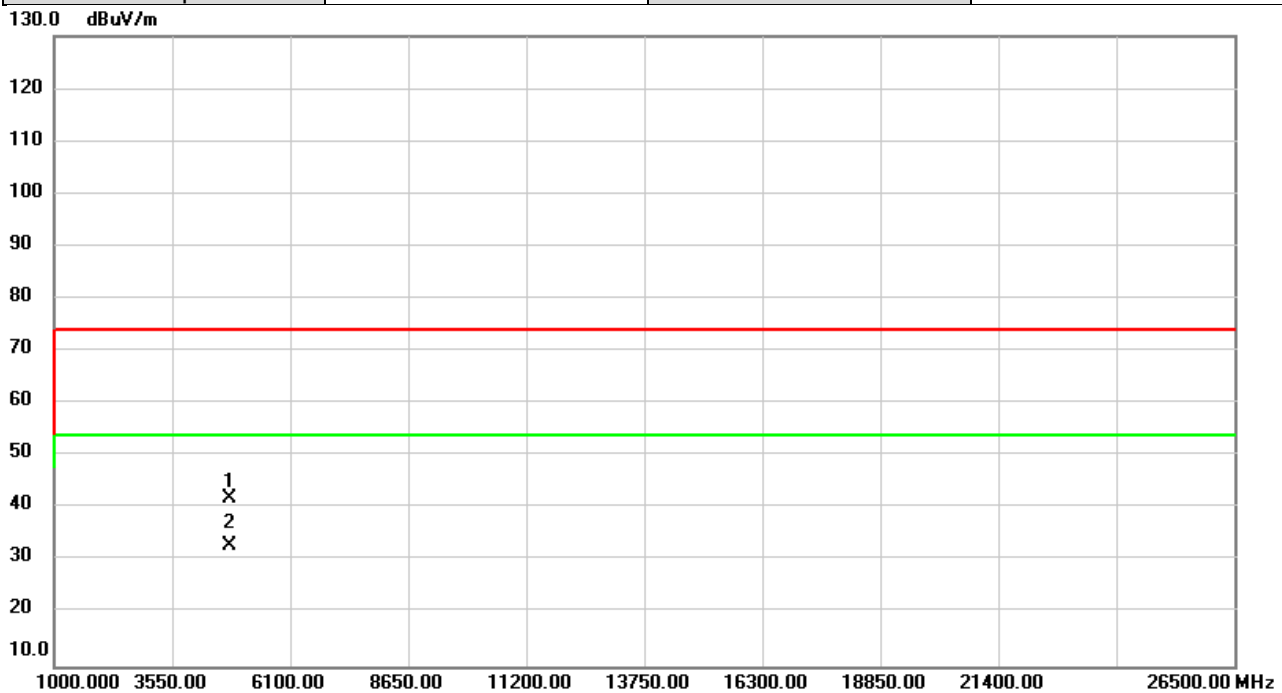


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.000	51.86	-10.03	41.83	74.00	-32.17	peak	
2	*	4804.000	42.95	-10.03	32.92	54.00	-21.08	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(1Mbps)	Test Date	2021/4/14
Test Frequency	2402MHz	Polarization	Horizontal
Temp	22°C	Hum.	61%

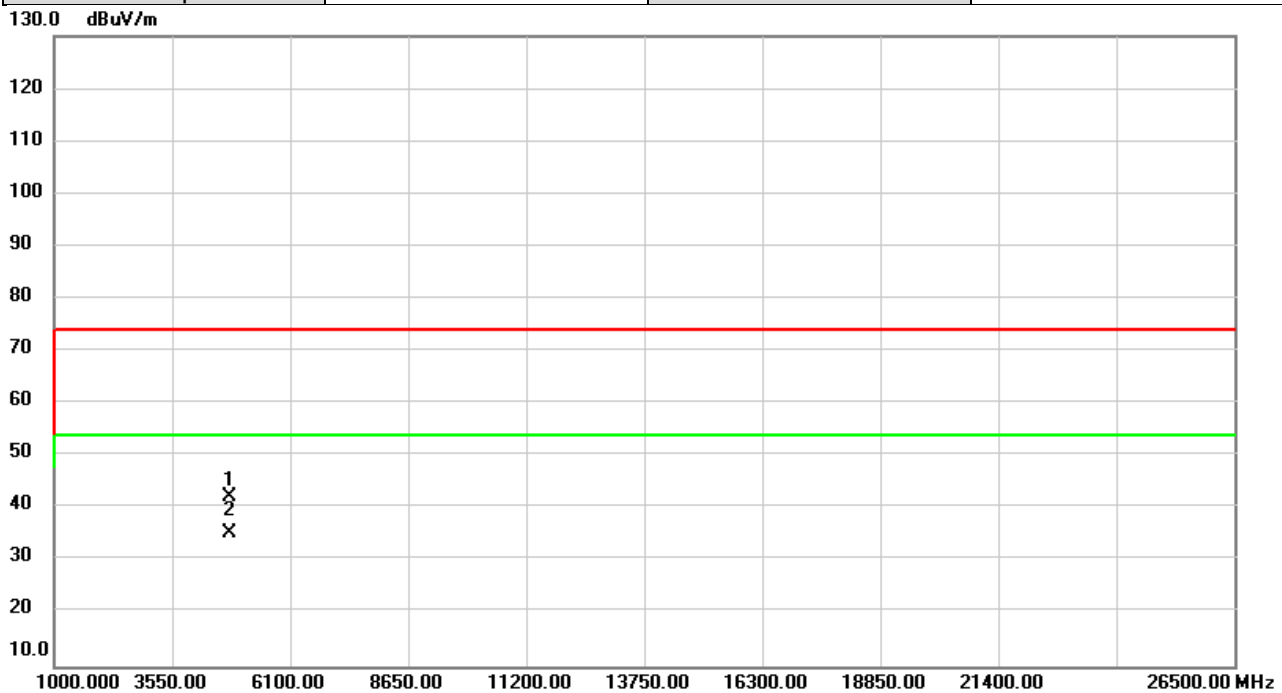


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.000	52.27	-10.03	42.24	74.00	-31.76	peak	
2	*	4804.000	45.39	-10.03	35.36	54.00	-18.64	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(1Mbps)	Test Date	2021/4/14
Test Frequency	2441MHz	Polarization	Vertical
Temp	22°C	Hum.	61%

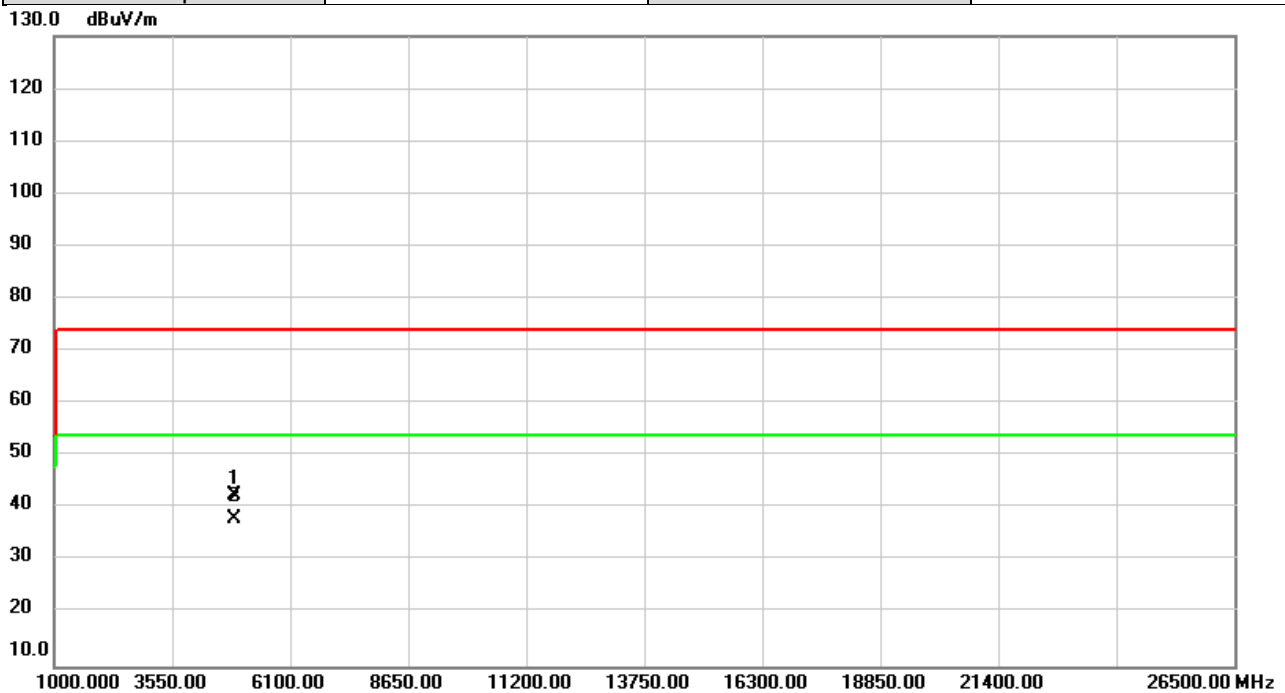


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4882.000	52.18	-9.76	42.42	74.00	-31.58	peak	
2	*	4882.000	47.86	-9.76	38.10	54.00	-15.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(1Mbps)	Test Date	2021/4/14
Test Frequency	2441MHz	Polarization	Horizontal
Temp	22°C	Hum.	61%

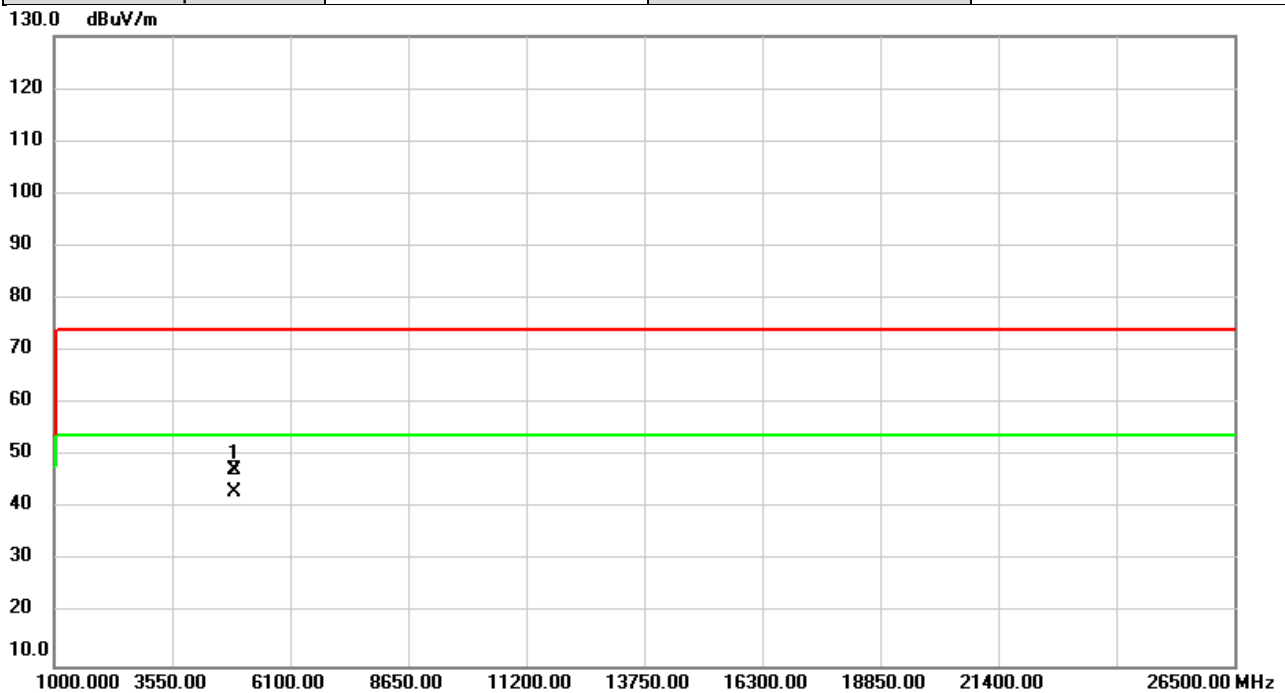


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4882.000	56.99	-9.76	47.23	74.00	-26.77	peak	
2	*	4882.000	52.86	-9.76	43.10	54.00	-10.90	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(1Mbps)	Test Date	2021/4/14
Test Frequency	2480MHz	Polarization	Vertical
Temp	22°C	Hum.	61%

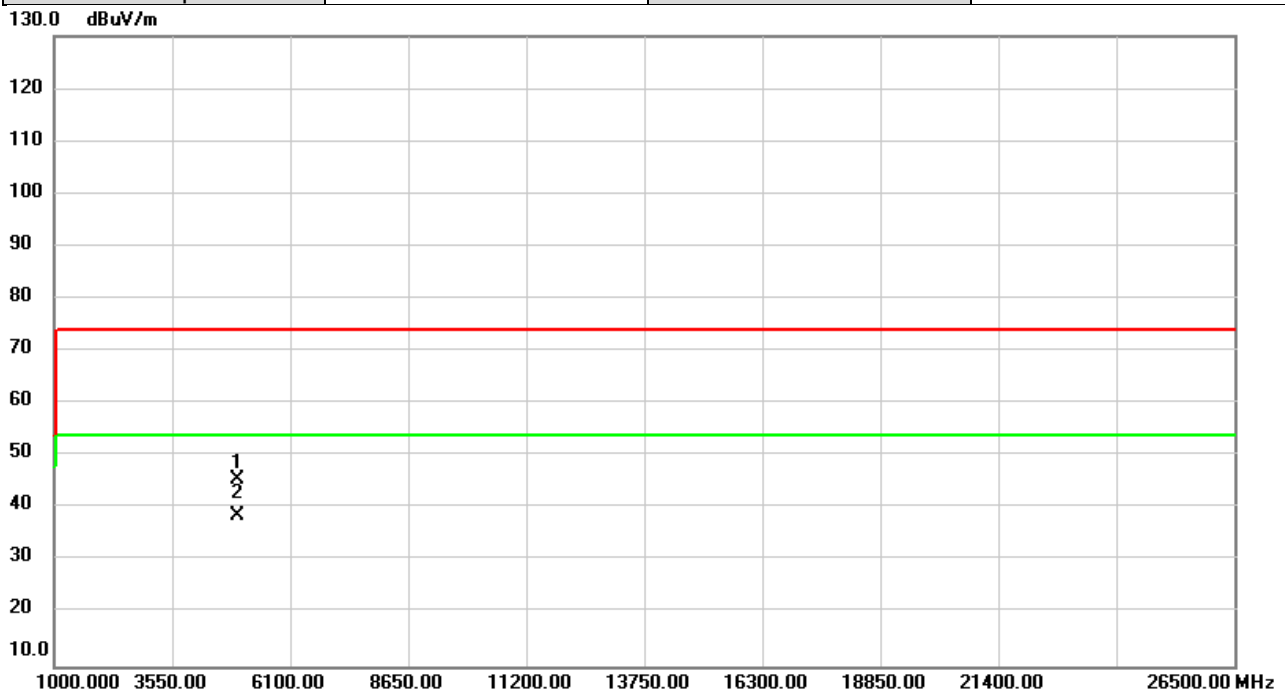


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4960.000	55.08	-9.49	45.59	74.00	-28.41	peak	
2	*	4960.000	48.14	-9.49	38.65	54.00	-15.35	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(1Mbps)	Test Date	2021/4/14
Test Frequency	2480MHz	Polarization	Horizontal
Temp	22°C	Hum.	61%

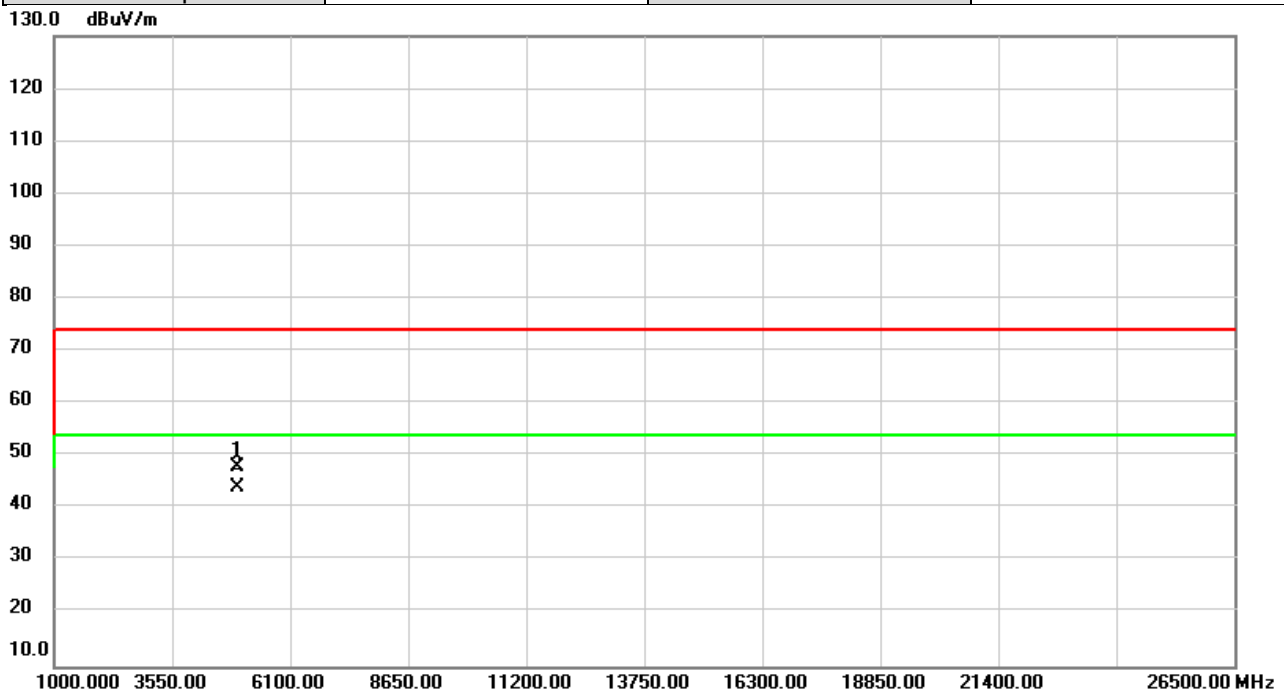


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4960.000	57.58	-9.49	48.09	74.00	-25.91	peak	
2	*	4960.000	53.65	-9.49	44.16	54.00	-9.84	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(3Mbps)	Test Date	2021/4/14
Test Frequency	2402MHz	Polarization	Vertical
Temp	22°C	Hum.	61%

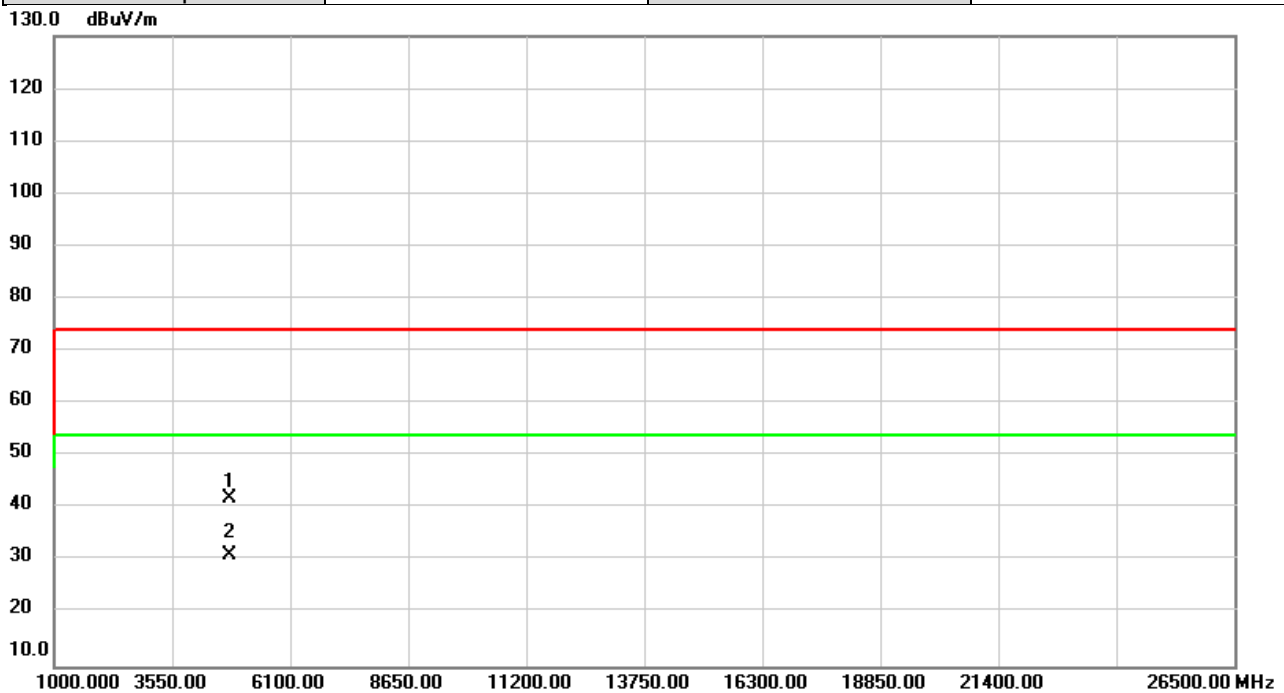


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.000	51.90	-10.03	41.87	74.00	-32.13	peak	
2	*	4804.000	41.24	-10.03	31.21	54.00	-22.79	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(3Mbps)	Test Date	2021/4/14
Test Frequency	2402MHz	Polarization	Horizontal
Temp	22°C	Hum.	61%

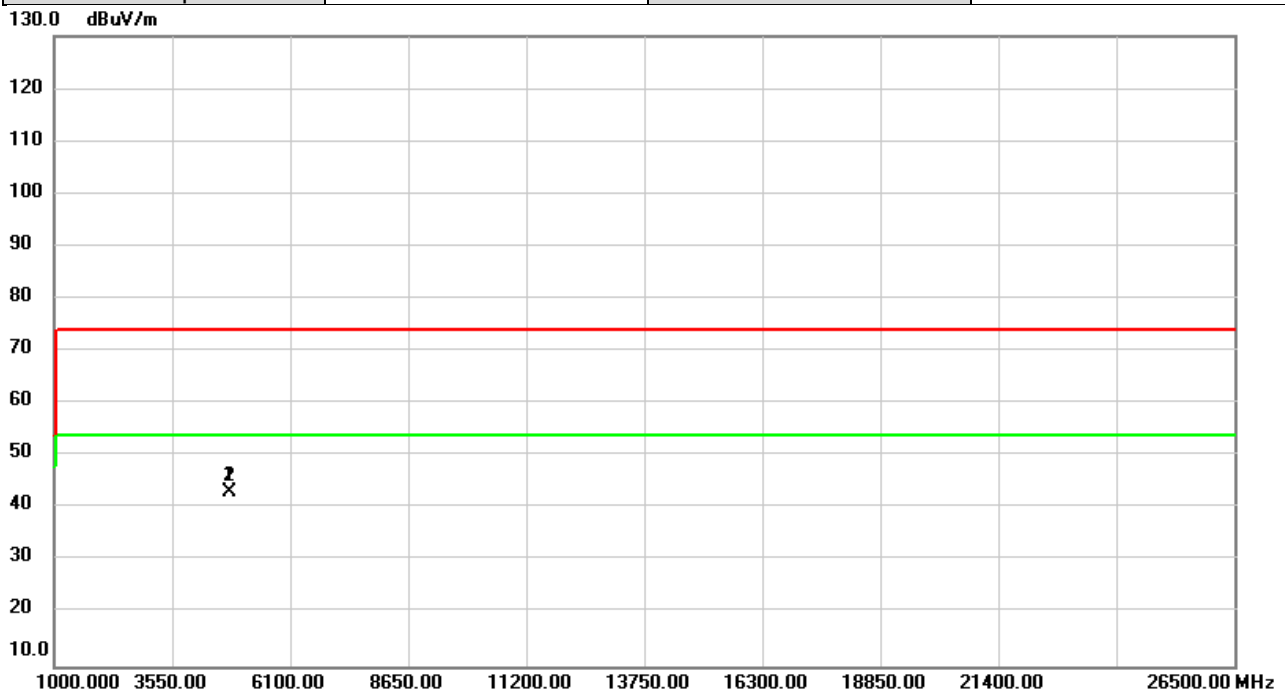


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4804.000	53.14	-10.03	43.11	74.00	-30.89	peak	
2	*	4804.000	53.14	-10.03	43.11	74.00	-30.89	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(3Mbps)	Test Date	2021/4/14
Test Frequency	2441MHz	Polarization	Vertical
Temp	22°C	Hum.	61%

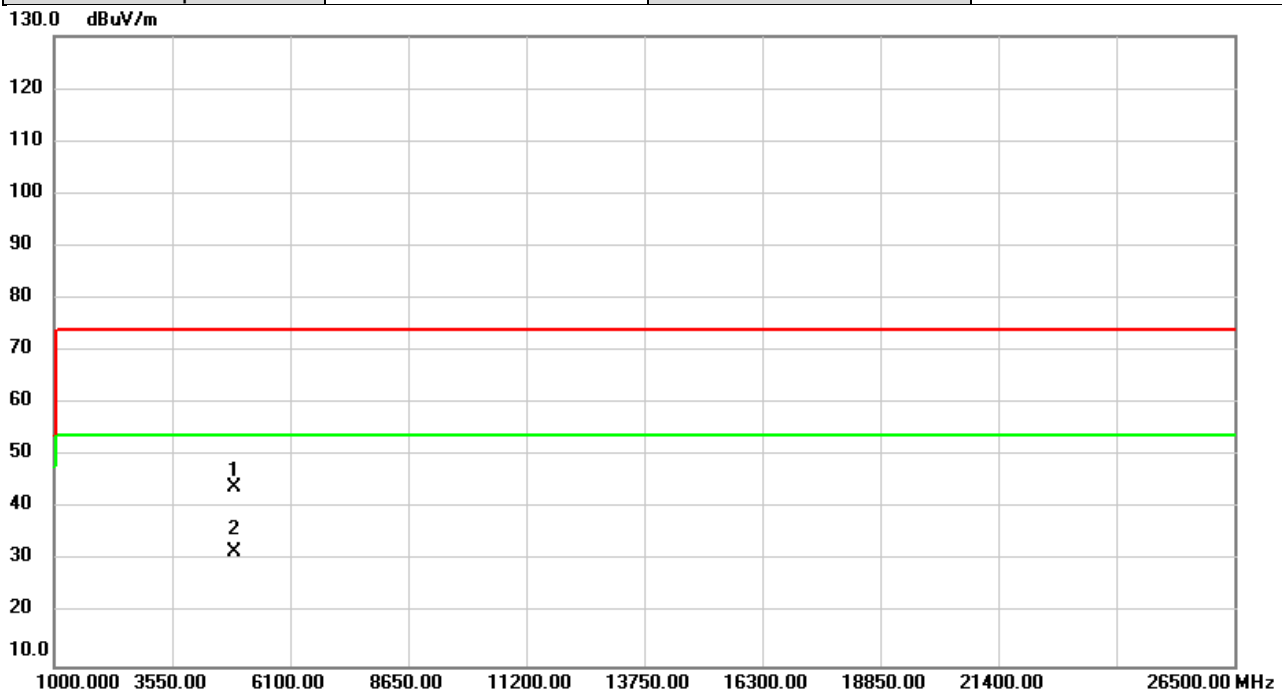


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4882.000	53.69	-9.76	43.93	74.00	-30.07	peak	
2	*	4882.000	41.57	-9.76	31.81	54.00	-22.19	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(3Mbps)	Test Date	2021/4/14
Test Frequency	2441MHz	Polarization	Horizontal
Temp	22°C	Hum.	61%

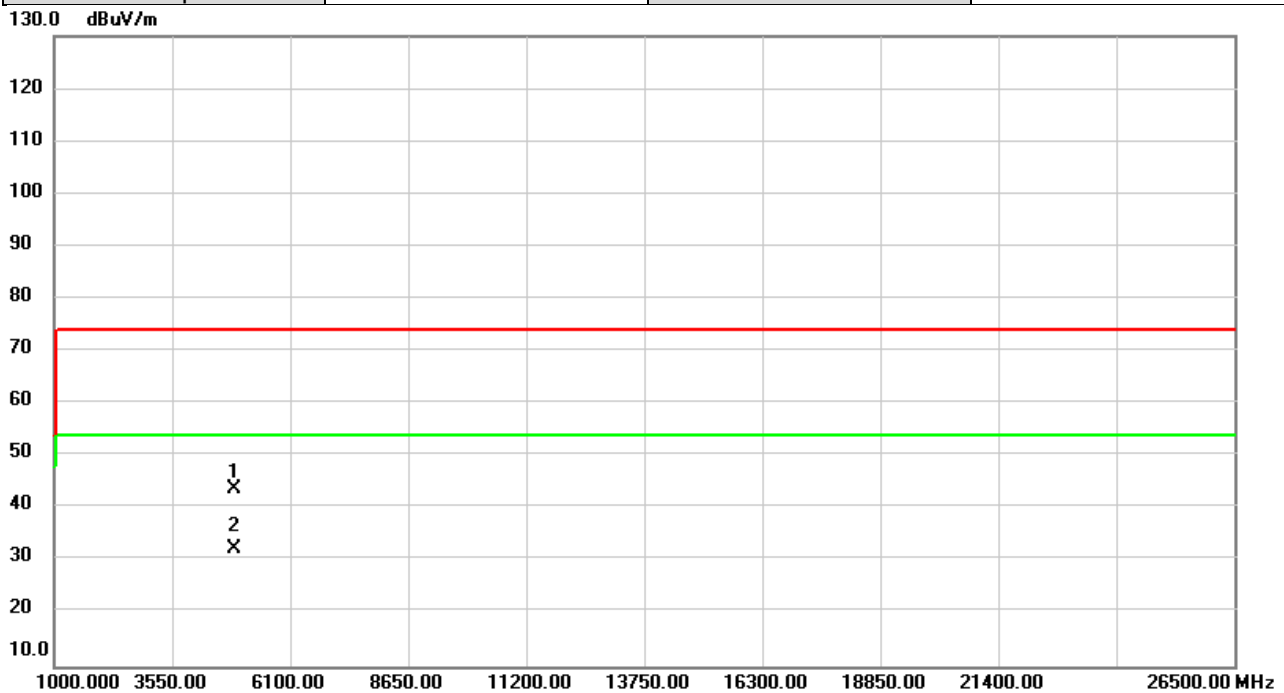


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4882.000	53.58	-9.76	43.82	74.00	-30.18	peak	
2	*	4882.000	42.14	-9.76	32.38	54.00	-21.62	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(3Mbps)	Test Date	2021/4/14
Test Frequency	2480MHz	Polarization	Vertical
Temp	22°C	Hum.	61%

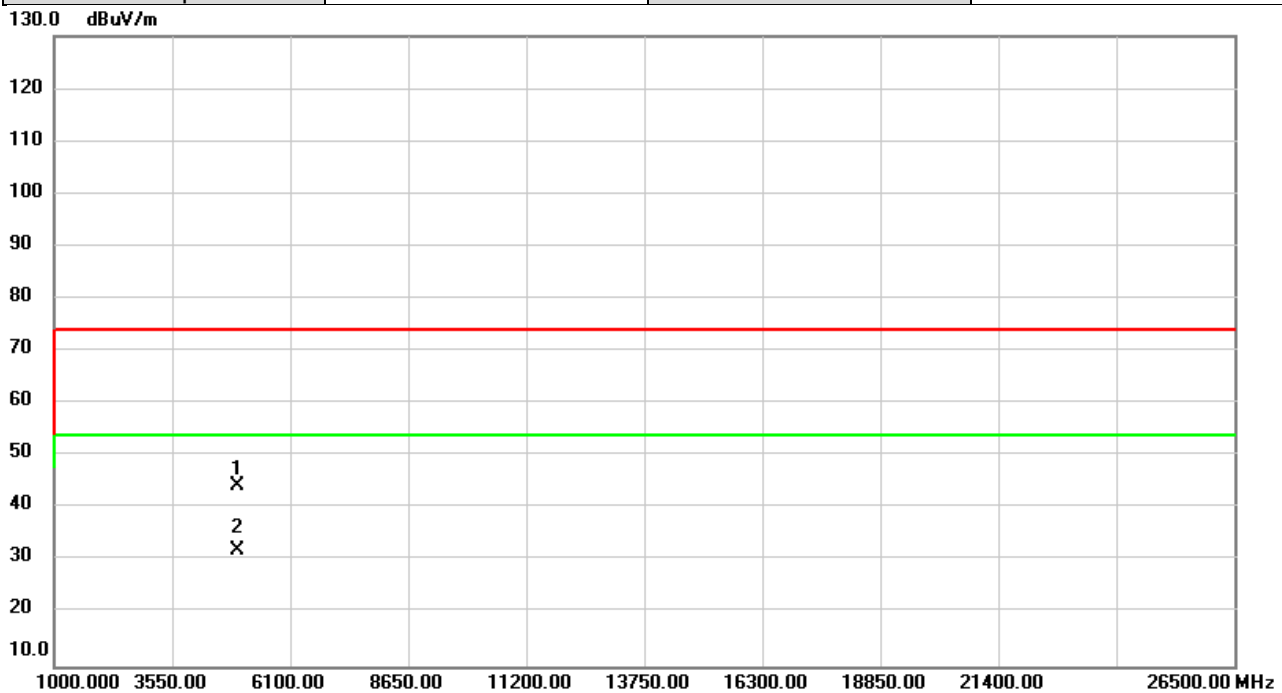


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4960.000	53.88	-9.49	44.39	74.00	-29.61	peak	
2	*	4960.000	41.53	-9.49	32.04	54.00	-21.96	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(3Mbps)	Test Date	2021/4/14
Test Frequency	2480MHz	Polarization	Horizontal
Temp	22°C	Hum.	61%

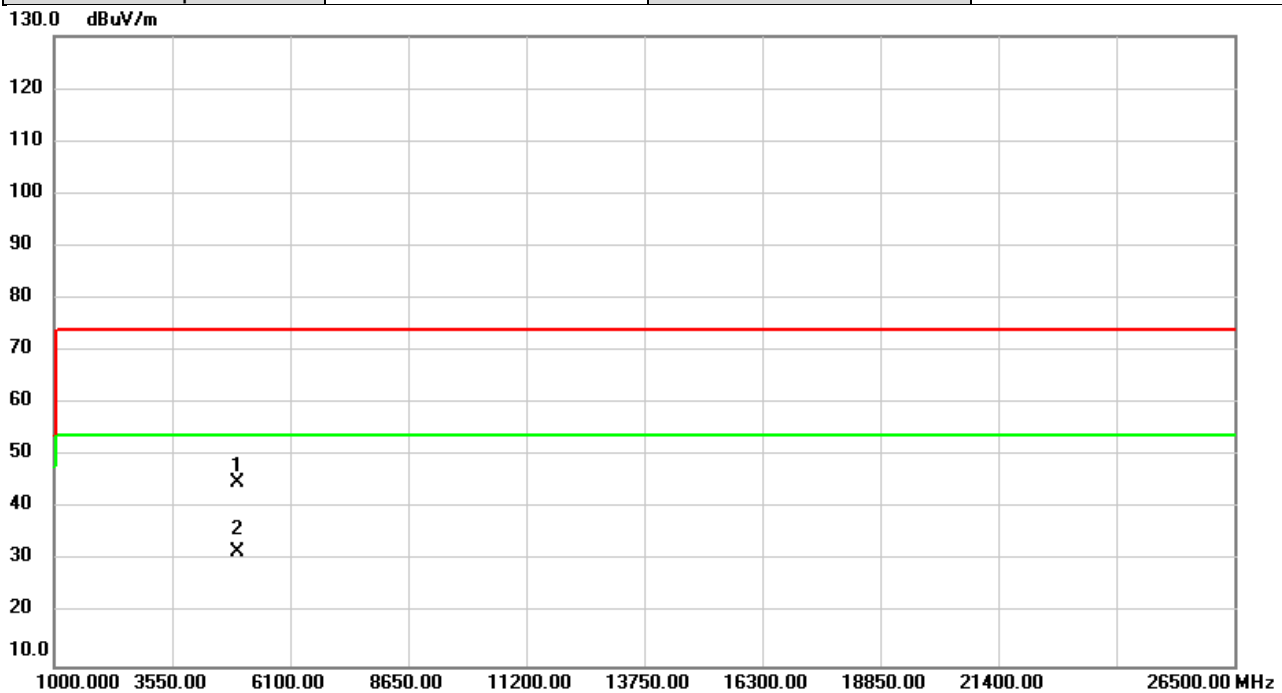

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4960.000	54.34	-9.49	44.85	74.00	-29.15	peak	
2	*	4960.000	41.35	-9.49	31.86	54.00	-22.14	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.


(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D NUMBER OF HOPPING CHANNEL

Test Mode	1/3Mbps
-----------	---------


Test Mode	Number of Hopping Channel	≥ Limit	Test Result
1 Mbps	79	15	Pass
3 Mbps	79	15	Pass

1 Mbps

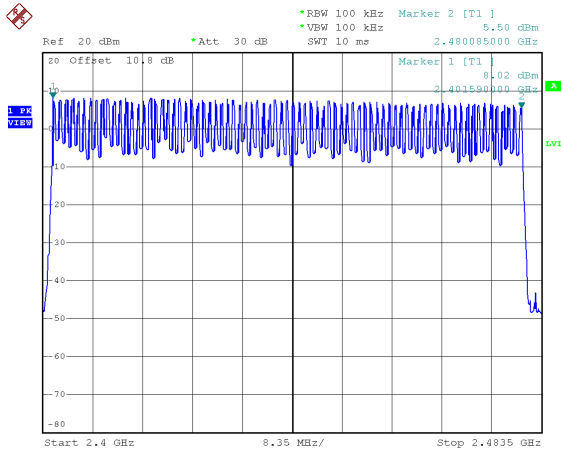

Date: 15.APR.2021 19:14:14

3 Mbps

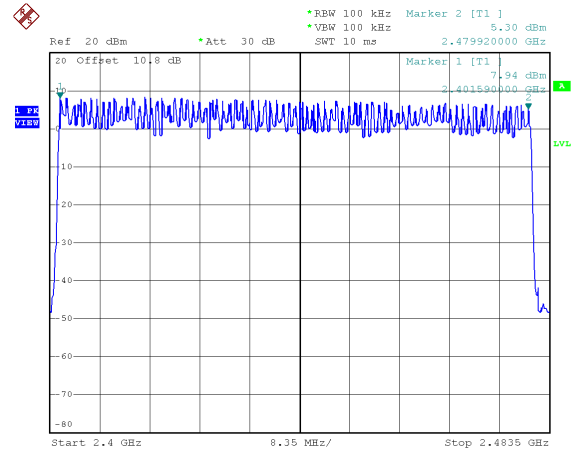


Date: 15.APR.2021 19:59:56

APPENDIX E AVERAGE TIME OF OCCUPANCY


Test Mode : 1Mbps

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
DH5	2402 MHz	2.8800	0.3072	0.4000	Pass
DH3	2402 MHz	1.6400	0.2624	0.4000	Pass
DH1	2402 MHz	0.3850	0.1232	0.4000	Pass
DH5	2441 MHz	2.8800	0.3072	0.4000	Pass
DH3	2441 MHz	1.6600	0.2656	0.4000	Pass
DH1	2441 MHz	0.3850	0.1232	0.4000	Pass
DH5	2480 MHz	2.9200	0.3115	0.4000	Pass
DH3	2480 MHz	1.6400	0.2624	0.4000	Pass
DH1	2480 MHz	0.3850	0.1232	0.4000	Pass

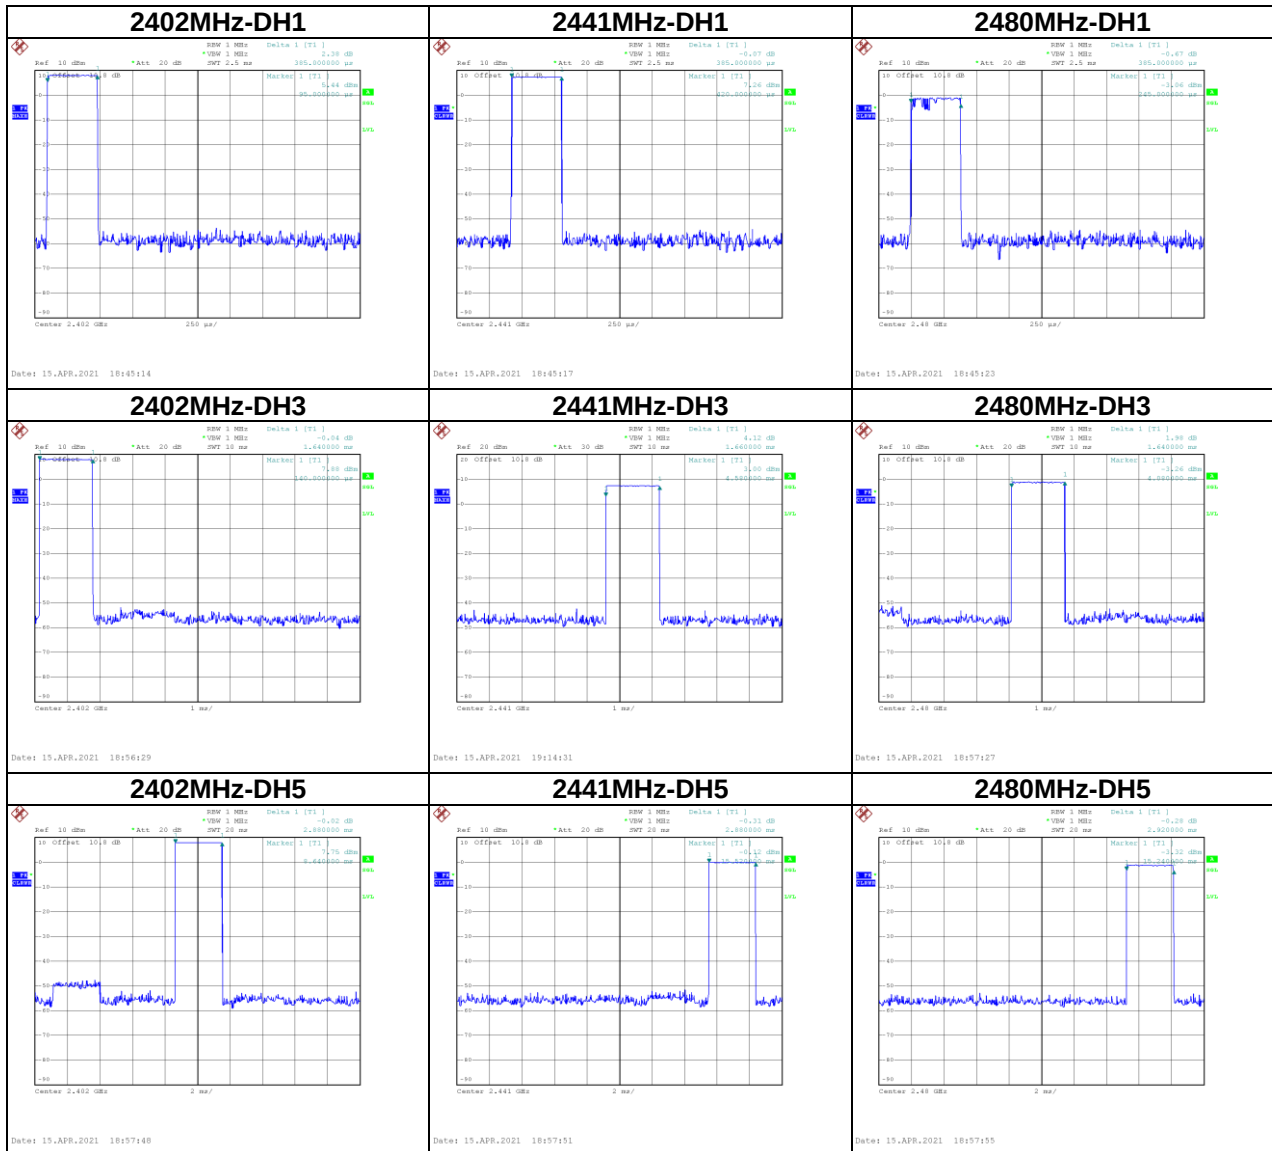


Test Mode : 3Mbps


Data Packet	Frequency	Pulse Duration(ms)	Dwell Time(s)	Limits(s)	Test Result
3DH5	2402 MHz	2.9200	0.3115	0.4000	Pass
3DH3	2402 MHz	1.6600	0.2656	0.4000	Pass
3DH1	2402 MHz	0.3950	0.1264	0.4000	Pass
3DH5	2441 MHz	2.8800	0.3072	0.4000	Pass
3DH3	2441 MHz	1.6600	0.2656	0.4000	Pass
3DH1	2441 MHz	0.3950	0.1264	0.4000	Pass
3DH5	2480 MHz	2.9200	0.3115	0.4000	Pass
3DH3	2480 MHz	1.6600	0.2656	0.4000	Pass
3DH1	2480 MHz	0.3950	0.1264	0.4000	Pass

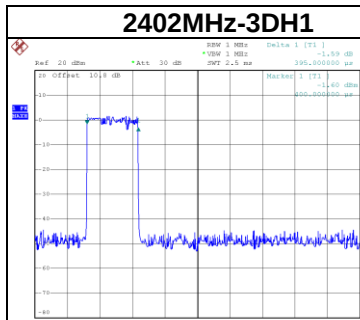


Date: 15.APR.2021 19:53:22

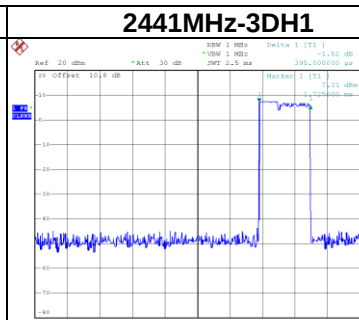


Date: 15.APR.2021 19:53:30

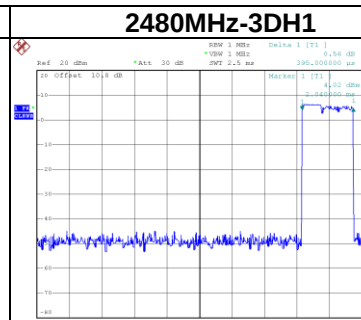


Date: 15.APR.2021 19:53:37

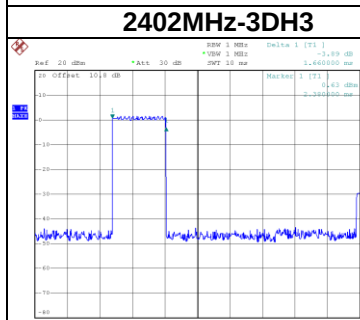


Date: 15.APR.2021 20:03:21

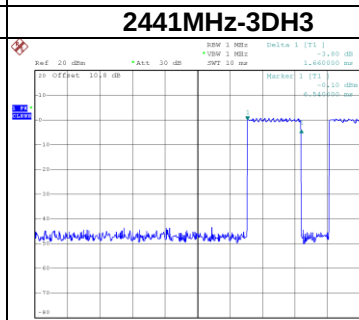


Date: 15.APR.2021 20:03:24

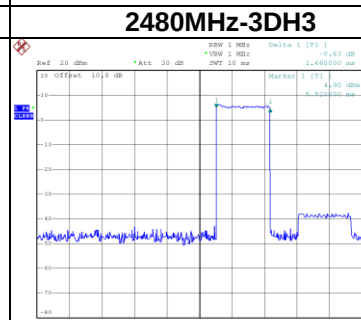


Date: 15.APR.2021 20:03:28

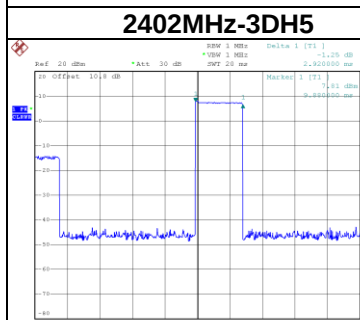

Date: 15.APR.2021 20:03:47

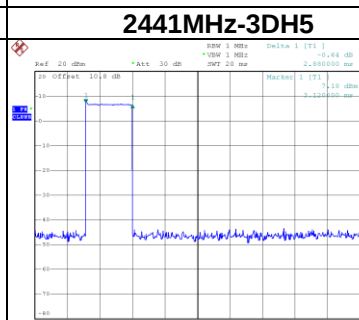

Date: 15.APR.2021 20:03:52



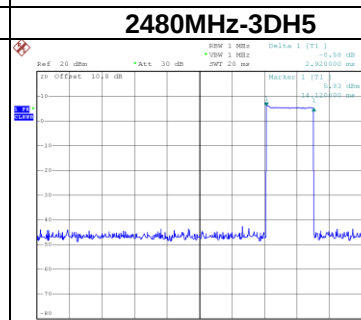


Date: 15.APR.2021 20:03:56

APPENDIX F HOPPING CHANNEL SEPARATION MEASUREMENT


Test Mode : Hopping on _1Mbps

Frequency (MHz)	Channel Separation (MHz)	2/3 of 20dB Bandwidth (MHz)	Test Result
2402	1.008	0.663	Pass
2441	1.002	0.645	Pass
2480	1.002	0.660	Pass

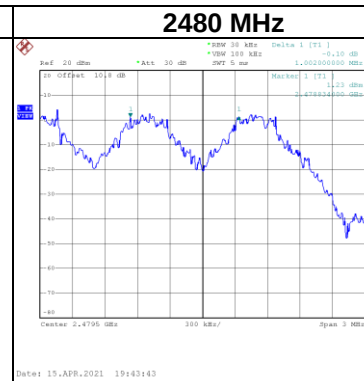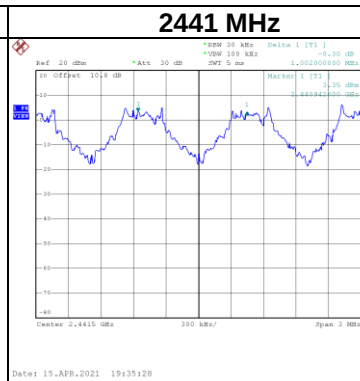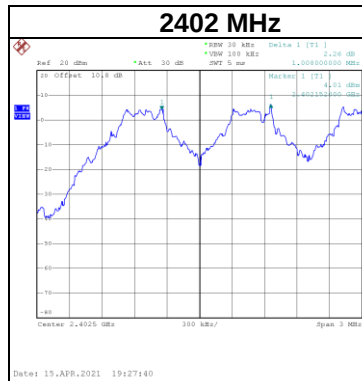

Test Mode : Hopping on _3Mbps


Frequency (MHz)	Channel Separation (MHz)	2/3 of 20dB Bandwidth (MHz)	Test Result
2402	1.008	0.835	Pass
2441	1.008	0.840	Pass
2480	1.002	0.836	Pass

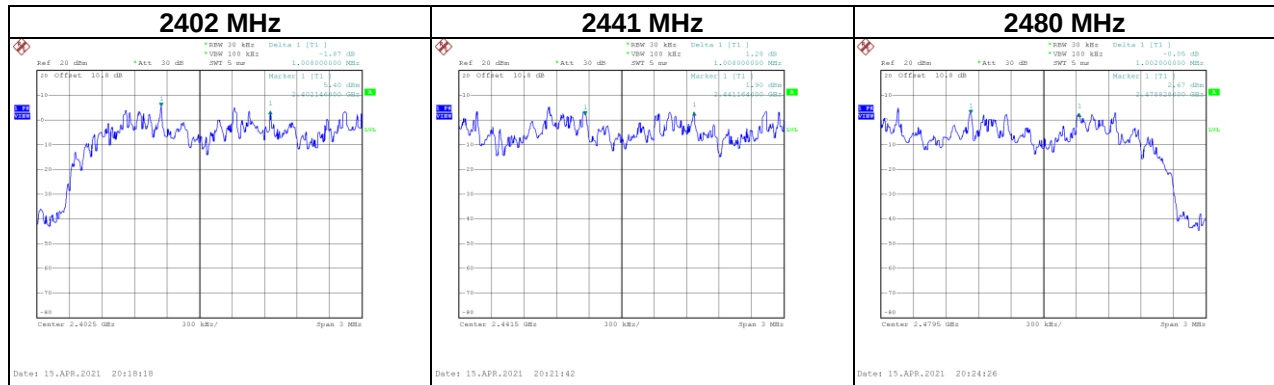

APPENDIX G BANDWIDTH


Test Mode :	1Mbps
-------------	-------

Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW (MHz)	Test Result
2402	0.994	0.916	Pass
2441	0.968	0.888	Pass
2480	0.990	0.888	Pass

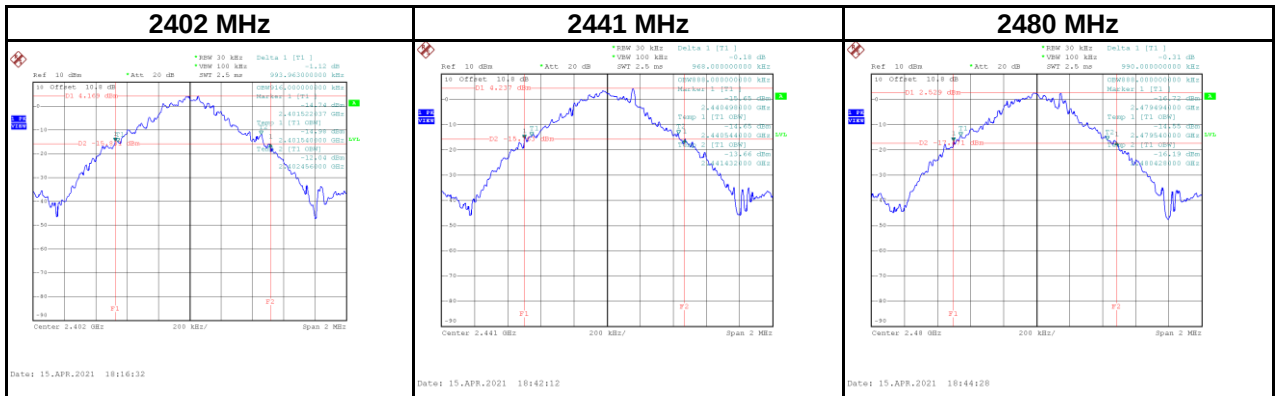

Test Mode :	3Mbps
-------------	-------

Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW (MHz)	Test Result
2402	1.252	1.156	Pass
2441	1.260	1.164	Pass
2480	1.254	1.164	Pass

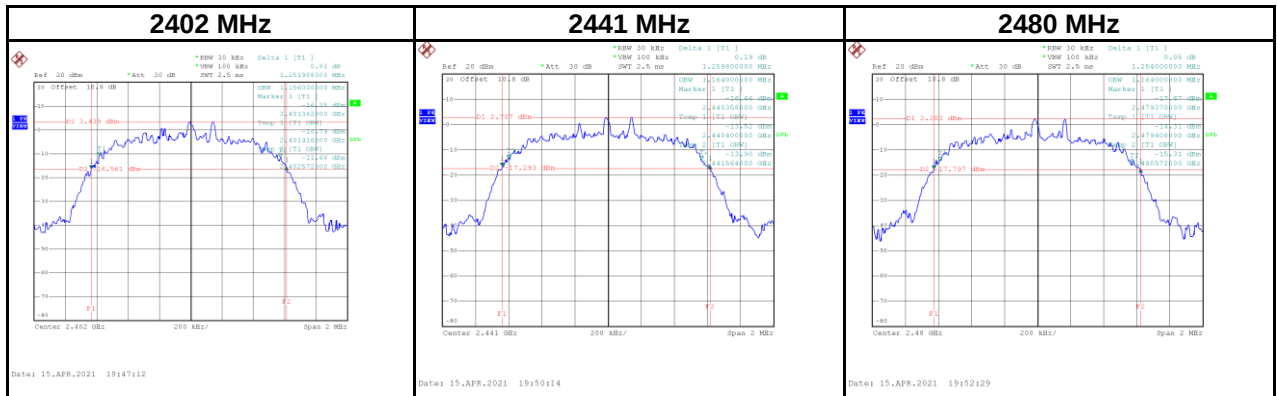

APPENDIX H OUTPUT POWER

Test Mode :	1Mbps	Tested Date	2021/4/12
-------------	-------	-------------	-----------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	7.97	0.0063	21.00	0.1250	Pass
2441	7.49	0.0056	21.00	0.1250	Pass
2480	5.37	0.0034	21.00	0.1250	Pass

Test Mode :	2Mbps	Tested Date	2021/4/12
-------------	-------	-------------	-----------





Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	7.94	0.0062	21.00	0.1250	Pass
2441	7.55	0.0057	21.00	0.1250	Pass
2480	7.50	0.0056	21.00	0.1250	Pass

Test Mode :	3Mbps	Tested Date	2021/4/12
-------------	-------	-------------	-----------


Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	9.68	0.0093	21.00	0.1250	Pass
2441	7.94	0.0062	21.00	0.1250	Pass
2480	5.97	0.0040	21.00	0.1250	Pass

APPENDIX I ANTENNA CONDUCTED SPURIOUS EMISSION


Test Mode 1Mbps

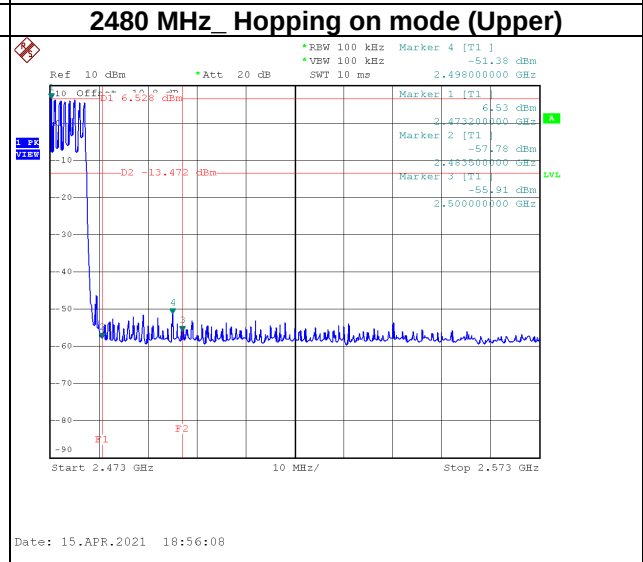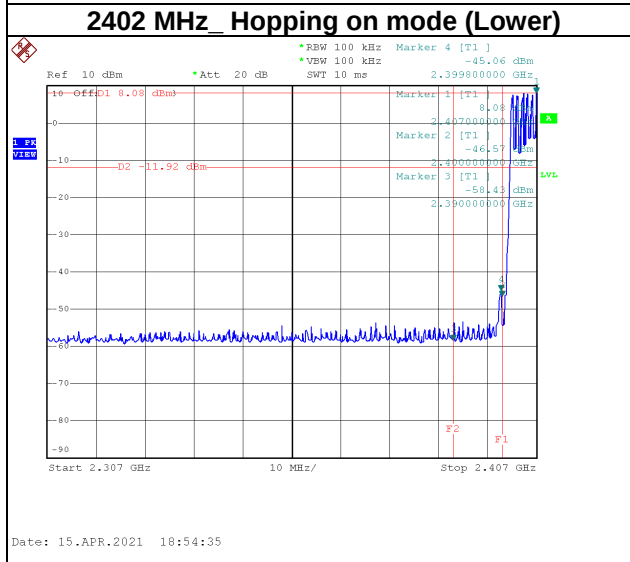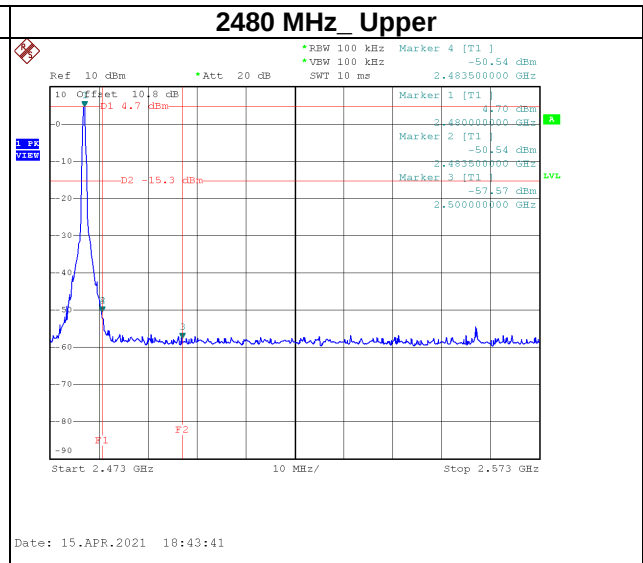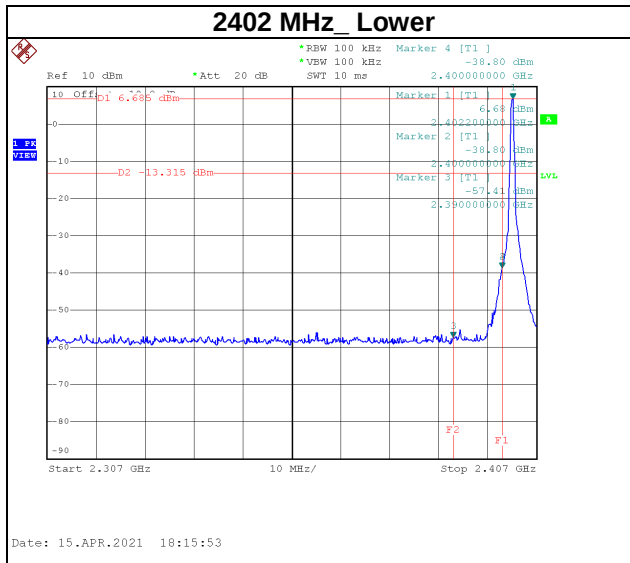


2402 MHz – 10th Harmonics

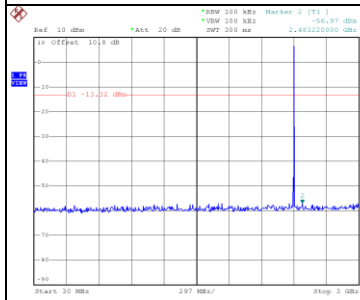

Date: 15.APR.2021 18:16:45

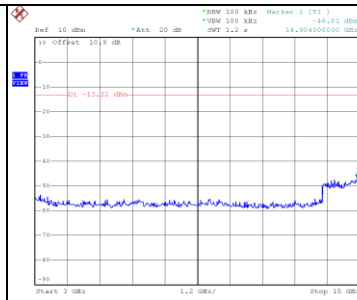


Date: 15.APR.2021 18:16:53

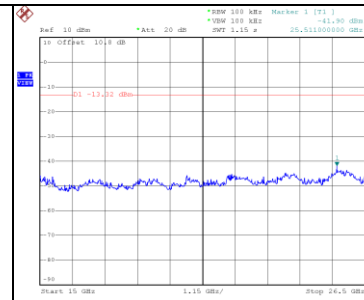


Date: 15.APR.2021 18:17:00


2441 MHz – 10th Harmonics

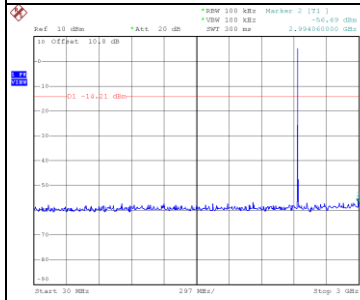

Date: 15.APR.2021 18:41:14

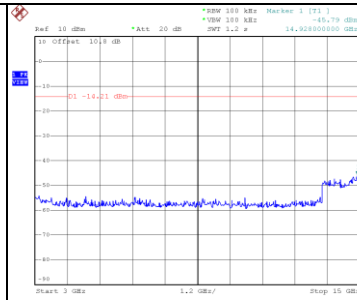


Date: 15.APR.2021 18:41:21

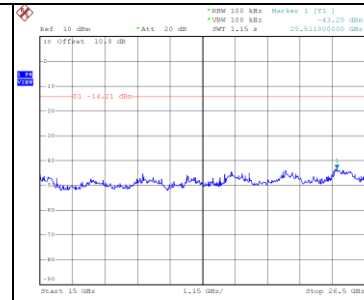


Date: 15.APR.2021 18:41:28


2480 MHz – 10th Harmonics

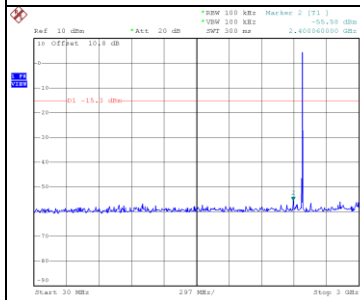

Date: 15.APR.2021 18:44:41

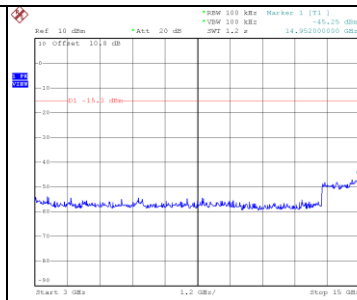

Date: 15.APR.2021 18:44:48

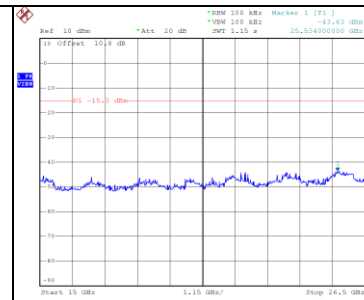


Date: 15.APR.2021 18:44:55

Test Mode


3Mbps

2402 MHz_ Lower

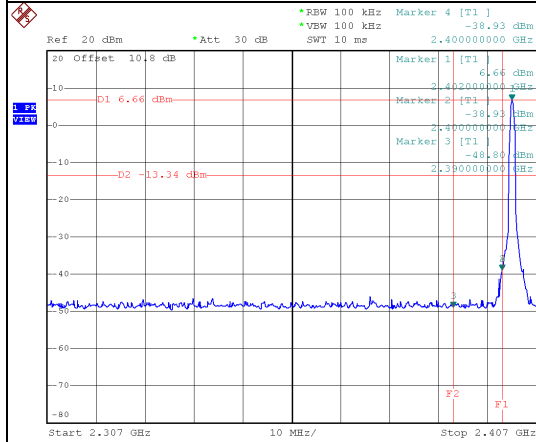


Date: 15.APR.2021 19:46:41

2480 MHz_ Upper

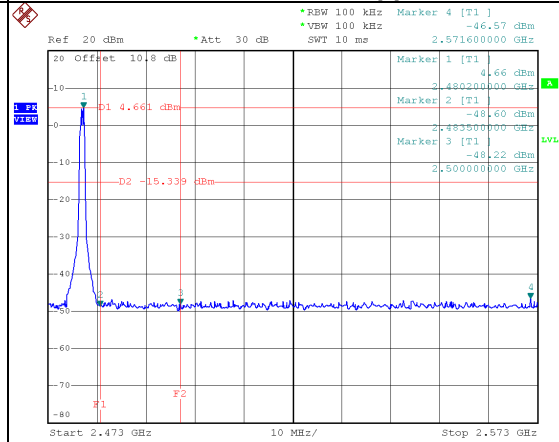


Date: 15.APR.2021 19:51:54

2402 MHz_ Hopping on mode (Lower)

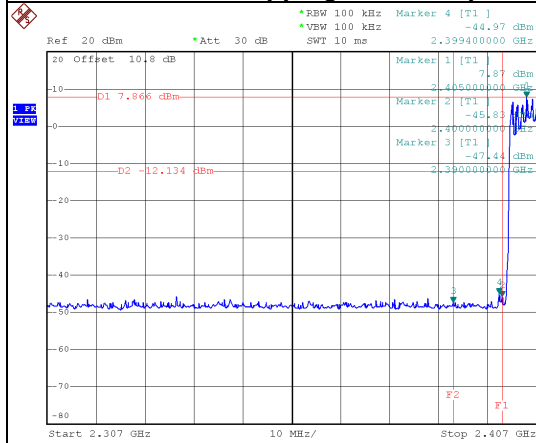




Date: 15.APR.2021 20:01:30

2480 MHz_ Hopping on mode (Upper)



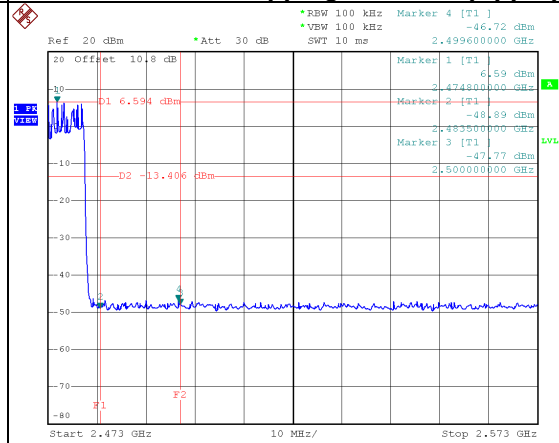


Date: 15.APR.2021 20:03:04




2402 MHz – 10 Harmonics

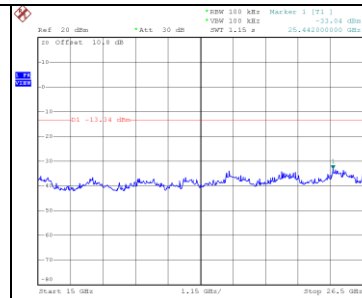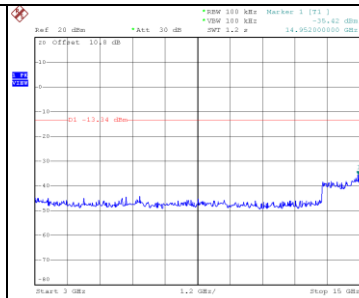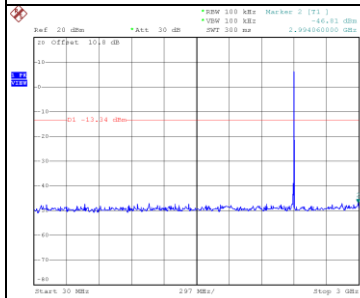

2441 MHz – 10 Harmonics

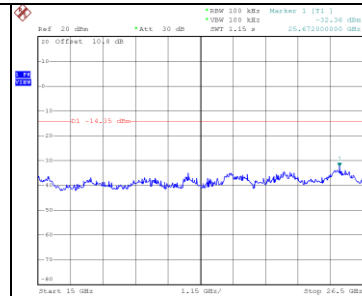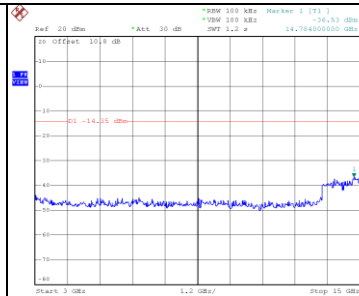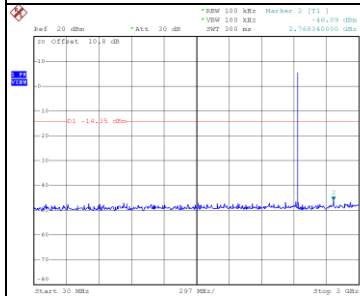

2480 MHz – 10 Harmonics

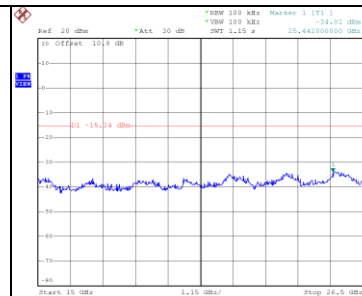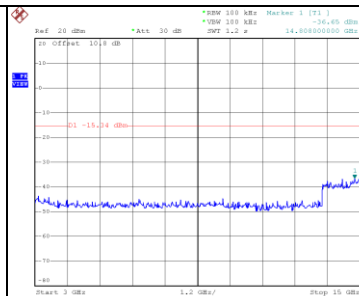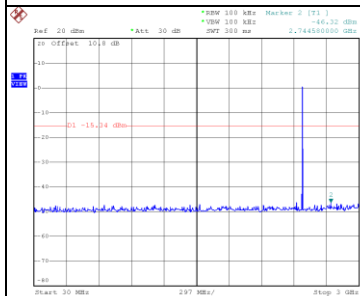

End of Test Report