



**FCC CFR47 PART 15 SUBPART C**

**CLASS II PERMISSIVE CHANGE  
TEST REPORT**

**FOR**

**802.11A/B MINI PCI TYPE 3B CARD**

**MODEL NUMBER: PA3234U-1MPC**

**FCC ID: CJ6UPA3234WL**

**REPORT NUMBER: 03U2197-1**

**ISSUE DATE: OCTOBER 16, 2003**

*Prepared for*

**TOSHIBA CORPORATION DIGITAL MEDIA NETWORK COMPANY  
2-9 SUEHIRO-CHO, OME  
TOKYO, 198-8710, JAPAN**

*Prepared by*

**COMPLIANCE CERTIFICATION SERVICES  
561F MONTEREY ROAD,  
MORGAN HILL, CA 95037, USA  
TEL: (408) 463-0885  
FAX: (408) 463-0888**



## TABLE OF CONTENTS

|                                                          |           |
|----------------------------------------------------------|-----------|
| <b>1. TEST RESULT CERTIFICATION .....</b>                | <b>3</b>  |
| <b>2. DESCRIPTION OF CLASS II PERMISSIVE CHANGE.....</b> | <b>4</b>  |
| <b>3. TEST METHODOLOGY .....</b>                         | <b>5</b>  |
| <b>4. FACILITIES AND ACCREDITATION .....</b>             | <b>5</b>  |
| <b>5. CALIBRATION AND UNCERTAINTY .....</b>              | <b>6</b>  |
| 5.1. MEASURING INSTRUMENT CALIBRATION .....              | 6         |
| 5.2. MEASUREMENT UNCERTAINTY .....                       | 6         |
| 5.3. TEST AND MEASUREMENT EQUIPMENT .....                | 7         |
| <b>6. SETUP OF EQUIPMENT UNDER TEST.....</b>             | <b>8</b>  |
| <b>7. APPLICABLE RULES AND TEST RESULTS .....</b>        | <b>10</b> |
| 7.1. RADIATED EMISSIONS .....                            | 10        |
| 7.1.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS .....     | 10        |
| 7.1.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ .....  | 13        |
| 7.1.3. CO-LOCATED TRANSMITTER RADIATED EMISSIONS .....   | 22        |
| 7.1.4. WORST-CASE RADIATED EMISSIONS BELOW 1 GHZ .....   | 31        |
| 7.2. POWERLINE CONDUCTED EMISSIONS.....                  | 36        |
| <b>8. SETUP PHOTOS.....</b>                              | <b>39</b> |

## 1. TEST RESULT CERTIFICATION

**COMPANY NAME:** TOSHIBA CORPORATION DIGITAL MEDIA NETWORK COMPANY  
2-9 SUEHIRO-CHO, OME  
TOKYO, 198-8710, JAPAN

**EUT DESCRIPTION:** 802.11A/B MINI PCI TYPE 3B CARD

**MODEL:** PA3234U-1MPC

**DATE TESTED:** SEPTEMBER 22 - OCTOBER 15, 2003

| APPLICABLE STANDARDS  |                         |
|-----------------------|-------------------------|
| STANDARD              | TEST RESULTS            |
| FCC PART 15 SUBPART C | NO NON-COMPLIANCE NOTED |

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

**Note:** The 2.4 GHz band is applicable to this report; another band of operation (5.2 GHz) is documented in a separate report.

Approved & Released For CCS By:

Tested By:



MIKE HECKROTTE  
CHIEF ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

VIEN TRAN  
EMC TECHNICIAN  
COMPLIANCE CERTIFICATION SERVICES

## 2. DESCRIPTION OF CLASS II PERMISSIVE CHANGE

The Class II Permissive Change is to add portable operation in the Toshiba Tablet PC, model PPM20U-AAAA2, including co-location with the Toshiba PA3232U-1BTM Bluetooth radio card.

The 802.11a/b WLAN transmitter has a maximum peak conducted output power as follows:

| Frequency Band<br>(MHz) | Mode    | Output Power<br>(mW) | Output Power<br>(dBm) |
|-------------------------|---------|----------------------|-----------------------|
| 2412 - 2462             | 802.11b | 45.00                | 16.53                 |

The WLAN radio utilizes two identical internal dipole antennas for diversity, with a maximum gain of 4.8 dBi.

The Bluetooth radio card has a modular approval, FCC ID: CJ6UPA3232BT. The Bluetooth radio utilizes a film antenna with a maximum gain of 1.22 dBi.

### 3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4/1992, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

### 4. FACILITIES AND ACCREDITATION

The open area test sites and conducted measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.



No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.

## 5. CALIBRATION AND UNCERTAINTY

### 5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

|                                     |                |
|-------------------------------------|----------------|
| Radiated Emission, 30 to 200 MHz    | +/- 3.3 dB     |
| Radiated Emission, 200 to 1000 MHz  | +4.5 / -2.9 dB |
| Radiated Emission, 1000 to 2000 MHz | +4.5 / -2.9 dB |
| Power Line Conducted Emission       | +/- 2.9 dB     |

Uncertainty figures are valid to a confidence level of 95%.

### 5.3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| TEST AND MEASUREMENT EQUIPMENT LIST |               |             |               |                      |
|-------------------------------------|---------------|-------------|---------------|----------------------|
| Name of Equipment                   | Manufacturer  | Model       | Serial Number | Calibration Due Date |
| EMI Test Receiver                   | R & S         | ESHS 20     | 827129/006    | 7/17/2004            |
| LISN, 10 kHz ~ 30 MHz               | FCC           | 50/250-25-2 | 114           | 9/6/2004             |
| Spectrum Analyzer                   | AGILENT       | E4446A      | US42070220    | 1/13/04              |
| Pre-amplifier                       | MITEQ         | NSP2600-SP  | 924341        | 4/25/04              |
| Horn Antenna                        | EMCO          | 3115        | 6717          | 2/04/04              |
| Power Meter                         | AGILENT       | E4416A      | 0841291160    | 11/07/04             |
| Power Sensor                        | Agilent       | E9327A      | US40440755    | 11/07/04             |
| Antenna, Biconical                  | Eaton         | 94455-1     | 1214          | 3/06/04              |
| Antenna, Log Periodic               | EMCO          | 3146        | 9107-3163     | 3/06/04              |
| Preamplifier                        | Miteq         | NSP10023988 | 646456        | 4/26/04              |
| Band Reject 2.4GHz                  | Micro-Tronics | BRM50702    | 003           | N.C.R.               |
|                                     |               |             |               |                      |

## 6. SETUP OF EQUIPMENT UNDER TEST

### SUPPORT EQUIPMENT

| PERIPHERAL SUPPORT EQUIPMENT LIST |                |                     |                 |            |
|-----------------------------------|----------------|---------------------|-----------------|------------|
| Device Type                       | Manufacturer   | Model               | Serial Number   | FCC ID     |
| <b>Laptop</b>                     | <b>Toshiba</b> | <b>PPM20U-AAAA2</b> | <b>93010025</b> | <b>DoC</b> |
| <b>AC adapter</b>                 | <b>Toshiba</b> | <b>ADP-60RH A</b>   | <b>0394336</b>  | <b>DoC</b> |

### I/O CABLES


| Cable No. | Port      | # of Identical Ports | Connector Type | Cable Type        | Cable Length | Remarks   |
|-----------|-----------|----------------------|----------------|-------------------|--------------|-----------|
| <b>1</b>  | <b>AC</b> | <b>1</b>             | <b>US115</b>   | <b>Unshielded</b> | <b>1.8m</b>  | <b>No</b> |
| <b>2</b>  | <b>DC</b> | <b>1</b>             | <b>DC Jack</b> | <b>Unshielded</b> | <b>1.8m</b>  | <b>No</b> |

### TEST SETUP

The EUT is installed in the host laptop.



**SETUP DIAGRAM**

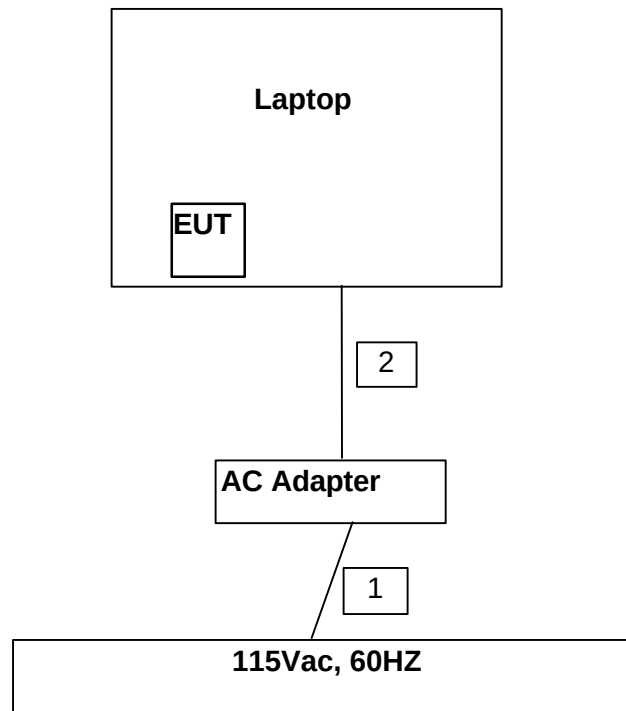

## 7. APPLICABLE RULES AND TEST RESULTS

### 7.1. RADIATED EMISSIONS

#### 7.1.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

##### LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                        | MHz                   | MHz             | GHz              |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110              | 16.42 - 16.423        | 399.9 - 410     | 4.5 - 5.15       |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525   | 608 - 614       | 5.35 - 5.46      |
| 2.1735 - 2.1905            | 16.80425 - 16.80475   | 960 - 1240      | 7.25 - 7.75      |
| 4.125 - 4.128              | 25.5 - 25.67          | 1300 - 1427     | 8.025 - 8.5      |
| 4.17725 - 4.17775          | 37.5 - 38.25          | 1435 - 1626.5   | 9.0 - 9.2        |
| 4.20725 - 4.20775          | 73 - 74.6             | 1645.5 - 1646.5 | 9.3 - 9.5        |
| 6.215 - 6.218              | 74.8 - 75.2           | 1660 - 1710     | 10.6 - 12.7      |
| 6.26775 - 6.26825          | 108 - 121.94          | 1718.8 - 1722.2 | 13.25 - 13.4     |
| 6.31175 - 6.31225          | 123 - 138             | 2200 - 2300     | 14.47 - 14.5     |
| 8.291 - 8.294              | 149.9 - 150.05        | 2310 - 2390     | 15.35 - 16.2     |
| 8.362 - 8.366              | 156.52475 - 156.52525 | 2483.5 - 2500   | 17.7 - 21.4      |
| 8.37625 - 8.38675          | 156.7 - 156.9         | 2655 - 2900     | 22.01 - 23.12    |
| 8.41425 - 8.41475          | 162.0125 - 167.17     | 3260 - 3267     | 23.6 - 24.0      |
| 12.29 - 12.293             | 167.72 - 173.2        | 3332 - 3339     | 31.2 - 31.8      |
| 12.51975 - 12.52025        | 240 - 285             | 3345.8 - 3358   | 36.43 - 36.5     |
| 12.57675 - 12.57725        | 322 - 335.4           | 3600 - 4400     | ( <sup>2</sup> ) |
| 13.36 - 13.41              |                       |                 |                  |

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|--------------------|--------------------------------------|----------------------------------|
| 30 - 88            | 100 **                               | 3                                |
| 88 - 216           | 150 **                               | 3                                |
| 216 - 960          | 200 **                               | 3                                |
| Above 960          | 500                                  | 3                                |

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

## **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


The configuration and orientation of the EUT was varied to determine the worst-case. The EUT was first configured as a typical laptop notebook PC resting on the turntable in a normal operating condition. It was then configured as a tablet PC, and evaluated in X, Y and Z orientations. The worst-case condition was observed with the EUT in the laptop configuration. Worst-case results are reported.


## **RESULTS**

No non-compliance noted:


## 7.1.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ


### RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

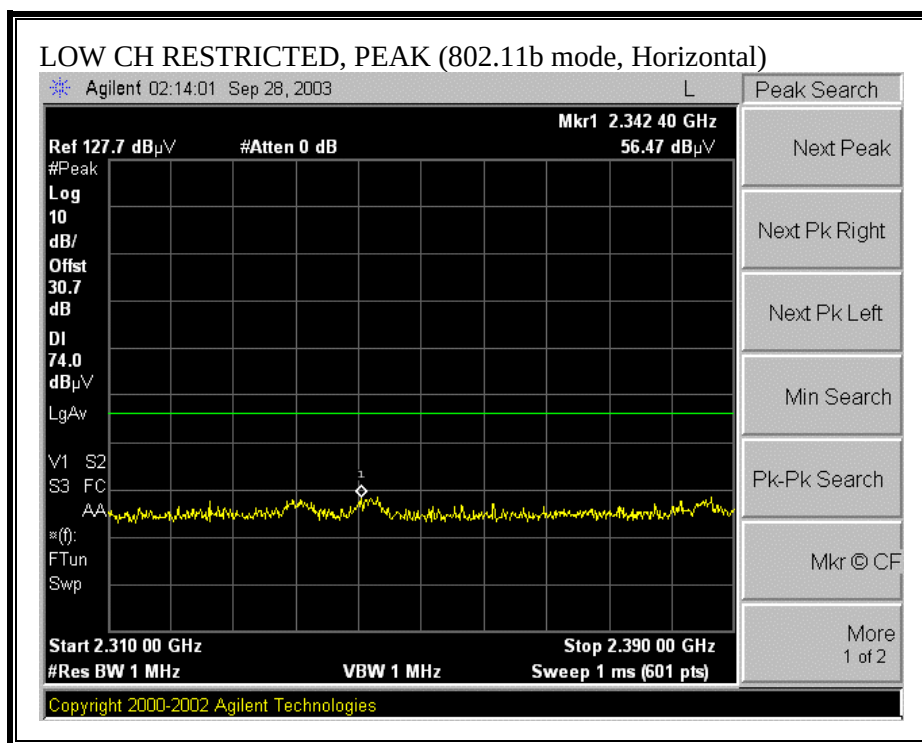

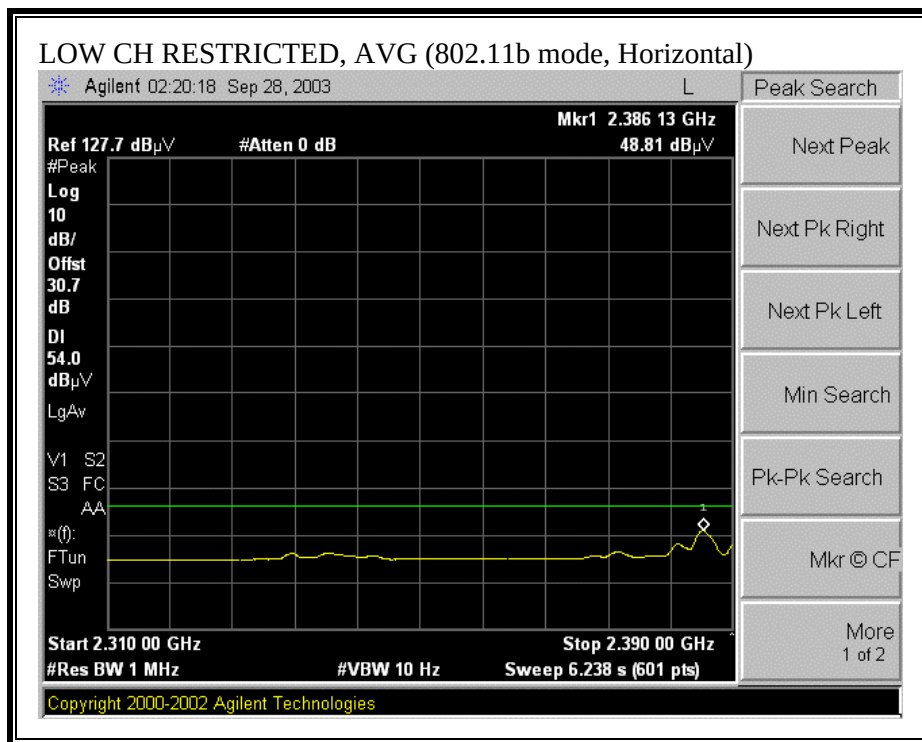


**RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)**

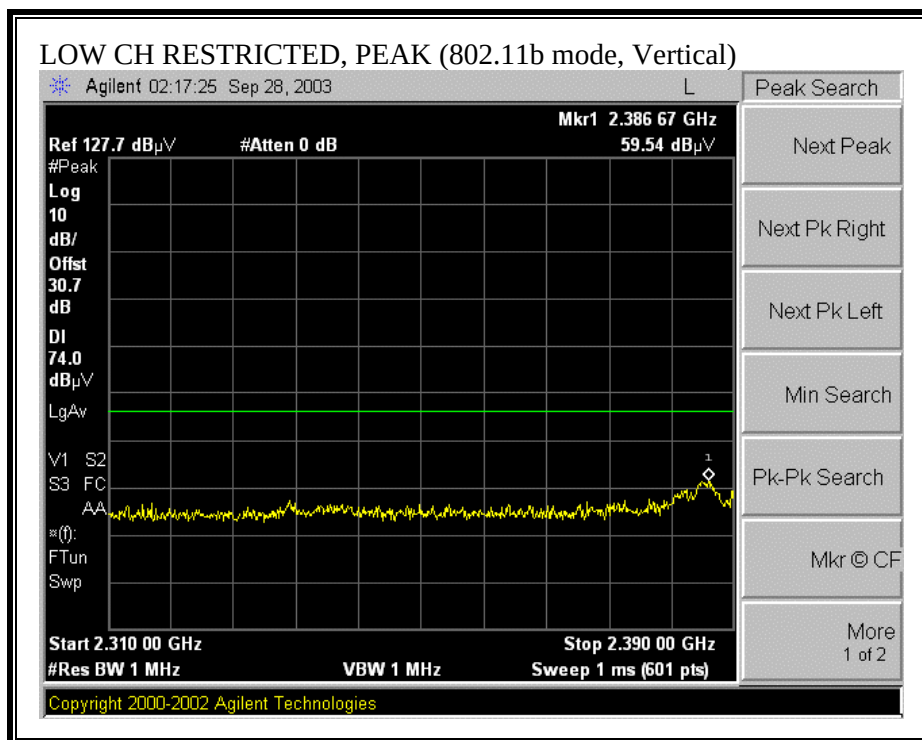


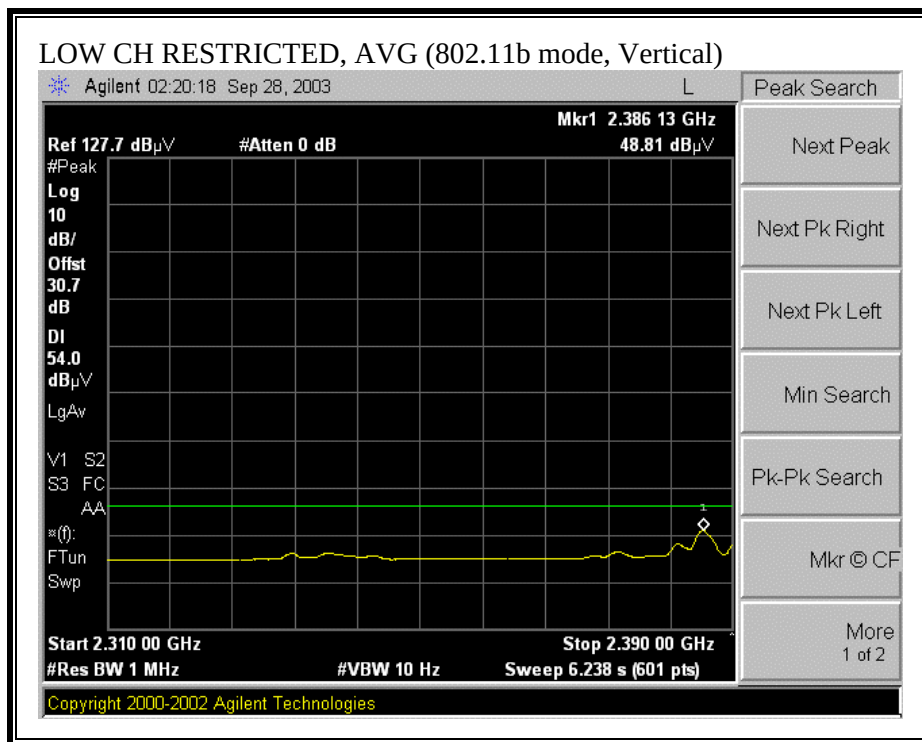





**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)**

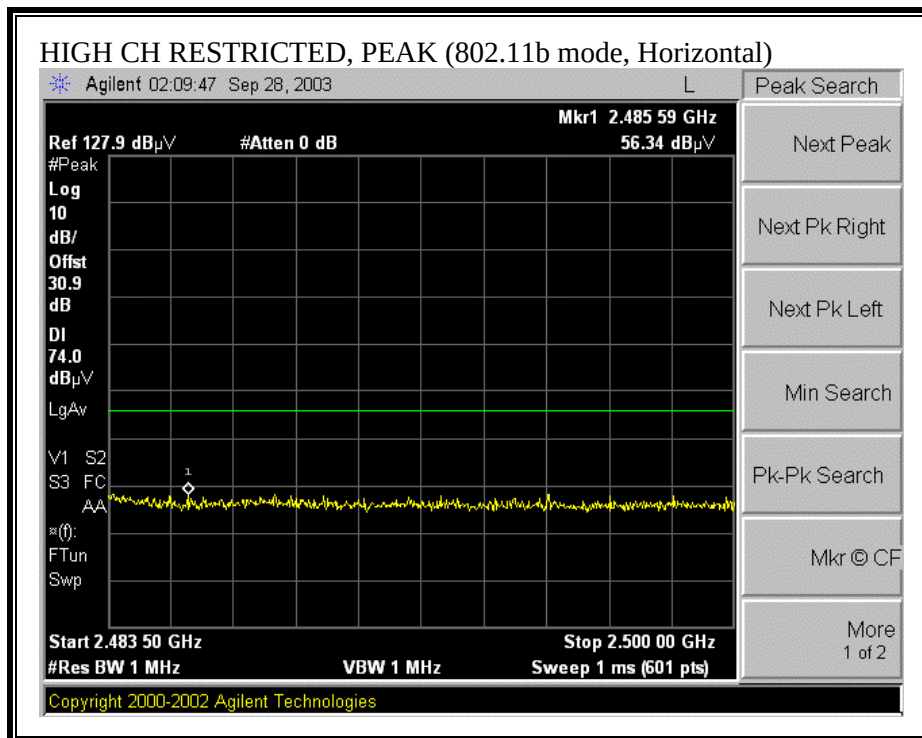

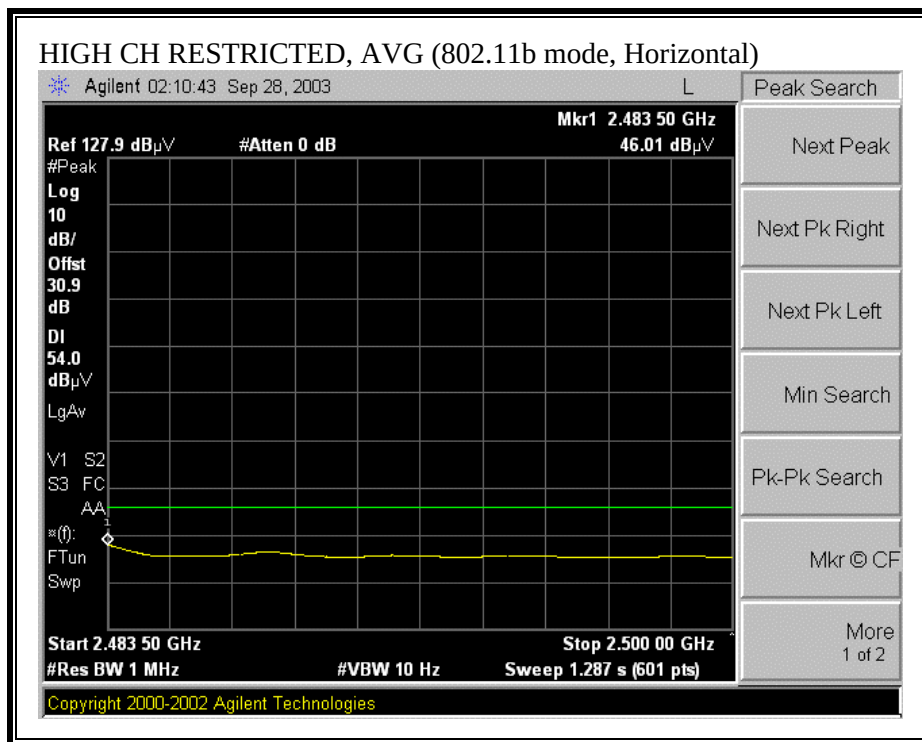

**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)**

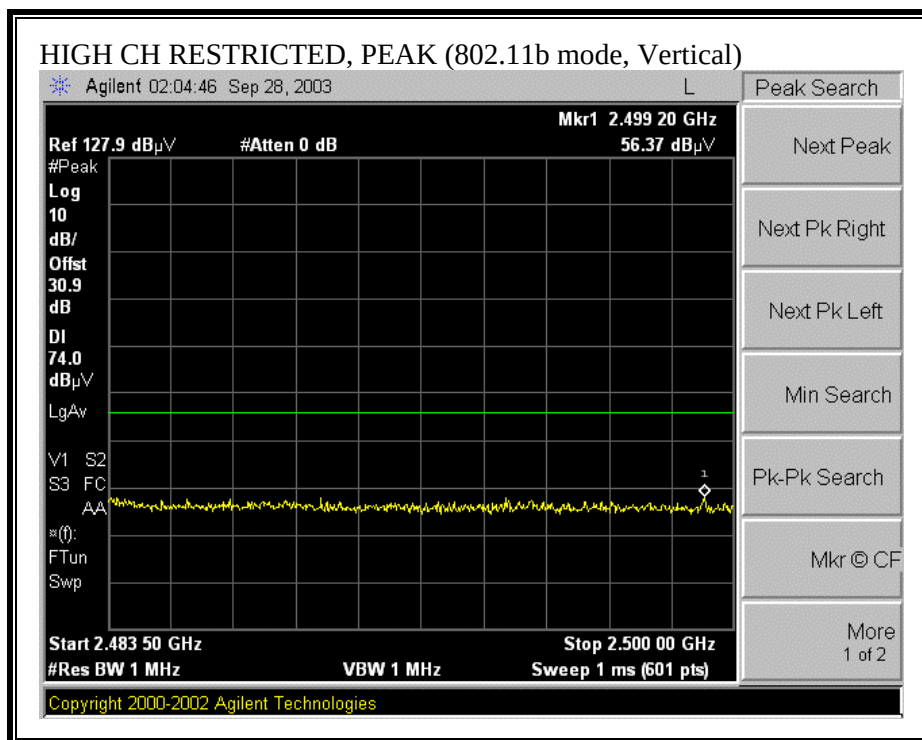

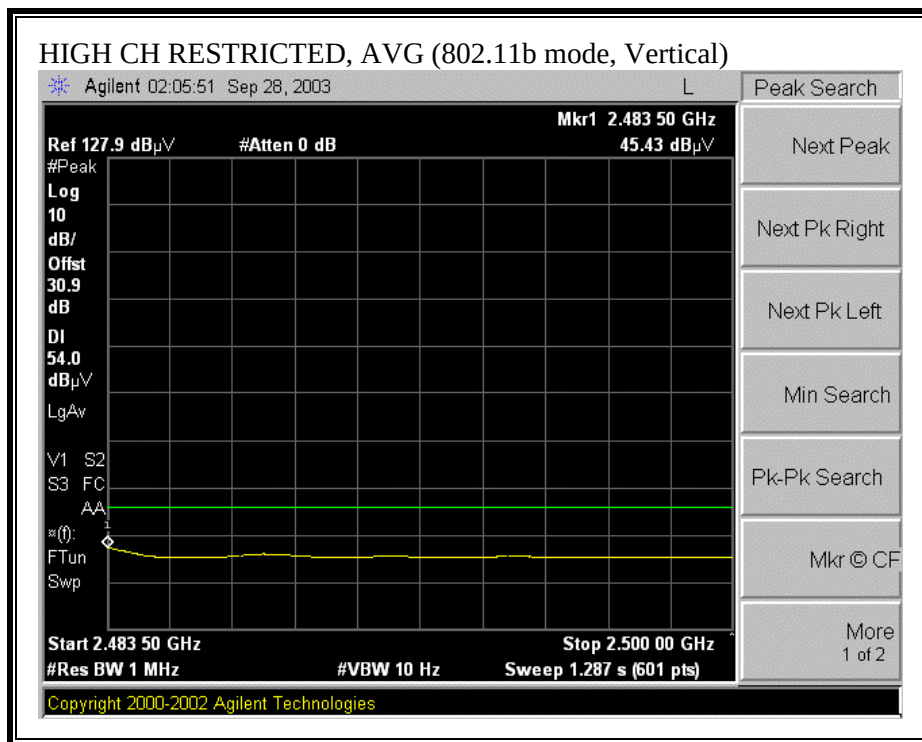



### 7.1.3. CO-LOCATED TRANSMITTER RADIATED EMISSIONS

#### SUPPLEMENTAL TEST PROCEDURE


The dominant transmitter is set to the worst-case channel. The spurious emissions performance of the dominant transmitter is investigated as the frequency of the non-dominant transmitter is varied. Worst-case results are reported.


#### RESULTS

The 5.2 GHz transmitter is dominant.


No non-compliance noted:

#### WORST-CASE RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

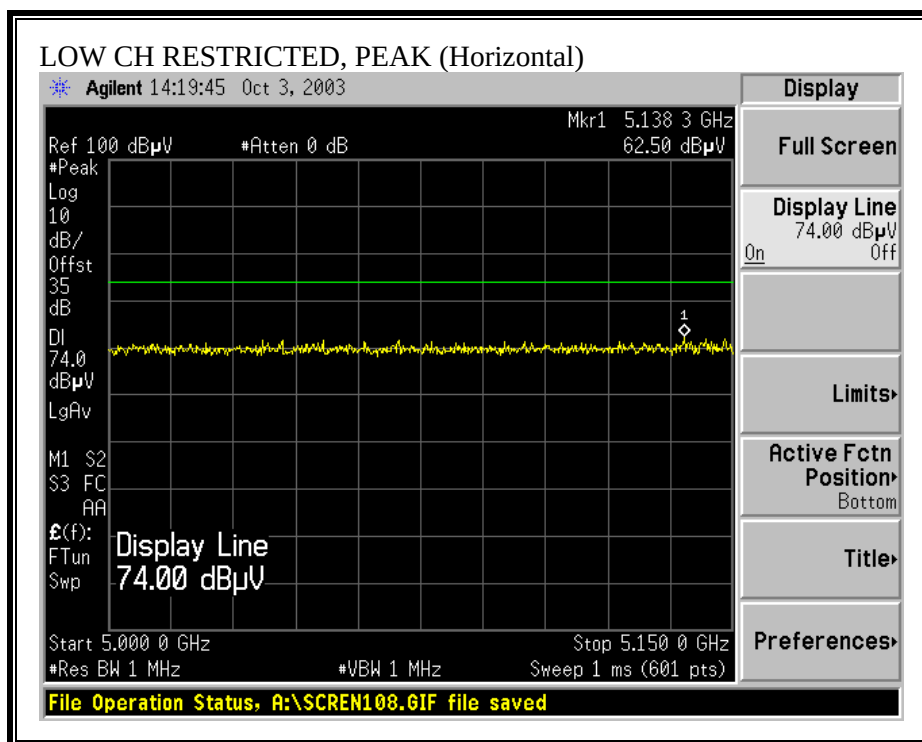


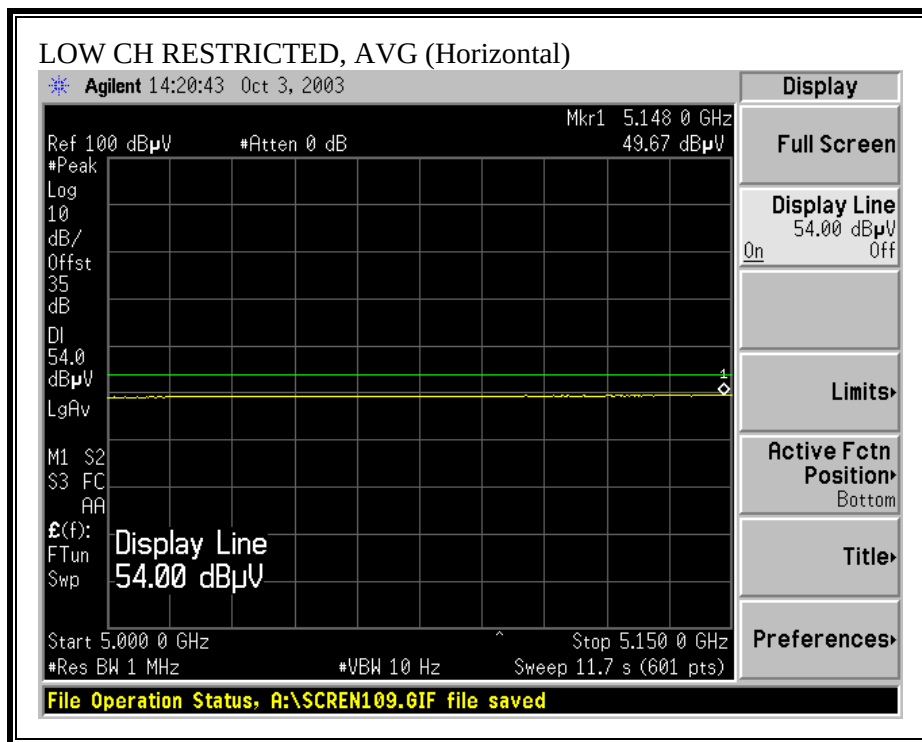


**WORST-CASE RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

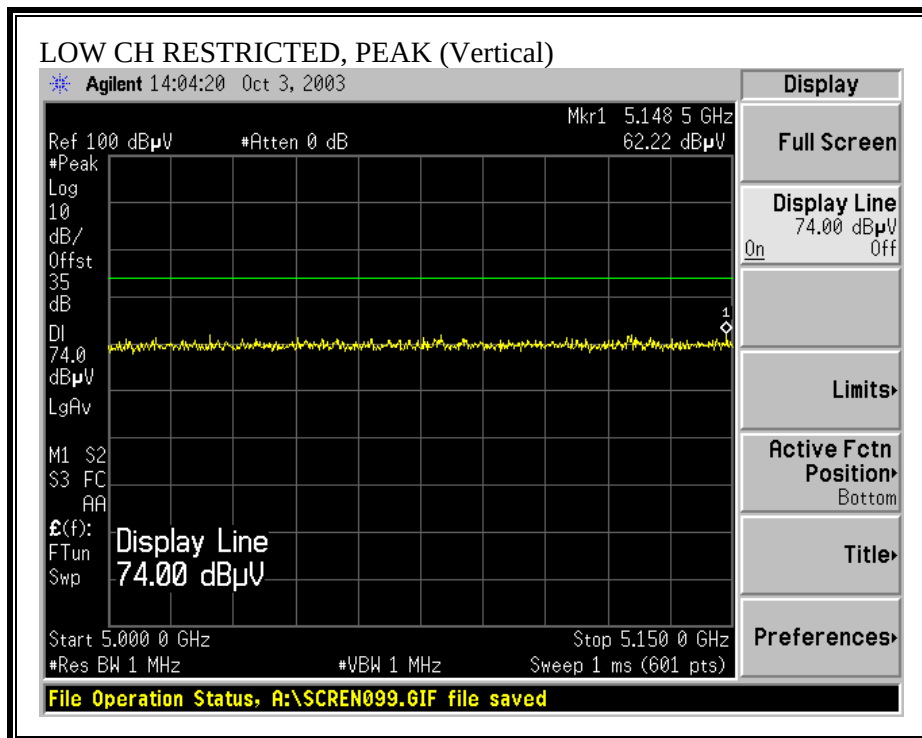




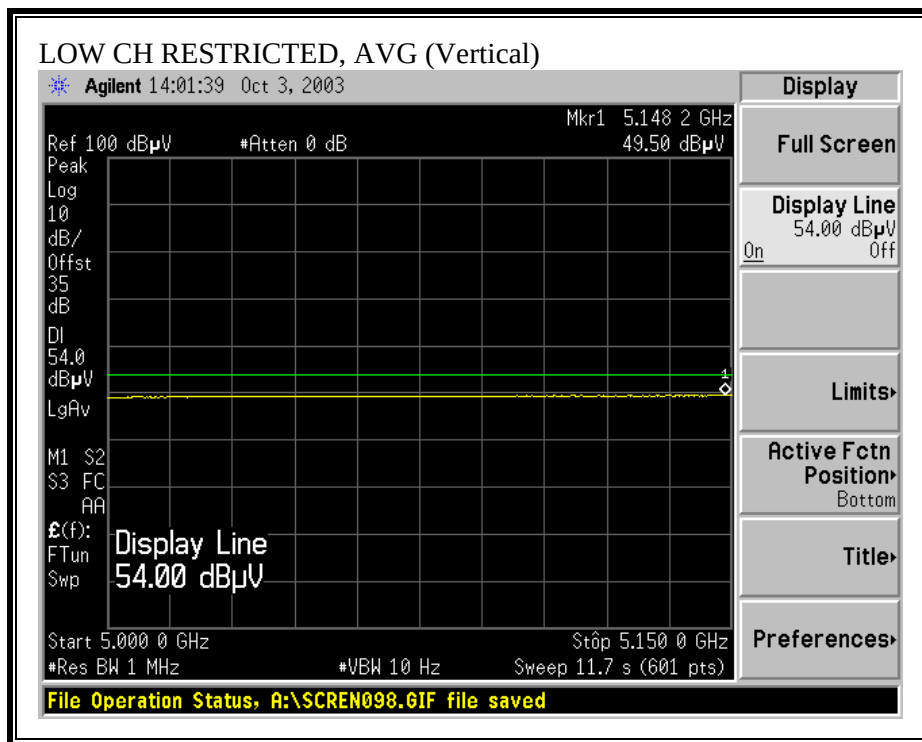



**WORST-CASE RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

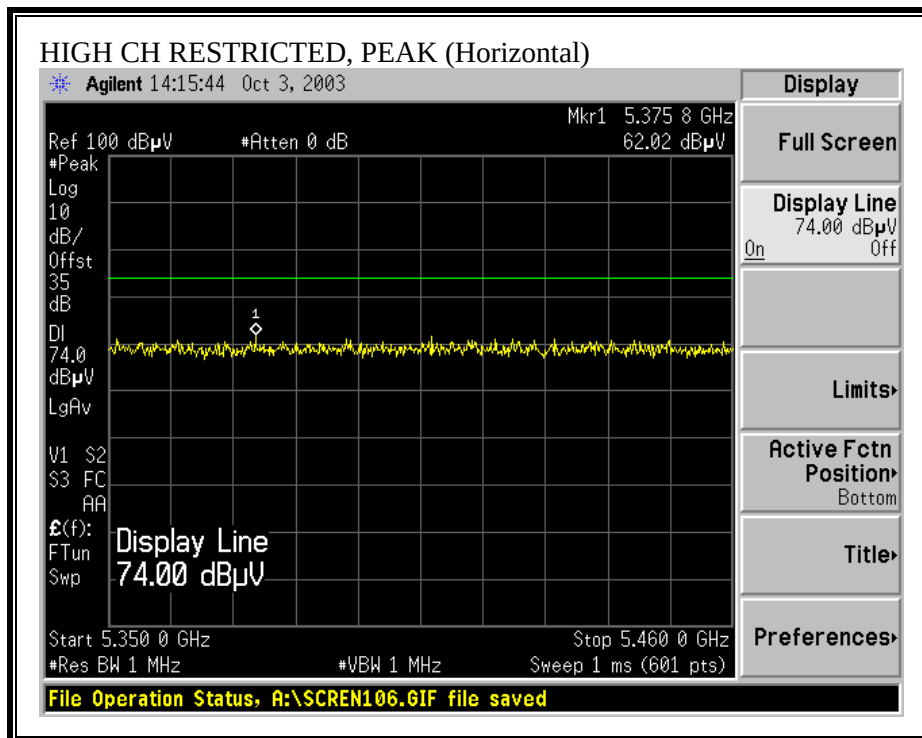

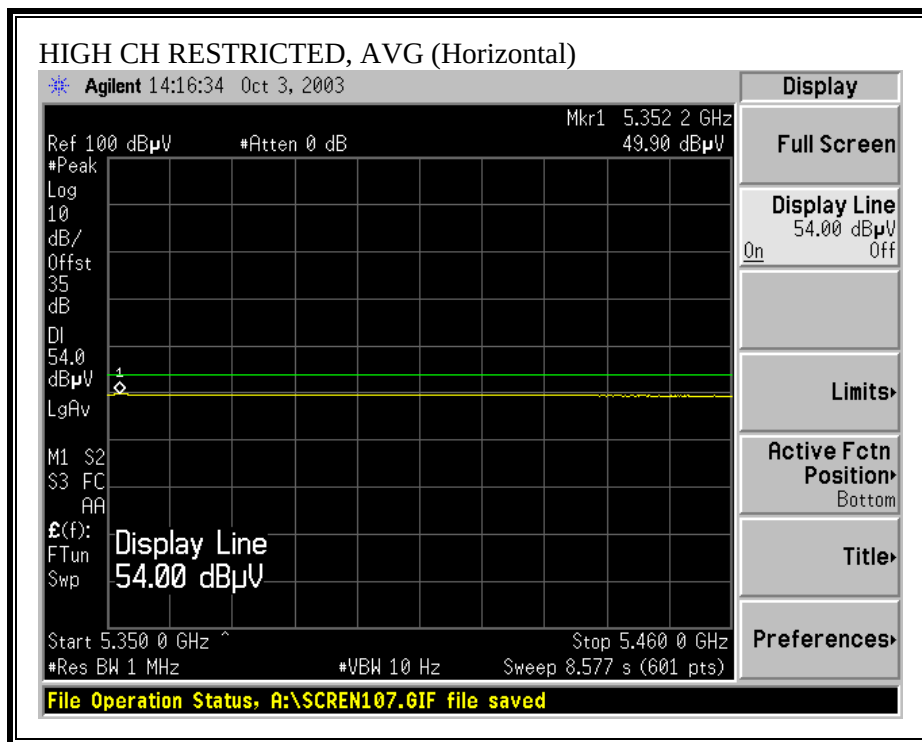

**WORST-CASE RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

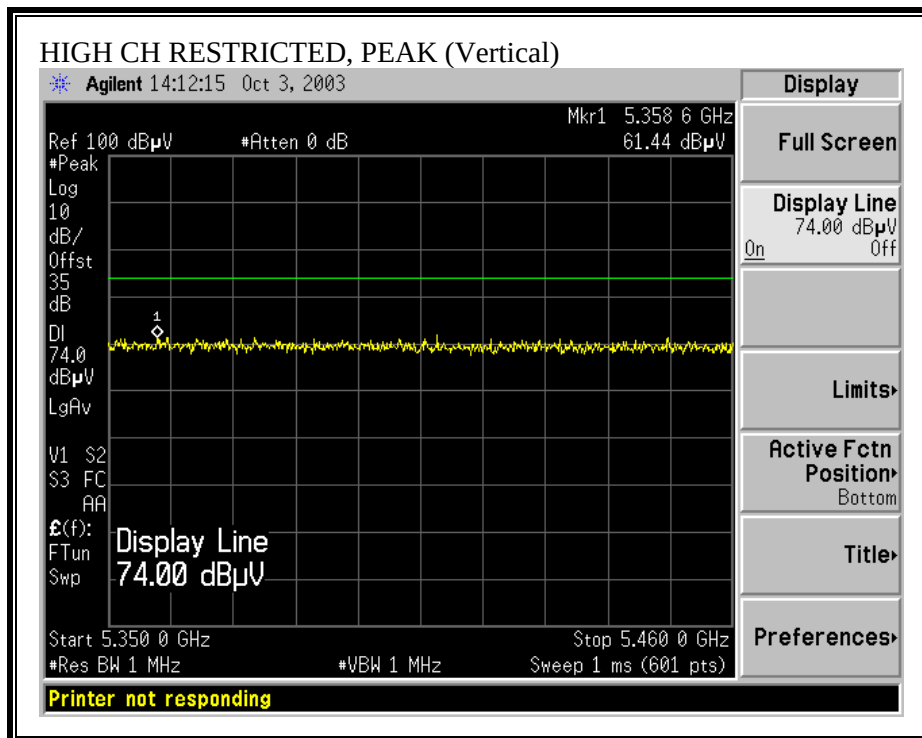

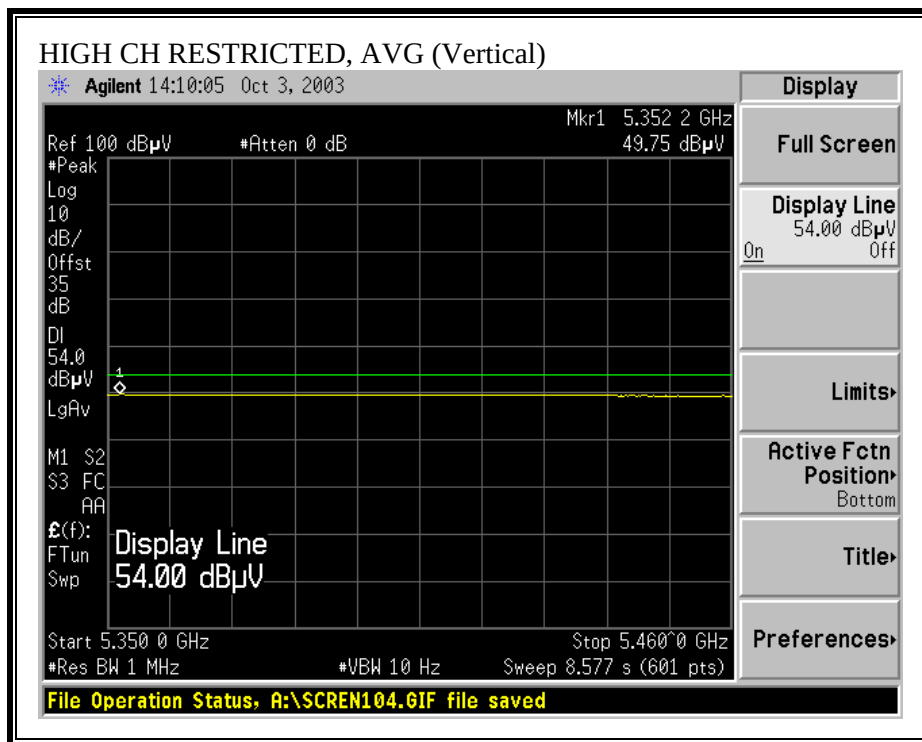

## WORST-CASE HARMONICS AND SPURIOUS EMISSIONS

| 10/03/03 High Frequency Measurement                                                                                                                        |                       |                                                                                                              |           |                         |     |        |                                |     |        |            |        |         |                              |         |       |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|--------------------------------------------------------------------------------------------------------------|-----------|-------------------------|-----|--------|--------------------------------|-----|--------|------------|--------|---------|------------------------------|---------|-------|--|
| Compliance Certification Services, Morgan Hill Open Field Site                                                                                             |                       |                                                                                                              |           |                         |     |        |                                |     |        |            |        |         |                              |         |       |  |
| Test Engr:                                                                                                                                                 |                       | Yan Zheng                                                                                                    |           |                         |     |        |                                |     |        |            |        |         |                              |         |       |  |
| Project #:                                                                                                                                                 |                       | 03U2197                                                                                                      |           |                         |     |        |                                |     |        |            |        |         |                              |         |       |  |
| Company:                                                                                                                                                   |                       | TOSHIBA AMERICA INFORMATION SYSTEM                                                                           |           |                         |     |        |                                |     |        |            |        |         |                              |         |       |  |
| EUT Descrip.:                                                                                                                                              |                       | Intel 802.11 a/b Mini PCI Type B                                                                             |           |                         |     |        |                                |     |        |            |        |         |                              |         |       |  |
| EUT M/N:                                                                                                                                                   |                       | PA3234U-IMPC                                                                                                 |           |                         |     |        |                                |     |        |            |        |         |                              |         |       |  |
| Test Target:                                                                                                                                               |                       | FCC CLASS B                                                                                                  |           |                         |     |        |                                |     |        |            |        |         |                              |         |       |  |
| Mode Oper:                                                                                                                                                 |                       | TX at worst-case co-located with bluetooth<br>Mini PCI Card at Channel 5520MHz; Bluetooth at Channel 2412MHz |           |                         |     |        |                                |     |        |            |        |         |                              |         |       |  |
| Test Equipment:                                                                                                                                            |                       |                                                                                                              |           |                         |     |        |                                |     |        |            |        |         |                              |         |       |  |
| IMCO Horn 1-18GHz                                                                                                                                          |                       | Pre-amplifier 1-26GHz                                                                                        |           | Spectrum Analyzer       |     |        | Horn > 18GHz                   |     |        | Limit      |        |         |                              |         |       |  |
| T73; S/N: 6717 @1m                                                                                                                                         |                       | T86 Miteq 924341                                                                                             |           | Agilent E4446A Analyzer |     |        | T117; ARA 18-26GHz; S/N:1013   |     |        | FCC 15.205 |        |         |                              |         |       |  |
| Hi Frequency Cables                                                                                                                                        |                       |                                                                                                              |           |                         |     |        |                                |     |        |            |        |         |                              |         |       |  |
| <input type="checkbox"/> (2 ft) <input checked="" type="checkbox"/> (2-3 ft) <input type="checkbox"/> (4-6 ft) <input checked="" type="checkbox"/> (12 ft) |                       |                                                                                                              |           |                         |     |        |                                |     |        |            |        |         |                              |         |       |  |
| Peak Measurements: Average Measurements:                                                                                                                   |                       |                                                                                                              |           |                         |     |        |                                |     |        |            |        |         |                              |         |       |  |
| 1 MHz Resolution Bandwidth 1 MHz Resolution Bandwidth                                                                                                      |                       |                                                                                                              |           |                         |     |        |                                |     |        |            |        |         |                              |         |       |  |
| 1MHz Video Bandwidth 10Hz Video Bandwidth                                                                                                                  |                       |                                                                                                              |           |                         |     |        |                                |     |        |            |        |         |                              |         |       |  |
| f                                                                                                                                                          | Dist                  | Read Pk                                                                                                      | Read Avg. | AF                      | CL  | Amp    | D Corr                         | HPF | Peak   | Avg        | Pk Lim | Avg Lim | Pk Mar                       | Avg Mar | Notes |  |
| GHz                                                                                                                                                        | feet                  | dBuV                                                                                                         | dBuV      | dB/m                    | dB  | dB     | dB                             |     | dBuV/m | dBuV/m     | dBuV/m | dBuV/m  | dB                           | dB      |       |  |
| SPURIOUS & HARMONICS                                                                                                                                       |                       |                                                                                                              |           |                         |     |        |                                |     |        |            |        |         |                              |         |       |  |
| 1.823                                                                                                                                                      | 9.8                   | 57.8                                                                                                         | 38.4      | 27.8                    | 2.2 | -44.1  | 0.0                            | 1.0 | 44.6   | 25.2       | 74.0   | 54.0    | -29.4                        | -38.8   | H     |  |
| 10.640                                                                                                                                                     | 9.8                   | 50.3                                                                                                         | 37.3      | 38.8                    | 7.1 | -44.2  | 0.0                            | 1.0 | 52.9   | 39.9       | 80.0   | 60.0    | -27.1                        | -20.1   | H     |  |
| 15.960                                                                                                                                                     | 9.8                   | 53.2                                                                                                         | 41.2      | 38.6                    | 9.1 | -48.4  | 0.0                            | 1.0 | 53.5   | 41.5       | 80.0   | 60.0    | -26.5                        | -18.5   | H     |  |
| 1.823                                                                                                                                                      | 9.8                   | 58.8                                                                                                         | 45.3      | 27.8                    | 2.2 | -44.1  | 0.0                            | 1.0 | 45.6   | 32.1       | 74.0   | 54.0    | -28.4                        | -21.9   | V     |  |
| 10.640                                                                                                                                                     | 9.8                   | 50.7                                                                                                         | 37.4      | 38.8                    | 7.1 | -44.2  | 0.0                            | 1.0 | 53.3   | 40.0       | 80.0   | 60.0    | -26.7                        | -20.0   | V     |  |
| 15.960                                                                                                                                                     | 9.8                   | 47.6                                                                                                         | 41.2      | 38.6                    | 9.1 | -48.4  | 0.0                            | 1.0 | 47.9   | 41.5       | 80.0   | 60.0    | -32.1                        | -19.5   | V     |  |
| NO RADIATED EMISSION FOUND ABOVE 16GHz                                                                                                                     |                       |                                                                                                              |           |                         |     |        |                                |     |        |            |        |         |                              |         |       |  |
| f                                                                                                                                                          | Measurement Frequency |                                                                                                              |           |                         |     | Amp    | Preamp Gain                    |     |        |            |        | Avg Lim | Average Field Strength Limit |         |       |  |
| Dist                                                                                                                                                       | Distance to Antenna   |                                                                                                              |           |                         |     | D Corr | Distance Correct to 3 meters   |     |        |            |        | Pk Lim  | Peak Field Strength Limit    |         |       |  |
| Read                                                                                                                                                       | Analyzer Reading      |                                                                                                              |           |                         |     | Avg    | Average Field Strength @ 3 m   |     |        |            |        | Avg Mar | Margin vs. Average Limit     |         |       |  |
| AF                                                                                                                                                         | Antenna Factor        |                                                                                                              |           |                         |     | Peak   | Calculated Peak Field Strength |     |        |            |        | Pk Mar  | Margin vs. Peak Limit        |         |       |  |
| CL                                                                                                                                                         | Cable Loss            |                                                                                                              |           |                         |     | HPF    | High Pass Filter               |     |        |            |        |         |                              |         |       |  |


## 7.1.4. WORST-CASE RADIATED EMISSIONS BELOW 1 GHZ

### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)



561F Monterey Road  
San Jose, CA 95131  
Tel: (408) 463-0888  
Fax: (408) 463-0885

Data#: 6 File#: 30-1GHz.EMI Date: 09-27-2003 Time: 16:31:21

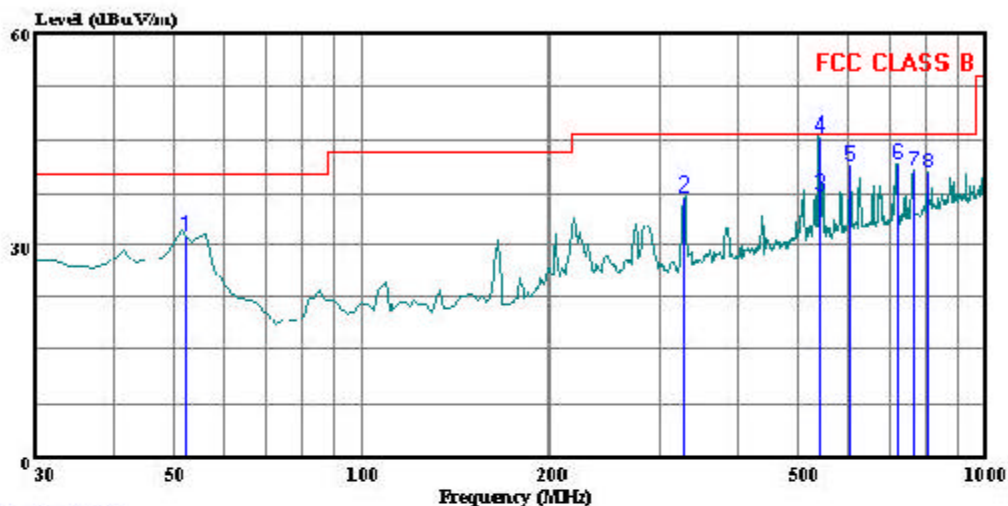

(Auxiliary ATC)

Trace: 3

Ref Trace:

Condition: FCC CLASS B 3m CHAMBER 030306 1185 VERTICAL  
Tester : Thanh Nguyen  
Project # : 03U2197  
Company : Toshiba  
EUT : 802.11a/b Mini PCI Type 3B card  
Model No : PA3234U-1MPC (FCC ID: CJ6UPA3234WL)  
Configuration : EUT  
Target of Test : FCC CLASS B  
Mode of Operation: TX, Worst Case  
: VERTICAL

Page: 1

|   | Freq    | Read Level | Probe Factor | Cable Loss | Limit Level | Over Limit | Remark     |
|---|---------|------------|--------------|------------|-------------|------------|------------|
|   | MHz     | dBuV       | dB           | dB         | dBuV/m      | dB         |            |
| 1 | 52.310  | 16.39      | 14.18        | 0.70       | 31.26       | 40.00      | -8.74 Peak |
| 2 | 328.760 | 22.23      | 12.82        | 1.83       | 36.87       | 46.00      | -9.13 Peak |
| 3 | 541.190 | 17.70      | 17.02        | 2.43       | 37.15       | 46.00      | -8.85 QP   |
| 4 | 541.190 | 25.92      | 17.04        | 2.39       | 45.35       | 46.00      | -0.65 Peak |
| 5 | 606.180 | 21.08      | 17.75        | 2.53       | 41.36       | 46.00      | -4.64 Peak |
| 6 | 719.670 | 19.90      | 18.82        | 2.80       | 41.51       | 46.00      | -4.49 Peak |
| 7 | 764.290 | 18.24      | 19.38        | 2.92       | 40.54       | 46.00      | -5.46 Peak |





Data#: 2 File#: 30-1GHz.EMI Date: 09-27-2003 Time: 16:20:35  
Page: 2


|   |         | Read  | Probe  | Cable |        | Limit  | Over  |        |
|---|---------|-------|--------|-------|--------|--------|-------|--------|
|   | Freq    | Level | Factor | Loss  | Level  | Line   | Limit | Remark |
|   | MHz     | dBuV  | dB     | dB    | dBuV/m | dBuV/m | dB    |        |
| 8 | 807.940 | 16.10 | 19.86  | 3.01  | 38.97  | 46.00  | -7.03 | Peak   |

**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)**



561F Monterey Road  
San Jose, CA 95131  
Tel: (408) 463-0888  
Fax: (408) 463-0885

Data#: 6 File#: 30-1GHz.EMI Date: 09-27-2003 Time: 16:31:21

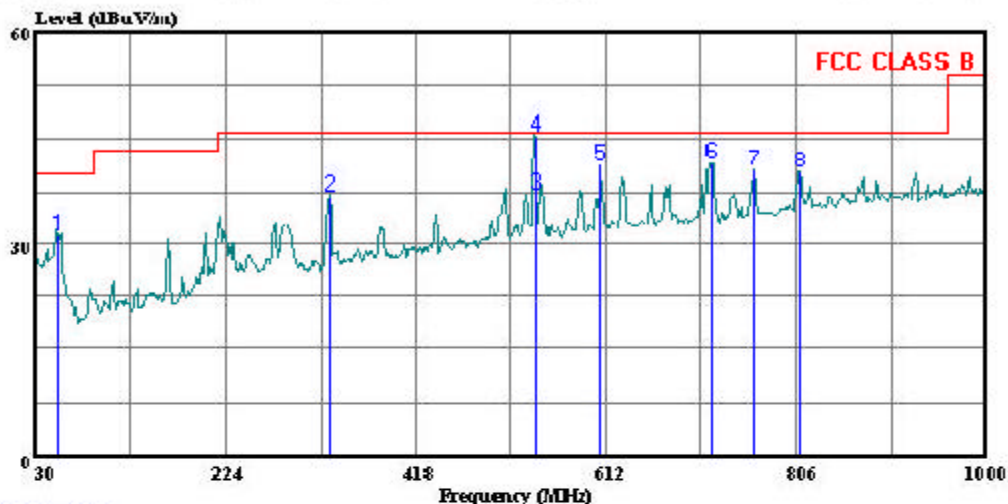

(Auxiliary ATC)

Trace: 3

Ref Trace:

Condition: FCC CLASS B 3m CHAMBER 030306 1185 VERTICAL

Tester : Thanh Nguyen  
Project # : 03U2197  
Company : Toshiba  
EUT : 802.11a/b Mini PCI Type 3B card  
Model No : PA3234U-1MPC (FCC ID: CJ6UPA3234WL)  
Configuration : EUT  
Target of Test : FCC CLASS B  
Mode of Operation: TX, Worst Case  
: VERTICAL

Page: 1

|   | Freq    | Read Level | Probe Factor | Cable Loss | Level  | Limit Line | Over Limit | Remark |
|---|---------|------------|--------------|------------|--------|------------|------------|--------|
|   | MHz     | dBuV       | dB           | dB         | dBuV/m | dBuV/m     | dB         |        |
| 1 | 52.310  | 16.39      | 14.18        | 0.70       | 31.26  | 40.00      | -8.74      | Peak   |
| 2 | 328.760 | 22.23      | 12.82        | 1.83       | 36.87  | 46.00      | -9.13      | Peak   |
| 3 | 541.190 | 17.70      | 17.02        | 2.43       | 37.15  | 46.00      | -8.85      | QP     |
| 4 | 541.190 | 25.92      | 17.04        | 2.39       | 45.35  | 46.00      | -0.65      | Peak   |
| 5 | 606.180 | 21.08      | 17.75        | 2.53       | 41.36  | 46.00      | -4.64      | Peak   |
| 6 | 719.670 | 19.90      | 18.82        | 2.80       | 41.51  | 46.00      | -4.49      | Peak   |
| 7 | 764.290 | 18.24      | 19.38        | 2.92       | 40.54  | 46.00      | -5.46      | Peak   |

Data#: 6 File#: 30-1GHz.EMI Date: 09-27-2003 Time: 16:31:21  
Page: 2

|   | Freq    | Read<br>Level | Probe<br>Factor | Cable<br>Loss | Level  | Limit<br>Line | Over<br>Limit | Remark |
|---|---------|---------------|-----------------|---------------|--------|---------------|---------------|--------|
|   | MHz     | dBuV          | dB              | dB            | dBuV/m | dBuV/m        | dB            |        |
| 8 | 808.910 | 17.38         | 19.87           | 3.01          | 40.26  | 46.00         | -5.74         | Peak   |

## 7.2. POWERLINE CONDUCTED EMISSIONS

### LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

| Frequency of Emission (MHz) | Conducted Limit (dBuV) |           |
|-----------------------------|------------------------|-----------|
|                             | Quasi-peak             | Average   |
| 0.15-0.5                    | 66 to 56*              | 56 to 46* |
| 0.5-5                       | 56                     | 46        |
| 5-30                        | 60                     | 50        |

\* Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.


### RESULTS

No non-compliance noted:

# **6 WORST EMISSIONS**

| CONDUCTED EMISSIONS DATA (115VAC 60Hz) |           |           |           |       |       |       |         |         |         |
|----------------------------------------|-----------|-----------|-----------|-------|-------|-------|---------|---------|---------|
| Freq.                                  | Reading   |           |           | Closs | Limit |       | Margin  |         | Remark  |
| (MHz)                                  | PK (dBuV) | QP (dBuV) | AV (dBuV) | (dB)  | QP    | AV    | QP (dB) | AV (dB) | L1 / L2 |
| 0.21                                   | 51.18     | --        | --        | 0.00  | 64.40 | 54.40 | -13.22  | -3.22   | L1      |
| 0.96                                   | 31.10     | --        | --        | 0.00  | 56.00 | 46.00 | -24.90  | -14.90  | L1      |
| 20.49                                  | 30.70     | --        | --        | 0.00  | 60.00 | 50.00 | -29.30  | -19.30  | L1      |
| 0.21                                   | 48.93     | --        | --        | 0.00  | 64.43 | 54.43 | -15.50  | -5.50   | L2      |
| 1.18                                   | 31.28     | --        | --        | 0.00  | 56.00 | 46.00 | -24.72  | -14.72  | L2      |
| 9.86                                   | 31.22     | --        | --        | 0.00  | 60.00 | 50.00 | -28.78  | -18.78  | L2      |
| 6 Worst Data                           |           |           |           |       |       |       |         |         |         |

**LINE 1 AND LINE 2 RESULTS**

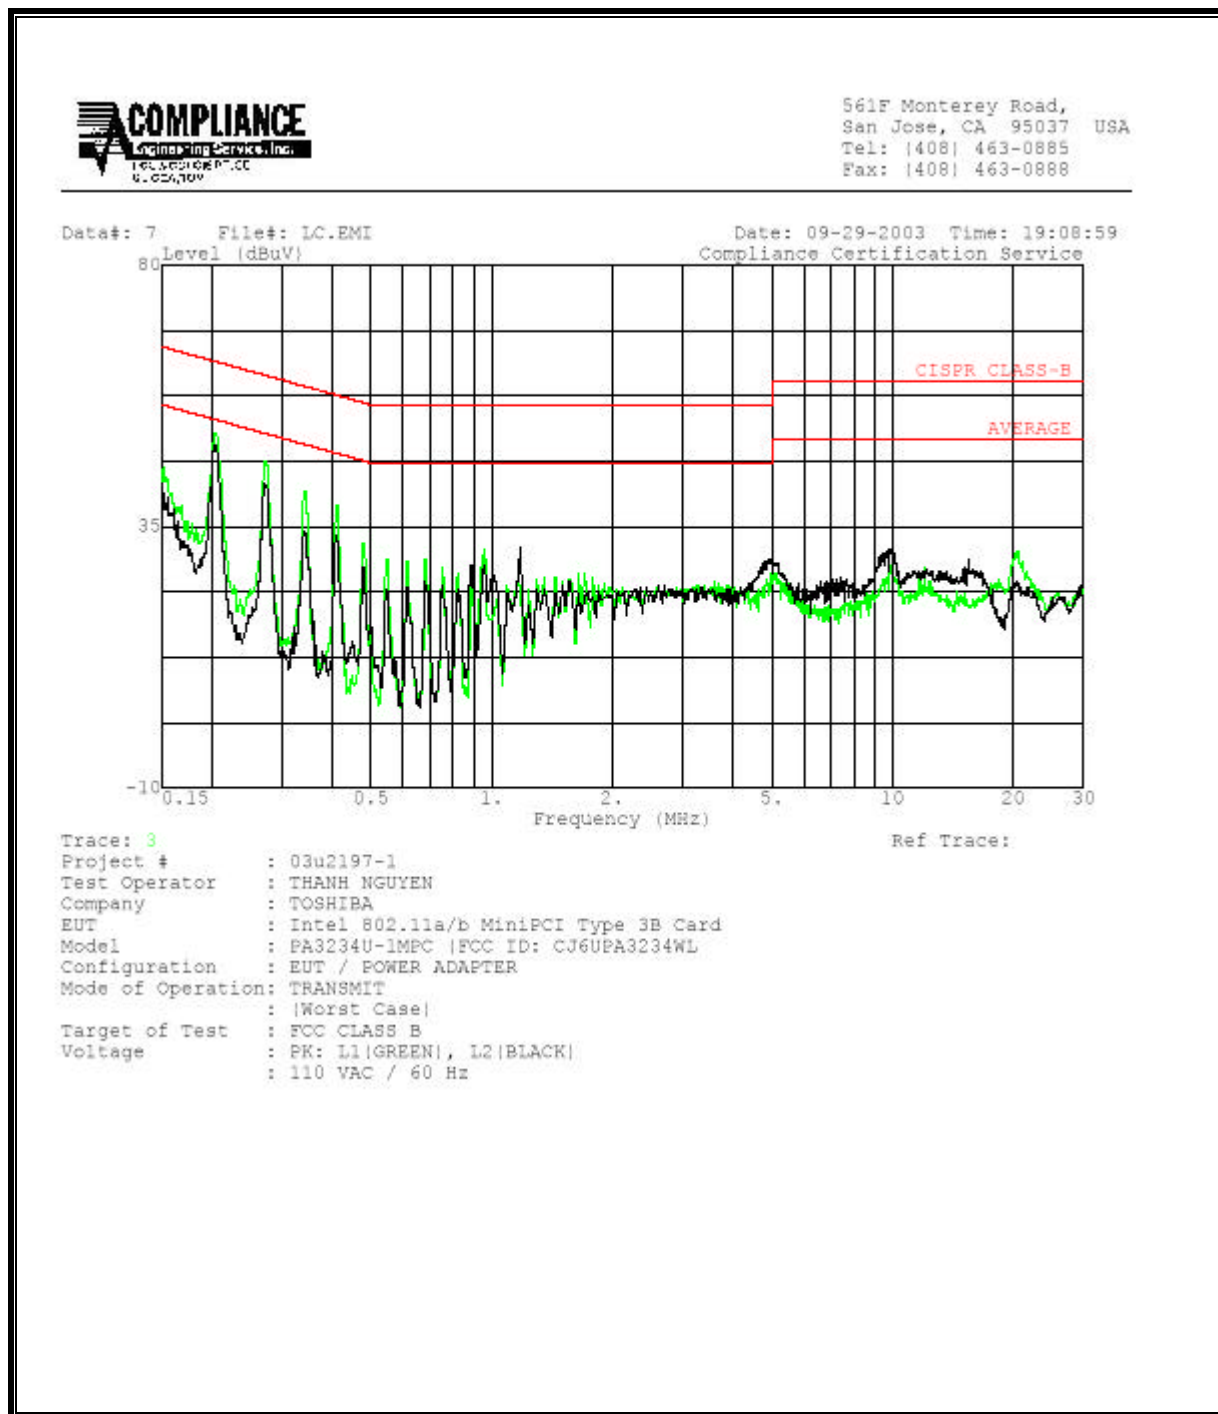

## 8. SETUP PHOTOS

### RADIATED RF MEASUREMENT SETUP



LAPTOP CONFIGURATION BACK PHOTO





TABLET CONFIGURATION X AXIS PHOTO



TABLET CONFIGURATION Y AXIS FRONT PHOTO



TABLET CONFIGURATION Y AXIS BACK PHOTO




TABLET CONFIGURATION Z AXIS FRONT PHOTO



TABLET CONFIGURATION Z AXIS BACK PHOTO



**POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP**

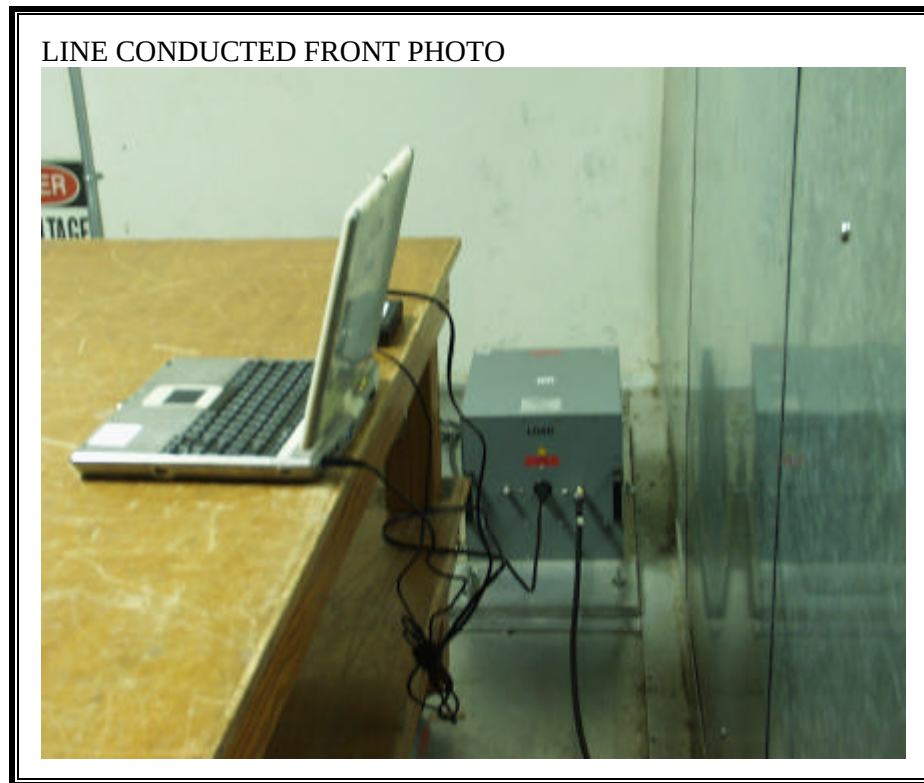



LINE CONDUCTED BACK PHOTO



**END OF REPORT**