



FCC CFR47 PART 15 SUBPART E

**CLASS II PERMISSIVE CHANGE
TEST REPORT**

FOR

802.11A/B MINI PCI TYPE 3B CARD

MODEL NUMBER: PA3234U-1MPC

FCC ID: CJ6UPA3234WL

REPORT NUMBER: 03U2197-2

ISSUE DATE: OCTOBER 16, 2003

Prepared for

**TOSHIBA CORPORATION DIGITAL MEDIA NETWORK COMPANY
2-9 SUEHIRO-CHO, OME
TOKYO, 198-8710, JAPAN**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	3
2. DESCRIPTION OF CLASS II PERMISSIVE CHANGE.....	4
3. TEST METHODOLOGY	5
4. FACILITIES AND ACCREDITATION	5
5. CALIBRATION AND UNCERTAINTY	6
5.1. MEASURING INSTRUMENT CALIBRATION	6
5.2. MEASUREMENT UNCERTAINTY	6
5.3. TEST AND MEASUREMENT EQUIPMENT	7
6. SETUP OF EQUIPMENT UNDER TEST.....	8
7. APPLICABLE RULES AND TEST RESULTS	10
7.1. RADIATED EMISSIONS	10
7.1.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS	10
7.1.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ	13
7.1.3. CO-LOCATED TRANSMITTER RADIATED EMISSIONS	24
7.1.4. WORST-CASE RADIATED EMISSIONS BELOW 1 GHZ	33
7.2. POWERLINE CONDUCTED EMISSIONS.....	38
8. SETUP PHOTOS.....	41

1. TEST RESULT CERTIFICATION

COMPANY NAME: TOSHIBA CORPORATION DIGITAL MEDIA NETWORK COMPANY
2-9 SUEHIRO-CHO, OME
TOKYO, 198-8710, JAPAN

EUT DESCRIPTION: 802.11A/B MINI PCI TYPE 3B CARD

MODEL: PA3234U-1MPC

DATE TESTED: SEPTEMBER 22 - OCTOBER 15, 2003

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART E	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

Note: The 5.2 GHz band is applicable to this report; another band of operation (2.4 GHz) is documented in a separate report.

Approved & Released For CCS By:

Tested By:



MIKE HECKROTTE
CHIEF ENGINEER
COMPLIANCE CERTIFICATION SERVICES

VIEN TRAN
EMC TECHNICIAN
COMPLIANCE CERTIFICATION SERVICES

2. DESCRIPTION OF CLASS II PERMISSIVE CHANGE

The Class II Permissive Change is to add portable operation in the Toshiba Tablet PC, model PPM20U-AAAA2, including co-location with the Toshiba PA3232U-1BTM Bluetooth radio card.

The 802.11a/b WLAN transmitter has a maximum peak conducted output power as follows:

Frequency Band (MHz)	Mode	Output Power (mW)	Output Power (dBm)
5150 - 5250	802.11b	45.00	16.53
5250 - 5350	802.11b	54.00	17.32

The WLAN radio utilizes two identical internal dipole antennas for diversity, with a maximum gain of 4.8 dBi.

The Bluetooth radio card has a modular approval, FCC ID: CJ6UPA3232BT. The Bluetooth radio utilizes a film antenna with a maximum gain of 1.22 dBi.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4/1992, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

4. FACILITIES AND ACCREDITATION

The open area test sites and conducted measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.



No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.

5. CALIBRATION AND UNCERTAINTY

5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5.3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST AND MEASUREMENT EQUIPMENT LIST				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due Date
EMI Test Receiver	R & S	ESHS 20	827129/006	7/17/2004
LISN, 10 kHz ~ 30 MHz	FCC	50/250-25-2	114	9/6/2004
Spectrum Analyzer	AGILENT	E4446A	US42070220	1/13/04
Pre-amplifier	MITEQ	NSP2600-SP	924341	4/25/04
Horn Antenna	EMCO	3115	6717	2/04/04
Power Meter	AGILENT	E4416A	0841291160	11/07/04
Power Sensor	Agilent	E9327A	US40440755	11/07/04
Antenna, Biconical	Eaton	94455-1	1214	3/06/04
Antenna, Log Periodic	EMCO	3146	9107-3163	3/06/04
Preamplifier	Miteq	NSP10023988	646456	4/26/04
7.6GHz HPF	Microwave	HP7600-9SS	NA	NCR

6. SETUP OF EQUIPMENT UNDER TEST

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Device Type	Manufacturer	Model	Serial Number	FCC ID
Laptop	Toshiba	PPM20U-AAAA2	93010025	DoC
AC adapter	Toshiba	ADP-60RH A	0394336	DoC


I/O CABLES

Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US115	Unshielded	1.8m	No
2	DC	1	DC Jack	Unshielded	1.8m	No

TEST SETUP

The EUT is installed in the host laptop.

SETUP DIAGRAM

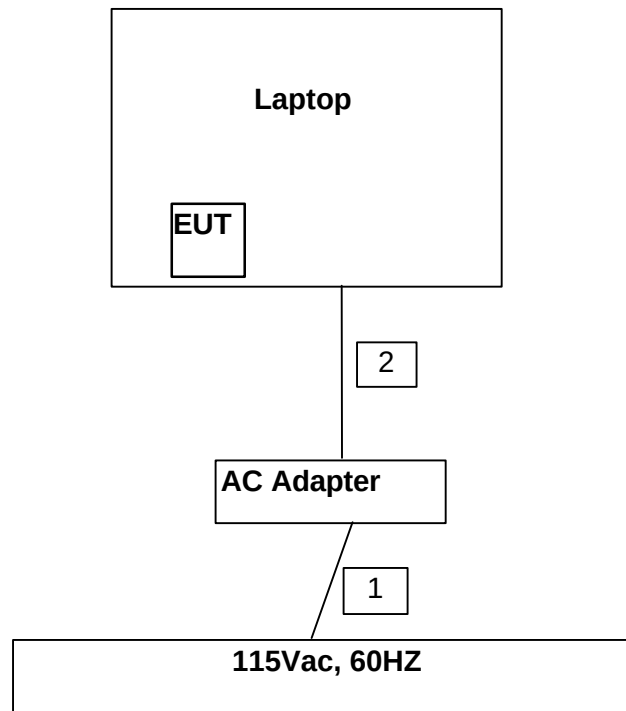

7. APPLICABLE RULES AND TEST RESULTS

7.1. RADIATED EMISSIONS

7.1.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


The configuration and orientation of the EUT was varied to determine the worst-case. The EUT was first configured as a typical laptop notebook PC resting on the turntable in a normal operating condition. It was then configured as a tablet PC, and evaluated in X, Y and Z orientations. The worst-case condition was observed with the EUT in the laptop configuration. Worst-case results are reported.


RESULTS

No non-compliance noted:


7.1.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ


RESTRICTED BANDEDGE (NORMAL MODE, LOW CHANNEL, HORIZONTAL)

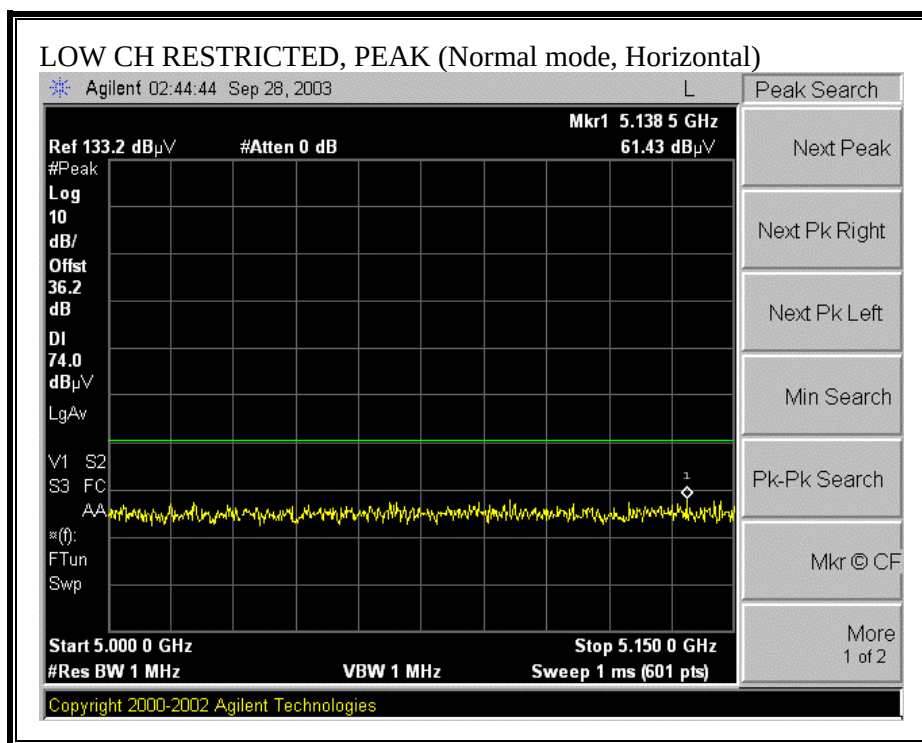

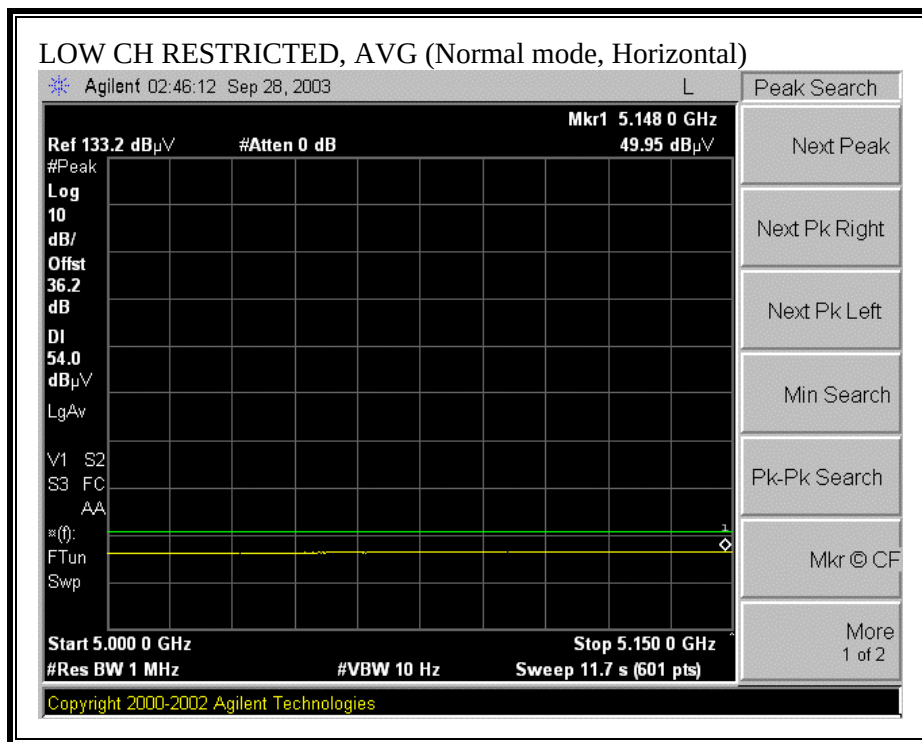



RESTRICTED BANDEDGE (NORMAL MODE, LOW CHANNEL, VERTICAL)

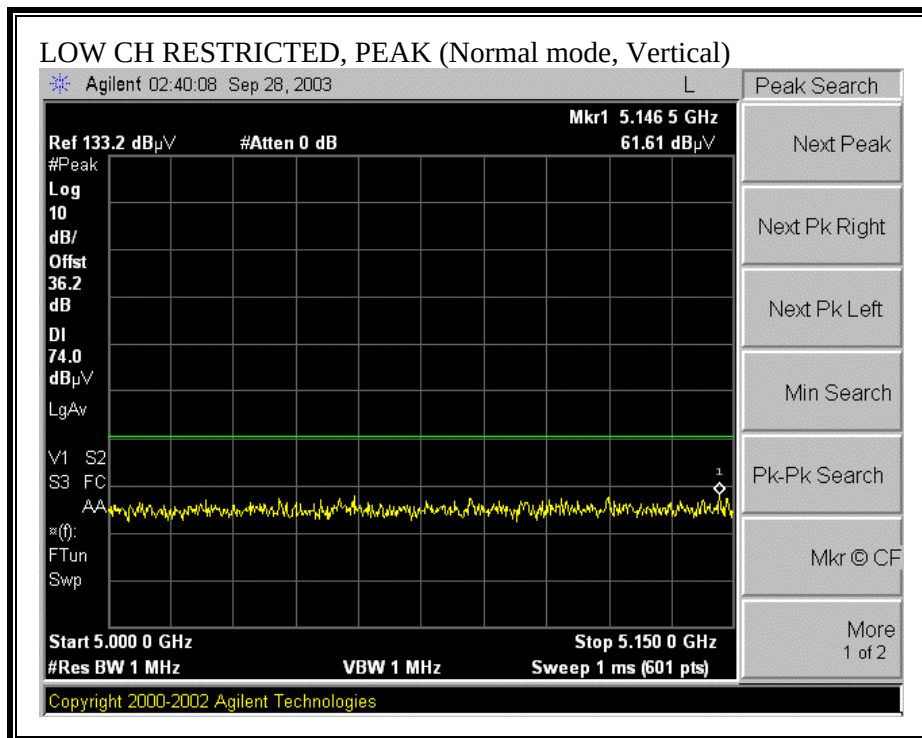

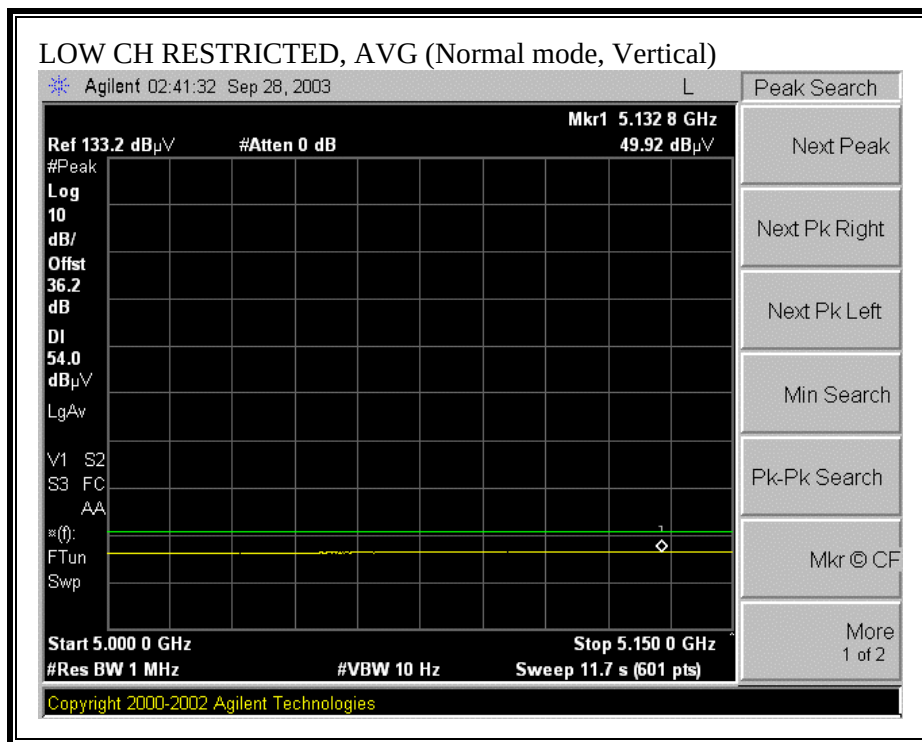



RESTRICTED BANDEDGE (NORMAL MODE, HIGH CHANNEL, HORIZONTAL)

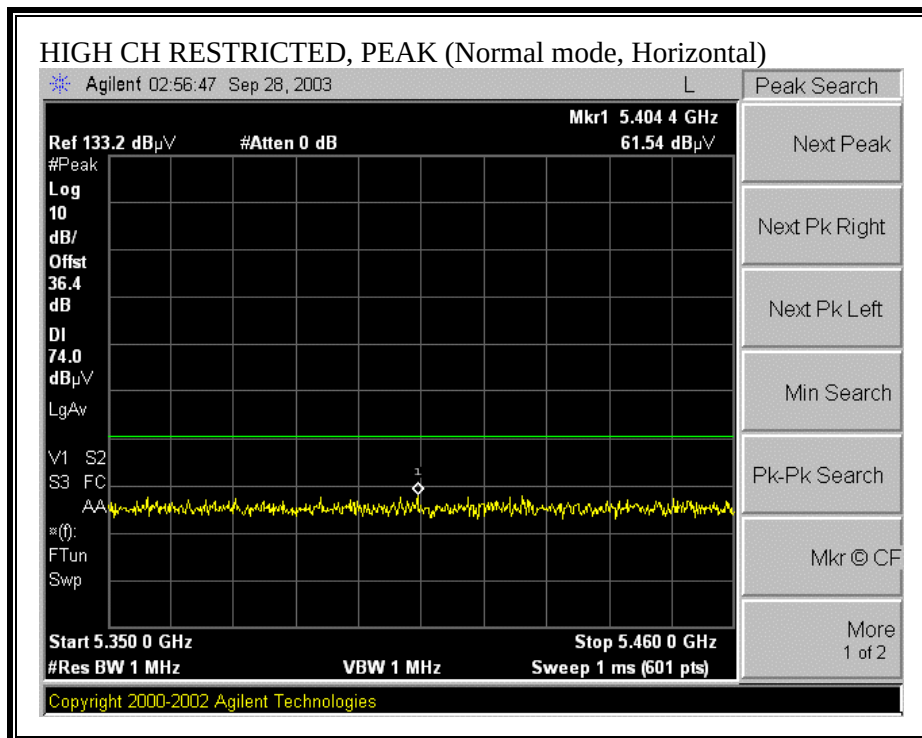

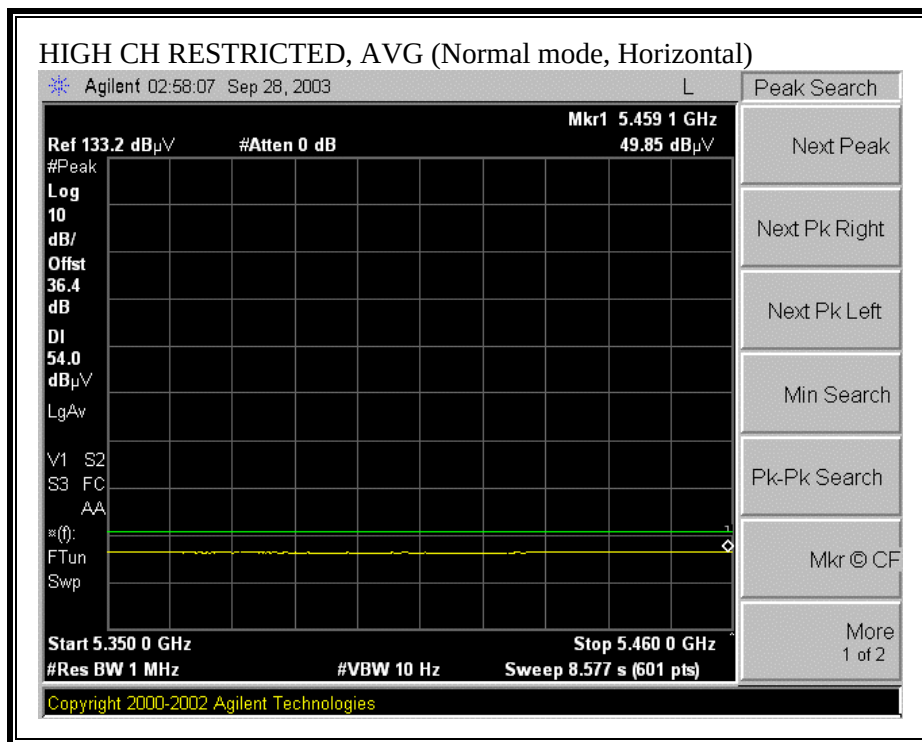

RESTRICTED BANDEDGE (NORMAL MODE, HIGH CHANNEL, VERTICAL)

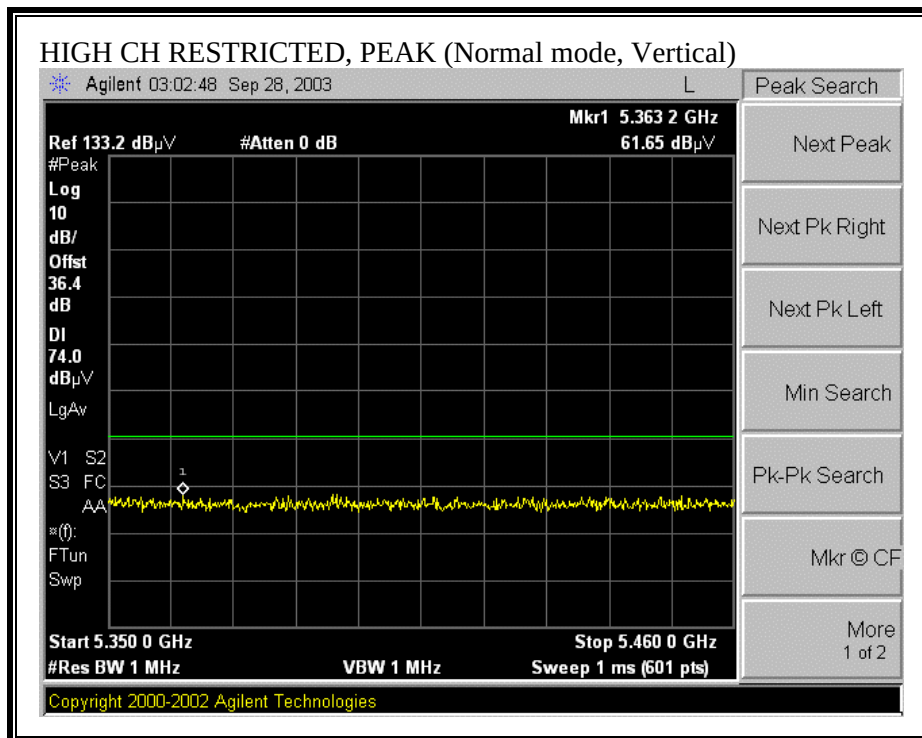

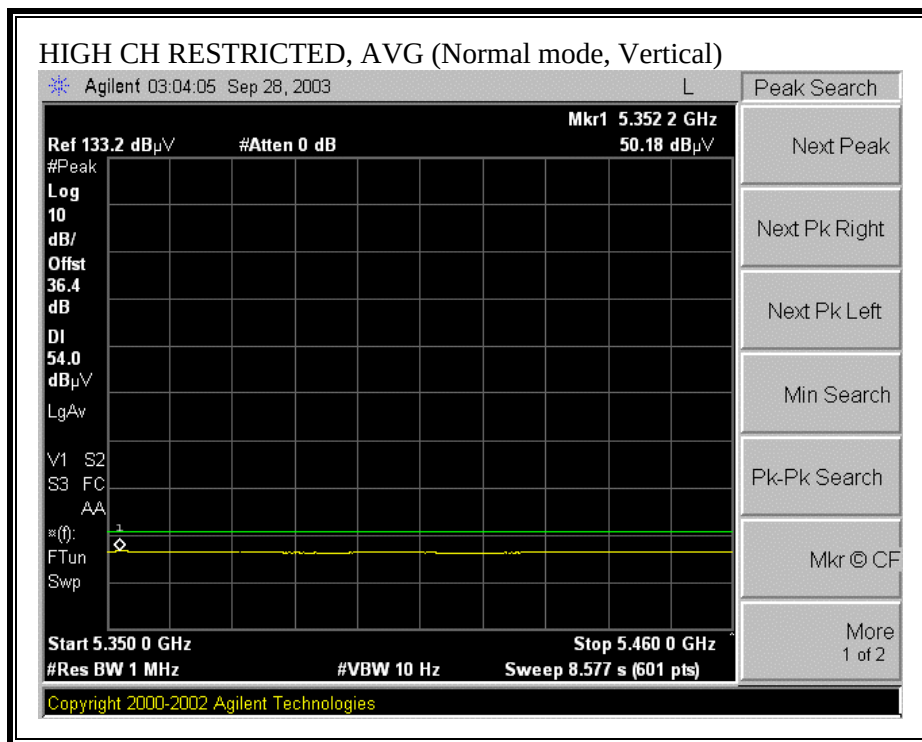

HARMONICS AND SPURIOUS EMISSIONS (NORMAL MODE, LOW CHANNEL)

09/27/03 High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: THANH NGUYEN
Project #: 03U2197
Company: TOSHIBA AMERICA INFORMATION SYSTEMS, INC.
EUT Descrip.: Intel 802.11 a/b MiniPCI Type 3B card
EUT M/N: PA3234U-1MPC (FCC ID: CJ6UPA3234WL)
Test Target: FCC 15.407
Mode Oper: a mode

Test Equipment:

EMCO Horn 1-18GHz
T73; S/N: 6717 @3m

Pre-amplifier 1-26GHz
T86 Miteq 924341

Spectrum Analyzer
Agilent E4446A Analyzer

Horn > 18GHz
T87 ARA 18-26GHz & Mixer > 26GHz

Limit
FCC 15.209

18 Frequency Cables
☐ (2 ft) ☒ (2 - 3 ft) ☐ (4 - 6 ft) ☒ (12 ft)

Peak Measurements:
1 MHz Resolution Bandwidth
15MHz Video Bandwidth

Average Measurements:
1 MHz Resolution Bandwidth
10Hz Video Bandwidth

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
Tx at 5.180GHz Harmonics and Spurious Emissions.															
15.540	9.8	47.1	37.1	39.2	6.5	-48.2	0.0	1.0	45.5	35.5	74.0	54.0	-28.5	-18.5	Noise Floor
20.720	9.8	46.1	36.5	38.5	7.8	-44.6	0.0	1.0	43.7	34.1	74.0	54.0	-30.3	-19.9	Noise Floor
No more Spurious emissions was detected above 22GHz for both V&H Antenna.															
f	Measurement Frequency					Amp	Presamp Gain					Avg Lim	Average Field Strength Limit		
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit		
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit		
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit		
CL	Cable Loss					HPF	High Pass Filter								

HARMONICS AND SPURIOUS EMISSIONS (NORMAL MODE, MID CHANNEL)

09/27/03 High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: THANH NGUYEN
Project #: 03U2197
Company: TOSHIBA AMERICA INFORMATION SYSTEMS, INC.
EUT Descr.: Intel 802.11 a/b MiniPCI Type 3B card
EUT M/N: PA3234U-1MPC (FCC ID: CJ6UPA3234WL)
Test Target: FCC 15.407
Mode Oper: a mode

Test Equipment:

EMCO Horn 1-18GHz
T73; S/N: 6717 @3m

Pre-amplifier 1-26GHz
T86 Miteq 924341

Spectrum Analyzer
Agilent E4446A Analyzer

Horn > 18GHz
T87 ARA 18-26GHz & Mixer > 26GHz

Limit
FCC 15.209

18 Frequency Cables
☐ (2 ft) ☒ (2 - 3 ft) ☐ (4 - 6 ft) ☒ (12 ft)

Peak Measurements: 1 MHz Resolution Bandwidth
15MHz Video Bandwidth
Average Measurements: 1 MHz Resolution Bandwidth
10Hz Video Bandwidth

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
Tx at 5260GHz Harmonics and Spurious Emissions.															
15.780	9.8	47.2	38.0	38.6	6.6	-48.3	0.0	1.0	45.1	35.9	74.0	54.0	-18.9	-18.1	Noise floor
21.040	9.8	44.8	34.8	33.8	7.9	-44.3	0.0	1.0	43.0	33.1	74.0	54.0	-31.0	-20.9	Noise floor
10.550	9.8	54.3	44.4	38.3	5.2	-44.3	0.0	1.0	54.4	44.5	74.0	54.0	-19.6	-8.5	Spur.H
10.533	9.8	52.6	33.4	38.3	5.2	-44.3	0.0	1.0	52.6	33.5	74.0	54.0	-21.4	-20.5	Spur.H
No more Spurious emissions was detected above 22GHz for both V&H Antenna.															

f Measurement Frequency
Dist Distance to Antenna
Read Analyzer Reading
AF Antenna Factor
CL Cable Loss

Amp Presamp Gain
D Corr Distance Correct to 3 meters
Avg Average Field Strength @ 3 m
Peak Calculated Peak Field Strength
HPF High Pass Filter

Avg Lim Average Field Strength Limit
Pk Lim Peak Field Strength Limit
Avg Mar Margin vs. Average Limit
Pk Mar Margin vs. Peak Limit

HARMONICS AND SPURIOUS EMISSIONS (NORMAL MODE, HIGH CHANNEL)

09/27/03 High Frequency Measurement																		
Compliance Certification Services, Morgan Hill Open Field Site																		
Test Eng: THANH NGUYEN																		
Project #: 03U2197																		
Company: TOSHIBA AMERICA INFORMATION SYSTEMS, INC.																		
EUT Descr.: Intel 802.11 a/b MiniPCI Type 3B card																		
EUT M/N: PA3234U-1MPC (FCC ID: CJ6UPA3234WL)																		
Test Target: FCC 15.407																		
Mode Oper: a mode																		
Test Equipment:																		
EMCO Horn 1-18GHz		Pre-amplifier 1-26GHz		Spectrum Analyzer		Horn > 18GHz		Limit										
T731 S/N: 6717 @3m		T86 Mitraq 924941		Agilent E4446A Analyzer		T87 ARA 18-26GHz & Mixer > 26GHz		FCC 15.209										
HI Frequency Cables ☐ (2 ft) ☒ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☒ (12 ft)										Peak Measurements: 1 MHz Resolution Bandwidth 1MHz Video Bandwidth							Average Measurements: 1 MHz Resolution Bandwidth 10Hz Video Bandwidth	
f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes			
Tx at 5.320GHz Harmonics and spurious Emissions.																		
10.640	9.8	46.0	34.0	38.3	5.2	-44.2	0.0	1.0	46.2	34.2	74.0	54.0	-27.8	-19.8	Noise floor			
15.960	9.8	46.5	38.1	38.2	6.6	-48.4	0.0	1.0	44.0	35.5	74.0	54.0	-30.0	-18.5	Noise floor			
21.280	9.8	42.7	38.2	34.2	7.9	-44.4	0.0	1.0	41.4	26.8	74.0	54.0	-32.6	-17.2	Noise floor			
26.600	9.8	43.2	38.3	37.0	9.2	-42.1	0.0	1.0	43.3	43.4	74.0	54.0	-30.7	-10.6	Noise floor			
10.616	9.8	49.7	39.4	38.3	8.2	-44.3	0.0	1.0	49.9	39.6	74.0	54.0	-24.1	-14.4	Spurious H			
No more Spurious emissions was detected above 26GHz for both V&H Antenna.																		
f	Measurement Frequency			Amp	Presamp Gain			Avg Lim	Average Field Strength Limit									
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim	Peak Field Strength Limit									
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar	Margin vs. Average Limit									
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar	Margin vs. Peak Limit									
CL	Cable Loss			HPF	High Pass Filter													

7.1.3. CO-LOCATED TRANSMITTER RADIATED EMISSIONS

SUPPLEMENTAL TEST PROCEDURE


The dominant transmitter is set to the worst-case channel. The spurious emissions performance of the dominant transmitter is investigated as the frequency of the non-dominant transmitter is varied. Worst-case results are reported.


RESULTS

The 5.2 GHz transmitter is dominant.


No non-compliance noted:


WORST-CASE RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

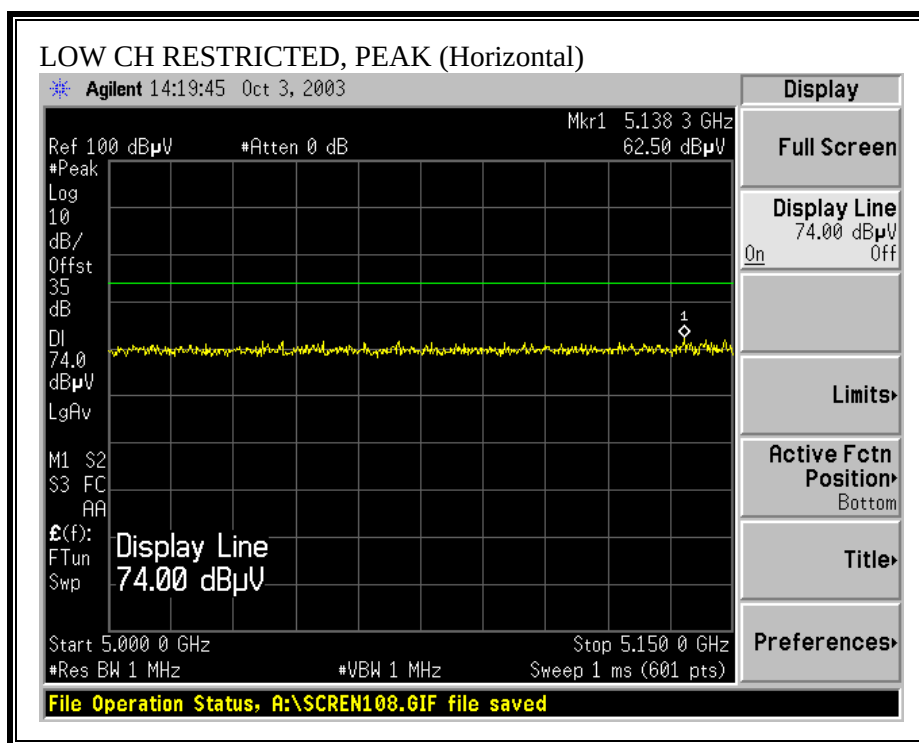

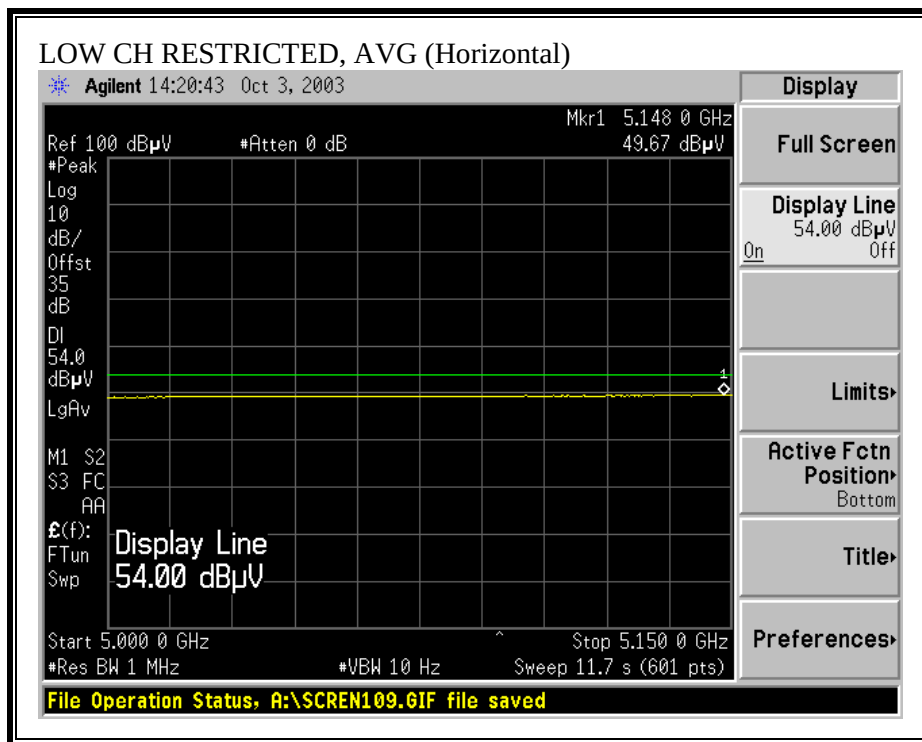



WORST-CASE RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

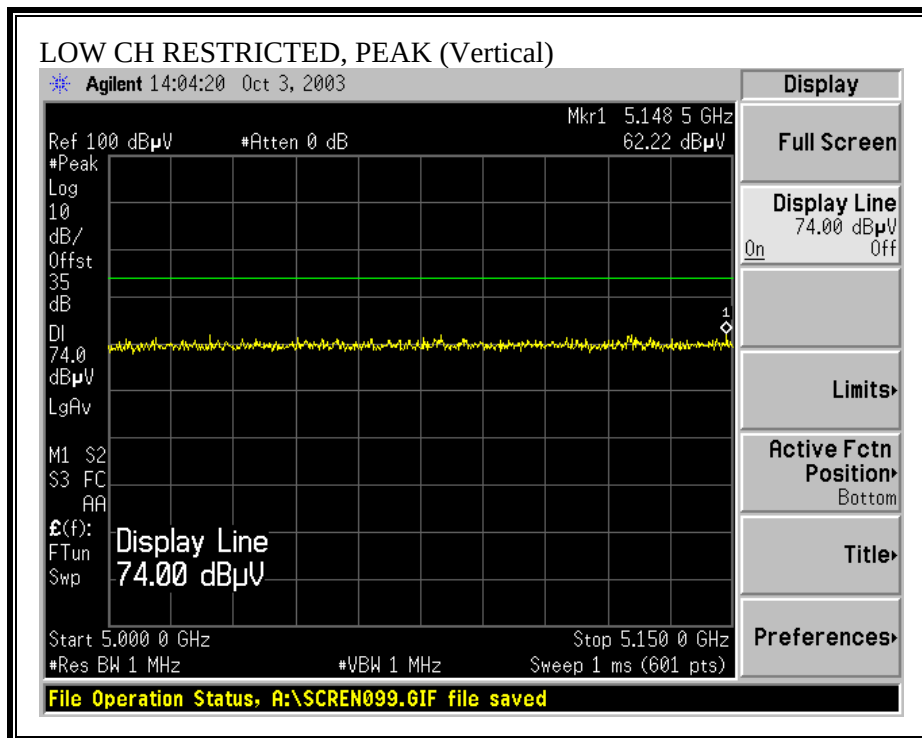

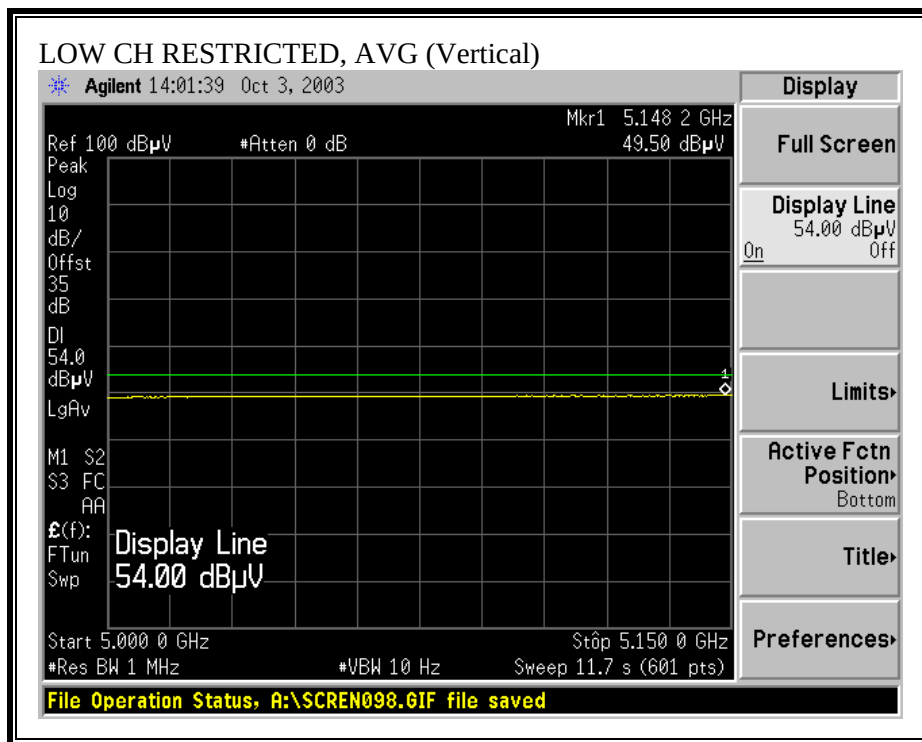



WORST-CASE RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

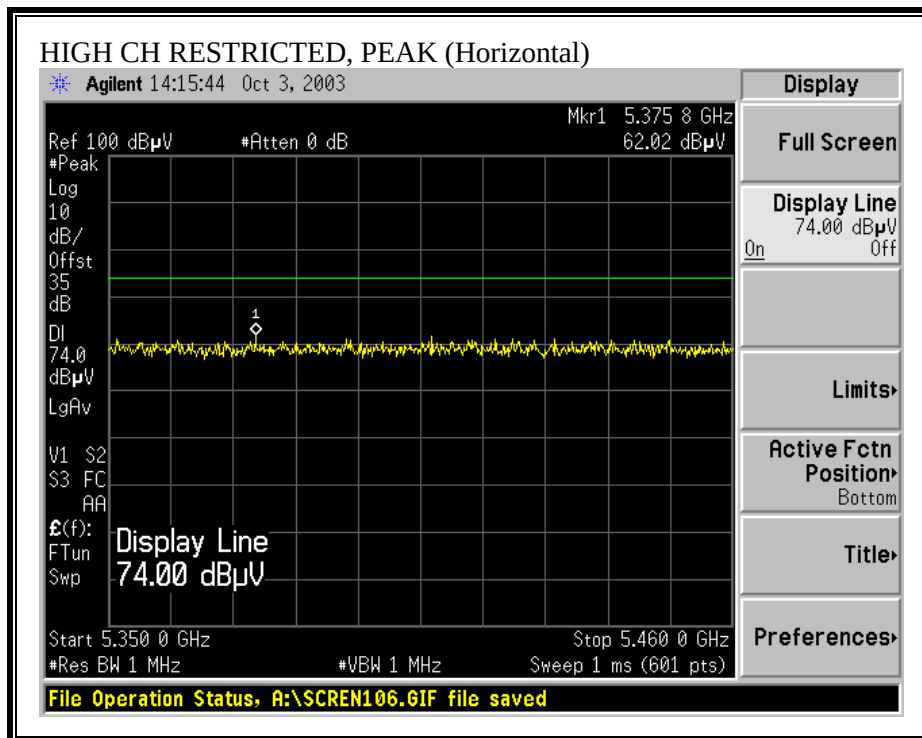

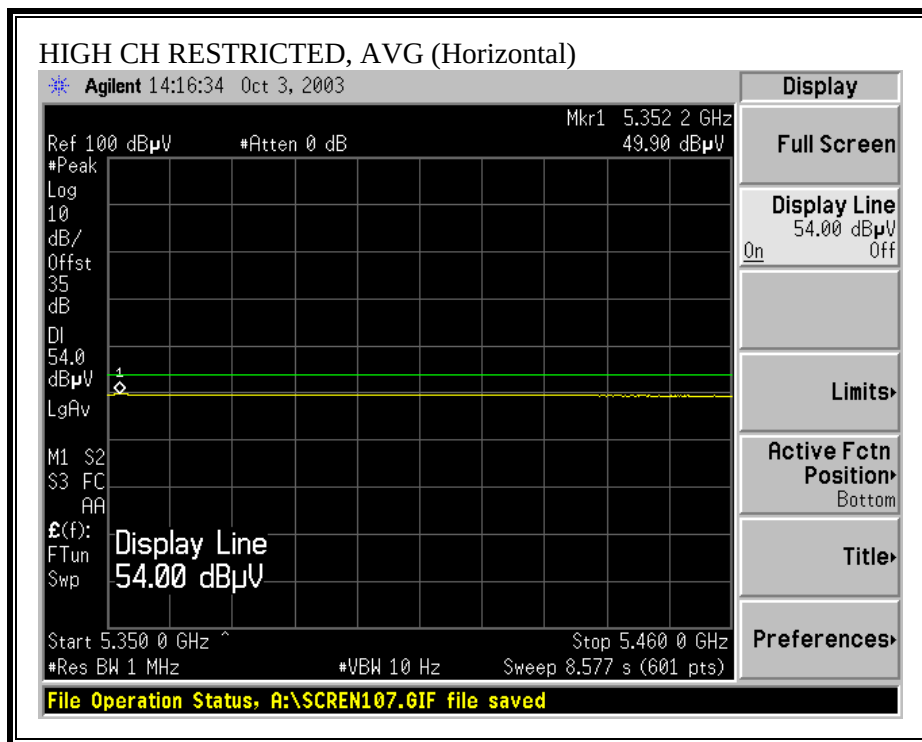

WORST-CASE RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

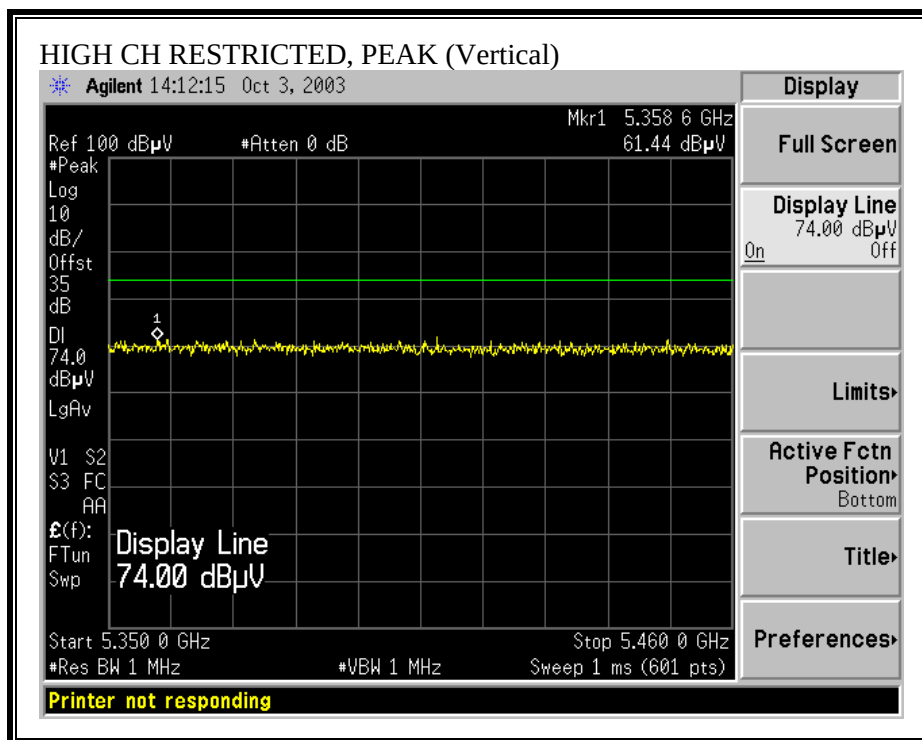

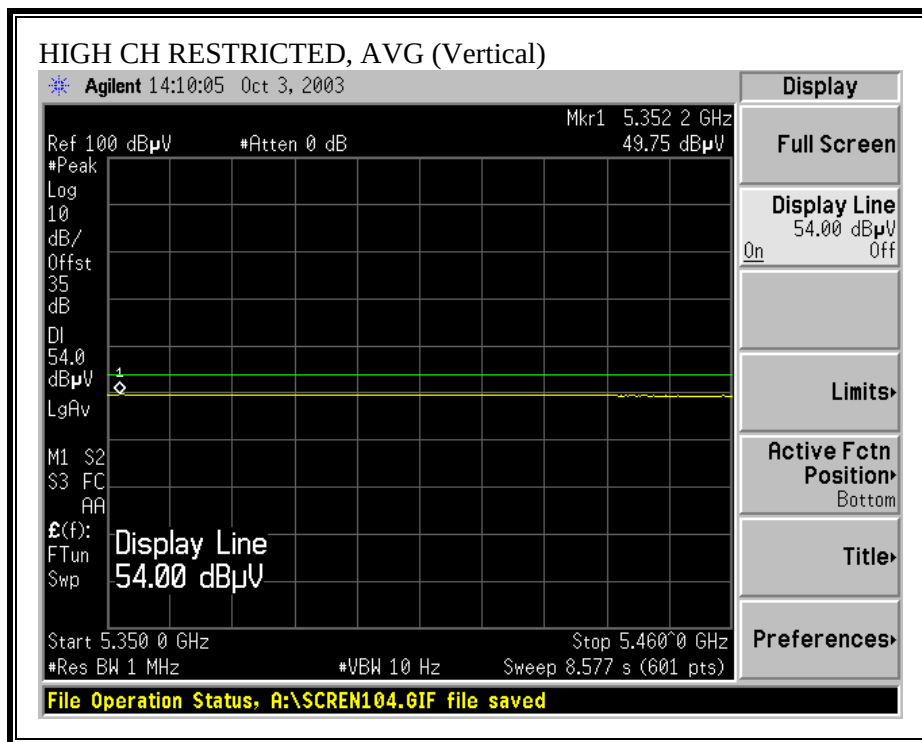

WORST-CASE HARMONICS AND SPURIOUS EMISSIONS

10/03/03 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site																	
Test Engr:		Yan Zheng															
Project #:		03U2197															
Company:		TOSHIBA AMERICA INFORMATION SYSTEM															
EUT Descrip:		Intel 802.11 a/b Mini PCI Type B															
EUT M/N:		PA3234U-IMPC															
Test Target:		FCC CLASS B															
Mode Oper:		TX at worst-case co-located with bluetooth Mini PCI Card at Channel 5520MHz; Bluetooth at Channel 2412MHz															
Test Equipment:																	
IMCO Horn 1-18GHz				Pre-amplifier 1-26GHz				Spectrum Analyzer				Horn > 18GHz				Limit	
T73; S/N: 6717 @1m				T86 Miteq 924341				Agilent E4446A Analyzer				T117; ARA 18-26GHz; S/N:1013				FCC 15.205	
Hi Frequency Cables																	
☐ (2 ft) ☒ (2-3 ft) ☐ (4-6 ft) ☒ (12 ft)																	
Peak Measurements: Average Measurements: 1 MHz Resolution Bandwidth 1 MHz Resolution Bandwidth 10Hz Video Bandwidth 10Hz Video Bandwidth																	
f	Dist	Read Pk	Read Avg.	AF	CL	Amp	D Corr	HPF	Peak	Avg	Pk Lim	Avg Lim	Pk Mar	Avg Mar	Notes		
GHz	feet	dBuV	dBuV	dB/m	dB	dB	dB		dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB			
SPURIOUS & HARMONICS																	
1.823	9.8	57.8	38.4	27.8	2.2	-44.1	0.0	1.0	44.6	25.2	74.0	54.0	-29.4	-38.8	H		
10.640	9.8	50.3	37.3	38.8	7.1	-44.2	0.0	1.0	52.9	39.9	80.0	60.0	-27.1	-20.1	H		
15.960	9.8	53.2	41.2	38.6	9.1	-48.4	0.0	1.0	53.5	41.5	80.0	60.0	-26.5	-18.5	H		
1.823	9.8	58.8	45.3	27.8	2.2	-44.1	0.0	1.0	45.6	32.1	74.0	54.0	-28.4	-21.9	V		
10.640	9.8	50.7	37.4	38.8	7.1	-44.2	0.0	1.0	53.3	40.0	80.0	60.0	-26.7	-20.0	V		
15.960	9.8	47.6	41.2	38.6	9.1	-48.4	0.0	1.0	47.9	41.5	80.0	60.0	-32.1	-19.5	V		
NO RADIATED EMISSION FOUND ABOVE 16GHz																	
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit				
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit				
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit				
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit				
CL	Cable Loss					HPF	High Pass Filter										


7.1.4. WORST-CASE RADIATED EMISSIONS BELOW 1 GHZ

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)



561F Monterey Road
San Jose, CA 95131
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 6 File#: 30-1GHz.EMI Date: 09-27-2003 Time: 16:31:21

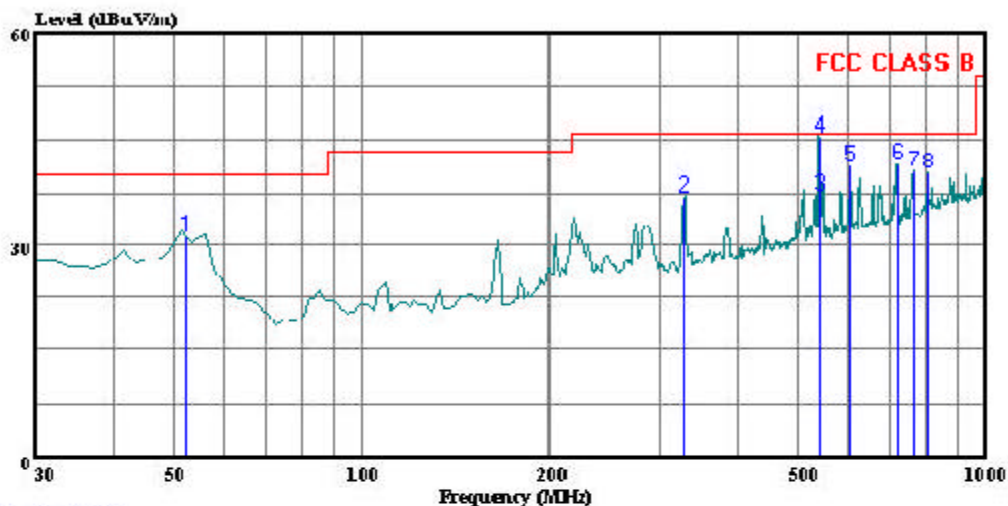

(Auxiliary ATC)

Trace: 3

Ref Trace:

Condition: FCC CLASS B 3m CHAMBER 030306 1185 VERTICAL
Tester : Thanh Nguyen
Project # : 03U2197
Company : Toshiba
EUT : 802.11a/b Mini PCI Type 3B card
Model No : PA3234U-1MPC (FCC ID: CJ6UPA3234WL)
Configuration : EUT
Target of Test : FCC CLASS B
Mode of Operation: TX, Worst Case
: VERTICAL

Page: 1

	Freq	Read Level	Probe Factor	Cable Loss	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV/m	dBuV/m	dB	
1	52.310	16.39	14.18	0.70	31.26	40.00	-8.74	Peak
2	328.760	22.23	12.82	1.83	36.87	46.00	-9.13	Peak
3	541.190	17.70	17.02	2.43	37.15	46.00	-8.85	QP
4	541.190	25.92	17.04	2.39	45.35	46.00	-0.65	Peak
5	606.180	21.08	17.75	2.53	41.36	46.00	-4.64	Peak
6	719.670	19.90	18.82	2.80	41.51	46.00	-4.49	Peak
7	764.290	18.24	19.38	2.92	40.54	46.00	-5.46	Peak

Data#: 2 File#: 30-1GHz.EMI Date: 09-27-2003 Time: 16:20:35
Page: 2


		Read	Probe	Cable		Limit	Over	
	Freq	Level	Factor	Loss	Level	Line	Limit	Remark
	MHz	dBuV	dB	dB	dBuV/m	dBuV/m	dB	
8	807.940	16.10	19.86	3.01	38.97	46.00	-7.03	Peak

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)



561F Monterey Road
San Jose, CA 95131
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 6 File#: 30-1GHz.EMI Date: 09-27-2003 Time: 16:31:21

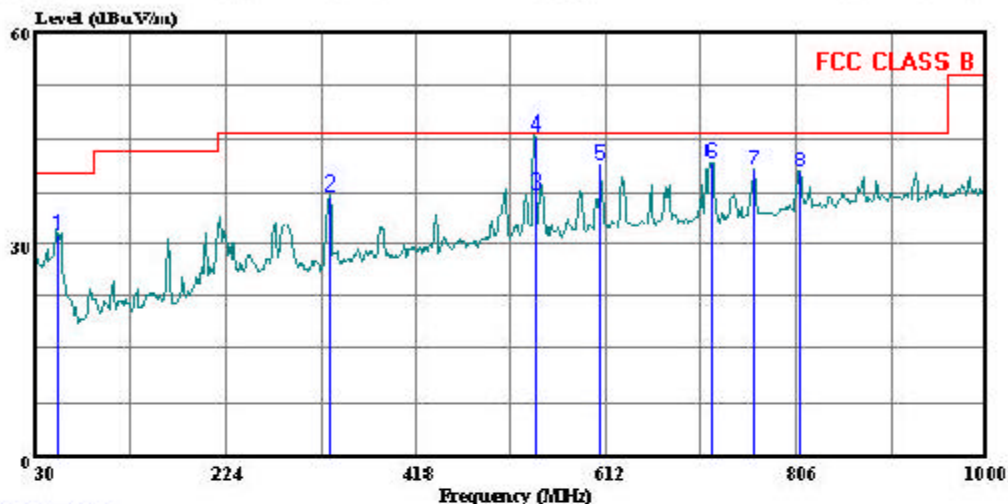

(Audio ATC)

Trace: 3

Ref Trace:

Condition: FCC CLASS B 3m CHAMBER 030306 1185 VERTICAL
Tester : Thanh Nguyen
Project # : 03U2197
Company : Toshiba
EUT : 802.11a/b Mini PCI Type 3B card
Model No : PA3234U-1MPC (FCC ID: CJ6UPA3234WL)
Configuration : EUT
Target of Test : FCC CLASS B
Mode of Operation: TX,Worst Case
: VERTICAL

Page: 1

	Freq	Read Level	Probe Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV/m	dBuV/m	dB	
1	52.310	16.39	14.18	0.70	31.26	40.00	-8.74	Peak
2	328.760	22.23	12.82	1.83	36.87	46.00	-9.13	Peak
3	541.190	17.70	17.02	2.43	37.15	46.00	-8.85	QP
4	541.190	25.92	17.04	2.39	45.35	46.00	-0.65	Peak
5	606.180	21.08	17.75	2.53	41.36	46.00	-4.64	Peak
6	719.670	19.90	18.82	2.80	41.51	46.00	-4.49	Peak
7	764.290	18.24	19.38	2.92	40.54	46.00	-5.46	Peak

Data#: 6 File#: 30-1GHz.EMI Date: 09-27-2003 Time: 16:31:21
Page: 2

	Freq	Read Level	Probe Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV/m	dBuV/m	dB	
8	808.910	17.38	19.87	3.01	40.26	46.00	-5.74	Peak

7.2. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

No non-compliance noted:

6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit		Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.21	51.18	--	--	0.00	64.40	54.40	-13.22	-3.22	L1
0.96	31.10	--	--	0.00	56.00	46.00	-24.90	-14.90	L1
20.49	30.70	--	--	0.00	60.00	50.00	-29.30	-19.30	L1
0.21	48.93	--	--	0.00	64.43	54.43	-15.50	-5.50	L2
1.18	31.28	--	--	0.00	56.00	46.00	-24.72	-14.72	L2
9.86	31.22	--	--	0.00	60.00	50.00	-28.78	-18.78	L2
6 Worst Data									

8. SETUP PHOTOS

RADIATED RF MEASUREMENT SETUP



LAPTOP CONFIGURATION BACK PHOTO



TABLET CONFIGURATION X AXIS PHOTO



TABLET CONFIGURATION Y AXIS FRONT PHOTO



TABLET CONFIGURATION Y AXIS BACK PHOTO




TABLET CONFIGURATION Z AXIS FRONT PHOTO



TABLET CONFIGURATION Z AXIS BACK PHOTO



POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP

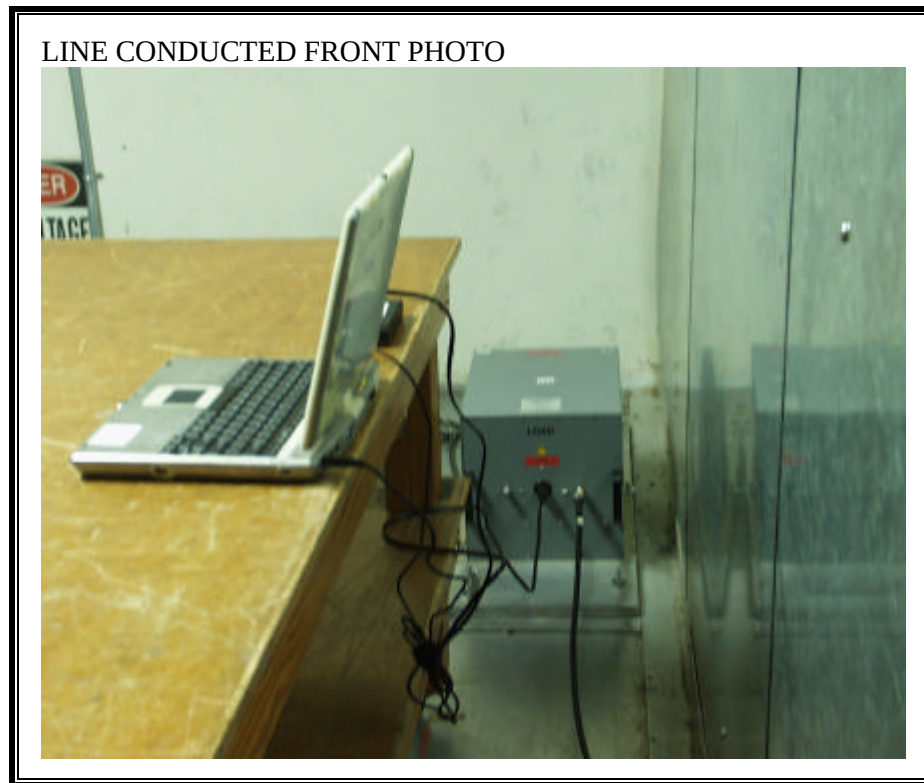

LINE CONDUCTED BACK PHOTO



END OF REPORT