



SAR Evaluation Report

**IN ACCORDANCE WITH THE REQUIREMENTS OF
FCC REPORT AND ORDER:
ET DOCKET 93-62, AND OET BULLETIN 65 SUPPLEMENT C**

FOR

MB62HL 802.11ag Half Size Mini-PCI WLAN Module

MODEL: PA3459U-1MPC

MODEL (Optional): PA3461U/E-1MPC

FCC ID: CJ6UPA3459WL

REPORT NUMBER: 05U3390-5

ISSUE DATE: May 25, 2005

Prepared for

**Toshiba Corporation Digital Media Network Company
Ome Complex, 2-9, Suehiro-cho
Tokyo, 198-8710, Japan**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885**



LAB CODE:200065-0

Revision History

<u>Rev.</u>	<u>Revisions</u>	<u>Revised By</u>
-------------	------------------	-------------------

CERTIFICATE OF COMPLIANCE (SAR EVALUATION)**DATES OF TEST:** May 21 - 25, 2005

APPLICANT:	Toshiba Corporation Digital Media Network Company
ADDRESS:	Ome Complex, 2-9, Suehiro-cho, Tokyo, 198-8710, Japan
FCC ID:	CJ6UPA3459WL or PA3461U/E-1MPC (Optional)
MODEL:	PA3459U-1MPC
DEVICE CATEGORY:	Portable Device
EXPOSURE CATEGORY:	General Population/Uncontrolled Exposure


MB62HL 802.11ag Half Size Mini-PCI WLAN Module installed in Toshiba Firebolt 10 (PortegeM200) Laptop, including co-location with the Toshiba PA3232U-1BTM (BC02) and PA3418U-1BTM (BC04) Bluetooth radio cards.

Test Sample is a:	Production unit		
Modulation type:	Direct Sequence Spread Spectrum (DSSS) for 802.11b Orthogonal Frequency Division Multiplexing (OFDM) for 802.11ag		
Antenna(s)	The radio utilizes two antennas for diversity (main and auxiliary). HTL008 (PIFA Film Antenna): 2.89 dBi @ 2.4GHz w/o cable loss HTL017 (PIFA Film Antenna): 4.24 dBi @ 2.4GHz w/o cable loss TIAN01 (PIFA Film Antenna): 4.02 dBi @ 2.4GHz w/o cable loss		
FCC Rule Parts	Frequency Range [MHz]	The Highest SAR Values [1g_mW/g]	Max. Average Output Power [dBm]
15.247	2412 - 2462	0.047	18.30
15.401	5180 - 5320	0.090	15.40
	5745 - 5825	0.131	15.40

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in ANSI/IEEE Std. C95.1-1992 and had been tested in accordance with the measurement procedures specified in FCC OET 65 Supplement C (Edition 01-01).

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Released For CCS By:



Hsin Fu Shih (Sunny Shih)

COMPLIANCE CERTIFICATION SERVICES

Table Of Contents

1	Equipment Under Test (EUT) Description.....	5
2	FaCILITIES AND ACCREDITATION.....	5
3	System Description.....	6
4	System Component.....	7
4.1	DASY4 Measurement Server.....	7
4.2	Data Acquisition Electronics (DAE).....	7
4.3	EX3DV3 Isotropic E-Field Probe for Dosimetric Measurements	7
4.4	Light Beam Unit.....	8
4.5	SAM Phantom (V4.0)	8
4.6	Device Holder for SAM Twin Phantom	9
4.7	System Validation Kits	9
4.8	Composition of Ingredients for tissue simulating liquid.....	9
5	Test positions for devices Operating Next To A Person's Ear	10
5.1	Cheek/Touch Position	11
5.2	Ear/Tilt Position	12
6	Test Positions For Body-worn And Other Similar Configurations	13
7	Simulating Liquid Parameters Check	15
7.1	Simulating Liquid Parameter Check Result	17
8	System Performance Check.....	22
8.1	System Performance Check Results	23
9	SAR Measurement Procedure	24
10	Procedures Used to Establish Test Signal	26
11	SAR Measurement Result (2.4 GHz)	27
11.1	Test Position 3 – Main Antenna (HTL017).....	27
11.2	Test Position 4 – Aux Antenna (HTL017)	28
11.3	Test Position 3 – Main Antenna (TIAN01)	29
11.4	Test Position 4 – Aux Antenna (TIAN01).....	30
12	SAR Measurement Result (5 GHz)	31
12.1	Test Position 3 – Main Antenna (HTL017).....	31
12.2	Test Position 4 – Aux Antenna (HTL017)	32
12.3	Test Position 3 – Main Antenna (TIAN01)	33
12.4	Test Position 4 – Aux Antenna (TIAN01).....	34
13	EUT Photos	35
14	Measurement Uncertainty	40
14.1	Measurement Uncertainty for 300 MHz – 3000 MHz.....	40
14.2	Measurement Uncertainty 3 GHz – 6 GHz	41
15	Equipment List & Calibration	42
16	Attachment	43

1 EQUIPMENT UNDER TEST (EUT) DESCRIPTION

MB62HL 802.11a/b/g Half Size Mini-PCI WLAN Module installed in Toshiba Firebolt 10 (PortegeM200) Laptop, including co-location with the Toshiba PA3232U-1BTM (BC02) and PA3418U-1BTM (BC04) Bluetooth radio cards.	
Normal operation:	Lap-held position
Accessory:	N/A
Earphone/Headset Jack:	N/A
Duty cycle:	100% for DSSS & OFDM
Host Device(s):	Toshiba, Firebolt10 (PORTEGE M200)
Power supply:	Power supplied through the laptop computer (host device)

2 FACILITIES AND ACCREDITATION


The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

3 SYSTEM DESCRIPTION

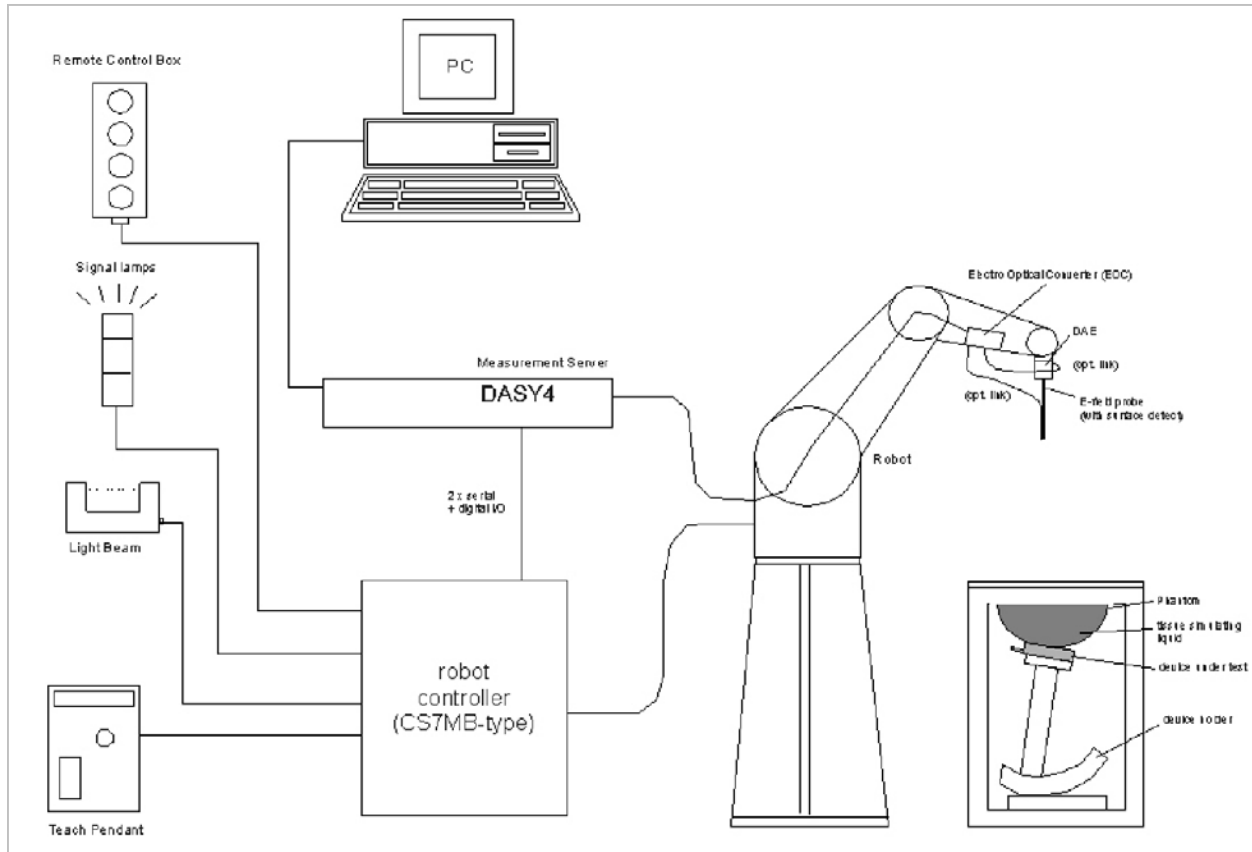

The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.
- DASY4 software.
- Remote controls with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validate the proper functioning of the system.

4 SYSTEM COMPONENT

4.1 DASY4 MEASUREMENT SERVER



The DASY4 measurement server is based on a PC/104 CPU board with a 166MHz low-power Pentium, 32MB chip disk and 64MB RAM. The necessary circuits for communication with either the DAE3 electronic box as well as the 16-bit AD-converter system for optical detection and digital I/O interface are contained on the DASY4 I/O-board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. The PC-operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with two expansion slots which are reserved for future applications. Please note that the expansion slots do not have a standardized pinout and therefore only the expansion cards provided by SPEAG can be inserted. Expansion cards from any other supplier could seriously damage the measurement server. Calibration: No calibration required.

4.2 DATA ACQUISITION ELECTRONICS (DAE)

The data acquisition electronics (DAE3) consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE3 box is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



4.3 EX3DV3 ISOTROPIC E-FIELD PROBE FOR DOSIMETRIC MEASUREMENTS

Construction: Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

Frequency: 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)

Directivity: ± 0.3 dB in HSL (rotation around probe axis);
 ± 0.5 dB in tissue material (rotation normal to probe axis)

Dynamic Range: 10 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)


Dimensions: Overall length: 330 mm (Tip: 20 mm)
Tip diameter: 2.5 mm (Body: 12 mm)
Typical distance from probe tip to dipole centers: 1 mm

Application: High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.



4.4 LIGHT BEAM UNIT

The light beam switch allows automatic "tooling" of the probe. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, so that the robot coordinates are valid for the probe tip. The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.




4.5 SAM PHANTOM (V4.0)

Construction: The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-200X, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

Shell Thickness: 2 ± 0.2 mm

Filling Volume: Approx. 25 liters

Dimensions: Height: 810mm; Length: 1000mm; Width: 500mm

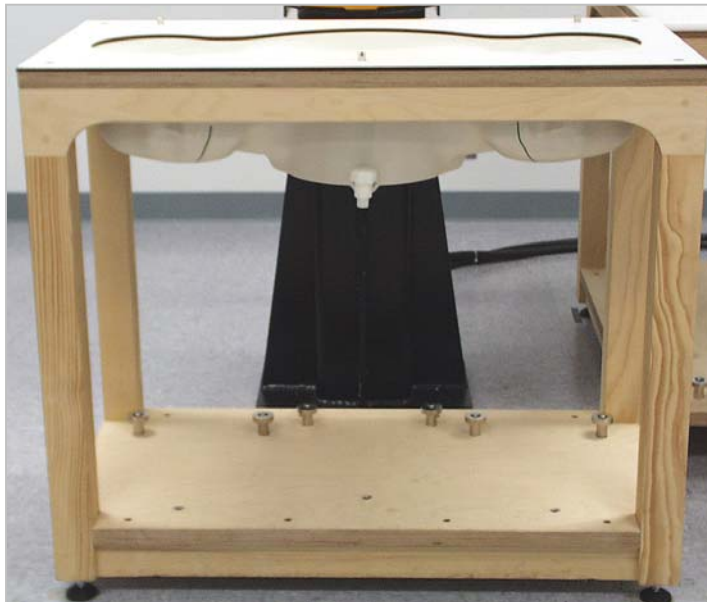

4.6 DEVICE HOLDER FOR SAM TWIN PHANTOM

Construction: In combination with the Twin SAM Phantom V4.0 or Twin SAM, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



4.7 SYSTEM VALIDATION KITS

Construction: Symmetrical dipole with 1/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor.

Frequency: 450, 900, 1800, 2450, 5800 MHz

Return loss: > 20 dB at specified validation position

Power capability: > 100 W (f < 1GHz); > 40 W (f > 1GHz)

Dimensions: 450V2: dipole length: 270 mm; overall height: 330 mm
 D900V2: dipole length: 149 mm; overall height: 330 mm
 D1800V2: dipole length: 72 mm; overall height: 300 mm
 D835V2: dipole length: 161; overall height: 330
 D1900V2: dipole length: 68; overall height: 300
 D2450V2: dipole length: 51.5 mm; overall height: 300 mm D5GHzV2: dipole length: 25.5 mm; overall height: 290 mm

4.8 COMPOSITION OF INGREDIENTS FOR TISSUE SIMULATING LIQUID

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16 MΩ+ resistivity

HEC: Hydroxyethyl Cellulose



DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether

5 TEST POSITIONS FOR DEVICES OPERATING NEXT TO A PERSON'S EAR

This category includes most wireless handsets with fixed, retractable or internal antennas located toward the top half of the device, with or without a foldout, sliding or similar keypad cover. The handset should have its earpiece located within the upper ¼ of the device, either along the centerline or off-centered, as perceived by its users. This type of handset should be positioned in a normal operating position with the "test device reference point" located along the "vertical centerline" on the front of the device aligned to the "ear reference point". The "test device reference point" should be located at the same level as the center of the earpiece region. The "vertical centerline" should bisect the front surface of the handset at its top and bottom edges. A "ear reference point" is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the "phantom reference plane" defined by the three lines joining the center of each "ear reference point" (left and right) and the tip of the mouth.

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom. For the SCC-34/SC-2 head phantom, the device should be positioned parallel to the "N-F" line defined along the base of the ear spacer that contains the "ear reference point". For interim head phantoms, the device should be positioned parallel to the cheek for maximum RF energy coupling. The "test device reference point" is aligned to the "ear reference point" on the head phantom and the "vertical centerline" is aligned to the "phantom reference plane". This is called the "initial ear position". While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:

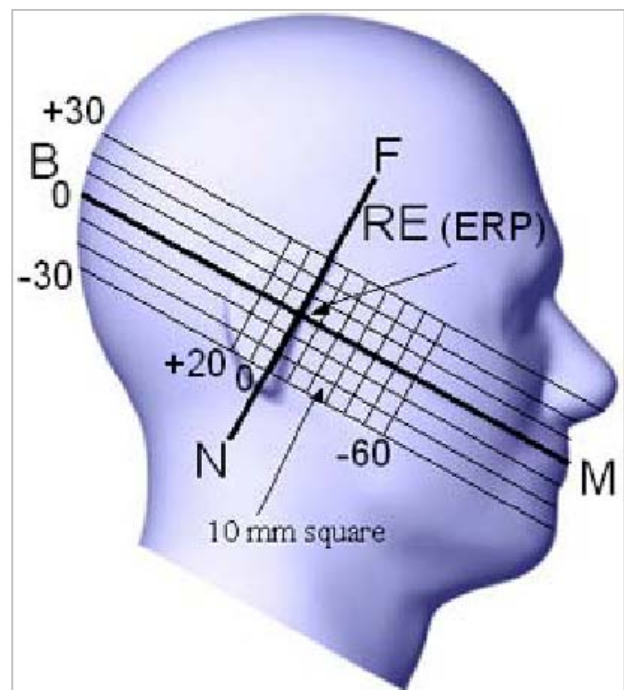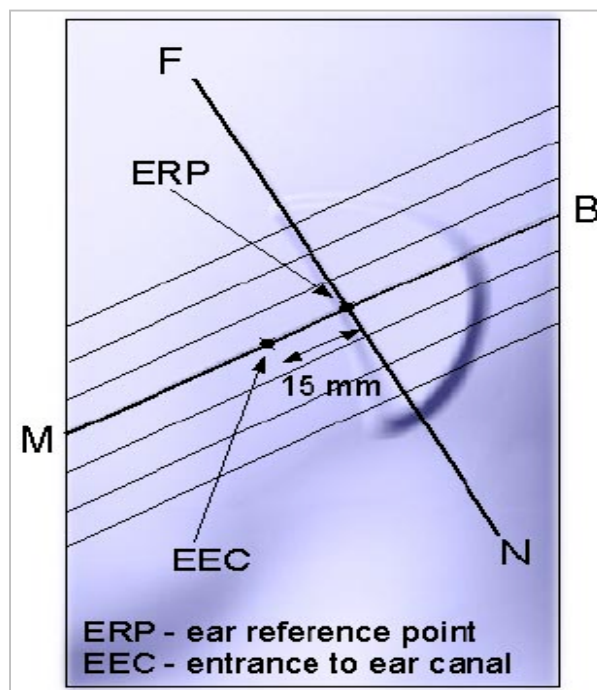

5.1 CHEEK/TOUCH POSITION


The device is brought toward the mouth of the head phantom by pivoting against the “ear reference point” or along the “N-F” line for the SCC-34/SC-2 head phantom.

This test position is established:

- i. When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.
- ii. (or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

Cheek / Touch Position

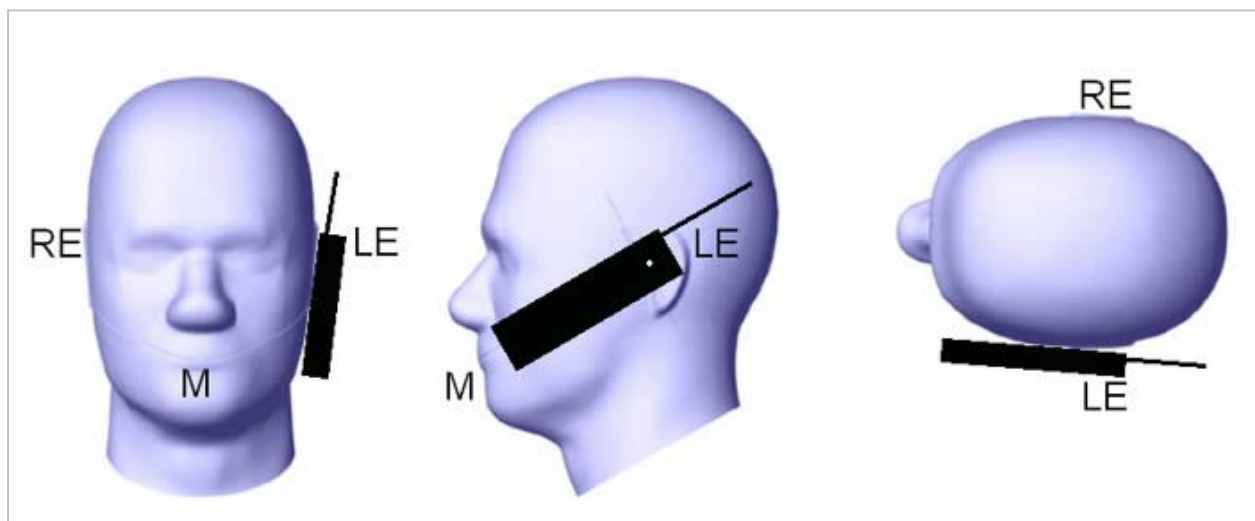


5.2 EAR/TILT POSITION

With the handset aligned in the “Cheek/Touch Position”:

- i. If the earpiece of the handset is not in full contact with the phantom’s ear spacer (in the “Cheek/Touch position”) and the peak SAR location for the “Cheek/Touch” position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the “initial ear position” by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.
- ii. (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both “ear reference points” (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the “test device reference point” until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point is by 15° . After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both “ear reference points” until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the “Cheek/Touch” and “Ear/Tilt” positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tile/Ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s). If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.

Ear/Tilt 15° Position

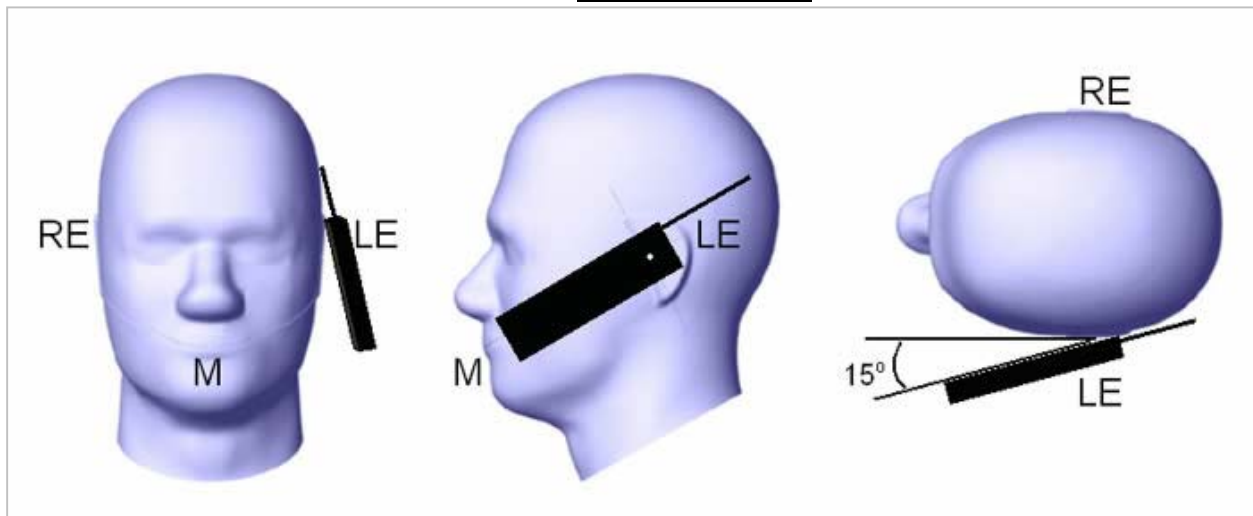

6 TEST POSITIONS FOR BODY-WORN AND OTHER SIMILAR CONFIGURATIONS

☐ With the belt-clips or holsters

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. For purpose of determining test requirements, accessories may be divided into two categories: those that do not contain metallic components and those that do.

☐ When multiple accessories

When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

☐ Without the belt-clips or holsters

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

☐ Transmitter that is designed to operate in front of a person's face (face-held)

Transmitters that are designed to operate in front of a person's face, in push-to-talk configurations, should be tested for SAR compliance with the front of the device positioned at 2.5 cm from a flat phantom. Frontal face-phantoms are typically not recommended because of the potential of higher E-field probe boundary-effects errors in the non-smooth regions of these face phantoms, such as the nose, lips and eyes etc. For devices that are carried next to the body, such as shoulder, waist or chest-worn transmitters, SAR compliance should be tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in normal use configurations.

☐ With neck-strap or lanyard


SAR data is requested for cellphones designed to be used with a headset while worn next to the body using a neck-strap or lanyard; device should be tested with front and back sides in contact with a flat phantom

☒ Lap-held

SAR is tested for a lap-held position with the bottom of the computer in direct contact against a flat phantom.

7 SIMULATING LIQUID PARAMETERS CHECK

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The relative permittivity and conductivity of the tissue material should be within $\pm 5\%$ of the values given in the table below.

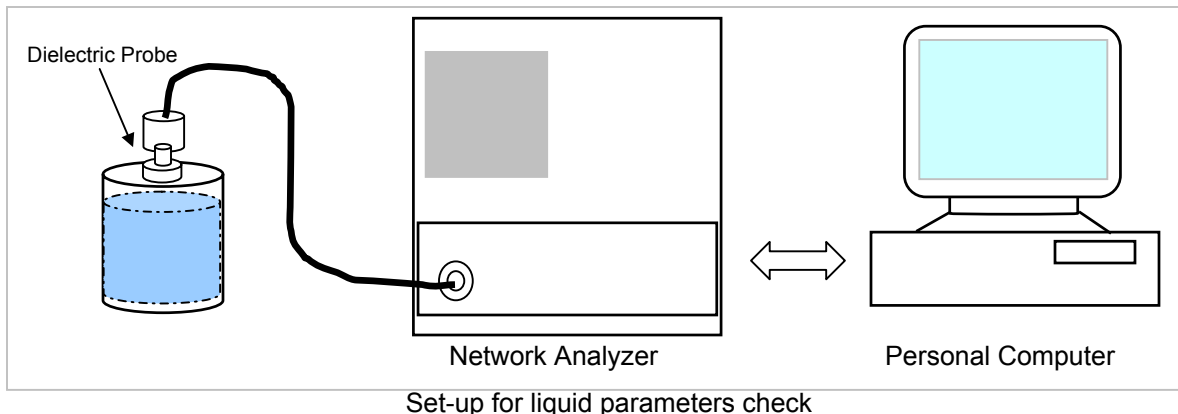

Reference Values of Tissue Dielectric Parameters for Head and Body Phantom (for 150 – 3000 MHz and 5800 MHz)

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in IEEE Standard 1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in IEEE Standard 1528.

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

Reference Values of Tissue Dielectric Parameters for Head and Body Phantom (for 3000 MHz – 5800 MHz)

In the current guidelines and draft standards for compliance testing of mobile phones (i.e., IEEE P1528, OET 65 Supplement C), the dielectric parameters suggested for head and body tissue simulating liquid are given only at 3.0 GHz and 5.8 GHz. As an intermediate solution, dielectric parameters for the frequencies between 5 to 5.8 GHz were obtained using linear interpolation (see table below).

SPEAG has developed suitable head and body tissue simulating liquids consisting of the following ingredients: de-ionized water, salt and a special composition including mineral oil and an emulgators. Dielectric parameters of these liquids were measured suing a HP 8570C Dielectric Probe Kit in conjunction with HP 8753ES Network Analyzer (30 kHz – 6G Hz). The differences with respect to the interpolated values were well within the desired $\pm 5\%$ for the whole 5 to 5.8 GHz range.

f (MHz)	Head Tissue		Body Tissue		Reference
	rel. permittivity	conductivity	rel. permittivity	conductivity	
3000	38.5	2.40	52.0	2.73	Standard
5800	35.3	5.27	48.2	6.00	Standard
5000	36.2	1.45	49.3	5.07	Interpolated
5100	36.1	4.55	49.1	5.18	Interpolated
5200	36.0	4.66	49.0	5.30	Interpolated
5300	35.9	4.76	48.9	5.42	Interpolated
5400	35.8	4.86	48.7	5.53	Interpolated
5500	35.6	4.96	48.6	5.65	Interpolated
5600	35.5	5.07	48.5	5.77	Interpolated
5700	35.4	5.17	48.3	5.88	Interpolated

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

7.1 SIMULATING LIQUID PARAMETER CHECK RESULT

Simulating Liquid Dielectric Parameter Check Result @ Muscle 2450 MHz

Room Ambient Temperature =24°C; Relative humidity = 40%

Measured by: Sunny Shih

Simulating Liquid			Parameters		Target	Measured	Deviation (%)	Limit (%)
f (MHz)	Temp. (°C)	Depth (cm)	ε"	Relative Permittivity (ε _r):				
2450	23	15			52.7	53.0544	0.67	± 5
			14.4348	Conductivity (σ):	1.95	1.96741	0.89	± 5

Liquid Check

Ambient temperature: 24.0 deg. C, Liquid temperature: 23.0 deg. C

May 21, 2005 02:54 PM

Frequency	ε'	ε"
2400000000.	53.2253	14.1967
2410000000.	53.1781	14.2620
2420000000.	53.1326	14.3065
2430000000.	53.0975	14.3694
2440000000.	53.1005	14.3830
2450000000.	53.0544	14.4348
2460000000.	53.0497	14.4519
2470000000.	53.0103	14.4770
2480000000.	52.9848	14.4879
2490000000.	52.9627	14.5264
2500000000.	52.9196	14.5626

The conductivity (σ) can be given as:

$$\sigma = \omega \epsilon_0 \epsilon'' = 2 \pi f \epsilon_0 \epsilon''$$

where $f = \text{target } f * 10^6$

$$\epsilon_0 = 8.854 * 10^{-12}$$

Simulating Liquid Parameter Check Result @ Muscle 5200 & 5800 MHz

Ambient Temperature = 25°C; Relative humidity = 35%

Measured by: David Garcia

Simulating Liquid			Parameters		Target	Measured	Deviation (%)	Limit (%)
f (MHz)	Temp. (°C)	Depth (cm)						
5200	24.5	15	e'	Relative Permittivity (e'')	49.0	50.0116	2.06	± 5
			18.6810	Conductivity (σ)	5.30	5.40409	1.96	± 5
5800	24.5	15	e'	Relative Permittivity (e'')	48.2	48.9131	1.48	± 5
			19.4276	Conductivity (σ)	6.00	6.26854	4.48	± 5

Liquid Check

Ambient temperature: 25.0 deg. C, Liquid temperature: 24.5 deg. C

May 23, 2005 12:07 PM

Frequency	e'	e''
4600000000.	51.1894	17.7802
4650000000.	51.1019	17.8434
4700000000.	51.0114	17.9522
4750000000.	50.9018	18.0208
4800000000.	50.8217	18.1027
4850000000.	50.7172	18.1710
4900000000.	50.6210	18.2581
4950000000.	50.5311	18.3325
5000000000.	50.4147	18.4187
5050000000.	50.3304	18.4826
5100000000.	50.2281	18.5421
5150000000.	50.1209	18.6328
5200000000.	50.0116	18.6810
5250000000.	49.9275	18.7557
5300000000.	49.8258	18.8155
5350000000.	49.7424	18.8828
5400000000.	49.6351	18.9485
5450000000.	49.5323	18.9999
5500000000.	49.4369	19.0738
5550000000.	49.3512	19.1226
5600000000.	49.2719	19.1803
5650000000.	49.1581	19.2411
5700000000.	49.0878	19.3047
5750000000.	48.9910	19.3542
5800000000.	48.9131	19.4276
5850000000.	48.7946	19.4815
5900000000.	48.7202	19.5658
5950000000.	48.6076	19.6197
6000000000.	48.5375	19.6969

The conductivity (σ) can be given as:

$$\sigma = \omega \epsilon_0 e'' = 2 \pi f \epsilon_0 e''$$

where $f = \text{target } f * 10^6$

$$\epsilon_0 = 8.854 * 10^{-12}$$

Simulating Liquid Parameter Check Result @ Muscle 5200 & 5800 MHz

Ambient Temperature = 25°C; Relative humidity = 35%

Measured by: David Garcia

Simulating Liquid			Parameters		Target	Measured	Deviation (%)	Limit (%)
f (MHz)	Temp. (°C)	Depth (cm)	e'	Relative Permittivity (e'')				
5200	24	15	e'	Relative Permittivity (e'')	49.0	50.0710	2.19	± 5
			18.7270	Conductivity (σ)	5.30	5.41740	2.22	± 5
5800	24	15	e'	Relative Permittivity (e'')	48.2	48.9173	1.49	± 5
			19.4924	Conductivity (σ)	6.00	6.28945	4.82	± 5

Liquid Check

Ambient temperature: 25.0 deg. C, Liquid temperature: 24.0 deg. C

May 24, 2005 10:32 AM

Frequency	e'	e''
4600000000.	51.2118	17.8471
4650000000.	51.1021	17.8881
4700000000.	51.0253	18.0218
4750000000.	50.9219	18.0444
4800000000.	50.8381	18.1638
4850000000.	50.7632	18.2301
4900000000.	50.6407	18.3152
4950000000.	50.5317	18.4000
5000000000.	50.4602	18.4433
5050000000.	50.3649	18.5552
5100000000.	50.2472	18.5808
5150000000.	50.1542	18.6869
5200000000.	50.0710	18.7270
5250000000.	49.9576	18.8026
5300000000.	49.8768	18.8805
5350000000.	49.7701	18.9360
5400000000.	49.6819	19.0173
5450000000.	49.5794	19.0686
5500000000.	49.4885	19.1475
5550000000.	49.3666	19.1722
5600000000.	49.2927	19.2509
5650000000.	49.1934	19.3060
5700000000.	49.0959	19.3698
5750000000.	48.9928	19.4164
5800000000.	48.9173	19.4924
5850000000.	48.8270	19.5438
5900000000.	48.7545	19.6029
5950000000.	48.6316	19.6771
6000000000.	48.5760	19.7505

The conductivity (σ) can be given as:

$$\sigma = \omega \epsilon_0 e'' = 2 \pi f \epsilon_0 e''$$

where $f = \text{target } f * 10^6$

$$\epsilon_0 = 8.854 * 10^{-12}$$

Simulating Liquid Parameter Check Result @ Muscle 5200 & 5800 MHz

Ambient Temperature = 25.0 °C; Relative humidity = 35%

Measured by: David Garcia

Simulating Liquid			Parameters		Target	Measured	Deviation (%)	Limit (%)
f (MHz)	Temp. (°C)	Depth (cm)	e'	Relative Permittivity (e'')				
5200	24.5	15	e'	Relative Permittivity (e'')	49.0	49.9154	1.87	± 5
			18.7606	Conductivity (σ)	5.30	5.42712	2.40	± 5
5800	24.5	15	e'	Relative Permittivity (e'')	48.2	48.7902	1.22	± 5
			19.4959	Conductivity (σ)	6.00	6.29057	4.84	± 5

Liquid Check

Ambient temperature: 25.0 deg. C, Liquid temperature: 24.5 deg. C

May 25, 2005 10:51 AM

Frequency	e'	e''
4600000000.	51.0769	17.8736
4650000000.	50.9812	17.9248
4700000000.	50.8935	18.0327
4750000000.	50.8035	18.0944
4800000000.	50.7073	18.1810
4850000000.	50.6085	18.2710
4900000000.	50.5163	18.3214
4950000000.	50.3611	18.3863
5000000000.	50.3054	18.4733
5050000000.	50.2153	18.5464
5100000000.	50.1145	18.6293
5150000000.	50.0132	18.6944
5200000000.	49.9154	18.7606
5250000000.	49.8030	18.8098
5300000000.	49.7150	18.9081
5350000000.	49.6151	18.9424
5400000000.	49.5235	18.9924
5450000000.	49.4230	19.0651
5500000000.	49.3488	19.1327
5550000000.	49.2233	19.1920
5600000000.	49.1377	19.2451
5650000000.	49.0252	19.3180
5700000000.	48.9806	19.3778
5750000000.	48.8413	19.4406
5800000000.	48.7902	19.4959
5850000000.	48.6517	19.5398
5900000000.	48.5936	19.6213
5950000000.	48.4656	19.6609
6000000000.	48.4115	19.7398

The conductivity (σ) can be given as:

$$\sigma = \omega \epsilon_0 e'' = 2 \pi f \epsilon_0 e''$$

where $f = \text{target } f * 10^6$

$$\epsilon_0 = 8.854 * 10^{-12}$$

Simulating Liquid Dielectric Parameter Check Result @ Muscle 2450 MHz

Room Ambient Temperature =25°C; Relative humidity = 35%

Measured by: David Garcia

Simulating Liquid			Parameters		Target	Measured	Deviation (%)	Limit (%)
f (MHz)	Temp. (°C)	Depth (cm)	ε"	Relative Permittivity (ε _r):				
2450	24	15	14.1553	Conductivity (σ):	52.7	52.4085	-0.55	± 5
					1.95	1.92932	-1.06	± 5

Liquid Check

Ambient temperature: 25.0 deg. C, Liquid temperature: 24.0 deg. C

May 25, 2005 03:33 PM

Frequency	ε'	ε"
2400000000.	52.6114	13.9491
2410000000.	52.5630	13.9761
2420000000.	52.5267	14.0262
2430000000.	52.4886	14.0528
2440000000.	52.4675	14.1001
2450000000.	52.4085	14.1553
2460000000.	52.3868	14.1819
2470000000.	52.3513	14.2349
2480000000.	52.3294	14.2823
2490000000.	52.2840	14.3309
2500000000.	52.2488	14.3860

The conductivity (σ) can be given as:

$$\sigma = \omega \epsilon_0 \epsilon'' = 2 \pi f \epsilon_0 \epsilon''$$

$$\text{where } f = \text{target } f * 10^6$$

$$\epsilon_0 = 8.854 * 10^{-12}$$

8 SYSTEM PERFORMANCE CHECK

The system performance check is performed prior to any usage of the system in order to guarantee reproducible results. The system performance check verifies that the system operates within its specifications of $\pm 10\%$.

System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the SAM twin phantom filled with Body simulating liquid of the following parameters.
- The DASY4 system with an Isotropic E-Field Probe EX3DV3-SN: 3531 was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
(For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.)
- Special 5 x 5 x 7 fine cube was chosen for cube integration(dx=dy=7.5mm; dz=5mm).
(For 5 GHz band - Special 7 x 7 x 8 fine cube was chosen for cube integration
(dx=dy=4.3mm; dz=3mm))
- Distance between probe sensors and phantom surface was set to 2.5 mm.
(For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.0 mm)
- The dipole input power (forward power) was 250 mW $\pm 3\%$.
- The results are normalized to 1 W input power.

Reference SAR Values

The reference SAR values were using measurement results indicated in the dipole calibration document (See attached dipole certificate).

f (MHz)	Head Tissue		Body Tissue	
	SAR _{1g}	SAR _{10g}	SAR _{1g}	SAR _{10g}
2450	52.0	23.8	54.8	25.4

Reference SAR Values

The reference SAR values were calculated using finite-difference time-domain FDTD method (feed point-impedance set to 50 ohms) and the mechanical dimensions of the D5GHzV2 dipole (manufactured by SPEAG).

f (MHz)	Head Tissue		Body Tissue		
	SAR _{1g}	SAR _{10g}	SAR _{1g}	SAR _{10g}	SAR _{Peak}
5000	72.9	20.7	68.1	19.2	260.3
5100	74.6	21.1	78.8	19.6	272.3
5200	76.5	21.6	71.8	20.1	284.7
5800	78.0	21.9	74.1	20.5	324.7

8.1 SYSTEM PERFORMANCE CHECK RESULTS

@ System Validation Dipole: D2450V2 SN: 748

Date: May 21, 2005

Ambient Temperature = 24°C, Relative humidity = 40%

Measured by: Sunny Shih

Body Simulating Liquid			Mrasured		Target _{1g}	Deviation[%]	Limit [%]
f (MHz)	Temp. [°C]	Depth [cm]	Normalized to 1 W				
2450	23	15	12.7	50.8	54.8	-7.30	± 10

@ System Validation Dipole: D5GHzV2 SN 1003

Date: May 23, 2005

Ambient Temperature = 25°C; Relative humidity = 35%

Measured by: David Garcia

Body Simulating Liquid			Measured		Target _{1g}	Deviation[%]	Limit [%]
f (MHz)	Temp. [°C]	Depth [cm]	1g	Normalized to 1 W			
5200	24.5	15	18.7	74.8	71.8	4.18	± 10

Body Simulating Liquid			Measured		Target _{1g}	Deviation[%]	Limit [%]
f (MHz)	Temp. [°C]	Depth [cm]	1g	Normalized to 1 W			
5800	24.5	15	19.7	78.8	74.1	6.34	± 10

@ System Validation Dipole: D5GHzV2 SN 1003

Date: May 24, 2005

Ambient Temperature = 25°C; Relative humidity = 35%

Measured by: David Garcia

Body Simulating Liquid			Measured		Target _{1g}	Deviation[%]	Limit [%]
f (MHz)	Temp. [°C]	Depth [cm]	1g	Normalized to 1 W			
5200	24	15	18.3	73.2	71.8	1.95	± 10

Body Simulating Liquid			Measured		Target _{1g}	Deviation[%]	Limit [%]
f (MHz)	Temp. [°C]	Depth [cm]	1g	Normalized to 1 W			
5800	24	15	19.5	78	74.1	5.26	± 10

@ System Validation Dipole: D5GHzV2 SN 1003

Date: May 25, 2005

Ambient Temperature = 25°C; Relative humidity = 35%

Measured by: David Garcia

Body Simulating Liquid			Measured		Target _{1g}	Deviation[%]	Limit [%]
f (MHz)	Temp. [°C]	Depth [cm]	1g	Normalized to 1 W			
5800	24.5	15	19.1	76.4	74.1	3.10	± 10

@ System Validation Dipole: D2450V2 SN: 748

Date: May 25, 2005

Ambient Temperature = 24°C, Relative humidity = 35%

Measured by: David Garcia

Body Simulating Liquid			Measured		Target _{1g}	Deviation[%]	Limit [%]
f (MHz)	Temp. [°C]	Depth [cm]	1g	Normalized to 1 W			
2450	24	15	12.5	50	54.8	-8.76	± 10

9 SAR MEASUREMENT PROCEDURE

A summary of the procedure follows:

- a) A measurement of the SAR value at a fixed location is used as a reference value for assessing the power drop of the EUT. The SAR at this point is measured at the start of the test, and then again at the end of the test.
- b) The SAR distribution at the exposed flat section of the flat phantom is measured at a distance of 2.5 mm from the inner surface of the shell. The area covers the entire dimension of the EUT and the horizontal grid spacing is 15 mm x 15 mm. Based on this data, the area of the maximum absorption is determined by Spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

(For 5 GHz band - The SAR distribution at the exposed flat section of the flat phantom is measured at a distance of 2.0 mm from the inner surface of the shell. The area covers the entire dimension of the EUT and the horizontal grid spacing is 10 mm x 10 mm. Based on this data, the area of the maximum absorption is determined by Spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified)

- c) Around this point, a volume of X=Y= 30 and Z=21 mm is assessed by measuring 5 x 5 x 7 mm points. On the basis of this data set, the spatial peak SAR value is evaluated with the following procedure:

(For 5 GHz band - Around this point, a volume of X=Y=Z=30 mm is assessed by measuring 7 x 7 x 8 mm points. On the basis of this data set, the spatial peak SAR value is evaluated with the following procedure:)

- (i) The data at the surface are extrapolated, since the centre of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation is based on a least square algorithm. A polynomial of the fourth order is calculated through the points in z-axes. This polynomial is then used to evaluate the points between the surface and the probe tip.
- (ii) The maximum interpolated value is searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g and 10 g) are computed using the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"- condition (in x, y and z-direction). The volume is integrated with the trapezoidal – algorithm. One thousand points (10 x 10 x 10) are interpolated to calculate the averages.
- (iii) All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.
- (iv) The SAR value at the same location as in Step (a) is again measured to evaluate the actual power drift.

DASY4 SAR MEASUREMENT PROCEDURE

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties (for example, 1.2 mm for an EX3DV3 probe type).

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY4 software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528, EN 50361 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures 5 x 5 x 7 points within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

(For 5 GHz band – Same as above except the Zoom Scan measures 7 x 7 x 8 points.)

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation, the extrapolated distance should not be larger than the step size in Z-direction.

10 PROCEDURES USED TO ESTABLISH TEST SIGNAL

The following procedures had been used to prepare the EUT for the SAR test.

The client supplied a special driving program (ART_v5.2 Build # 58) to program the EUT to continually transmit the specified maximum power and also to change the channel frequency.

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1.0 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

802.11b Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	18.25
Middle	2437	18.30
High	2462	18.13

802.11g Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	16.20
Middle	2437	16.40
High	2462	16.10

The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

802.11a Mode

Channel	Frequency (MHz)	Average Power (dBm)
Low	5180	15.10
Middle	5260	15.40
High	5320	15.36

The cable assembly insertion loss of 11.7 dB (including 10 dB pad and 1.7dB cable) was entered as an offset in the power meter to allow for direct reading of power.

802.11a Mode

Channel	Frequency (MHz)	Average Power (dBm)
Low	5745	15.40
Middle	5785	15.20
High	5825	15.35

11 SAR MEASUREMENT RESULT (2.4 GHZ)**11.1 Test Position 3 – Main Antenna (HTL017)**

Note: The setup photo here has been extracted under a separate document.

802.11b						
Separation. distance (mm)	Channel	f (MHz)	Measured 1g (mW/g)	Power Drift (dBm)	Extrapolated 1g (mW/g)	Limit (mW/g)
0	1	2412			0.000	
0	6	2437	0.019	-0.104	0.0195	1.6
0	11	2462			0.000	
802.11g						
Separation. distance (mm)	Channel	f (MHz)	Measured 1g (mW/g)	Power Drift (dBm)	Extrapolated 1g (mW/g)	Limit (mW/g)
0	1	2412			0.000	
0	6	2437	0.020	-0.099	0.0205	1.6
0	11	2462			0.000	

Notes:

- 1) The exact method of extrapolation is $\text{measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process
- 2) The SAR measured at the highest power channel for this configuration is at least 3 dB lower than SAR limit, thus testing at others channel is optional.
- 3) Please see attachment for the detailed measurement data and plots showing the maximum SAR location of the EUT.

11.2 Test Position 4 – Aux Antenna (HTL017)

Note: The setup photo here has been extracted under a separate document

802.11b						
Separation. distance (mm)	Channel	f (MHz)	Measured 1g (mW/g)	Power Drift (dBm)	Extrapolated 1g (mW/g)	Limit (mW/g)
0	6	2347	0.045	-0.153	0.047	
0	6 ¹⁾	2437	0.042	-0.090	0.0429	1.6
0	6 ²⁾	2437	0.042	-0.010	0.042	
802.11g						
Separation. distance (mm)	Channel	f (MHz)	Measured 1g (mW/g)	Power Drift (dBm)	Extrapolated 1g (mW/g)	Limit (mW/g)
0	1	2412			0.000	
0	6	2437	0.038	-0.040	0.0384	1.6
0	11	2462			0.000	

Notes:

- 1) The Co-located SAR measurement result with the Wireless card and Bluetooth (BC02) radio card (Transmitting simultaneously)
- 2) The Co-located SAR measurement result with the Wireless card and Bluetooth (BC04) radio card (Transmitting simultaneously)
- 3) The exact method of extrapolation is $\text{measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process
- 4) The SAR measured at the highest power channel for this configuration is at least 3 dB lower than SAR limit, thus testing at others channel is optional.
- 5) Please see attachment for the detailed measurement data and plots showing the maximum SAR location of the EUT.

11.3 Test Position 3 – Main Antenna (TIAN01)

Note: The setup photo here has been extracted under a separate document

802.11b

Separation. distance (mm)	Channel	f (MHz)	Measured 1g (mW/g)	Power Drift (dBm)	Extrapolated 1g (mW/g)	Limit (mW/g)
0	1	2412			0.000	
0	6	2437	0.024	-0.101	0.0246	1.6
0	11	2462			0.000	

802.11g

Separation. distance (mm)	Channel	f (MHz)	Measured 1g (mW/g)	Power Drift (dBm)	Extrapolated 1g (mW/g)	Limit (mW/g)
0	1	2412			0.000	
0	6	2437	0.022	-0.180	0.0229	1.6
0	11	2462			0.000	

Notes:

- 1) The exact method of extrapolation is $\text{measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process
- 2) The SAR measured at the highest power channel for this configuration is at least 3 dB lower than SAR limit, thus testing at others channel is optional.
- 3) Please see attachment for the detailed measurement data and plots showing the maximum SAR location of the EUT.

11.4 Test Position 4 – Aux Antenna (TIAN01)

Note: The setup photo here has been extracted under a separate document

802.11b						
Separation. distance (mm)	Channel	f (MHz)	Measured 1g (mW/g)	Power Drift (dBm)	Extrapolated 1g (mW/g)	Limit (mW/g)
0	1	2412			0.000	
0	6	2437	0.026	-0.186	0.0271	1.6
0	11	2462			0.000	
802.11g						
Separation. distance (mm)	Channel	f (MHz)	Measured 1g (mW/g)	Power Drift (dBm)	Extrapolated 1g (mW/g)	Limit (mW/g)
0	1	2412			0.000	
0	6	2437	0.023	-0.011	0.0231	1.6
0	11	2462			0.000	

Notes:

- 1) The exact method of extrapolation is $\text{measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process
- 2) The SAR measured at the highest power channel for this configuration is at least 3 dB lower than SAR limit, thus testing at others channel is optional.
- 3) Please see attachment for the detailed measurement data and plots showing the maximum SAR location of the EUT.

12 SAR MEASUREMENT RESULT (5 GHZ)**12.1 Test Position 3 – Main Antenna (HTL017)**

Note: The setup photo here has been extracted under a separate document

802.11a (5.2 GHz band)

Separation. distance (mm)	Channel	f (MHz)	Measured 1g (mW/g)	Power Drift (dBm)	Extrapolated 1g (mW/g)	Limit (mW/g)
0	36	5180			0.000	
0	52	5260	0.053	-0.198	0.055	1.6
0	64	5320			0.000	

802.11a (5.8 GHz band)

Separation. distance (mm)	Channel	f (MHz)	Measured 1g (mW/g)	Power Drift (dBm)	Extrapolated 1g (mW/g)	Limit (mW/g)
0	149	5745	0.064	-0.111	0.066	1.6
0	157	5785			0.000	
0	165	5820			0.000	

Notes:

- 1) The exact method of extrapolation is $\text{measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process
- 2) The SAR measured at the highest power channel for this configuration is at least 3 dB lower than SAR limit, thus testing at others channel is optional.
- 3) Please see attachment for the detailed measurement data and plots showing the maximum SAR location of the EUT.

12.2 Test Position 4 – Aux Antenna (HTL017)

Note: The setup photo here has been extracted under a separate document

802.11a (5.2 GHz band)

Separation. distance (mm)	Channel	f (MHz)	Measured 1g (mW/g)	Power Drift (dBm)	Extrapolated 1g (mW/g)	Limit (mW/g)
0	36	5180			0.000	
0	52	5260	0.047	-0.097	0.048	1.6
0	64	5320			0.000	

802.11a (5.8 GHz band)

Separation. distance (mm)	Channel	f (MHz)	Measured 1g (mW/g)	Power Drift (dBm)	Extrapolated 1g (mW/g)	Limit (mW/g)
0	149	5745	0.066	-0.148	0.068	1.6
0	157	5785			0.000	
0	165	5820			0.000	

Notes:

- 1) The exact method of extrapolation is $\text{measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process
- 2) The SAR measured at the highest power channel for this configuration is at least 3 dB lower than SAR limit, thus testing at others channel is optional.
- 3) Please see attachment for the detailed measurement data and plots showing the maximum SAR location of the EUT.

12.3 Test Position 3 – Main Antenna (TIAN01)

Note: The setup photo here has been extracted under a separate document

802.11a (5.2 GHz band)

Separation. distance (mm)	Channel	f (MHz)	Measured 1g (mW/g)	Power Drift (dBm)	Extrapolated 1g (mW/g)	Limit (mW/g)
0	36	5180			0.000	
0	52	5260	0.064	-0.123	0.066	1.6
0	64	5320			0.000	

802.11a (5.8 GHz band)

Separation. distance (mm)	Channel	f (MHz)	Measured 1g (mW/g)	Power Drift (dBm)	Extrapolated 1g (mW/g)	Limit (mW/g)
0	149	5745	0.094	-0.125	0.097	1.6
0	157	5785			0.000	
0	165	5820			0.000	

Notes:

- 1) The exact method of extrapolation is $\text{measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process
- 2) The SAR measured at the highest power channel for this configuration is at least 3 dB lower than SAR limit, thus testing at others channel is optional.
- 3) Please see attachment for the detailed measurement data and plots showing the maximum SAR location of the EUT.

12.4 Test Position 4 – Aux Antenna (TIAN01)

Note: The setup photo here has been extracted under a separate document

802.11a (5.2 GHz band)

Separation. distance (mm)	Channel	f (MHz)	Measured 1g (mW/g)	Power Drift (dBm)	Extrapolated 1g (mW/g)	Limit (mW/g)
0	36	5180			0.000	
0	52	5260	0.088	-0.101	0.090	1.6
0	64	5320			0.000	

802.11a (5.8 GHz band)

Separation. distance (mm)	Channel	f (MHz)	Measured 1g (mW/g)	Power Drift (dBm)	Extrapolated 1g (mW/g)	Limit (mW/g)
0	149	5745	0.119	-0.170	0.124	
0	149 ¹⁾	5745	0.089	-0.111	0.091	1.6
0	149 ²⁾	5745	0.127	-0.140	0.131	

Notes:

- 1) The Co-located SAR measurement result with the Wireless card and Bluetooth (BC02) radio card (Transmitting simultaneously)
- 2) The Co-located SAR measurement result with the Wireless card and Bluetooth (BC04) radio card (Transmitting simultaneously)
- 3) The exact method of extrapolation is $\text{measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 measurement system can be scaled up by the measured drift to determine the SAR at the beginning of the measurement process.
- 4) The SAR measured at the highest power channel for this configuration is at least 3 dB lower than SAR limit, thus testing at others channel is optional.
- 5) Please see attachment for the detailed measurement data and plots showing the maximum SAR location of the EUT.

13 EUT PHOTOS

Note: The EUT Photos on this page have been extracted under a separate document.

Note: The EUT Photos on this page have been extracted under a separate document.

Note: The EUT Photos on this page have been extracted under a separate document.

Note: The EUT Photo on this page has been extracted under a separate document.

Note: The antenna location photos on this page have been extracted under a separate document.

14 MEASUREMENT UNCERTAINTY**14.1 MEASUREMENT UNCERTAINTY FOR 300 MHZ – 3000 MHZ**

Uncertainty component	Tol. (±%)	Probe Dist.	Div.	Ci (1g)	Ci (10g)	Std. Unc.(±%)	
						Ui (1g)	Ui(10g)
Measurement System							
Probe Calibration	4.80	N	1	1	1	4.80	4.80
Axial Isotropy	4.70	R	1.732	0.707	0.707	1.92	1.92
Hemispherical Isotropy	9.60	R	1.732	0.707	0.707	3.92	3.92
Boundary Effects	1.00	R	1.732	1	1	0.58	0.58
Linearity	4.70	R	1.732	1	1	2.71	2.71
System Detection Limits	1.00	R	1.732	1	1	0.58	0.58
Readout Electronics	1.00	N	1	1	1	1.00	1.00
Response Time	0.80	R	1.732	1	1	0.46	0.46
Integration Time	2.60	R	1.732	1	1	1.50	1.50
RF Ambient Conditions - Noise	1.59	R	1.732	1	1	0.92	0.92
RF Ambient Conditions - Reflections	0.00	R	1.732	1	1	0.00	0.00
Probe Positioner Mechanical Tolerance	0.40	R	1.732	1	1	0.23	0.23
Probe Positioning With Respect to Phantom Shell	2.90	R	1.732	1	1	1.67	1.67
Extrapolation, interpolation, and integration algorithms for max. SAR evaluation	3.90	R	1.732	1	1	2.25	2.25
Test sample Related							
Test Sample Positioning	1.10	N	1	1	1	1.10	1.10
Device Holder Uncertainty	3.60	N	1	1	1	3.60	3.60
Power and SAR Drift Measurement	5.00	R	1.732	1	1	2.89	2.89
Phantom and Tissue Parameters							
Phantom Uncertainty	4.00	R	1.732	1	1	2.31	2.31
Liquid Conductivity - Target	5.00	R	1.732	0.64	0.43	1.85	1.24
Liquid Conductivity - Meas.	8.60	N	1	0.64	0.43	5.50	3.70
Liquid Permittivity - Target	5.00	R	1.732	0.6	0.49	1.73	1.41
Liquid Permittivity - Meas.	3.30	N	1	0.6	0.49	1.98	1.62
Combined Standard Uncertainty	RSS					11.44	10.49
Expanded Uncertainty (95% Confidence Interval)	K=2					22.87	20.98
Notesfor table							
1. Tol. - tolerance in influence quaity							
2. N - Nomal							
3. R - Rectangular							
4. Div. - Divisor used to obtain standard uncertainty							
5. Ci - is te sensitivity coefficient							

14.2 MEASUREMENT UNCERTAINTY 3 GHZ – 6 GHZ

Uncertainty component	Tol. (±%)	Probe Dist.	Div.	Ci (1g)	Ci (10g)	Std. Unc.(±%)	
						Ui (1g)	Ui(10g)
Measurement System							
Probe Calibration	4.80	N	1	1	1	4.80	4.80
Axial Isotropy	4.70	R	1.732	0.707	0.707	1.92	1.92
Hemispherical Isotropy	9.60	R	1.732	0.707	0.707	3.92	3.92
Boundary Effects	1.00	R	1.732	1	1	0.58	0.58
Linearity	4.70	R	1.732	1	1	2.71	2.71
System Detection Limits	1.00	R	1.732	1	1	0.58	0.58
Readout Electronics	1.00	N	1	1	1	1.00	1.00
Response Time	0.80	R	1.732	1	1	0.46	0.46
Integration Time	2.60	R	1.732	1	1	1.50	1.50
RF Ambient Conditions - Noise	3.00	R	1.732	1	1	1.73	1.73
RF Ambient Conditions - Reflections	3.00	R	1.732	1	1	1.73	1.73
Probe Positioner Mechanical Tolerance	0.40	R	1.732	1	1	0.23	0.23
Probe Positioning With Respect to Phantom Shell	2.90	R	1.732	1	1	1.67	1.67
Extrapolation, interpolation, and integration algorithms for max. SAR evaluation	3.90	R	1.732	1	1	2.25	2.25
Test sample Related							
Test Sample Positioning	1.10	N	1	1	1	1.10	1.10
Device Holder Uncertainty	3.60	N	1	1	1	3.60	3.60
Power and SAR Drift Measurement	5.00	R	1.732	1	1	2.89	2.89
Phantom and Tissue Parameters							
Phantom Uncertainty	4.00	R	1.732	1	1	2.31	2.31
Liquid Conductivity - Target	5.00	R	1.732	0.64	0.43	1.85	1.24
Liquid Conductivity - Meas.	8.60	N	1	0.64	0.43	5.50	3.70
Liquid Permittivity - Target	5.00	R	1.732	0.6	0.49	1.73	1.41
Liquid Permittivity - Meas.	3.30	N	1	0.6	0.49	1.98	1.62
Combined Standard Uncertainty	RSS					11.66	10.73
Expanded Uncertainty (95% Confidence Interval)	K=2					23.32	21.46
Notesfor table							
1. Tol. - tolerance in influence quaity							
2. N - Nomal							
3. R - Rectangular							
4. Div. - Divisor used to obtain standard uncertainty							
5. Ci - is te sensitivity coefficient							

15 EQUIPMENT LIST & CALIBRATION

<u>Name of Equipment</u>	<u>Manufacturer</u>	<u>Type/Model</u>	<u>Serial Number</u>	<u>Cal. Due date</u>
Robot - Six Axes	Stäubli	RX90BL	N/A	N/A
Robot Remote Control	Stäubli	CS7MB	3403-91535	N/A
DASY4 Measurement Server	SPEAG	SEUMS001BA	1041	N/A
Probe Alignment Unit	SPEAG	LB (V2)	261	N/A
S-Parameter Network Analyzer	Agilent	8753ES-6	US39173569	8/19/05
Electronic Probe kit	Hewlett Packard	85070C	N/A	N/A
E-Field Probe	SPEAG	EX3DV3	3531	7/18/05
E-Field Probe	SPEAG	EX3DV4	3552	3/19/06
Thermometer	ERTCO	639-1	8402	10/13/2005
Thermometer	ERTCO	639-1	8404	10/21/2005
Thermometer	ERTCO	637-1	8661	10/21/2005
SAM Phantom (SAM1)	SPEAG	TP-1185	QD000P40CA	N/A
SAM Phantom (SAM2)	SPEAG	TP-1015	N/A	N/A
Data Acquisition Electronics	SPEAG	DAE3 V1	500	2/7/06
System Validation Dipole	SPEAG	D2450V2	748	5/14/06
System Validation Dipole	SPEAG	D5GHzV2	1003	10/5/05
Signal General	R&H	SMP 04	DE34210	5/5/05
Power Meter	Giga-tronics	8651A	8651404	9/16/05
Power Sensor	Giga-tronics	80701A	1834588	9/16/05
Amplifier	Mini-Circuits	ZVE-8G	0360	N/A
Amplifier	Mini-Circuits	ZHL-42W	D072701-5	N/A
Radio Communication Tester	Rohde & Schwarz	CMU 200	838114/032	12/17/06
Simulating Liquid	CCS	M2450	N/A	Within 24 hrs of first test
Simulating Liquid	SPEAG	M5200-5800	N/A	Within 24 hrs of first test

16 ATTACHMENT

No.	Contents	No. of page (s)
1	System Performance Check Plots	14
2-1	SAR Test Plots (2.4 GHz)	10
2-3	SAR Test Plots (5 GHz)	10
3	Certificate of E-filed Probe EX3DV4 SN 3552	10
4	Certificate of System Validation Dipole D2450V2 SN 748	9
5	Certificate of System Validation Dipole D5GHzV2 SN 1003	11
6	Material Specification Data Sheet of Body Simulating Liquid (5GHz)	3

END OF REPORT