

Test Laboratory: Compliance Certification Services

Secondary Landscape Position

DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A

Communication System: 802.11abn; Frequency: 5260 MHz; Duty Cycle: 1:1.1

Medium parameters used (interpolated): $f = 5260$ MHz; $\sigma = 5.48$ mho/m; $\epsilon_r = 46.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3554; ConvF(3.68, 3.68, 3.68); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Toshiba A mode Chain A Main Ant - M ch/Area Scan (8x9x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.744 mW/g

Toshiba A mode Chain A Main Ant - M ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm


Reference Value = 5.03 V/m; Power Drift = 0.136 dB

Peak SAR (extrapolated) = 2.80 W/kg

SAR(1 g) = 0.741 mW/g; SAR(10 g) = 0.324 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.33 mW/g

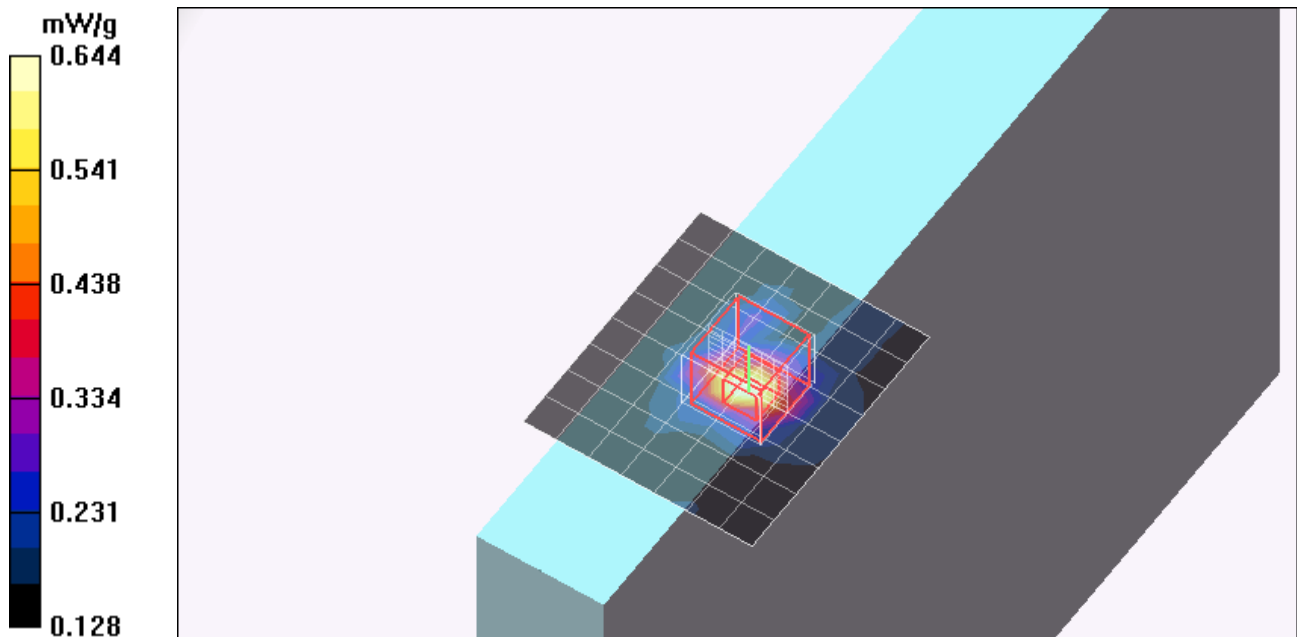

Test Laboratory: Compliance Certification Services

Secondary Landscape Position

DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A

Communication System: 802.11abn; Frequency: 5260 MHz; Duty Cycle: 1:1.1

Medium parameters used (interpolated): $f = 5260$ MHz; $\sigma = 5.48$ mho/m; $\epsilon_r = 46.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3554; ConvF(3.68, 3.68, 3.68); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Toshiba A mode Chain A Main Ant - M ch (Co-Tx)/Area Scan (8x12x1): Measurement grid:

dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.677 mW/g

Toshiba A mode Chain A Main Ant - M ch (Co-Tx)/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm


Reference Value = 12.2 V/m; Power Drift = 0.196 dB

Peak SAR (extrapolated) = 2.94 W/kg

SAR(1 g) = 0.753 mW/g; SAR(10 g) = 0.329 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.33 mW/g

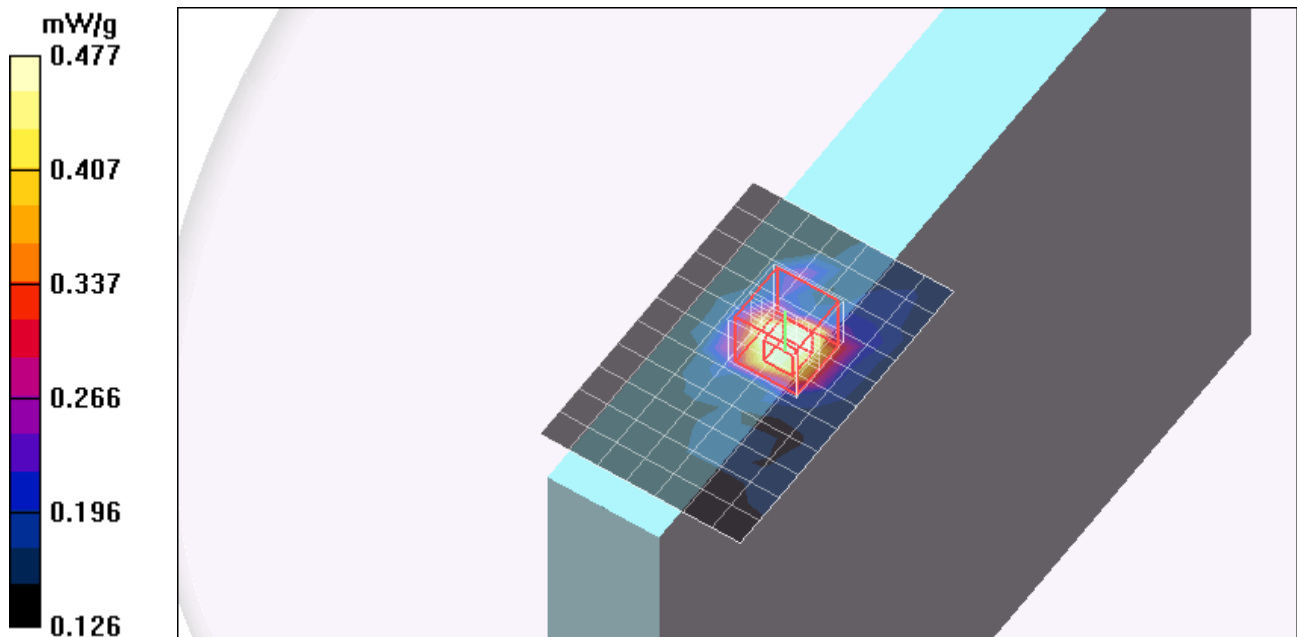

Test Laboratory: Compliance Certification Services

Secondary Landscape Position

DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A

Communication System: 802.11abn; Frequency: 5180 MHz; Duty Cycle: 1:1.1

Medium parameters used (interpolated): $f = 5180$ MHz; $\sigma = 5.36$ mho/m; $\epsilon_r = 46.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3554; ConvF(3.77, 3.77, 3.77); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Toshiba A mode Chain B Sub A Ant - L ch/Area Scan (8x9x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.839 mW/g

Toshiba A mode Chain B Sub A Ant - L ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2.5mm


Reference Value = 13.9 V/m; Power Drift = -0.096 dB

Peak SAR (extrapolated) = 3.27 W/kg

SAR(1 g) = 0.852 mW/g; SAR(10 g) = 0.337 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.68 mW/g

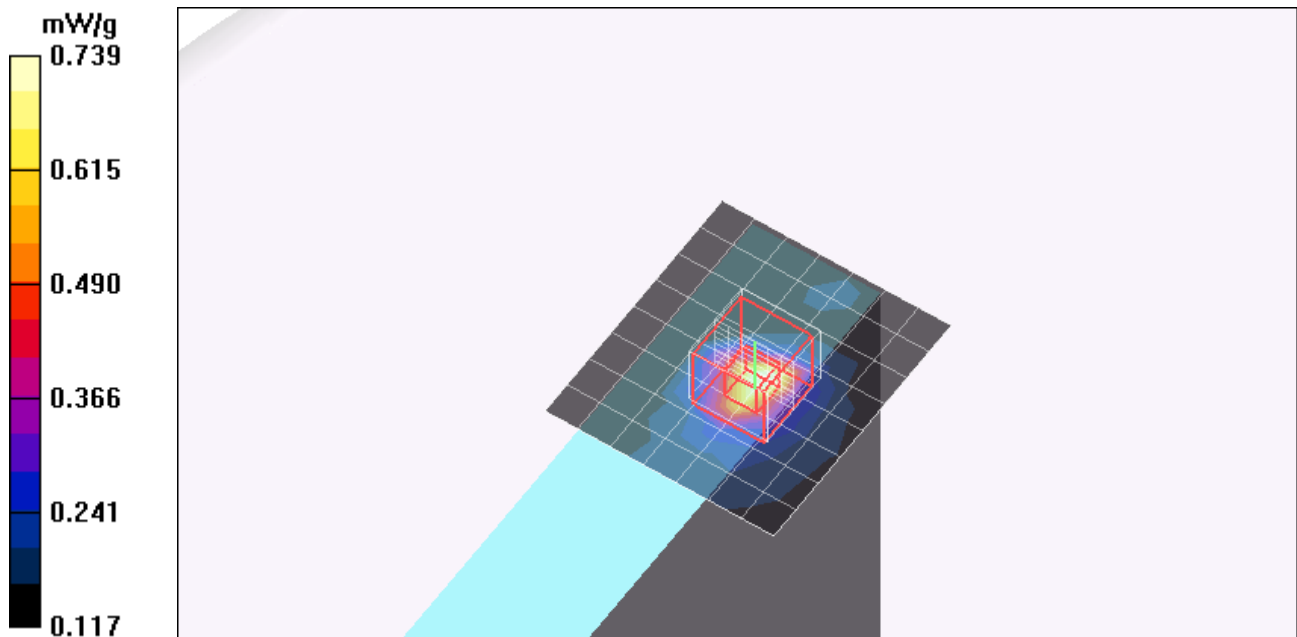

Test Laboratory: Compliance Certification Services

Secondary Landscape Position

DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A

Communication System: 802.11abn; Frequency: 5260 MHz; Duty Cycle: 1:1.1

Medium parameters used (interpolated): $f = 5260$ MHz; $\sigma = 5.48$ mho/m; $\epsilon_r = 46.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3554; ConvF(3.68, 3.68, 3.68); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Toshiba A mode Chain B Sub A Ant - M ch/Area Scan (8x9x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.958 mW/g

Toshiba A mode Chain B Sub A Ant - M ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm


Reference Value = 4.92 V/m; Power Drift = 0.097 dB

Peak SAR (extrapolated) = 3.97 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.387 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.98 mW/g

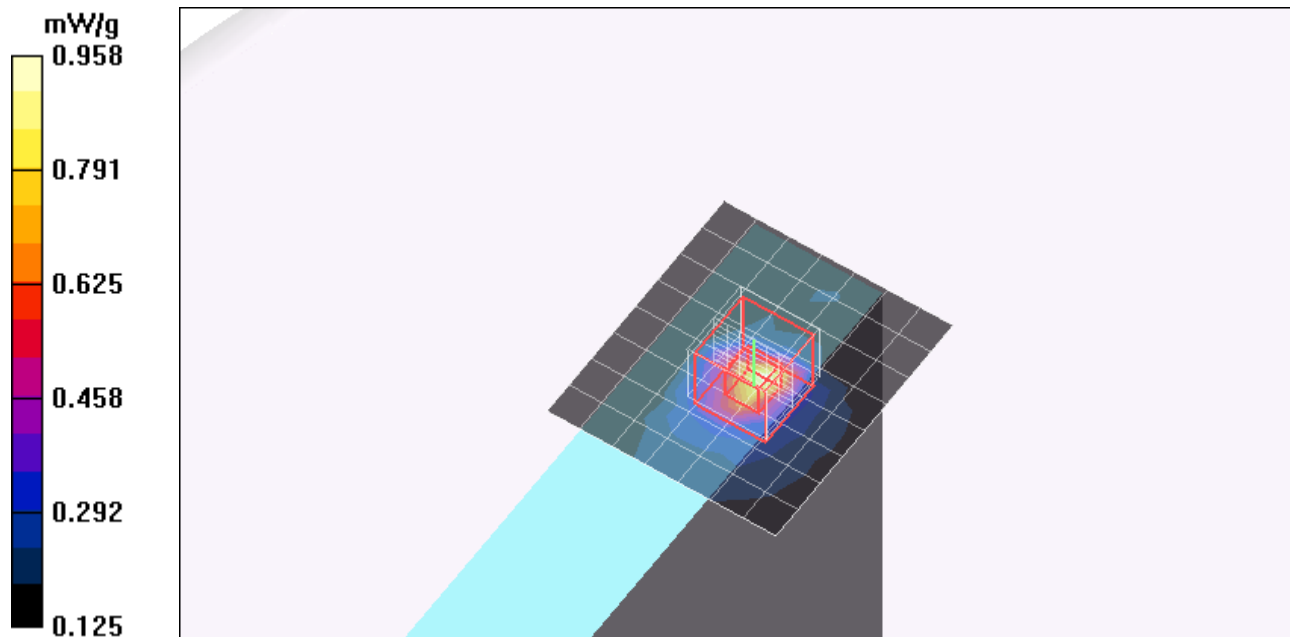

Test Laboratory: Compliance Certification Services

Secondary Landscape Position


DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A

Communication System: 802.11abn; Frequency: 5260 MHz; Duty Cycle: 1:1.1

Toshiba A mode Chain B Sub A Ant - M ch/Z Scan (1x1x41): Measurement grid: dx=20mm, dy=20mm, dz=2.5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.15 mW/g

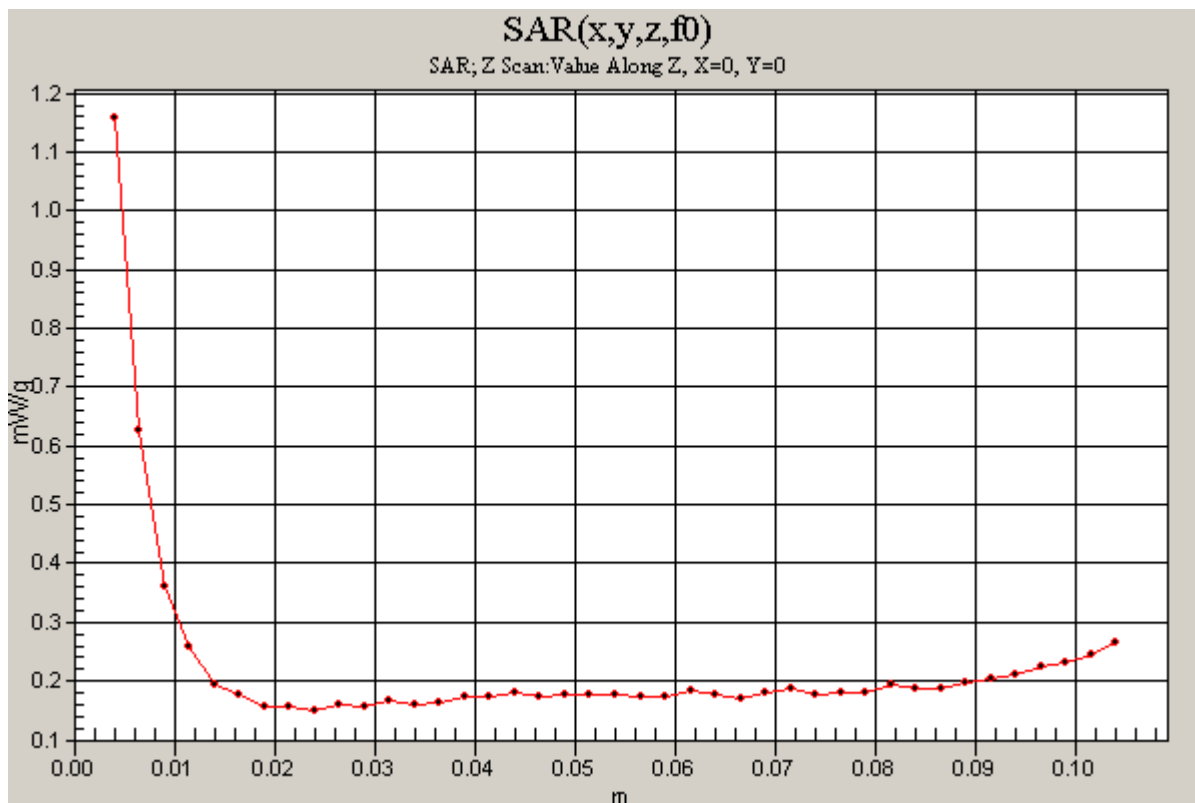

Test Laboratory: Compliance Certification Services

Secondary Landscape Position

DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A

Communication System: 802.11abn; Frequency: 5320 MHz; Duty Cycle: 1:1.1

Medium parameters used (interpolated): $f = 5320$ MHz; $\sigma = 5.56$ mho/m; $\epsilon_r = 46.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3554; ConvF(3.68, 3.68, 3.68); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Toshiba A mode Chain B Sub A Ant - H ch/Area Scan (8x9x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.733 mW/g

Toshiba A mode Chain B Sub A Ant - H ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm


Reference Value = 12.4 V/m; Power Drift = 0.100 dB

Peak SAR (extrapolated) = 2.80 W/kg

SAR(1 g) = 0.744 mW/g; SAR(10 g) = 0.316 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.42 mW/g

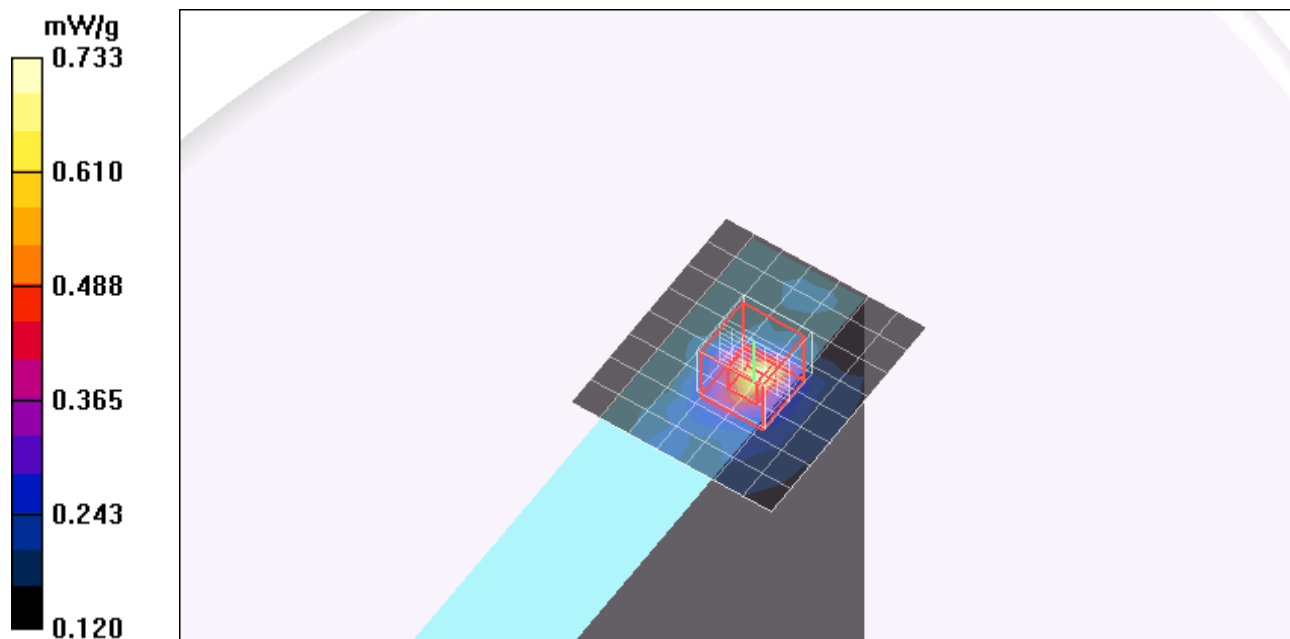

Test Laboratory: Compliance Certification Services

Secondary Landscape Position

DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A

Communication System: 802.11abn; Frequency: 5260 MHz; Duty Cycle: 1:1.1

Medium parameters used (interpolated): $f = 5260$ MHz; $\sigma = 5.48$ mho/m; $\epsilon_r = 46.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3554; ConvF(3.68, 3.68, 3.68); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Toshiba A mode Chain B Sub A Ant - M ch (Co-Tx)/Area Scan (8x9x1): Measurement grid:

dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.02 mW/g

Toshiba A mode Chain B Sub A Ant - M ch (Co-Tx)/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm


Reference Value = 14.9 V/m; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 3.92 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.387 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.00 mW/g

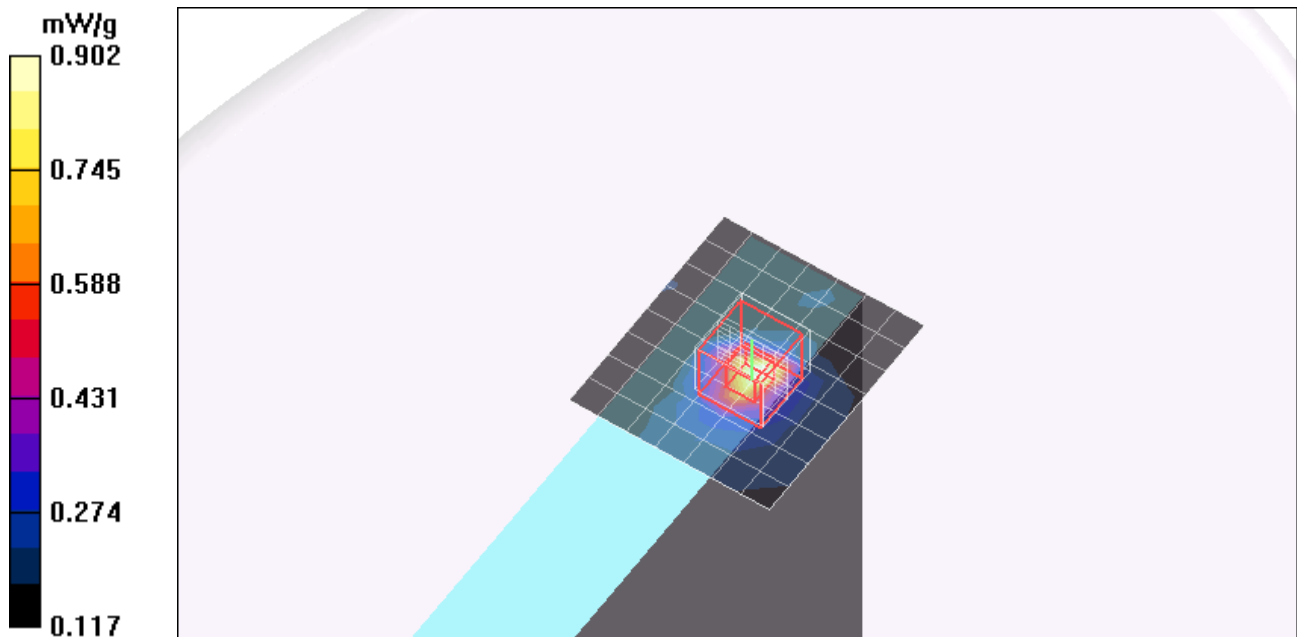

Test Laboratory: Compliance Certification Services

Secondary Landscape Position

DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A


Communication System: 802.11abn; Frequency: 5260 MHz; Duty Cycle: 1:1.1

Toshiba A mode Chain B Sub A Ant - M ch (Co-Tx)/Z Scan (1x1x41): Measurement grid:

dx=20mm, dy=20mm, dz=2.5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.15 mW/g

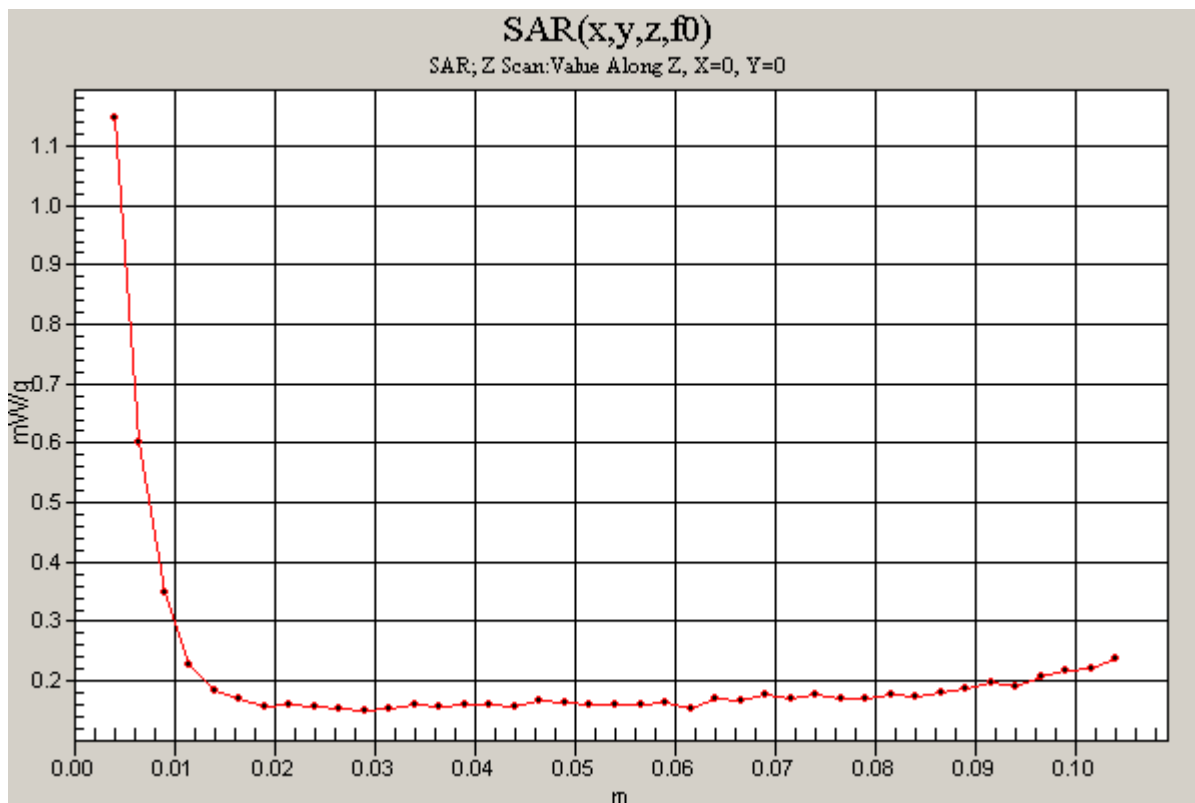

Test Laboratory: Compliance Certification Services

Secondary Landscape Position

DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A

Communication System: 802.11abn; Frequency: 5260 MHz; Duty Cycle: 1:1.41

Medium parameters used (interpolated): $f = 5260$ MHz; $\sigma = 5.48$ mho/m; $\epsilon_r = 46.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3554; ConvF(3.68, 3.68, 3.68); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Toshiba A mode MIMO 20MHz - M ch/Area Scan (8x31x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.626 mW/g

Toshiba A mode MIMO 20MHz - M ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 5.40 V/m; Power Drift = 0.055 dB

Peak SAR (extrapolated) = 2.24 W/kg

SAR(1 g) = 0.618 mW/g; SAR(10 g) = 0.291 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.11 mW/g

Toshiba A mode MIMO 20MHz - M ch/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm


Reference Value = 5.40 V/m; Power Drift = 0.055 dB

Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 0.447 mW/g; SAR(10 g) = 0.246 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.716 mW/g

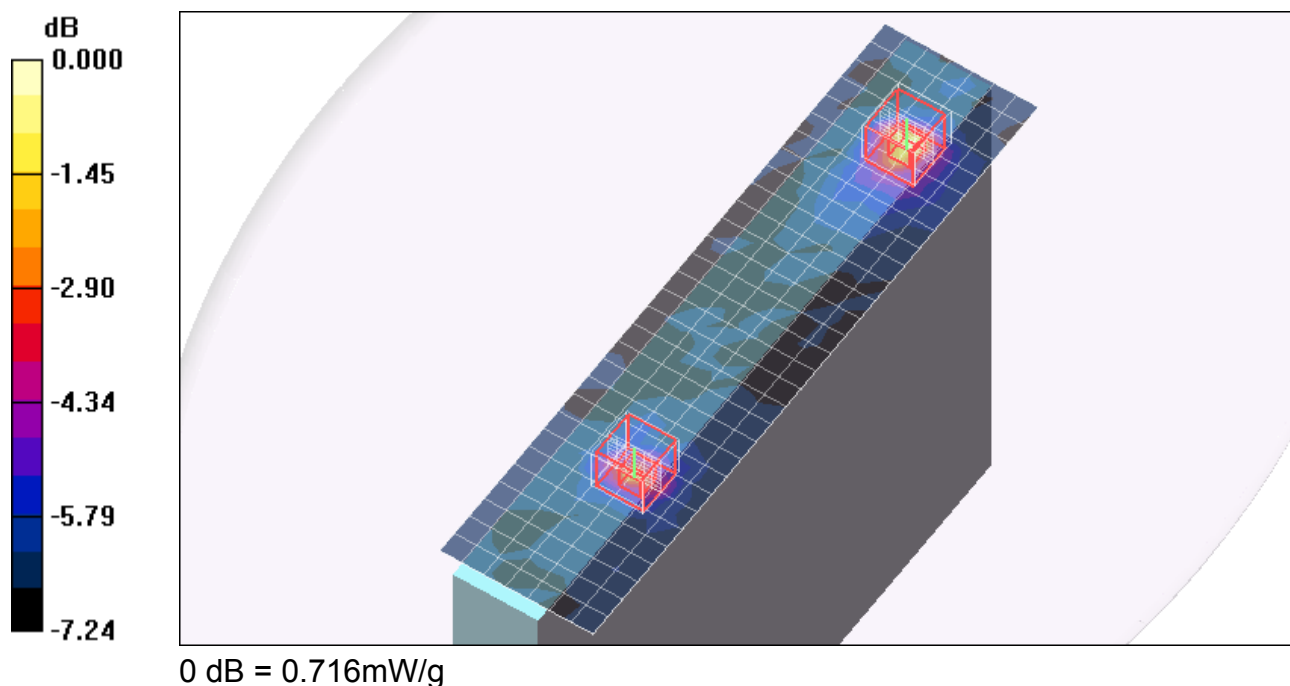

Test Laboratory: Compliance Certification Services

Lap-Held Position

DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A

Communication System: 802.11abn; Frequency: 5260 MHz; Duty Cycle: 1:1.1

Medium parameters used (interpolated): $f = 5260$ MHz; $\sigma = 5.48$ mho/m; $\epsilon_r = 46.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3554; ConvF(3.68, 3.68, 3.68); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Toshiba A mode Chain A Main ant - M ch/Area Scan (8x11x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.276 mW/g

Toshiba A mode Chain A Main ant - M ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm


Reference Value = 11.2 V/m; Power Drift = 0.088 dB

Peak SAR (extrapolated) = 0.360 W/kg

SAR(1 g) = 0.263 mW/g; SAR(10 g) = 0.241 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.360 mW/g

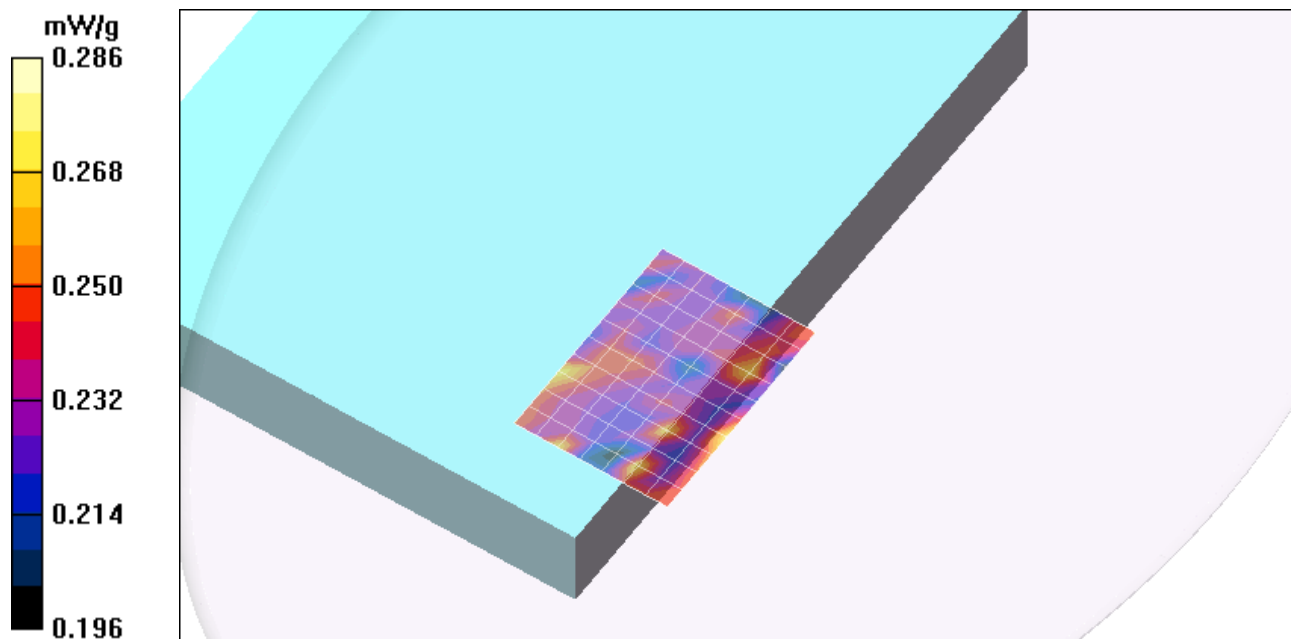

Test Laboratory: Compliance Certification Services

Lap-Held Position

DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A

Communication System: 802.11abn; Frequency: 5260 MHz; Duty Cycle: 1:1.1

Medium parameters used (interpolated): $f = 5260$ MHz; $\sigma = 5.48$ mho/m; $\epsilon_r = 46.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3554; ConvF(3.68, 3.68, 3.68); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Toshiba A mode Chain B Sub A ant - M ch/Area Scan (10x16x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.316 mW/g

Toshiba A mode Chain B Sub A ant - M ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm


Reference Value = 6.39 V/m; Power Drift = 0.106 dB

Peak SAR (extrapolated) = 0.284 W/kg

SAR(1 g) = 0.248 mW/g; SAR(10 g) = 0.230 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.284 mW/g

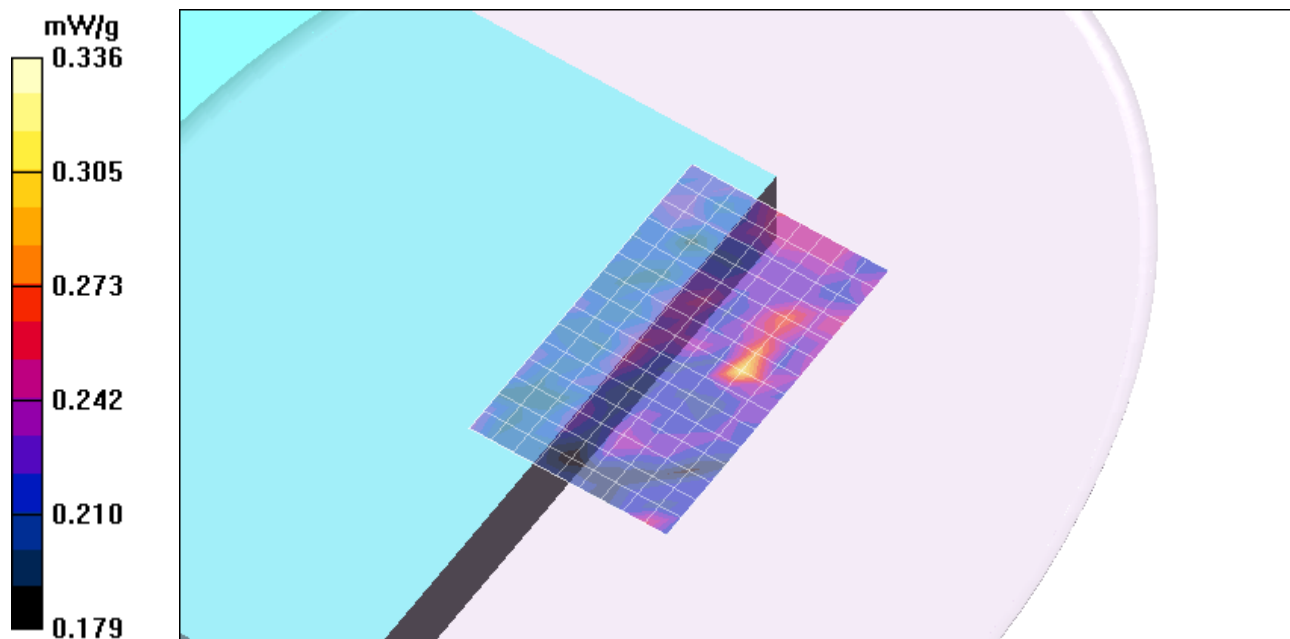

Test Laboratory: Compliance Certification Services

Lap-Held Position

DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A

Communication System: 802.11abn; Frequency: 5260 MHz; Duty Cycle: 1:1.41

Medium parameters used (interpolated): $f = 5260$ MHz; $\sigma = 5.48$ mho/m; $\epsilon_r = 46.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3554; ConvF(3.68, 3.68, 3.68); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Toshiba A mode MIMO Main ant - M ch/Area Scan (9x31x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.310 mW/g

Toshiba A mode MIMO Main ant - M ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 6.92 V/m; Power Drift = 0.095 dB

Peak SAR (extrapolated) = 0.364 W/kg

SAR(1 g) = 0.302 mW/g; SAR(10 g) = 0.277 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.364 mW/g

Toshiba A mode MIMO Main ant - M ch/Zoom Scan 2 (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm


Reference Value = 6.92 V/m; Power Drift = 0.095 dB

Peak SAR (extrapolated) = 0.355 W/kg

SAR(1 g) = 0.299 mW/g; SAR(10 g) = 0.277 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.353 mW/g

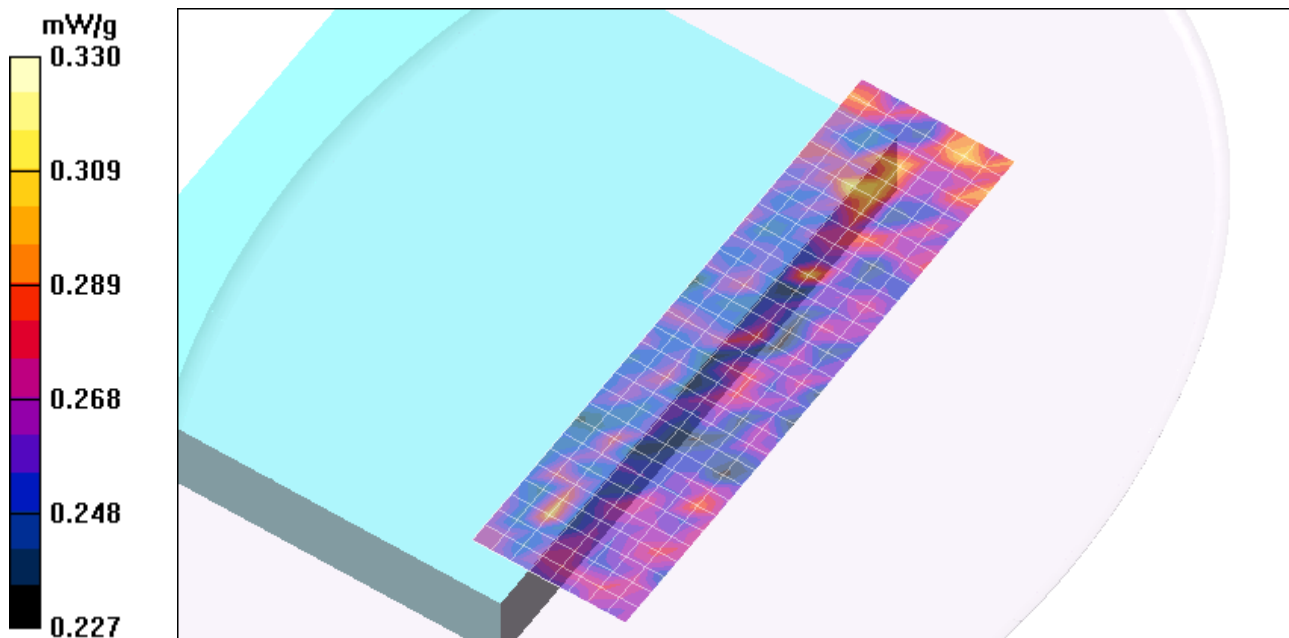

Test Laboratory: Compliance Certification Services

Primary Portrait Position

DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A

Communication System: 802.11abn; Frequency: 5260 MHz; Duty Cycle: 1:1.1

Medium parameters used (interpolated): $f = 5260$ MHz; $\sigma = 5.48$ mho/m; $\epsilon_r = 46.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3554; ConvF(3.68, 3.68, 3.68); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Toshiba A mode Chain A Main ant - M ch/Area Scan (9x13x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.156 mW/g

Toshiba A mode Chain A Main ant - M ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm


Reference Value = 4.56 V/m; Power Drift = -0.151 dB

Peak SAR (extrapolated) = 0.128 W/kg

SAR(1 g) = 0.116 mW/g; SAR(10 g) = 0.109 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.128 mW/g

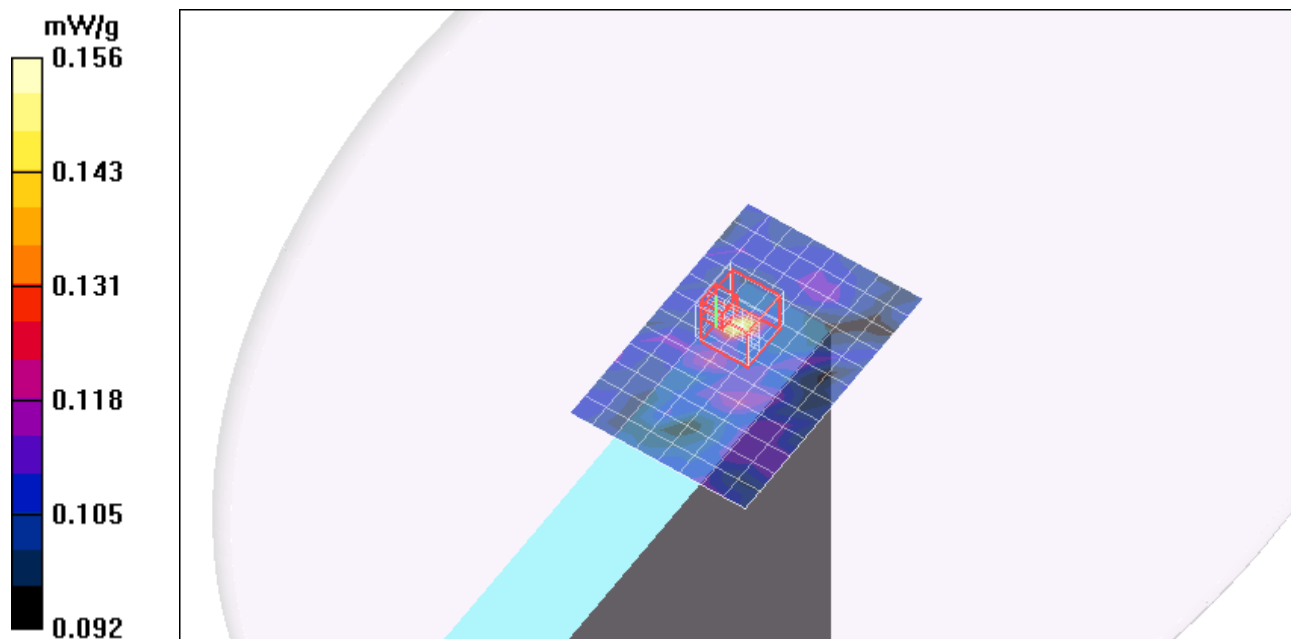

Test Laboratory: Compliance Certification Services

Primary Portrait Position

DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A

Communication System: 802.11abn; Frequency: 5260 MHz; Duty Cycle: 1:1.41

Medium parameters used (interpolated): $f = 5260$ MHz; $\sigma = 5.48$ mho/m; $\epsilon_r = 46.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3554; ConvF(3.68, 3.68, 3.68); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Toshiba A mode MIMO 20MHz - M ch/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.143 mW/g

Toshiba A mode MIMO 20MHz - M ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm


Reference Value = 5.02 V/m; Power Drift = -0.185 dB

Peak SAR (extrapolated) = 0.160 W/kg

SAR(1 g) = 0.144 mW/g; SAR(10 g) = 0.134 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.160 mW/g

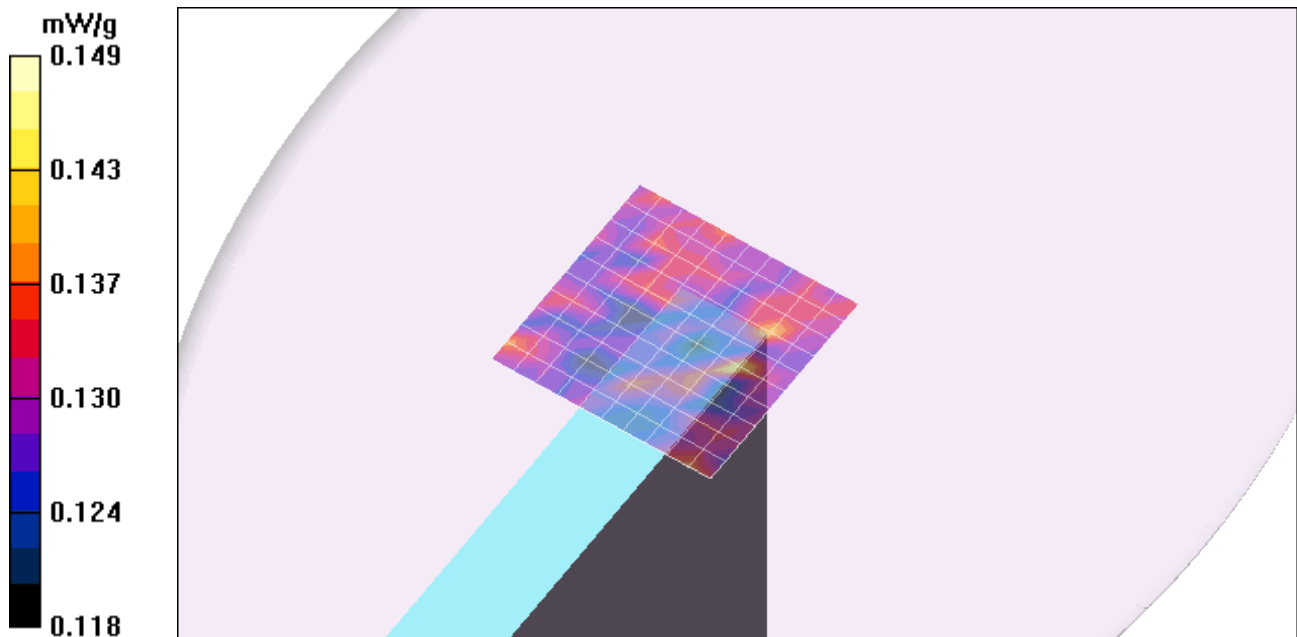

Test Laboratory: Compliance Certification Services

Secondary Portrait Position

DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A

Communication System: 802.11abn; Frequency: 5260 MHz; Duty Cycle: 1:1.1

Medium parameters used (interpolated): $f = 5260$ MHz; $\sigma = 5.48$ mho/m; $\epsilon_r = 46.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3554; ConvF(3.68, 3.68, 3.68); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Toshiba A mode Chain A Main ant - M ch/Area Scan (8x11x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.157 mW/g

Toshiba A mode Chain A Main ant - M ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2.5mm


Reference Value = 4.49 V/m; Power Drift = 0.047 dB

Peak SAR (extrapolated) = 0.415 W/kg

SAR(1 g) = 0.156 mW/g; SAR(10 g) = 0.128 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.197 mW/g

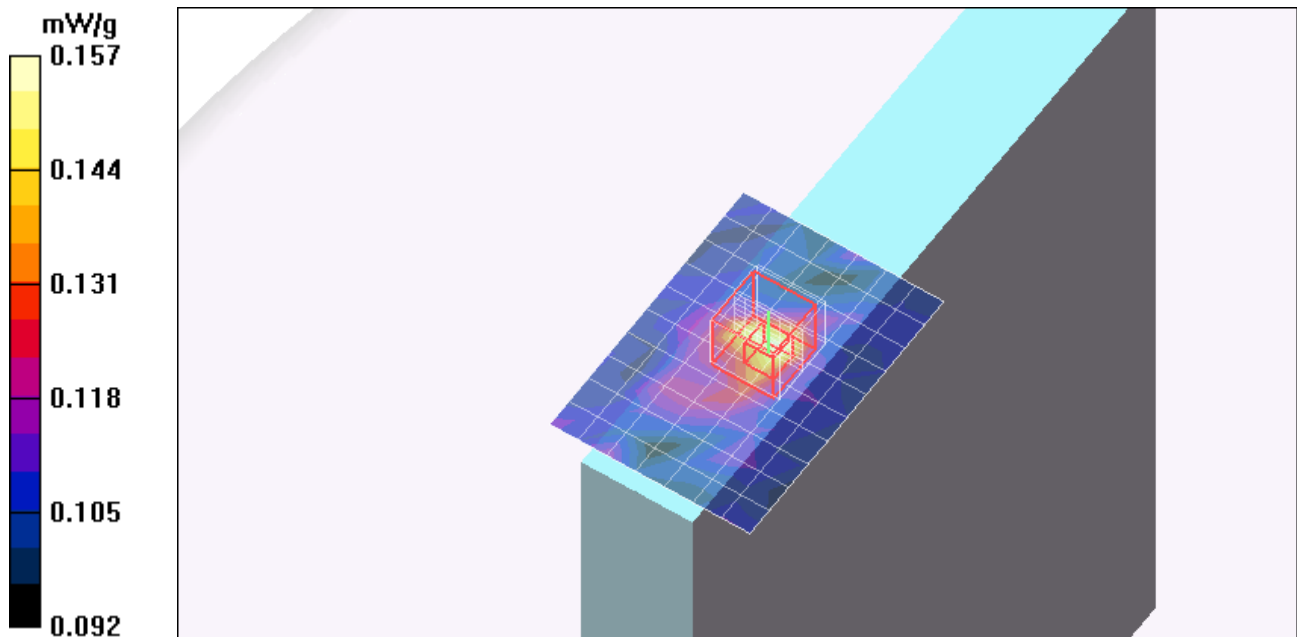

Test Laboratory: Compliance Certification Services

Secondary Portrait Position

DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A

Communication System: 802.11abn; Frequency: 5260 MHz; Duty Cycle: 1:1.41

Medium parameters used (interpolated): $f = 5260$ MHz; $\sigma = 5.48$ mho/m; $\epsilon_r = 46.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3554; ConvF(3.68, 3.68, 3.68); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Toshiba A mode MIMO 20MHz - M ch/Area Scan (8x10x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.157 mW/g

Toshiba A mode MIMO 20MHz - M ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 5.25 V/m; Power Drift = 0.079 dB

Peak SAR (extrapolated) = 0.225 W/kg

SAR(1 g) = 0.164 mW/g; SAR(10 g) = 0.154 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.205 mW/g

