

Test Laboratory: Compliance Certification Services

Secondary Landscape Position

DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1.1

Medium parameters used (interpolated): $f = 5745$ MHz; $\sigma = 6.17$ mho/m; $\epsilon_r = 49.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3554; ConvF(3.83, 3.83, 3.83); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Toshiba A mode Chain A Main Ant - L ch/Area Scan (8x9x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.873 mW/g

Toshiba A mode Chain A Main Ant - L ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm


Reference Value = 13.6 V/m; Power Drift = -0.058 dB

Peak SAR (extrapolated) = 4.69 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.456 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.01 mW/g

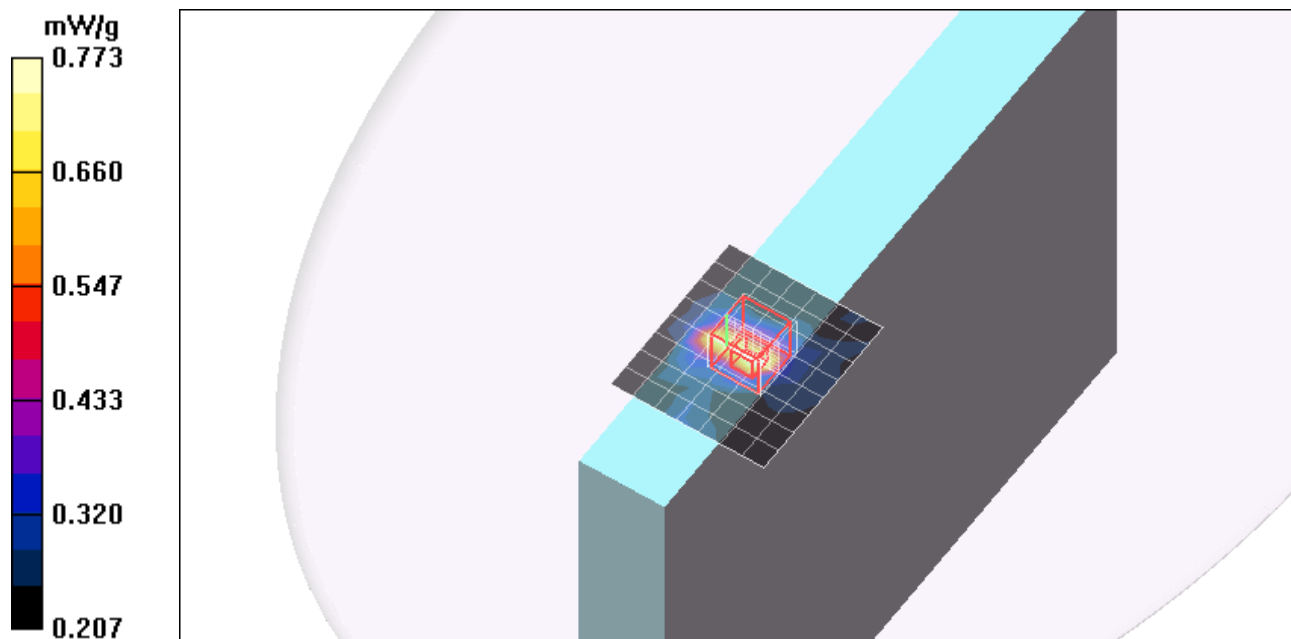

Test Laboratory: Compliance Certification Services

Secondary Landscape Position

DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A

Communication System: 802.11a; Frequency: 5785 MHz; Duty Cycle: 1:1.1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 6.24$ mho/m; $\epsilon_r = 49.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3554; ConvF(3.83, 3.83, 3.83); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Toshiba A mode Chain A Main Ant - M ch/Area Scan (8x9x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.878 mW/g

Toshiba A mode Chain A Main Ant - M ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm


Reference Value = 5.72 V/m; Power Drift = 0.062 dB

Peak SAR (extrapolated) = 4.81 W/kg

SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.491 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.08 mW/g

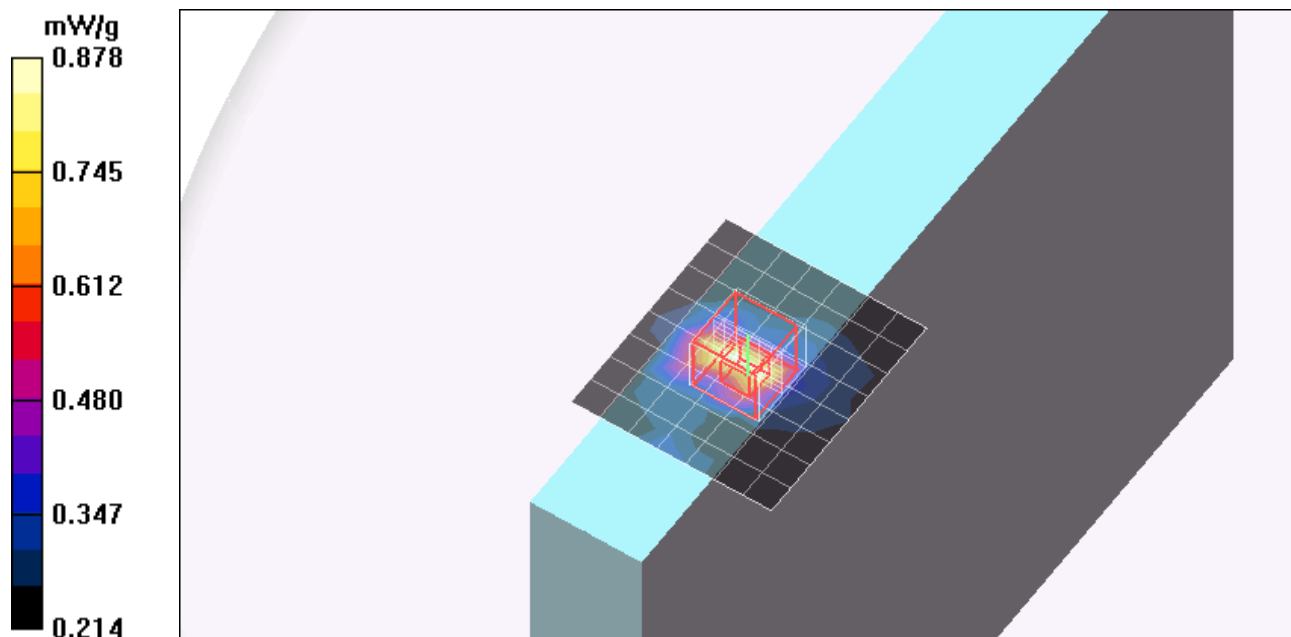

Test Laboratory: Compliance Certification Services

Secondary Landscape Position

DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A

Communication System: 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1.1

Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 6.31$ mho/m; $\epsilon_r = 49.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3554; ConvF(3.83, 3.83, 3.83); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Toshiba A mode Chain A Main Ant - H ch/Area Scan (8x9x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.985 mW/g

Toshiba A mode Chain A Main Ant - H ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm


Reference Value = 14.1 V/m; Power Drift = 0.079 dB

Peak SAR (extrapolated) = 5.57 W/kg

SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.481 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.03 mW/g

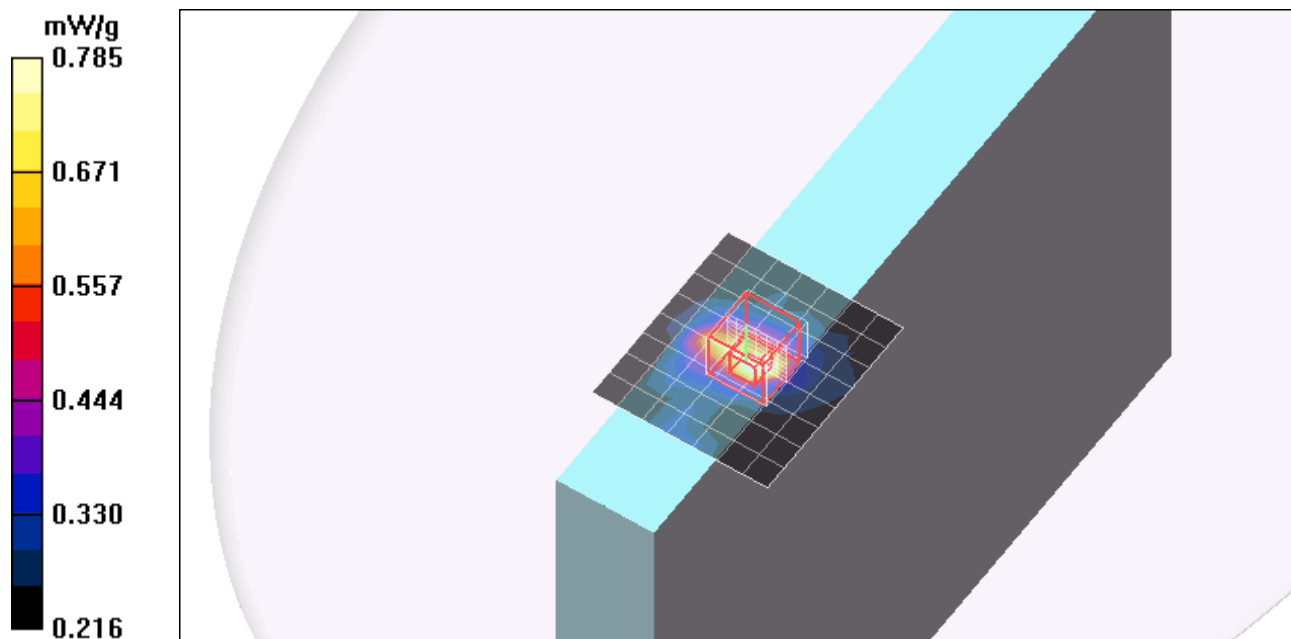

Test Laboratory: Compliance Certification Services

Secondary Landscape Position

DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A

Communication System: 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1.1

Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 6.31$ mho/m; $\epsilon_r = 49.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3554; ConvF(3.83, 3.83, 3.83); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Toshiba A mode Chain A Main Ant - H ch (Co-Tx)/Area Scan (8x9x1): Measurement grid:

dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.979 mW/g

Toshiba A mode Chain A Main Ant - H ch (Co-Tx)/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm


Reference Value = 7.10 V/m; Power Drift = 0.086 dB

Peak SAR (extrapolated) = 5.14 W/kg

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.509 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.16 mW/g

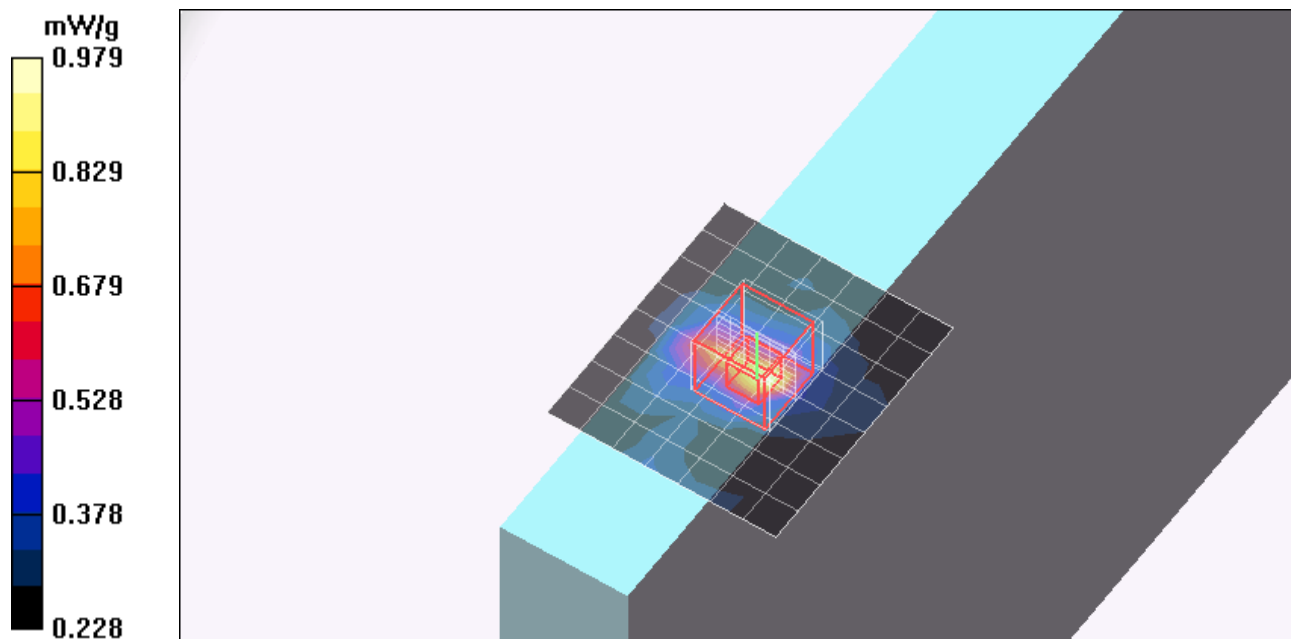

Test Laboratory: Compliance Certification Services

Secondary Landscape Position (B)

DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1.1

Medium parameters used (interpolated): $f = 5745$ MHz; $\sigma = 6.17$ mho/m; $\epsilon_r = 49.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3554; ConvF(3.83, 3.83, 3.83); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Toshiba A mode Chain B Sub A Ant - L ch/Area Scan (8x9x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.13 mW/g

Toshiba A mode Chain B Sub A Ant - L ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2.5mm


Reference Value = 17.1 V/m; Power Drift = -0.046 dB

Peak SAR (extrapolated) = 6.17 W/kg

SAR(1 g) = 1.41 mW/g; SAR(10 g) = 0.638 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.68 mW/g

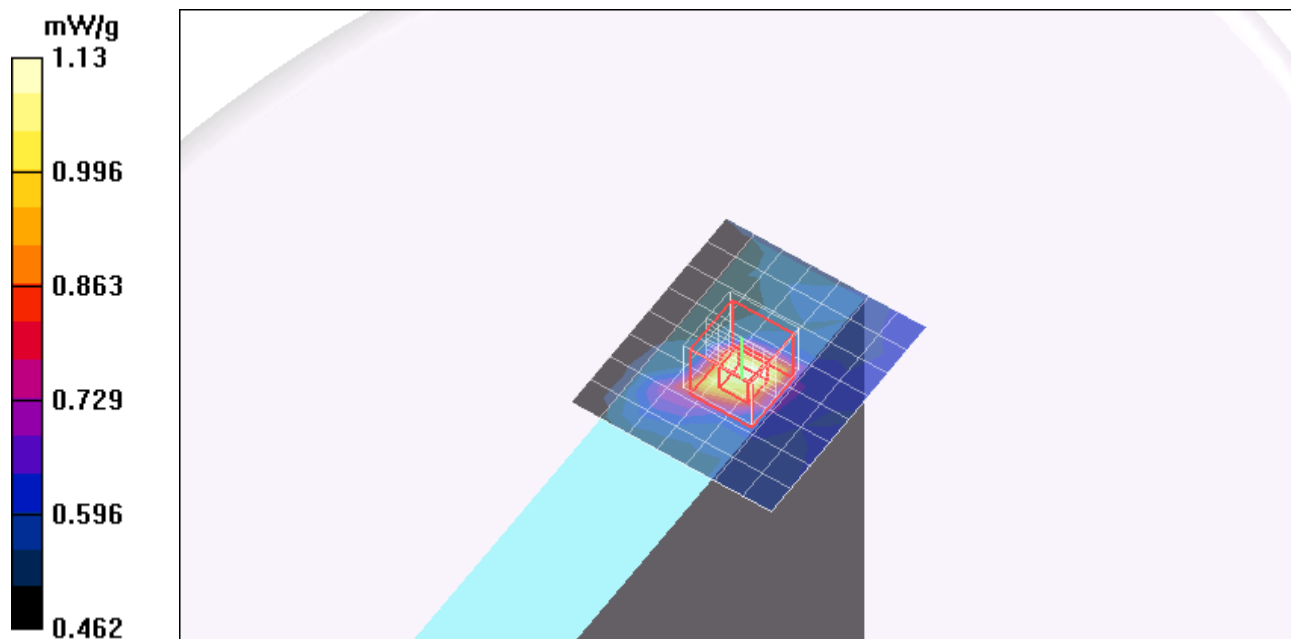

Test Laboratory: Compliance Certification Services

Secondary Landscape Position

DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A

Communication System: 802.11a; Frequency: 5785 MHz; Duty Cycle: 1:1.1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 6.24$ mho/m; $\epsilon_r = 49.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3554; ConvF(3.83, 3.83, 3.83); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Toshiba A mode Chain B Sub A Ant - M ch/Area Scan (8x9x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.02 mW/g

Toshiba A mode Chain B Sub A Ant - M ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm


Reference Value = 6.05 V/m; Power Drift = -0.050 dB

Peak SAR (extrapolated) = 7.28 W/kg

SAR(1 g) = 1.45 mW/g; SAR(10 g) = 0.537 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.95 mW/g

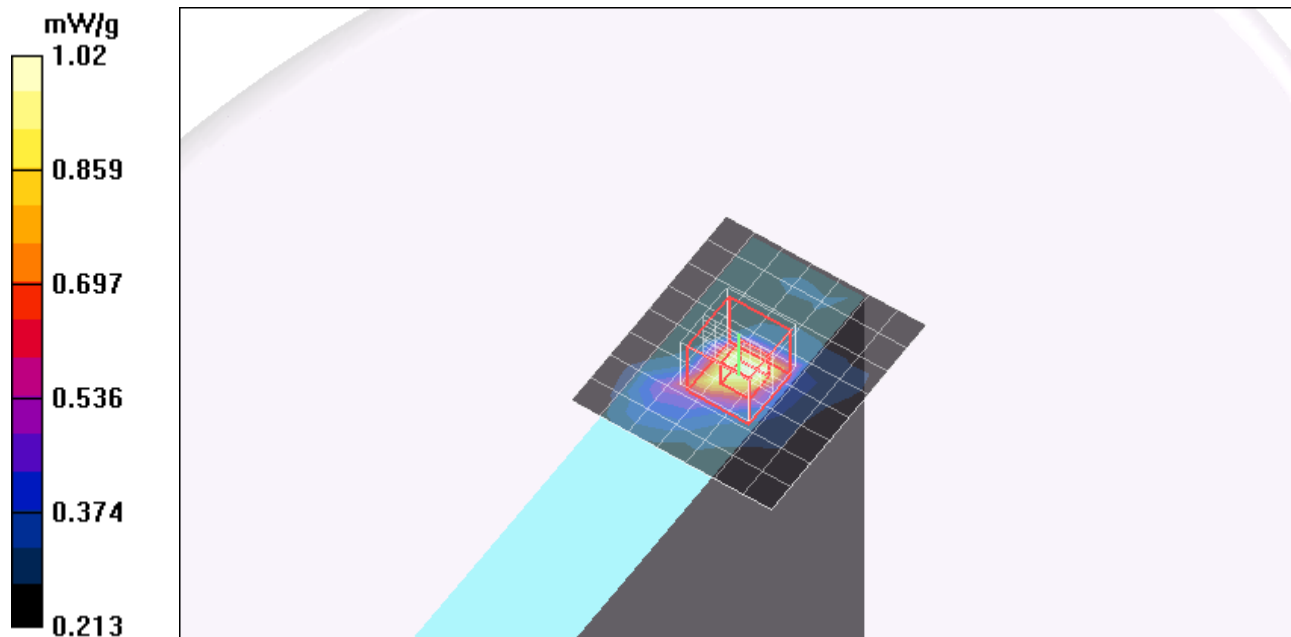

Test Laboratory: Compliance Certification Services

Secondary Landscape Position

DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A

Communication System: 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1.1

Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 6.31$ mho/m; $\epsilon_r = 49.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3554; ConvF(3.83, 3.83, 3.83); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Toshiba A mode Chain B Sub A Ant - H ch/Area Scan (8x9x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.969 mW/g

Toshiba A mode Chain B Sub A Ant - H ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm


Reference Value = 16.3 V/m; Power Drift = -0.183 dB

Peak SAR (extrapolated) = 7.09 W/kg

SAR(1 g) = 1.42 mW/g; SAR(10 g) = 0.536 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.86 mW/g

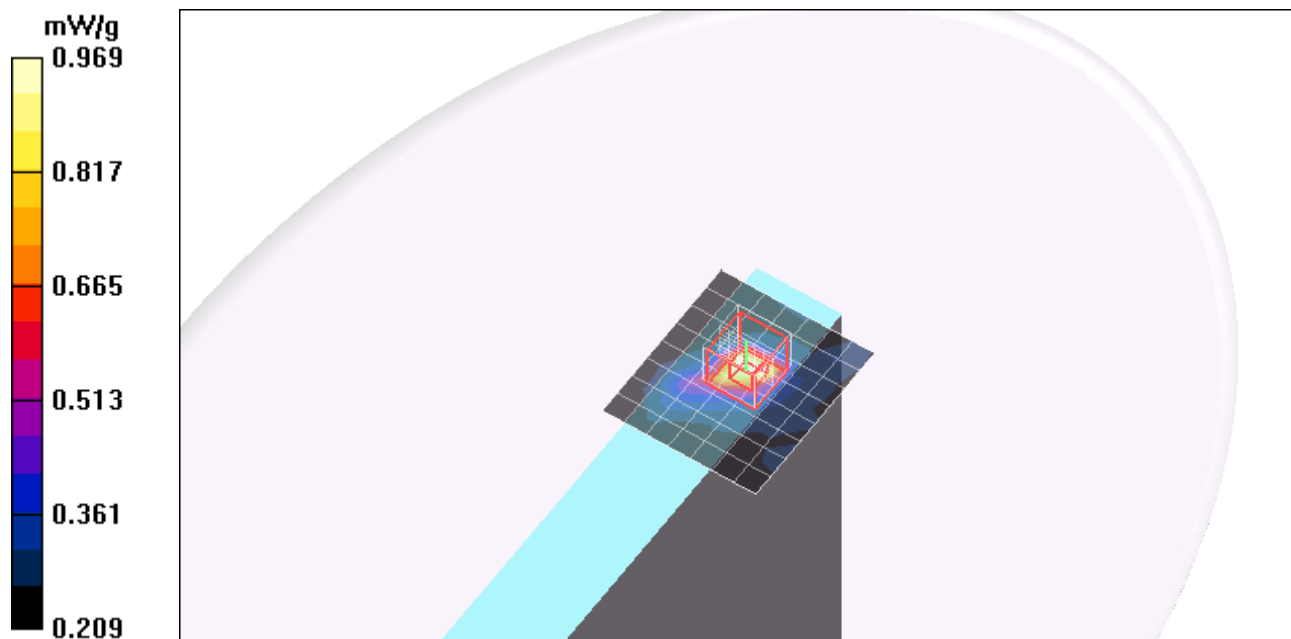

Test Laboratory: Compliance Certification Services

Secondary Landscape Position


DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A

Communication System: 802.11a/g; Frequency: 5825 MHz; Duty Cycle: 1:1.1

Toshiba A mode Chain B Sub A Ant - H ch/Z Scan (1x1x41): Measurement grid: dx=20mm, dy=20mm, dz=2.5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.58 mW/g

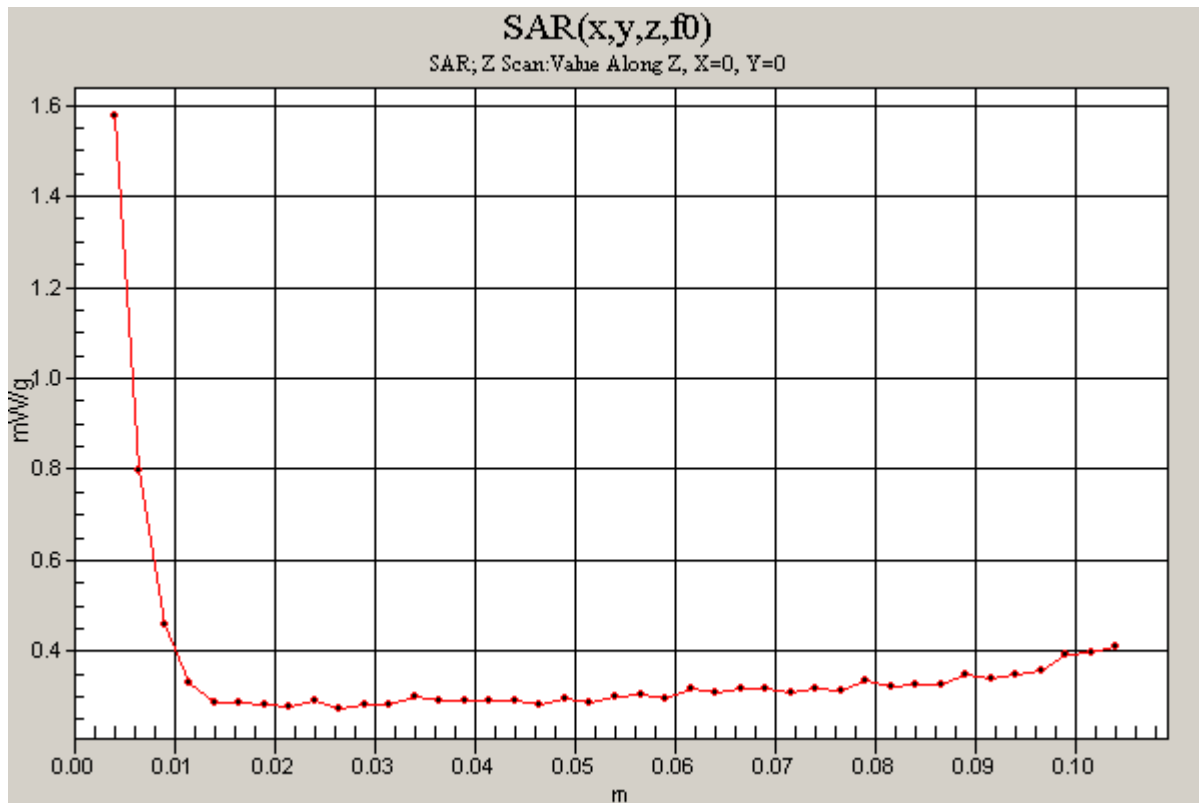

Test Laboratory: Compliance Certification Services

Secondary Landscape Position

DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A

Communication System: 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1.1

Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 6.31$ mho/m; $\epsilon_r = 49.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3554; ConvF(3.83, 3.83, 3.83); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Toshiba A mode Chain B Sub A Ant - H ch (Co-Tx)/Area Scan (8x9x1): Measurement grid:

dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.950 mW/g

Toshiba A mode Chain B Sub A Ant - H ch (Co-Tx)/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2.5mm


Reference Value = 16.4 V/m; Power Drift = -0.184 dB

Peak SAR (extrapolated) = 6.10 W/kg

SAR(1 g) = 1.43 mW/g; SAR(10 g) = 0.541 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.87 mW/g

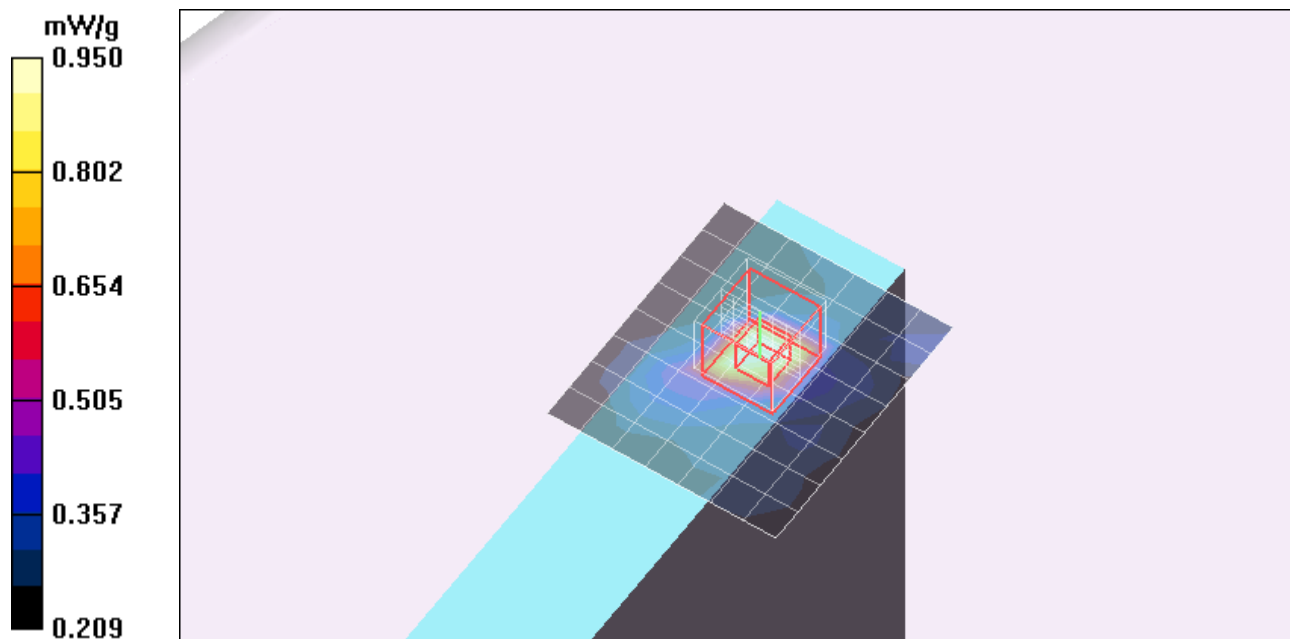

Test Laboratory: Compliance Certification Services

Secondary Landscape Position

DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A


Communication System: 802.11agn; Frequency: 5825 MHz; Duty Cycle: 1:1.1

Toshiba A mode Chain B Sub A Ant - H ch (Co-Tx)/Z Scan (1x1x41): Measurement grid:

dx=20mm, dy=20mm, dz=2.5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.56 mW/g

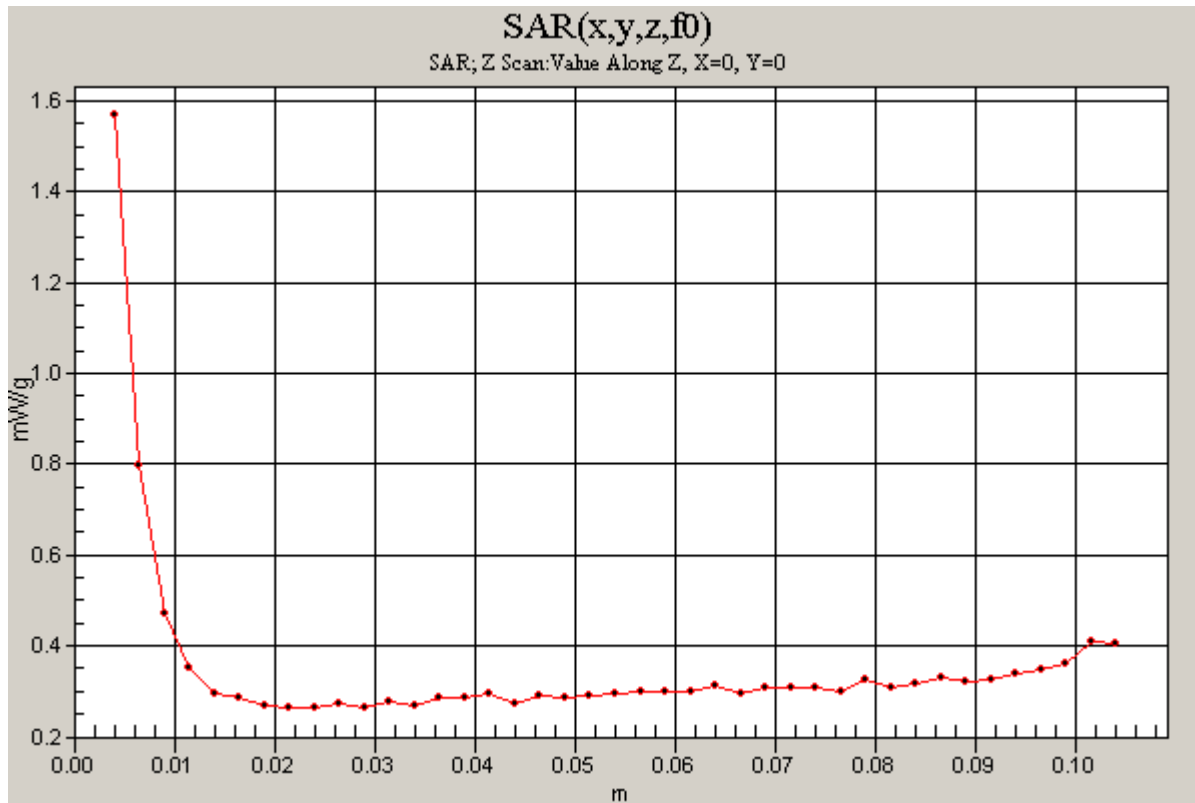

Test Laboratory: Compliance Certification Services

Lap Held Position

DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A

Communication System: 802.11a; Frequency: 5785 MHz; Duty Cycle: 1:1.1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 6.2$ mho/m; $\epsilon_r = 46$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3554; ConvF(3.83, 3.83, 3.83); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Toshiba A mode Chain A Main Ant - M ch/Area Scan (8x11x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.704 mW/g

Toshiba A mode Chain A Main Ant - M ch/Zoom Scan 2 (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm


Reference Value = 10.2 V/m; Power Drift = 0.056 dB

Peak SAR (extrapolated) = 0.744 W/kg

SAR(1 g) = 0.684 mW/g; SAR(10 g) = 0.643 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.744 mW/g

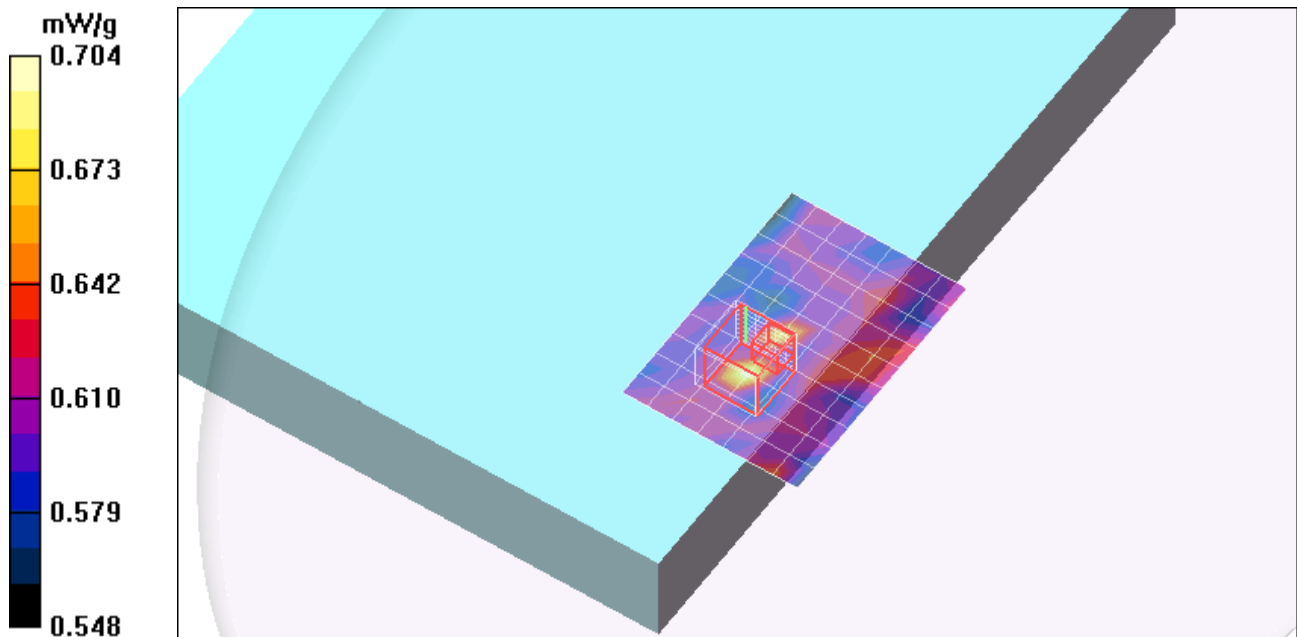

Test Laboratory: Compliance Certification Services

Lap Held Position

DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A

Communication System: 802.11a; Frequency: 5785 MHz; Duty Cycle: 1:1.1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 6.2$ mho/m; $\epsilon_r = 46$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3554; ConvF(3.83, 3.83, 3.83); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Toshiba A mode Chain B Sub A Ant - M ch/Area Scan (7x10x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.815 mW/g

Toshiba A mode Chain B Sub A Ant - M ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm


Reference Value = 18.1 V/m; Power Drift = 0.096 dB

Peak SAR (extrapolated) = 0.958 W/kg

SAR(1 g) = 0.790 mW/g; SAR(10 g) = 0.745 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.958 mW/g

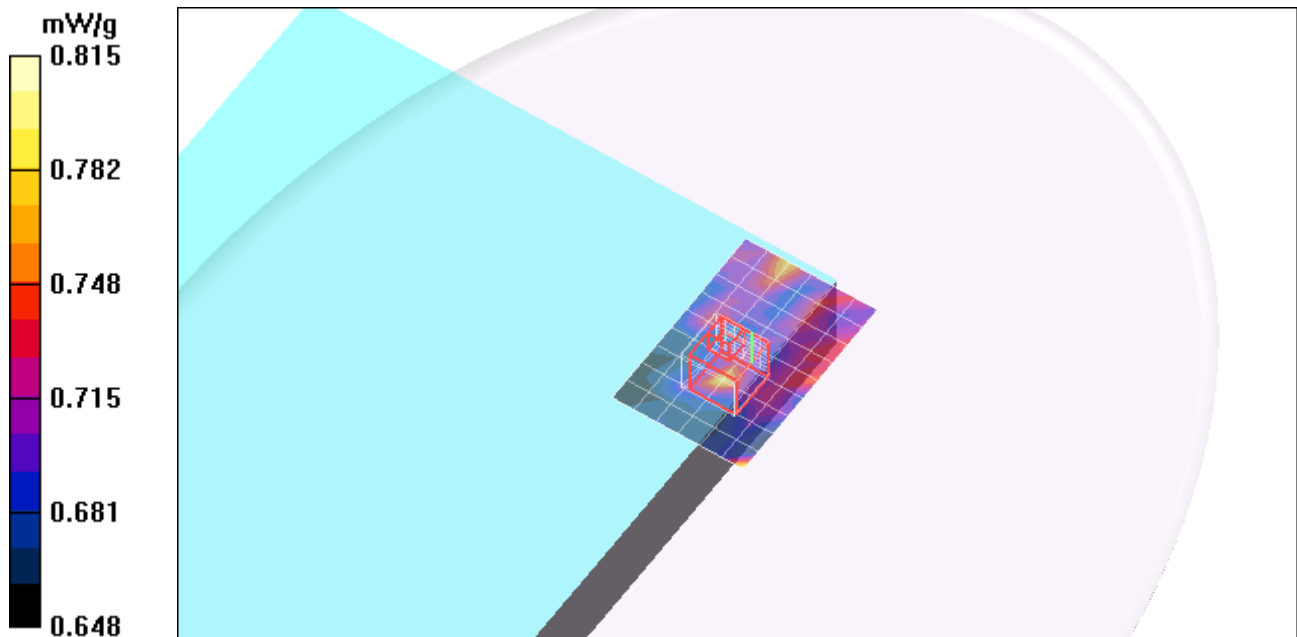

Test Laboratory: Compliance Certification Services

Primary Portrait Position

DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A

Communication System: 802.11abn; Frequency: 5785 MHz; Duty Cycle: 1:1.1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 6.2$ mho/m; $\epsilon_r = 46$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012 W/kg
- Probe: EX3DV4 - SN3554; ConvF(3.83, 3.83, 3.83); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Toshiba A mode Chain A Main ant - M ch/Area Scan (8x11x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.421 mW/g

Toshiba A mode Chain A Main ant - M ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2.5mm


Reference Value = 7.50 V/m; Power Drift = 0.089 dB

Peak SAR (extrapolated) = 0.386 W/kg

SAR(1 g) = 0.365 mW/g; SAR(10 g) = 0.352 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.386 mW/g

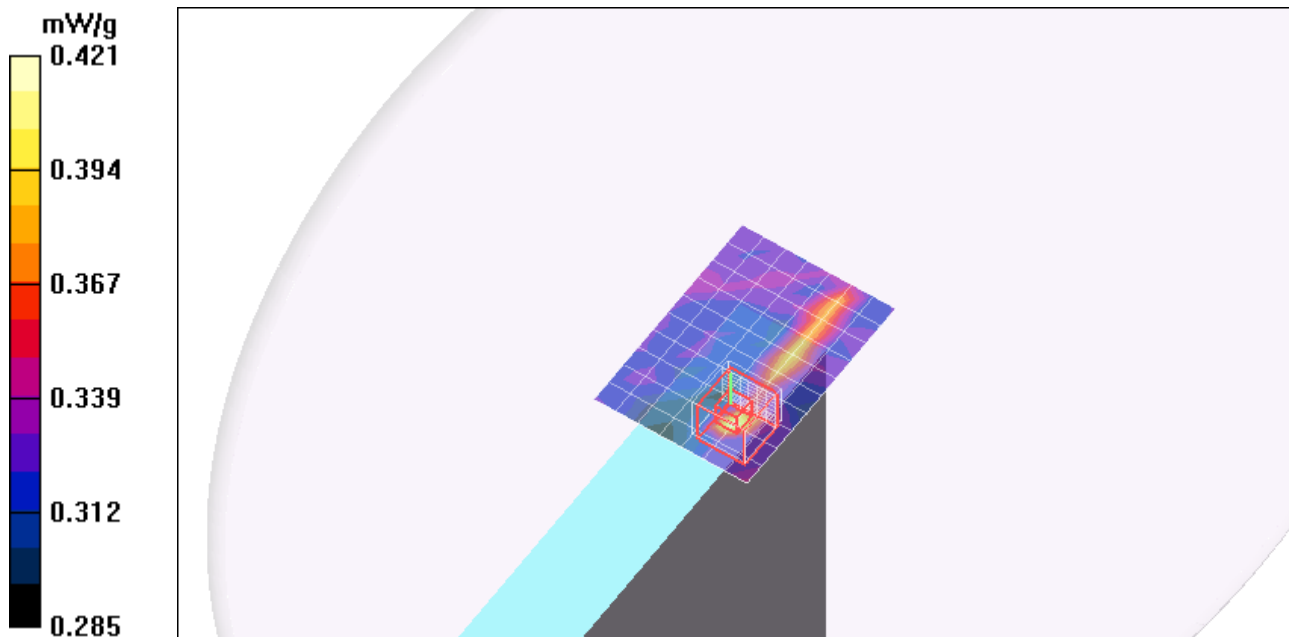

Test Laboratory: Compliance Certification Services

Secondary Portrait Position

DUT: Toshiba Protege M700 Tablet; Type: Laptop; Serial: N/A

Communication System: 802.11abn; Frequency: 5785 MHz; Duty Cycle: 1:1.1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 6.2$ mho/m; $\epsilon_r = 46$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3554; ConvF(3.83, 3.83, 3.83); Calibrated: 4/24/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 11/16/2006
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Toshiba A mode Chain A Main ant - M ch/Area Scan (8x9x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.427 mW/g

Toshiba A mode Chain A Main ant - M ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 7.51 V/m; Power Drift = 0.208 dB

Peak SAR (extrapolated) = 0.398 W/kg

SAR(1 g) = 0.373 mW/g; SAR(10 g) = 0.345 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.386 mW/g

