



**FCC CFR47 PART 15 SUBPART C
CERTIFICATION
TEST REPORT**

FOR

LAPTOP WITH 802.11 b WLAN MINI PCI MODULE

MODEL NUMBER: PP20XX-XXXXX

BRAND NAME: TOSHIBA

FCC ID: CJ6UPP20XWL

REPORT NUMBER: 03U1875-1

ISSUE DATE: MAY 01, 2003

Prepared for

**TOSHIBA CORPORATION DIGITAL MEDIA NETWORK COMPANY
2-9 SUEHIRO-CHO, OME
TOKYO, 198-8710
JAPAN**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**

TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	3
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY.....	5
4. FACILITIES AND ACCREDITATION.....	5
4.1. <i>FACILITIES AND EQUIPMENT.....</i>	5
4.2. <i>TABLE OF ACCREDITATIONS AND LISTINGS.....</i>	6
5. CALIBRATION AND UNCERTAINTY.....	7
5.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	7
5.2. <i>MEASUREMENT UNCERTAINTY.....</i>	7
5.3. <i>TEST AND MEASUREMENT EQUIPMENT.....</i>	8
6. SETUP OF EQUIPMENT UNDER TEST.....	9
7. APPLICABLE RULES.....	11
8. TEST SETUP, PROCEDURE AND RESULT.....	14
8.1. <i>6 dB BANDWIDTH.....</i>	14
8.2. <i>OUTPUT POWER.....</i>	18
8.3. <i>PEAK POWER SPECTRAL DENSITY.....</i>	19
8.4. <i>CONDUCTED EMISSIONS</i>	23
8.5. <i>RADIATED EMISSIONS</i>	30
8.6. <i>POWERLINE CONDUCTED EMISSIONS</i>	44
8.7. <i>SETUP PHOTOS.....</i>	47

1. TEST RESULT CERTIFICATION

COMPANY NAME: TOSHIBA CORPORATION DIGITAL MEDIA NETWORK COMPANY
2-9 SUEHIRO-CHO, OME
TOKYO, 198-8710
JAPAN

EUT DESCRIPTION: LAPTOP WITH 802.11 b WLAN MINI PCI MODULE

MODEL NAME: PP20XX-XXXXX

DATE TESTED: MARCH 24 - APRIL 14, 2003

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

Approved & Released For CCS By:



MIKE HECKROTTE
CHIEF ENGINEER
COMPLIANCE CERTIFICATION SERVICES

Tested By:



VIEN TRAN
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. EUT DESCRIPTION

The EUT is an 802.11b WLAN mini PCI module operating in the 2.4-2.4835 GHz band. The EUT has a peak output power of 18.96 dBm (78.7 mW) and an antenna gain of -3.6 dBi.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, and 15.407.

4. FACILITIES AND ACCREDITATION

4.1. FACILITIES AND EQUIPMENT

The open area test sites and conducted measurement facilities used to collect the radiated data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

4.2. TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 1300
Japan	VCCI	CISPR 22 Two OATS and one conducted Site	 R-1014, R-619, C-640
Norway	NEMKO	EN50081-1, EN50081-2, EN50082-1, EN50082-2, IEC61000-6-1, IEC61000-6-2, EN50083-2, EN50091-2, EN50130-4, EN55011, EN55013, EN55014-1, EN55104, EN55015, EN61547, EN55022, EN55024, EN61000-3-2, EN61000-3-3, EN60945, EN61326-1	 ELA 117
Norway	NEMKO	EN60601-1-2 and IEC 60601-1-2, the Collateral Standards for Electro-Medical Products. MDD, 93/42/EEC, AIMD 90/385/EEC	 ELA-171
Taiwan	BSMI	CNS 13438	 SL2-IN-E-1012
Canada	Industry Canada	RSS210 Low Power Transmitter and Receiver	 IC2324 A,B,C, and F

5. CALIBRATION AND UNCERTAINTY

5.1. MEASURING INSTRUMENT CALIBRATION

The measurement instruments utilized to perform the tests documented in this report have been calibrated in accordance with the manufacturer's recommendations, and are traceable to national standards.

5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Radiated Emission	
30MHz – 200 MHz	+/- 3.3dB
200MHz – 1000MHz	+4.5/-2.9dB
1000MHz – 2000MHz	+4.6/-2.2dB
Power Line Conducted Emission	
150kHz – 30MHz	+/-2.9

5.3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
Quasi-Peak Adaptor	HP	85650A	2811A01335	5/23/2003
SA Display Section 1	HP	85662A	3026A19146	5/23/2003
SA RF Section, 22 GHz	HP	85660B	2140A01296	5/23/2003
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	6717	2/4/2004
Preamplifier, 1 ~ 26.5 GHz	HP	8449B	3008A00369	6/30/2003
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	2238	2/4/2004
Antenna, Biconical	Eaton	94455-1	1214	3/6/2004
Antenna, Log Periodic 200 ~ 1000 MHz	EMCO	3146	9107-3163	3/6/2004
Preamplifier, 1300 MHz	HP	8447D	2944A06833	8/22/2003
Line Filter	16	LMF-3489	497	CNR
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	8379443	6/4/2003
EMI Test Receiver	R & S	ESHS 20	827129/006	4/17/2003
PSA Spectrum Analyzer	Agilent	E4446A	42070220	1/13/2004

6. SETUP OF EQUIPMENT UNDER TEST

SETUP INFORMATION FOR TRANSMITTER TESTS

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Device Type	Manufacturer	Model	Serial Number	FCC ID
Laptop	Toshiba	PP2002-00002	321029675	CJ6PA3171WL
AC Adapter	Toshiba	PA3241U-HACA	0211A00164506	N/A
Disk Drive	Toshiba	PA3109U-1FDD	2382975660	DoC


I/O CABLES

Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	DC	1	DC PWR	Unshielded	1.86 m	N/A
2	AC	1	AC PWR	Unshielded	1.86 m	N/A
3	USB	2	USB	Shielded	0.31 m	N/A

TEST SETUP

The EUT is installed inside the laptop.

SETUP DIAGRAM FOR TESTS

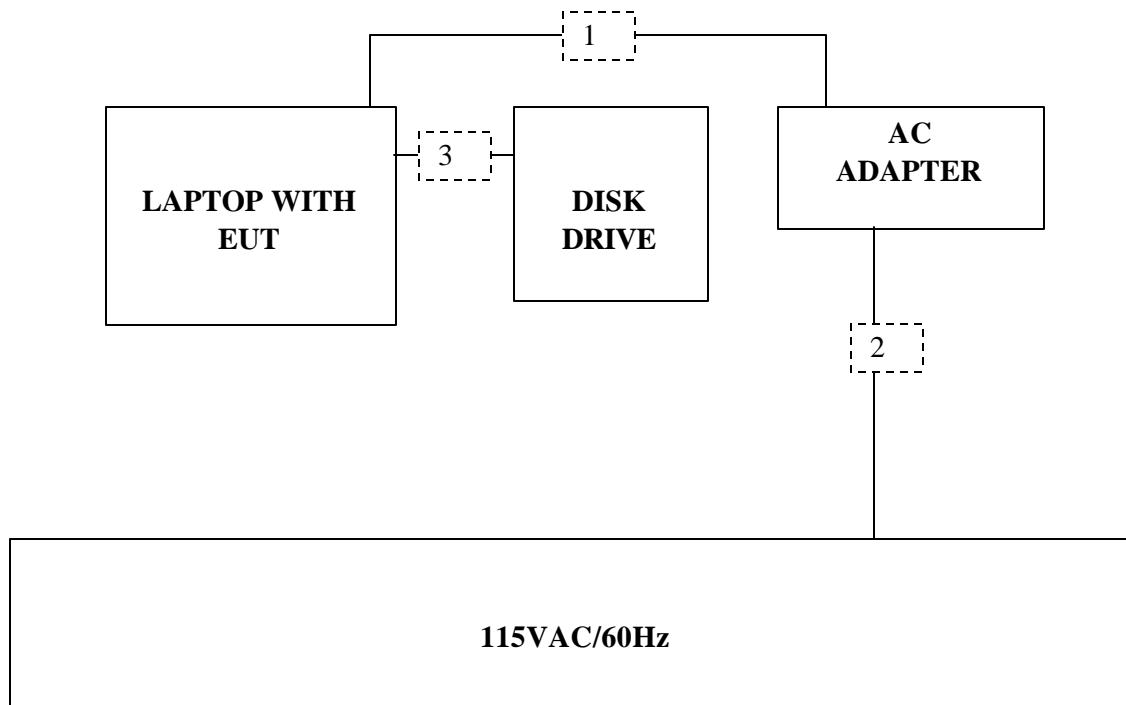

7. APPLICABLE RULES

§15.247 (a)- BANDWIDTH

(2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

§15.247 (b)- POWER OUTPUT

The maximum peak output power of the intentional radiator shall not exceed the following:

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

(4) Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.247 (b)- RADIO FREQUENCY EXPOSURE

(5) Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See §1.1307(b)(1) of this chapter.

§15.247 (c)- SPURIOUS EMISSIONS

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

§15.247 (d)- PEAK POWER SPECTRAL DENSITY

(d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

(f) The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

§15.205- RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.207- CONDUCTED LIMITS

(a) For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 450 kHz to 30 MHz shall not exceed 250 microvolts. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

§15.209- RADIATED EMISSION LIMITS

(a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


(b) In the emission table above, the tighter limit applies at the band edges.

Frequency Range (MHz)	Field Strength (uV/m at 3 m)	Field Strength (dBuV/m at 3 m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

8. TEST SETUP, PROCEDURE AND RESULT

8.1. 6 dB BANDWIDTH

TEST SETUP

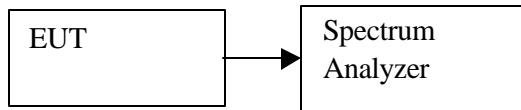

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.


RESULTS

No non-compliance noted:


2.4 GHz Band


Channel	Frequency (MHz)	B (kHz)	Limit (kHz)	Margin (kHz)
Low	2412	11300	500	10800
Middle	2437	11300	500	10800
High	2462	11100	500	10600

6 DB BANDWIDTH (LOW CHANNEL)

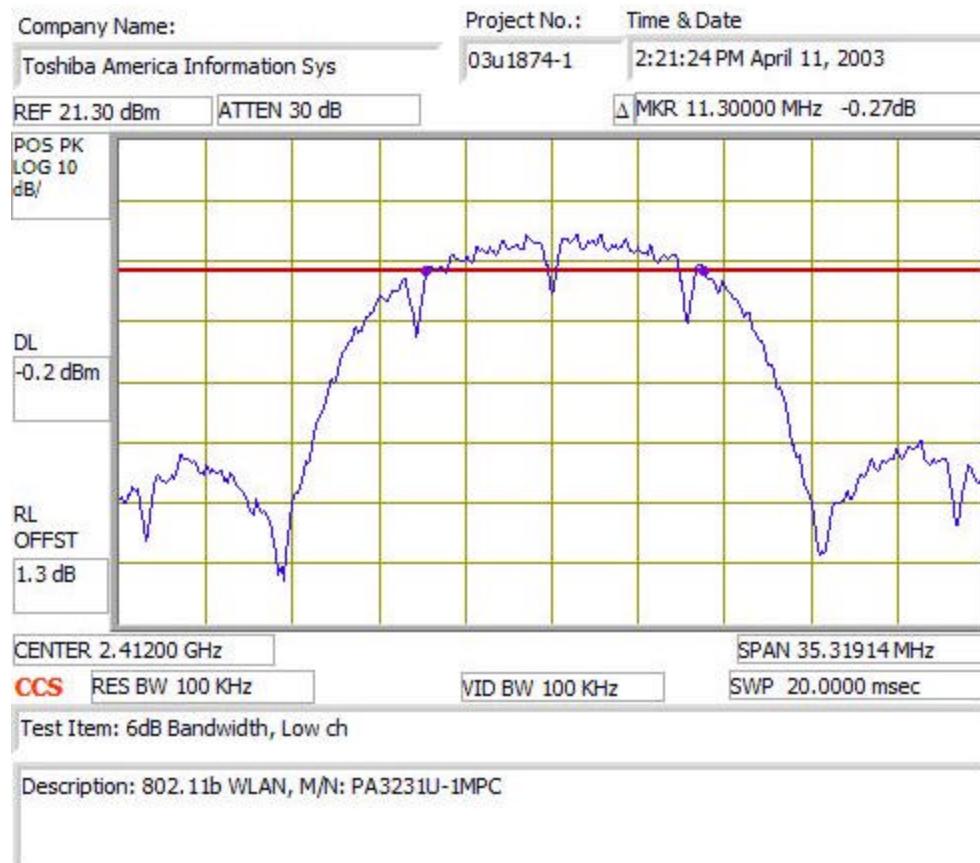


6 DB BANDWIDTH (MIDDLE CHANNEL)

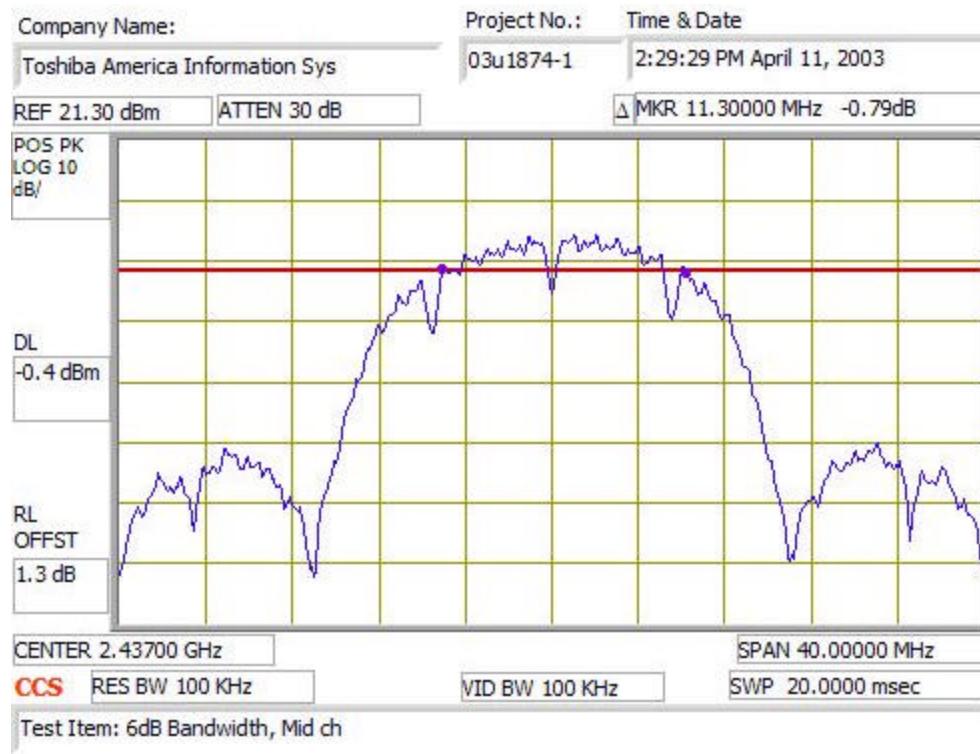

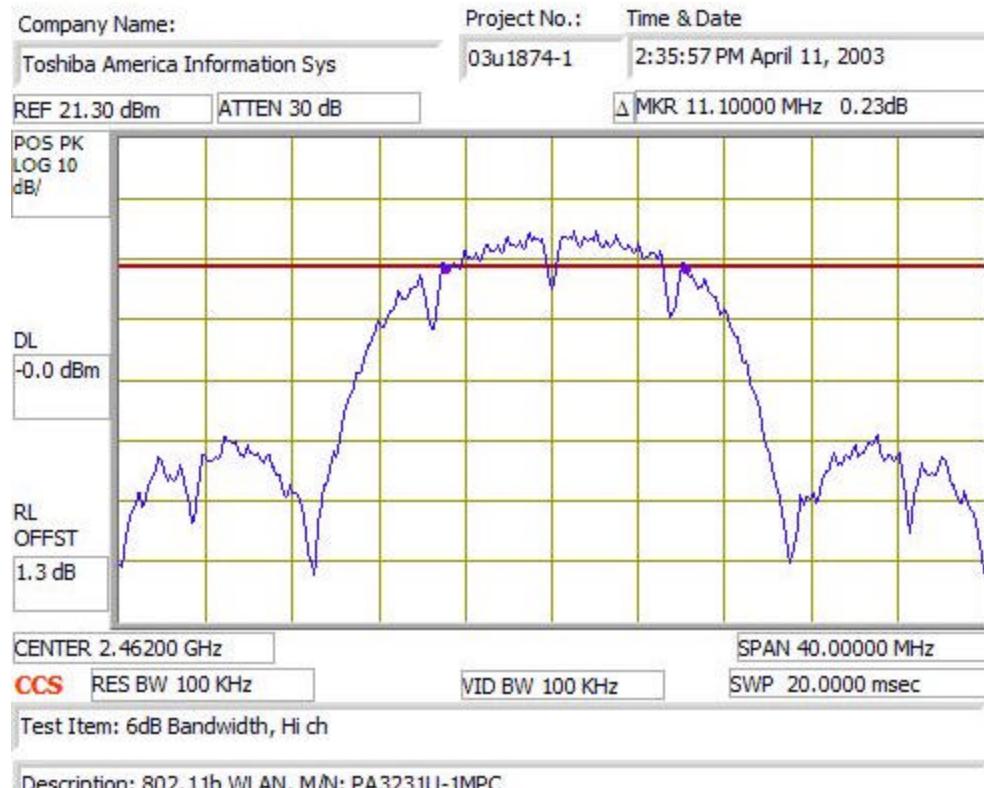6 DB BANDWIDTH (HIGH CHANNEL)

8.2. OUTPUT POWER

TEST SETUP

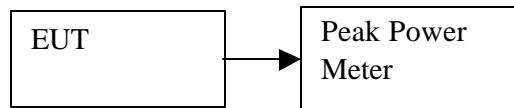

TEST PROCEDURE

The transmitter output is connected to the power meter. The power meter is set to read peak power.

PEAK LIMIT

The maximum antenna gain = -3.6 dBi, therefore the limit is 30 dBm.

AVERAGE LIMIT

None, reporting only.

RESULTS

No non-compliance noted:


The cable assembly insertion loss of 11.3 dB (including 10 dB pad and 1.3 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

2.4 GHz Band

Channel	Frequency (MHz)	Avg. Power (dBm)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	17.43	18.92	30	-11.08
Middle	2437	17.17	18.66	30	-11.34
High	2462	17.50	18.96	30	-11.04

8.3. PEAK POWER SPECTRAL DENSITY

TEST SETUP

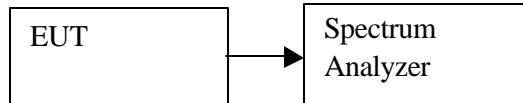

TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW \geq 3KHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

RESULTS

No non-compliance noted:


2.4 GHz Band


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-11.6	8	-19.6
Middle	2437	-12.1	8	-20.1
High	2462	-11.7	8	-19.7

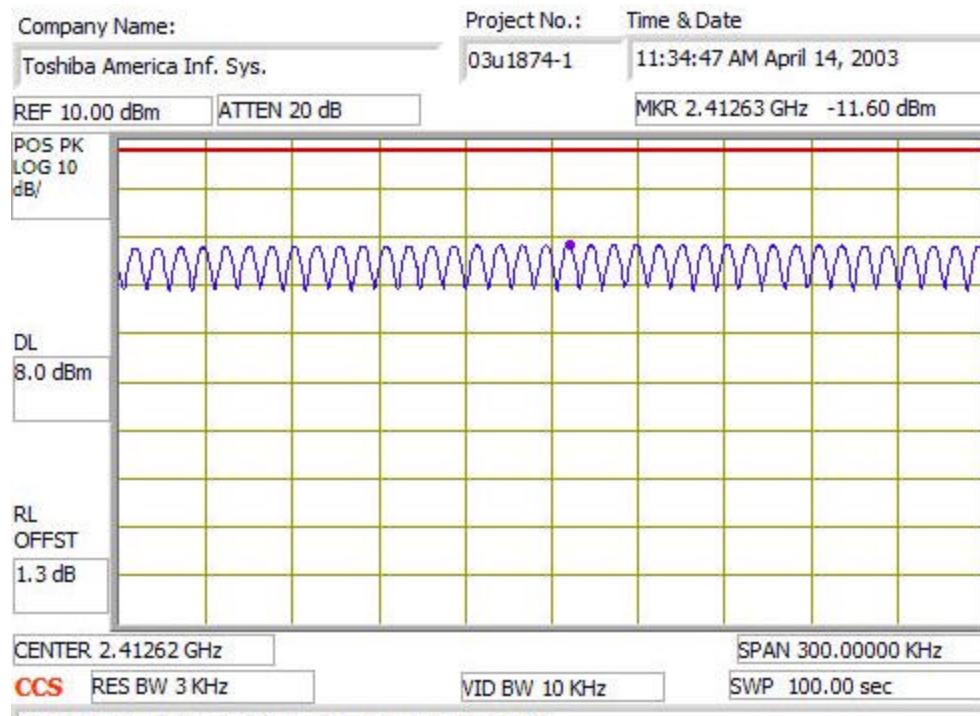PPSD (LOW CHANNEL)

Test Item: Peak Power Spectral Density, Low Ch (FCC)

Description:802.11b WLAN, M/N: PA3231U-1MPC

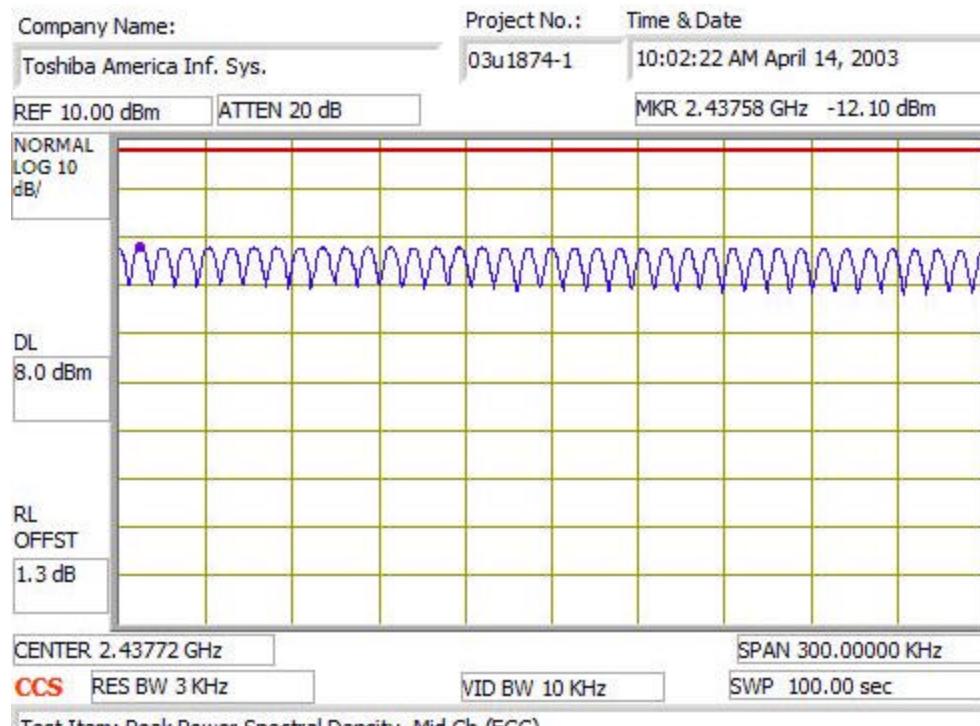PPSD (MIDDLE CHANNEL)

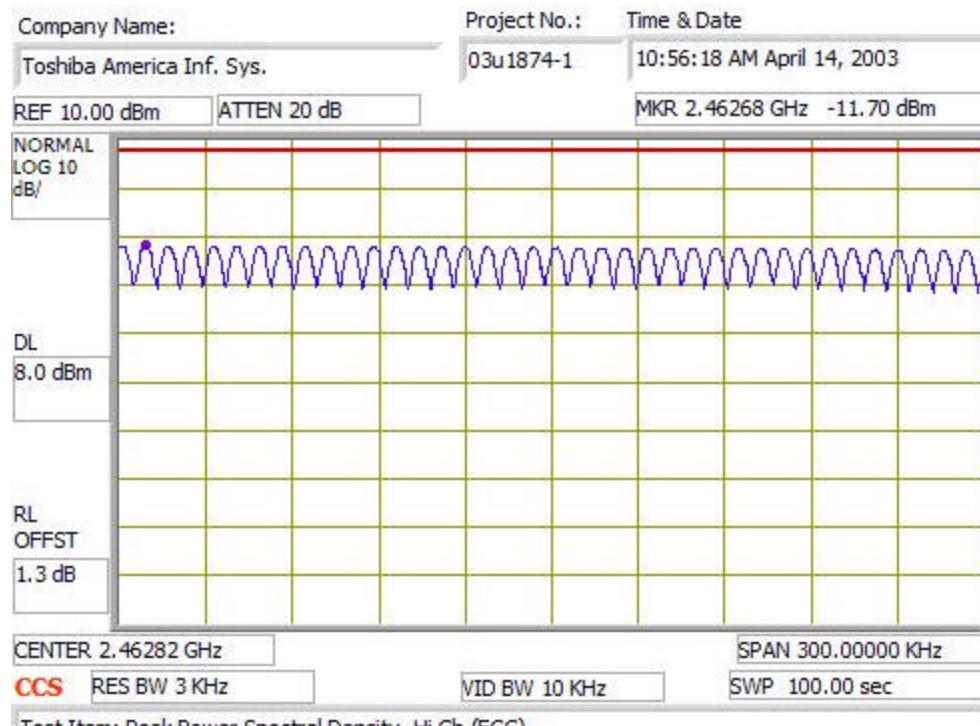PPSD (HIGH CHANNEL)


Test Item: Peak Power Spectral Density, Hi Ch (FCC)

Description:802.11b WLAN, M/N: PA3231U-1MPC

8.4. CONDUCTED EMISSIONS

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

TEST SETUP

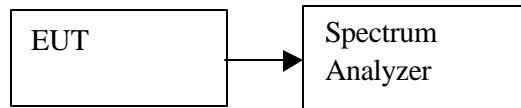


TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30 MHz to 26.5 GHz range with the transmitter set to the lowest, middle, and highest channels.

RESULTS

No non-compliance noted:

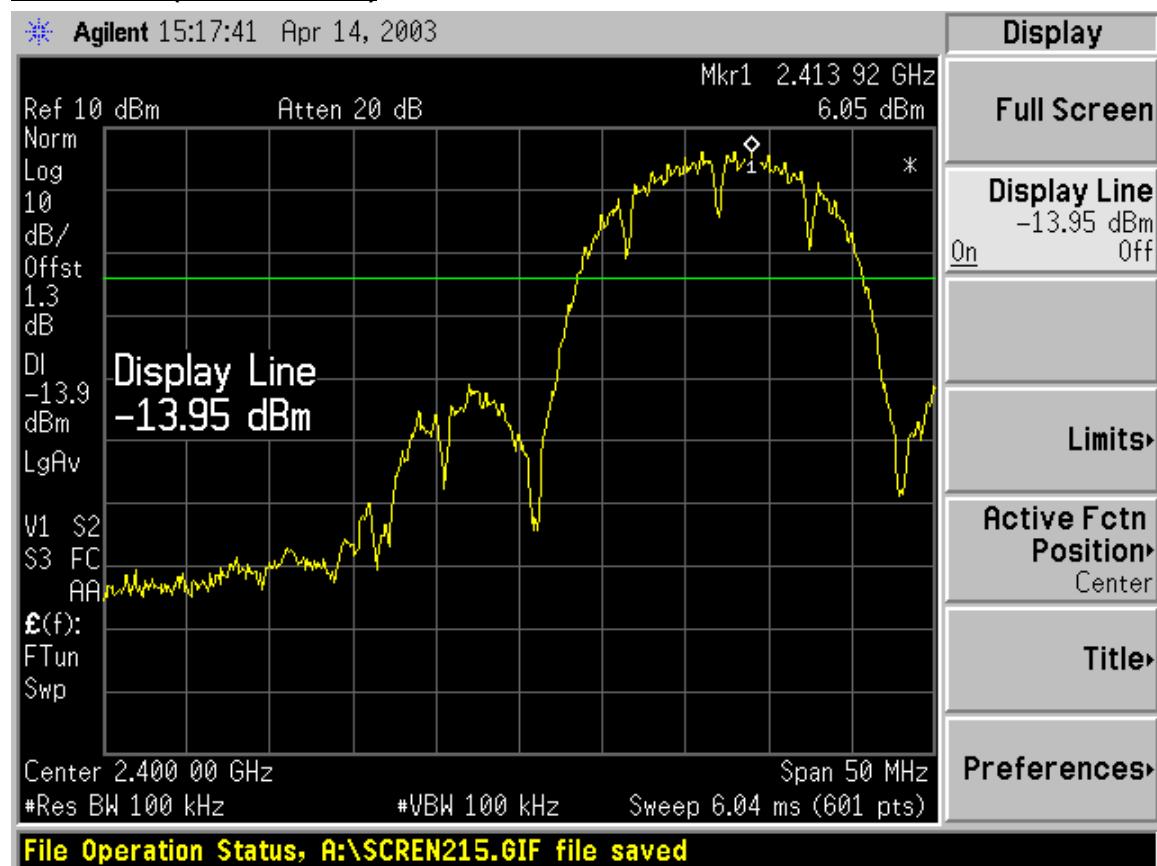BAND EDGE (LOW CHANNEL)

CONDUCTED SPURIOUS EMISSIONS (LOW CHANNEL)

