

FCC CFR47 PART 15 SUBPART C
CERTIFICATION



TEST REPORT

FOR

TOUCH SCREEN PLATFORM WITH BLUETOOTH AND IEEE802.11b

MODEL: PORTEGE 3500

FCC ID: CJ6UPP350BT

REPORT NUMBER: 02U1463-1

ISSUE DATE: OCTOBER 3, 2002

Prepared for
TOSHIBA CORPORATION DIGITAL MEDIA NETWORK COMPANY
2-9, SUEHIRO-CHO, OME,
TOKYO, 198-8710
JAPAN

Prepared by
COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888

TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	3
2. CROSS REFERENCES TO OTHER APPLICABLE REPORTS	4
3. EUT DESCRIPTION	4
4. TEST METHODOLOGY	5
5. FACILITIES AND ACCREDITATION.....	5
5.1. <i>FACILITIES AND EQUIPMENT</i>	5
5.2. <i>LABORATORY ACCREDITATIONS AND LISTINGS</i>	5
5.3. <i>TABLE OF ACCREDITATIONS AND LISTINGS.....</i>	6
6. CALIBRATION AND UNCERTAINTY	7
6.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	7
6.2. <i>MEASUREMENT UNCERTAINTY</i>	7
6.3. <i>TEST AND MEASUREMENT EQUIPMENT</i>	8
7. SETUP OF EQUIPMENT UNDER TEST.....	9
7.1. <i>APPLICABLE RULES</i>	11
8. TEST SETUP, PROCEDURE AND RESULT	13
8.1. <i>UNDESIRABLE EMISSIONS – RADIATED MEASUREMENTS</i>	13

1. TEST RESULT CERTIFICATION

COMPANY NAME: TOSHIBA CORPORATION DIGITAL MEDIA NETWORK COMPANY
2-9, SUEHIRO-CHO, OME
TOKYO, 198-8710 JAPAN

EUT DESCRIPTION: TOUCH SCREEN PLATFORM WITH BLUETOOTH AND IEEE802.11b

MODEL NAME: PORTEGE 3500

DATE TESTED: SEPTEMBER 24 - 25, 2002

TYPE OF EQUIPMENT	INTENTIONAL RADIATOR
EQUIPMENT TYPE	TWO CO-LOCATED 2.4 - 2.4835 GHz TRANSCEIVERS
MEASUREMENT PROCEDURE	ANSI 63.4 / 1992, TIA/EIA 603
PROCEDURE	CERTIFICATION
FCC RULE	CFR 47 PART 15.C

Compliance Certification Services, Inc. tested the above equipment for compliance with the requirements set forth in CFR 47, PART 15, Subpart C. Test results show that the measured emission levels emanating from the equipment in the configuration described in this report do not exceed the specified limits. This report documents the radiated emissions of the co-located radio modules. See Section 2 below for cross references to additional reports with respect to other applicable requirements.

Note: This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

Approved & Released For CCS By:



THU CHAN
SENIOR EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

Tested By:



MIKE HECKROTTE
CHIEF ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. CROSS REFERENCES TO OTHER APPLICABLE REPORTS

The Bluetooth Transmitter Module performance, with respect to FCC Part 15 Subpart C requirements, is documented by CCS Report 02U1501-1 dated October 3, 2002, FCC ID: CJ6UPA3232BT, Certification Pending.

The WLAN Transmitter Module has a limited module approval under FCC ID CJ6PA3171WL.

The performance of the Touch Screen Platform system, with respect to AC Mains Line Conducted emissions and radiated emissions as a Digital Device, is documented by Toshiba Document Number OFA-H3355 Rev.A dated October 3, 2002, FCC ID: CJ6UPP350SY.

3. EUT DESCRIPTION

The Toshiba Portege 3500 is a Touch Screen Platform with two transceivers installed. One is a Bluetooth module and one is a WLAN module.

The Bluetooth module is a wireless Frequency Hopping Spread Spectrum transceiver that operates from 2402 – 2480 MHz. This unit provides a maximum power output of +1.4 dBm (1.38 mW) and is connected to an internal film antenna with a 1.22 dBi gain (Single Film).

The WLAN module is a wireless Direct Sequence Spread Spectrum transceiver that operates from 2412 – 2462 MHz. This unit provides a maximum power output of +19.29 dBm (85 mW) and is connected to two identical internal film antennas. One antenna (Main) is used for transmit and both antennas (Main plus Aux) are used for dual diversity receive.

The Portege 3500 can be equipped with either of two pairs of WLAN antennas. One pair (Dual Film) utilizes antennas with 0.9 dBi gain. The alternate pair (Wide Dual Film) utilizes antennas with 1.26 dBi gain.

4. TEST METHODOLOGY

Conducted and radiated testing were performed according to the procedures documented on chapter 13 of ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, and 15.407.

5. FACILITIES AND ACCREDITATION

5.1. FACILITIES AND EQUIPMENT

The open area test sites and conducted measurement facilities used to collect the radiated data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

Receiving equipment (i.e., receiver, analyzer, quasi-peak adapter, pre-selector) and LISNs conform to CISPR specifications for "Radio Interference Measuring Apparatus and Measurement Methods," Publication 16.

5.2. LABORATORY ACCREDITATIONS AND LISTINGS

The test facilities used to perform radiated and conducted emissions tests are accredited by National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code: 200065-0 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government. In addition, the test facilities are listed with Federal Communications Commission (reference no: 31040/SIT (1300B3) and 31040/SIT (1300F2)).

5.3. TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	NVLAP*	FCC Part 15, CISPR 22, AS/NZS 3548, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11, CNS 13438	 200065-0
USA	FCC	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 1300
Japan	VCCI	CISPR 22 Two OATS and one conducted Site	 R-1014, R-619, C-640
Norway	NEMKO	EN50081-1, EN50081-2, EN50082-1, EN50082-2, IEC61000-6-1, IEC61000-6-2, EN50083-2, EN50091-2, EN50130-4, EN55011, EN55013, EN55014-1, EN55104, EN55015, EN61547, EN55022, EN55024, EN61000-3-2, EN61000-3-3, EN60945, EN61326-1	 ELA 117
Norway	NEMKO	EN60601-1-2 and IEC 60601-1-2, the Collateral Standards for Electro-Medical Products. MDD, 93/42/EEC, AIMD 90/385/EEC	 ELA-171
Taiwan	BSMI	CNS 13438	 SL2-IN-E-1012
Canada	Industry Canada	RSS210 Low Power Transmitter and Receiver	 IC2324 A,B,C, and F

* No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.

6. CALIBRATION AND UNCERTAINTY

6.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

6.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Radiated Emission	
30MHz – 200 MHz	+/- 3.3dB
200MHz – 1000MHz	+4.5/-2.9dB
1000MHz – 2000MHz	+4.6/-2.2dB
Power Line Conducted Emission	
150kHz – 30MHz	+/-2.9

Any results falling within the above values are deemed to be marginal.

6.3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST AND MEASUREMENT EQUIPMENT LIST				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due Date
Spectrum Analyzer	HP	8566B	3014A06685	6/1/03
Spectrum Display	HP	85662A	2152A03066	6/1/03
Quasi-Peak Detector	HP	85650A	3145A01654	6/1/03
Preamplifier	HP	8447D	2944A06833	8/10/02
Log Periodic Antenna	EMCO	3146	9107-3163	3/30/03
Biconical Antenna	Eaton	94455-1	1197	3/30/03
Spectrum Analyzer	HP	8593EM	3710A00205	6/11/03
Preamplifier (1 - 26.5GHz)	HP	11	646456	4/26/03
Horn Antenna (1 - 18GHz)	EMCO	3115	6717	1/31/03
Horn Antenna (18 - 26.5GHz)	ARA	MWH 1826/B	6717	1/31/03
High Pass Filter (4.57GHz)	FSY Microwave	FM-4570-9SS	003	N.C.R.

7. SETUP OF EQUIPMENT UNDER TEST

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Device Type	Manufacturer	Model	Serial Number	FCC ID
Touch Screen Platform	Toshiba	Portege 3500	92027903	Prototype / EUT
Laptop	Toshiba	TECRA 9100	12040512	DoC
Touch Screen Platform	Toshiba	Portege 3500	82010051	Prototype / EUT
Laptop	Toshiba	TECRA 9100	72043652	DoC
AC Adapter	Toshiba	PA3083U-1ACA	1336963G	DoC
AC Adapter	Toshiba	PA3083U-1ACA	1230257G	DoC

Note 1: EUT Serial Number 92027903 is equipped with the Dual Film WLAN antenna set.

Note 2: The Tecra 9100 Serial Number 12040512 is set up to establish an ad hoc WLAN link with EUT Serial Number 92027903.

Note 3: EUT Serial Number 82010051 is equipped with the Wide Dual Film WLAN antenna set.

Note 4: The Tecra 9100 Serial Number 72043652 is set up to establish an ad hoc WLAN link with EUT Serial Number 82010051.

Note 5: Both EUT samples are equipped with the Single Film Bluetooth antenna.


I/O CABLES

Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US115	Unshielded	2 m	Integrated with AC Adapter
2	AC	1	US115	Unshielded	2 m	Integrated with AC Adapter

TEST SETUP

The EUT (equipped with a Bluetooth transceiver and a WLAN transceiver) is placed next to a laptop computer (equipped with a similar WLAN transceiver) during the test.

The Bluetooth transceiver in the EUT is operated in a standalone mode by a utility program. The WLAN transceiver in the EUT is operated in a linked ad hoc mode, using the similar WLAN to complete the link.

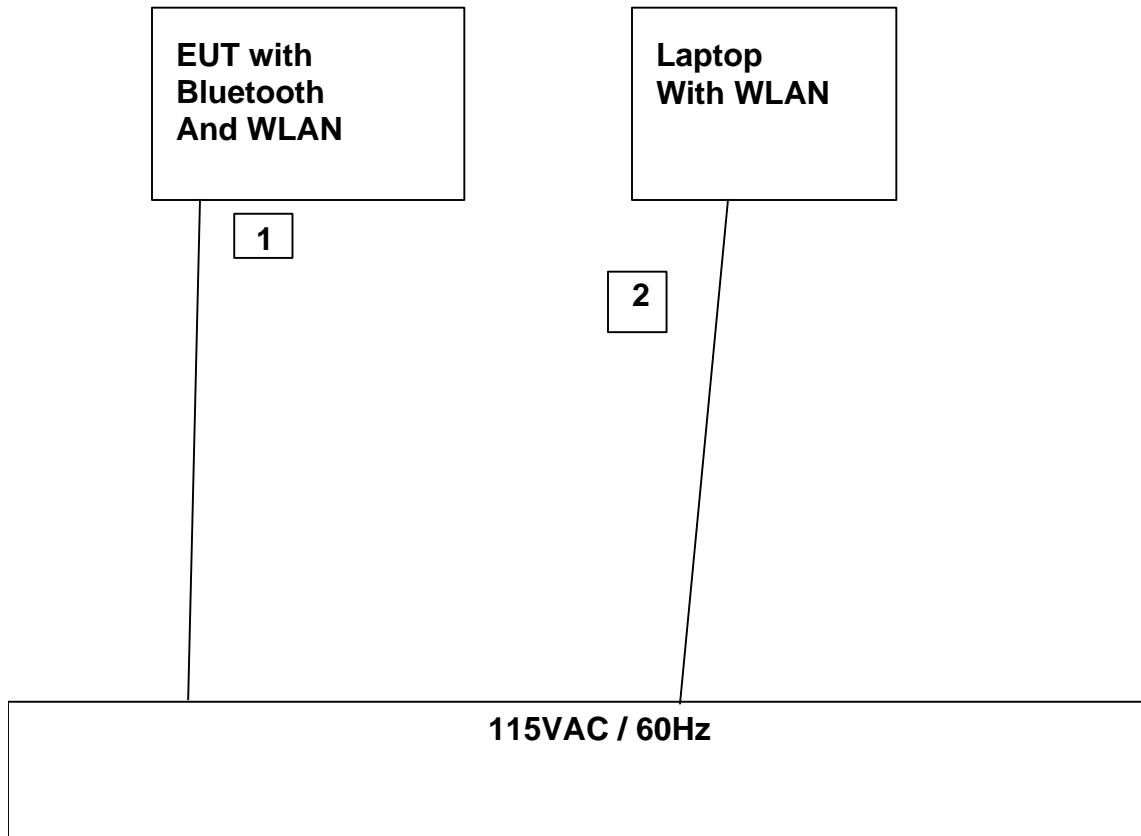SETUP DIAGRAM FOR TRANSMITTER TESTS

7.1. APPLICABLE RULES

§15.247 (c)- SPURIOUS EMISSIONS

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

§15.205- RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209- RADIATED EMISSION LIMITS

(a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

(b) In the emission table above, the tighter limit applies at the band edges.

Frequency Range (MHz)	Field Strength (uV/m at 3 m)	Field Strength (dBuV/m at 3 m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

8. TEST SETUP, PROCEDURE AND RESULT

8.1. UNDESIRABLE EMISSIONS – RADIATED MEASUREMENTS

TEST SETUP

The EUT is placed on the wooden table. The antenna to EUT distance is 3 meters for measurements below 1 GHz and 1 meter for measurements above 1 GHz. The EUT is configured in accordance with Section 8 of ANSI C63.4/1992.

The EUT is set to transmit in a continuous mode.

TEST PROCEDURE

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz within restricted bands, the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The frequency span is set small enough to easily differentiate between broadcast stations, intermittent ambient signals and EUT emissions. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the suspected signal. Measurements were made with the antenna polarized in both the vertical and the horizontal positions.

TEST PROCEDURE FOR CO-LOCATED TRANSMITTERS

Each transmitter is operated individually, in a continuously transmitting mode, on their respective Low, Middle, and High channels, and the spurious emissions are measured.

Pretesting of all channel combinations with both transmitters operating simultaneously is performed to determine the worst case simultaneous configuration.

The results of final testing of the worst case simultaneous configuration is presented in this report.

SYSTEM NOISE FLOOR FOR HARMONIC AND SPURIOUS MEASUREMENTS**Compliance Certification Services**

Worst Case Radiated Emissions System Noise Floor

Each band below corresponds to each horn antenna band

Uses the lowest gain preamplifier; actual preamp used may have higher gain

Uses the longest typical cable configuration; actual cables used may have less loss

Noise floor field strength results are compared to the FCC 15.205 Restricted Band limit

Specification Distance: 3 meters

Freq GHz	SA dBuV	AF dB/m	Distance m	Distance dB	Preamp dB	Cable dB	Field dBuV/m	Limit dBuV/m	Margin dB
1 to 18 GHz band									
RBW = 1 MHz, peak detection									
18	41.9	47.8	1	-9.5	32.6	13.5	61.06	74	-12.94
RBW = 1 MHz, average detection									
18	28.7	47.8	1	-9.5	32.6	13.5	47.86	54	-6.14
18 to 26.5 GHz band									
RBW = 1 MHz, peak detection									
26.5	44.6	33.4	1	-9.5	35.0	19.5	52.96	74	-21.04
RBW = 1 MHz, average detection									
26.5	32.4	33.4	1	-9.5	35.0	19.5	40.76	54	-13.24

TEST RESULTS

No non-compliance noted:

SPURIOUS RADIATED EMISSIONS WITH BLUETOOTH ONLY OPERATING

	Description of Test:		Spurious Radiated Emissions							
	Project Number:		02U1501							
	Date:		09/24/02							
	Test Engineer:		Mike Heckrotte							
	Site:		B							
	Company:		Toshiba							
	EUT Description:		Touch Screen / Bluetooth / Single Film Antenna / WLAN							
	Test Configuration:		EUT / AC Adapter / Laptop with WLAN / AC Adapter							
	Mode of Operation:		Bluetooth transmitting at maximum power, Low channel							
	WLAN is off									
	Specification Distance:		3.0	meters						
	Actual Distance:		1.0	meters	Cable Length:	15.0	feet			
Freq GHz	Pol V/H	Det SA	Dist dB	AF dB/m	Preamp dB	Filter dB	Cable dB	Field dBuV/m	Limit dBuV/m	Margin dB
4.804	V	Peak	50.0	-9.5	33.8	34.5	1.0	5.7	46.4	74.0
4.804	V	Peak*	50.0	-9.5	33.8	34.5	1.0	5.7	46.4	54.0
4.804	H	Peak	52.1	-9.5	33.8	34.5	1.0	5.7	48.5	74.0
4.804	H	Peak*	52.1	-9.5	33.8	34.5	1.0	5.7	48.5	54.0
7.206	V	Peak	44.6	-9.5	37.0	34.5	1.0	7.2	45.7	74.0
7.206	V	Peak*	44.6	-9.5	37.0	34.5	1.0	7.2	45.7	54.0
7.206	H	Peak	49.9	-9.5	37.0	34.5	1.0	7.2	51.0	74.0
7.206	H	Peak*	49.9	-9.5	37.0	34.5	1.0	7.2	51.0	54.0

Note 1: No other spurious emissions were detected above the system noise floor.

Note 2: * The Peak level was less than the Average limit.

	Description of Test: Spurious Radiated Emissions										
	Project Number: 02U1501										
	Date: 09/24/02										
	Test Engineer: Mike Heckrotte										
	Site: B										
	Company: Toshiba										
	EUT Description: Touch Screen / Bluetooth / Single Film Antenna / WLAN										
	Test Configuration: EUT / AC Adapter / Laptop with WLAN / AC Adapter										
	Mode of Operation: Bluetooth transmitting at maximum power, Mid channel										
	WLAN is off										
	Specification Distance: 3.0 meters										
	Actual Distance: 1.0 meters				Cable Length: 15.0 feet						
Freq GHz	Pol V/H	Det SA dBuV	Dist dB	AF dB/m	Preamp dB	Filter dB	Cable dB	Field dBuV/m	Limit dBuV/m	Margin dB	
4.882	V	Peak	51.1	-9.5	34.0	34.5	1.0	5.8	47.8	74.0	-26.2
4.882	V	Peak*	51.1	-9.5	34.0	34.5	1.0	5.8	47.8	54.0	-6.2
4.882	H	Peak	51.5	-9.5	34.0	34.5	1.0	5.8	48.2	74.0	-25.8
4.882	H	Peak*	51.5	-9.5	34.0	34.5	1.0	5.8	48.2	54.0	-5.8
7.323	V	Peak	43.9	-9.5	37.2	34.6	1.0	7.3	45.3	74.0	-28.7
7.323	V	Peak*	43.9	-9.5	37.2	34.6	1.0	7.3	45.3	54.0	-8.7
7.323	H	Peak	49.4	-9.5	37.2	34.6	1.0	7.3	50.8	74.0	-23.2
7.323	H	Peak*	49.4	-9.5	37.2	34.6	1.0	7.3	50.8	54.0	-3.2
Note 1: No other spurious emissions were detected above the system noise floor.											
Note 2: * The Peak level was less than the Average limit.											

	Description of Test: Spurious Radiated Emissions										
	Project Number: 02U1501										
	Date: 09/24/02										
	Test Engineer: Mike Heckrotte										
	Site: B										
	Company: Toshiba										
	EUT Description: Touch Screen / Bluetooth / Single Film Antenna / WLAN										
	Test Configuration: EUT / AC Adapter / Laptop with WLAN / AC Adapter										
	Mode of Operation: Bluetooth transmitting at maximum power, High channel										
	WLAN is off										
	Specification Distance: 3.0 meters										
	Actual Distance: 1.0 meters				Cable Length: 15.0 feet						
Freq GHz	Pol V/H	Det SA dBuV	Dist dB	AF dB/m	Preamp dB	Filter dB	Cable dB	Field dBuV/m	Limit dBuV/m	Margin dB	
4.960	V	Peak	50.2	-9.5	34.2	34.5	1.0	5.8	47.2	74.0	-26.8
4.960	V	Peak*	50.2	-9.5	34.2	34.5	1.0	5.8	47.2	54.0	-6.8
4.960	H	Peak	52.9	-9.5	34.2	34.5	1.0	5.8	49.9	74.0	-24.1
4.960	H	Peak*	52.9	-9.5	34.2	34.5	1.0	5.8	49.9	54.0	-4.1
7.440	V	Peak	44.7	-9.5	37.5	34.6	1.0	7.4	46.4	74.0	-27.6
7.440	V	Peak*	44.7	-9.5	37.5	34.6	1.0	7.4	46.4	54.0	-7.6
7.440	H	Peak	48.6	-9.5	37.5	34.6	1.0	7.4	50.3	74.0	-23.7
7.440	H	Peak*	48.6	-9.5	37.5	34.6	1.0	7.4	50.3	54.0	-3.7
Note 1: No other spurious emissions were detected above the system noise floor.											
Note 2: * The Peak level was less than the Average limit.											

SPURIOUS RADIATED EMISSIONS WITH WLAN ONLY OPERATING, DUAL FILM ANTENNAS

	Description of Test:		Spurious Radiated Emissions									
	Project Number:		02U1501									
	Date:		09/24/02									
	Test Engineer:		Mike Heckrotte									
	Site:		B									
	Company:		Toshiba									
	EUT Description:		Touch Screen / Bluetooth / WLAN / Dual Film Antenna									
	Test Configuration:		EUT / AC Adapter / Laptop with WLAN / AC Adapter									
	Mode of Operation:		WLAN transmitting at maximum power in linked mode, Low channel									
	Bluetooth is off											
	Specification Distance:		3.0	meters								
	Actual Distance:		1.0	meters								
Freq	Pol	Det	SA	Dist	AF	Preamp	Filter	Cable	Field	Limit	Margin	
GHz	V/H		dBuV	dB	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
4.824	V	Peak	63.3	-9.5	33.8	34.5	1.0	5.7	59.8	74.0	-14.2	
4.824	V	Avg	46.0	-9.5	33.8	34.5	1.0	5.7	42.5	54.0	-11.5	
4.824	H	Peak	61.8	-9.5	33.8	34.5	1.0	5.7	58.3	74.0	-15.7	
4.824	H	Avg	45.7	-9.5	33.8	34.5	1.0	5.7	42.2	54.0	-11.8	
7.236	V	Peak	58.5	-9.5	37.0	34.5	1.0	7.2	59.7	74.0	-14.3	
7.236	V	Avg	42.5	-9.5	37.0	34.5	1.0	7.2	43.7	54.0	-10.3	
7.236	H	Peak	60.8	-9.5	37.0	34.5	1.0	7.2	62.0	74.0	-12.0	
7.236	H	Avg	44.8	-9.5	37.0	34.5	1.0	7.2	46.0	54.0	-8.0	
9.648	V	Peak	56.7	-9.5	39.7	34.9	1.0	8.5	61.4	74.0	-12.6	
9.648	V	Avg	41.8	-9.5	39.7	34.9	1.0	8.5	46.6	54.0	-7.4	
9.648	H	Peak	56.5	-9.5	39.7	34.9	1.0	8.5	61.2	74.0	-12.8	
9.648	H	Avg	41.5	-9.5	39.7	34.9	1.0	8.5	46.2	54.0	-7.8	

Note 1: No other spurious emissions were detected above the system noise floor.

			Site: B								
		Company:	Toshiba								
		EUT Description:	Touch Screen / Bluetooth / WLAN / Dual Film Antenna								
		Test Configuration:	EUT / AC Adapter / Laptop with WLAN / AC Adapter								
		Mode of Operation:	WLAN transmitting at maximum power in linked mode, Mid channel								
			Bluetooth is off								
		Specification Distance:	3.0	meters							
		Actual Distance:	1.0	meters	Cable Length:	15.0	feet				
Freq	Pol	Det	SA	Dist	AF	Preamp	Filter	Cable	Field	Limit	Margin
GHz	V/H		dBuV	dB	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
4.874	V	Peak	63.6	-9.5	33.9	34.5	1.0	5.8	60.3	74.0	-13.7
4.874	V	Avg	46.1	-9.5	33.9	34.5	1.0	5.8	42.8	54.0	-11.2
4.874	H	Peak	61.5	-9.5	33.9	34.5	1.0	5.8	58.2	74.0	-15.8
4.874	H	Avg	45.6	-9.5	33.9	34.5	1.0	5.8	42.3	54.0	-11.7
7.311	V	Peak	58.1	-9.5	37.2	34.6	1.0	7.3	59.5	74.0	-14.5
7.311	V	Avg	42.0	-9.5	37.2	34.6	1.0	7.3	43.4	54.0	-10.6
7.311	H	Peak	61.6	-9.5	37.2	34.6	1.0	7.3	63.0	74.0	-11.0
7.311	H	Avg	45.1	-9.5	37.2	34.6	1.0	7.3	46.5	54.0	-7.5
9.748	V	Peak	56.0	-9.5	39.8	34.9	1.0	8.6	60.9	74.0	-13.1
9.748	V	Avg	41.5	-9.5	39.8	34.9	1.0	8.6	46.4	54.0	-7.6
9.748	H	Peak	56.9	-9.5	39.8	34.9	1.0	8.6	61.8	74.0	-12.2
9.748	H	Avg	41.9	-9.5	39.8	34.9	1.0	8.6	46.8	54.0	-7.2

Note 1: No other spurious emissions were detected above the system noise floor.

	Description of Test: Spurious Radiated Emissions										
	Project Number: 02U1501										
	Date: 09/24/02										
	Test Engineer: Mike Heckrotte										
	Site: B										
	Company: Toshiba										
	EUT Description: Touch Screen / Bluetooth / WLAN / Dual Film Antenna										
	Test Configuration: EUT / AC Adapter / Laptop with WLAN / AC Adapter										
	Mode of Operation: WLAN transmitting at maximum power in linked mode, High channel										
	Bluetooth is off										
	Specification Distance: 3.0 meters										
	Actual Distance: 1.0 meters										
Freq		Pol		Det		SA		Dist		AF	
GHz		V/H		dBuV		dB		dB/m		Preamp	
4.924		V		Peak		62.7		-9.5		34.1	
4.924		V		Avg		45.8		-9.5		34.1	
4.924		H		Peak		62.3		-9.5		34.1	
4.924		H		Avg		46.1		-9.5		34.1	
7.386		V		Peak		58.9		-9.5		37.3	
7.386		V		Avg		42.7		-9.5		37.3	
7.386		H		Peak		60.5		-9.5		37.3	
7.386		H		Avg		44.2		-9.5		37.3	
9.848		V		Peak		56.9		-9.5		40.0	
9.848		V		Avg		41.9		-9.5		40.0	
9.848		H		Peak		56.4		-9.5		40.0	
9.848		H		Avg		41.3		-9.5		40.0	

Note 1: No other spurious emissions were detected above the system noise floor.

SPURIOUS RADIATED EMISSIONS WITH WLAN ONLY OPERATING, WIDE DUAL FILM ANTENNAS

	Description of Test:		Spurious Radiated Emissions									
	Project Number:		02U1501									
	Date:		09/24/02									
	Test Engineer:		Mike Heckrotte									
	Site:		B									
	Company:		Toshiba									
	EUT Description:		Touch Screen / Bluetooth / WLAN / Wide Dual Film Antenna									
	Test Configuration:		EUT / AC Adapter / Laptop with WLAN / AC Adapter									
	Mode of Operation:		WLAN transmitting at maximum power in linked mode, Low channel									
	Bluetooth is off											
	Specification Distance:		3.0	meters								
	Actual Distance:		1.0	meters								
Freq		Pol		Det		SA		Dist		AF		Preamp
GHz		V/H		dBuV		dB		dB/m		dB		Filter
4.824		V		Peak		64.5		-9.5		33.8		34.5
4.824		V		Avg		47.3		-9.5		33.8		34.5
4.824		H		Peak		63.5		-9.5		33.8		34.5
4.824		H		Avg		46.5		-9.5		33.8		34.5
7.236		V		Peak		60.5		-9.5		37.0		34.5
7.236		V		Avg		45.7		-9.5		37.0		34.5
7.236		H		Peak		64.0		-9.5		37.0		34.5
7.236		H		Avg		47.0		-9.5		37.0		34.5
9.648		V		Peak		57.2		-9.5		39.7		34.9
9.648		V		Avg		42.0		-9.5		39.7		34.9
9.648		H		Peak		57.8		-9.5		39.7		34.9
9.648		H		Avg		42.0		-9.5		39.7		34.9

Note 1: No other spurious emissions were detected above the system noise floor.


	Description of Test: Spurious Radiated Emissions										
	Project Number: 02U1501										
	Date: 09/24/02										
	Test Engineer: Mike Heckrotte										
	Site: B										
	Company: Toshiba										
	EUT Description: Touch Screen / Bluetooth / WLAN / Wide Dual Film Antenna										
	Test Configuration: EUT / AC Adapter / Laptop with WLAN / AC Adapter										
	Mode of Operation: WLAN transmitting at maximum power in linked mode, Mid channel										
	Bluetooth is off										
	Specification Distance: 3.0 meters										
	Actual Distance: 1.0 meters										
Actual Distance: 1.0 meters		Cable Length: 15.0 feet									
Freq GHz	Pol V/H	Det SA	Dist dBuV	AF dB	Preamp dB	Filter dB	Cable dB	Field dBuV/m	Limit dBuV/m	Margin dB	
4.874	V	Peak	64.2	-9.5	33.9	34.5	1.0	5.8	60.9	74.0	-13.1
4.874	V	Avg	47.0	-9.5	33.9	34.5	1.0	5.8	43.7	54.0	-10.3
4.874	H	Peak	64.0	-9.5	33.9	34.5	1.0	5.8	60.7	74.0	-13.3
4.874	H	Avg	47.1	-9.5	33.9	34.5	1.0	5.8	43.8	54.0	-10.2
7.311	V	Peak	60.8	-9.5	37.2	34.6	1.0	7.3	62.2	74.0	-11.8
7.311	V	Avg	45.9	-9.5	37.2	34.6	1.0	7.3	47.3	54.0	-6.7
7.311	H	Peak	63.6	-9.5	37.2	34.6	1.0	7.3	65.0	74.0	-9.0
7.311	H	Avg	46.3	-9.5	37.2	34.6	1.0	7.3	47.7	54.0	-6.3
9.748	V	Peak	56.9	-9.5	39.8	34.9	1.0	8.6	61.8	74.0	-12.2
9.748	V	Avg	41.9	-9.5	39.8	34.9	1.0	8.6	46.8	54.0	-7.2
9.748	H	Peak	58.2	-9.5	39.8	34.9	1.0	8.6	63.1	74.0	-10.9
9.748	H	Avg	42.3	-9.5	39.8	34.9	1.0	8.6	47.2	54.0	-6.8

Note 1: No other spurious emissions were detected above the system noise floor.


	Description of Test: Spurious Radiated Emissions										
	Project Number: 02U1501										
	Date: 09/24/02										
	Test Engineer: Mike Heckrotte										
	Site: B										
	Company: Toshiba										
	EUT Description: Touch Screen / Bluetooth / WLAN / Wide Dual Film Antenna										
	Test Configuration: EUT / AC Adapter / Laptop with WLAN / AC Adapter										
	Mode of Operation: WLAN transmitting at maximum power in linked mode, High channel										
	Bluetooth is off										
	Specification Distance: 3.0 meters										
	Actual Distance: 1.0 meters										
Cable Length:		15.0 feet									
Freq GHz	Pol V/H	Det SA	Dist dBuV	AF dB	Preamp dB	Filter dB	Cable dB	Field dBuV/m	Limit dBuV/m	Margin dB	
4.924	V	Peak	64.4	-9.5	34.1	34.5	1.0	5.8	61.3	74.0	-12.7
4.924	V	Avg	47.3	-9.5	34.1	34.5	1.0	5.8	44.2	54.0	-9.8
4.924	H	Peak	63.7	-9.5	34.1	34.5	1.0	5.8	60.6	74.0	-13.4
4.924	H	Avg	46.8	-9.5	34.1	34.5	1.0	5.8	43.7	54.0	-10.3
7.386	V	Peak	60.2	-9.5	37.3	34.6	1.0	7.3	61.8	74.0	-12.2
7.386	V	Avg	45.3	-9.5	37.3	34.6	1.0	7.3	46.9	54.0	-7.1
7.386	H	Peak	64.6	-9.5	37.3	34.6	1.0	7.3	66.2	74.0	-7.8
7.386	H	Avg	47.7	-9.5	37.3	34.6	1.0	7.3	49.3	54.0	-4.7
9.848	V	Peak	57.0	-9.5	40.0	35.0	1.0	8.6	62.1	74.0	-11.9
9.848	V	Avg	42.0	-9.5	40.0	35.0	1.0	8.6	47.1	54.0	-6.9
9.848	H	Peak	58.1	-9.5	40.0	35.0	1.0	8.6	63.2	74.0	-10.8
9.848	H	Avg	42.4	-9.5	40.0	35.0	1.0	8.6	47.5	54.0	-6.5

Note 1: No other spurious emissions were detected above the system noise floor.


RADIATED EMISSIONS - LOWER BAND EDGE WITH CO-LOCATED BLUETOOTH AND WLAN
OPERATING SIMULTANEOUSLY AT THEIR LOW FREQUENCY CHANNELS; DUAL FILM
ANTENNAS INSTALLED FOR WLAN

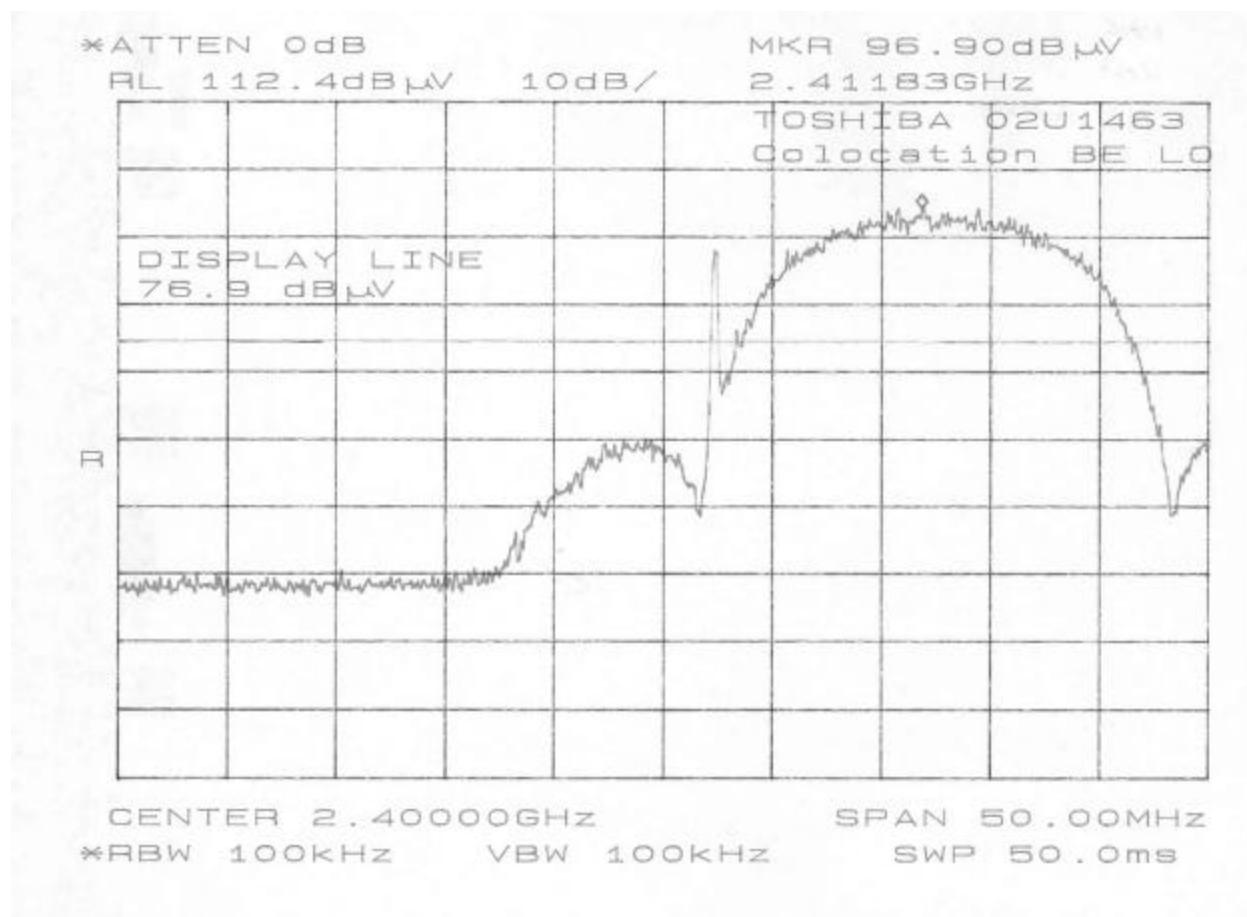


**RADIATED EMISSIONS - UPPER BAND EDGE WITH CO-LOCATED BLUETOOTH AND WLAN
OPERATING SIMULTANEOUSLY AT THEIR HIGH FREQUENCY CHANNELS; DUAL FILM
ANTENNAS INSTALLED FOR WLAN**

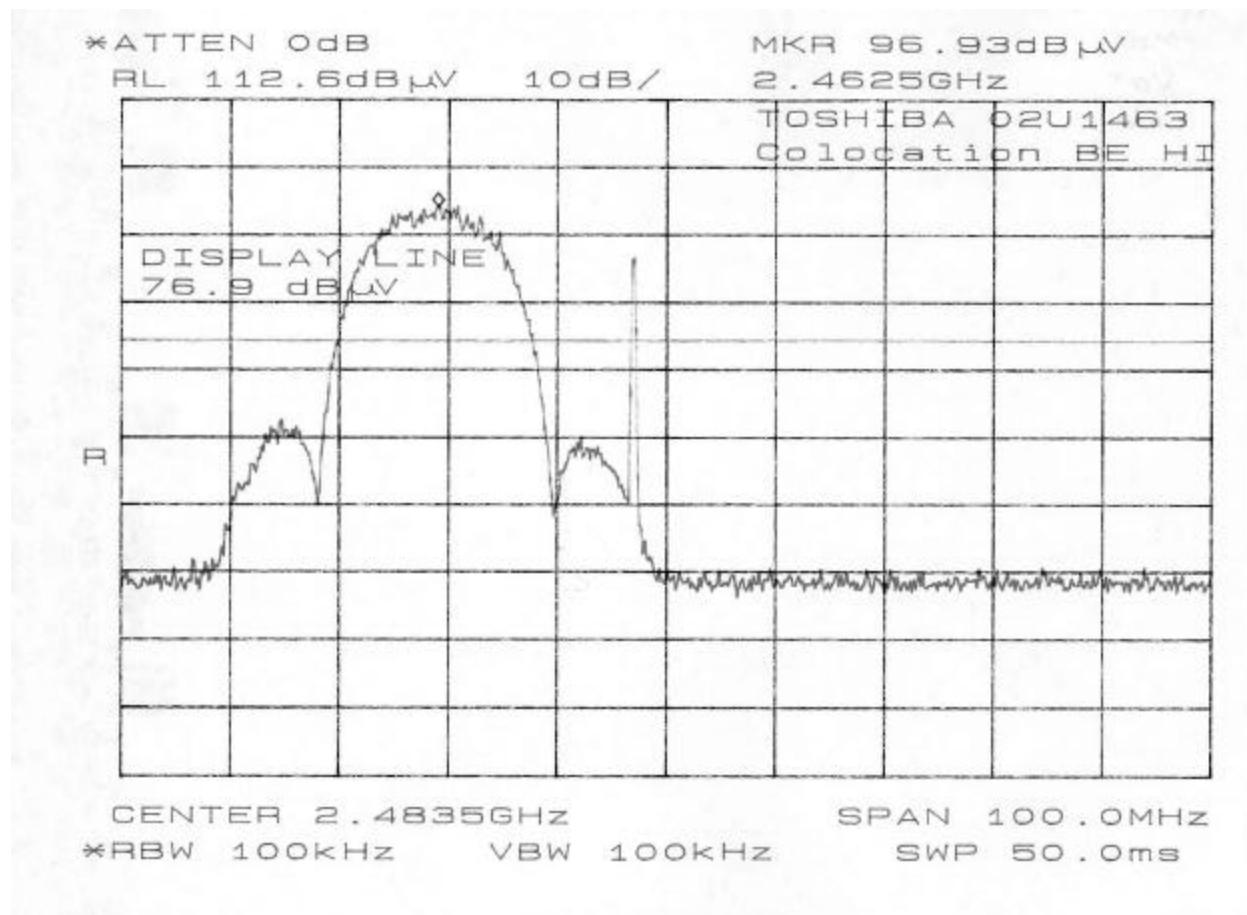


RADIATED EMISSIONS - LOWER BAND EDGE WITH CO-LOCATED BLUETOOTH AND WLAN
OPERATING SIMULTANEOUSLY AT THEIR LOW FREQUENCY CHANNELS; WIDE DUAL FILM
ANTENNAS INSTALLED FOR WLAN

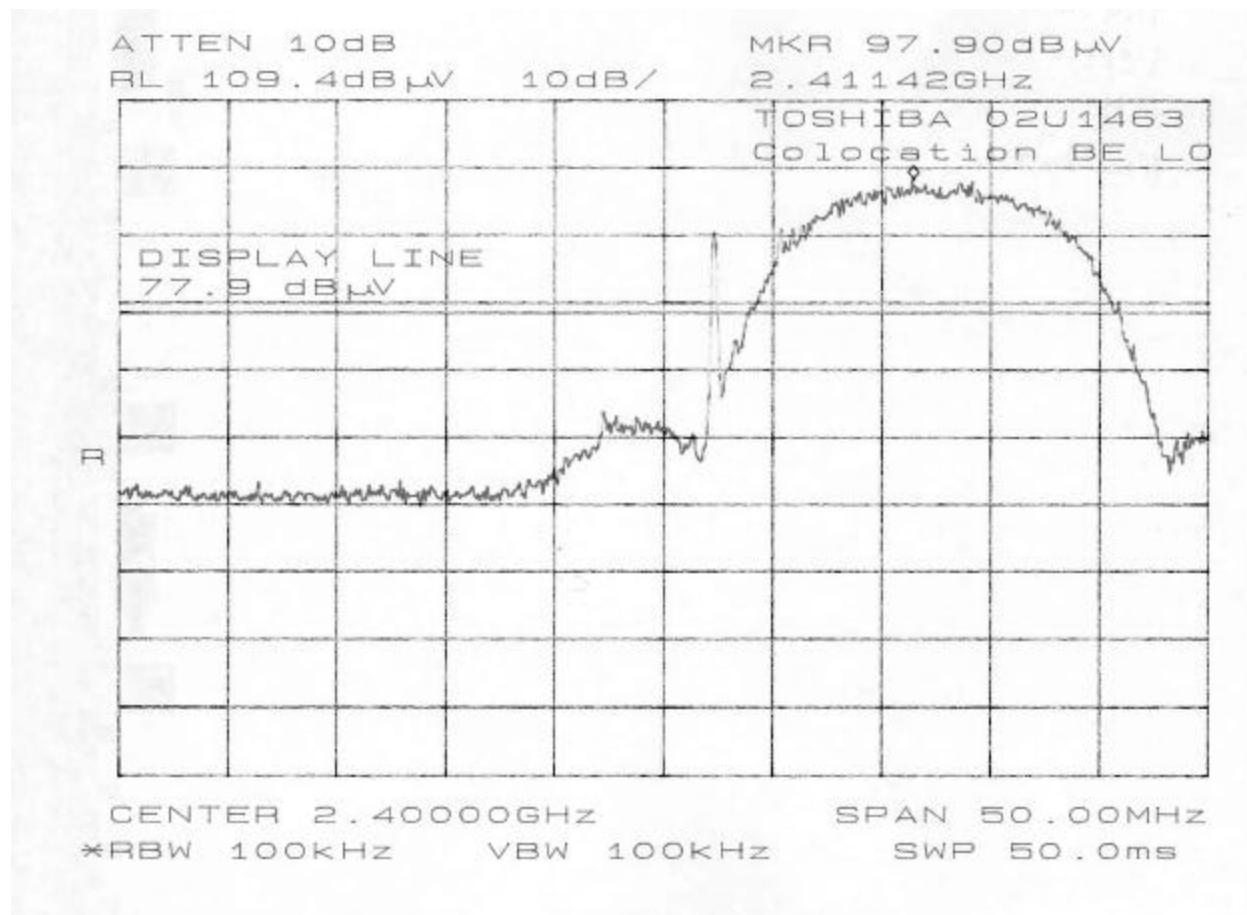


RADIATED EMISSIONS - UPPER BAND EDGE WITH CO-LOCATED BLUETOOTH AND WLAN
OPERATING SIMULTANEOUSLY AT THEIR HIGH FREQUENCY CHANNELS; WIDE DUAL FILM
ANTENNAS INSTALLED FOR WLAN

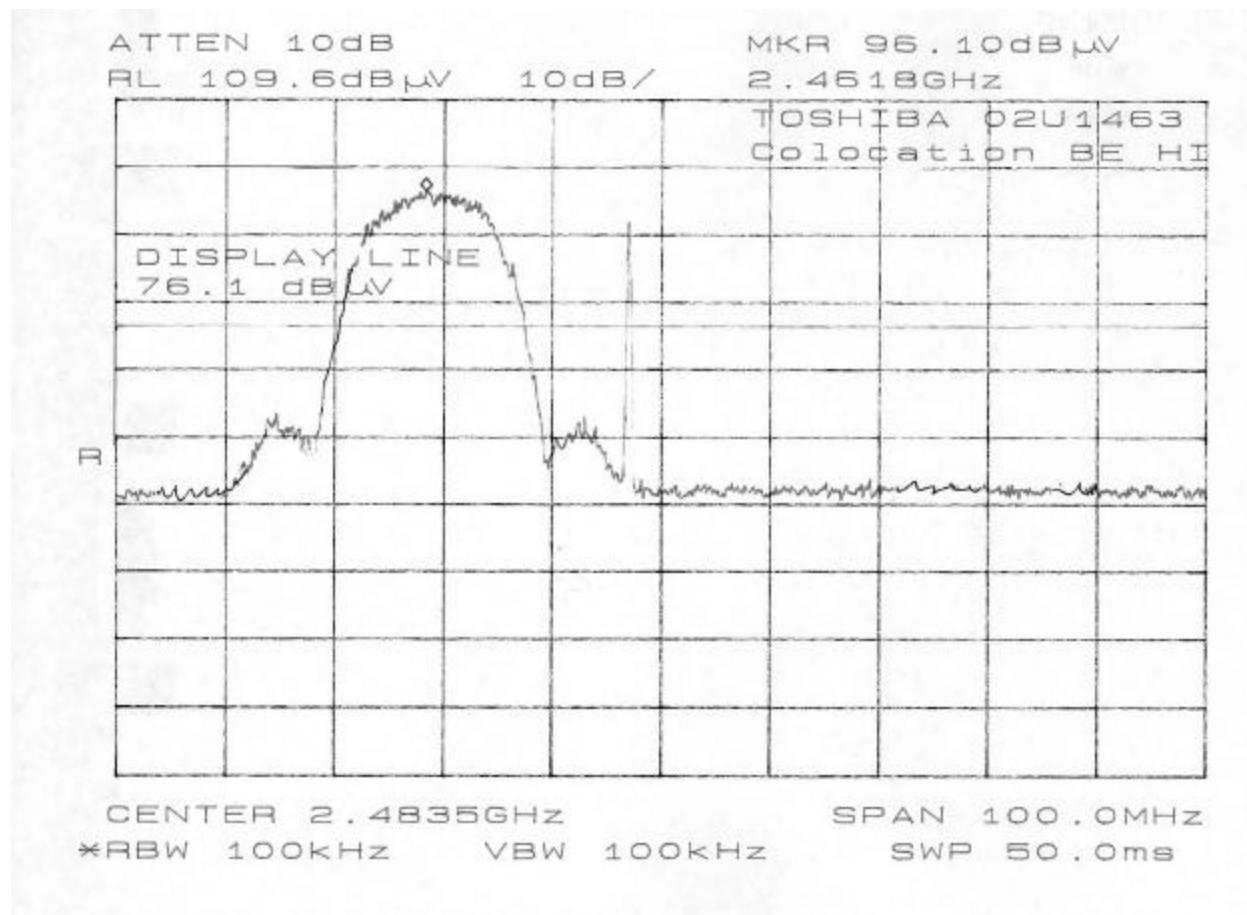


RADIATED EMISSIONS - LOWER RESTRICTED BAND EDGE WITH CO-LOCATED BLUETOOTH AND WLAN OPERATING SIMULTANEOUSLY AT THEIR LOW FREQUENCY CHANNELS; DUAL FILM ANTENNAS INSTALLED FOR WLAN – VERTICAL PEAK

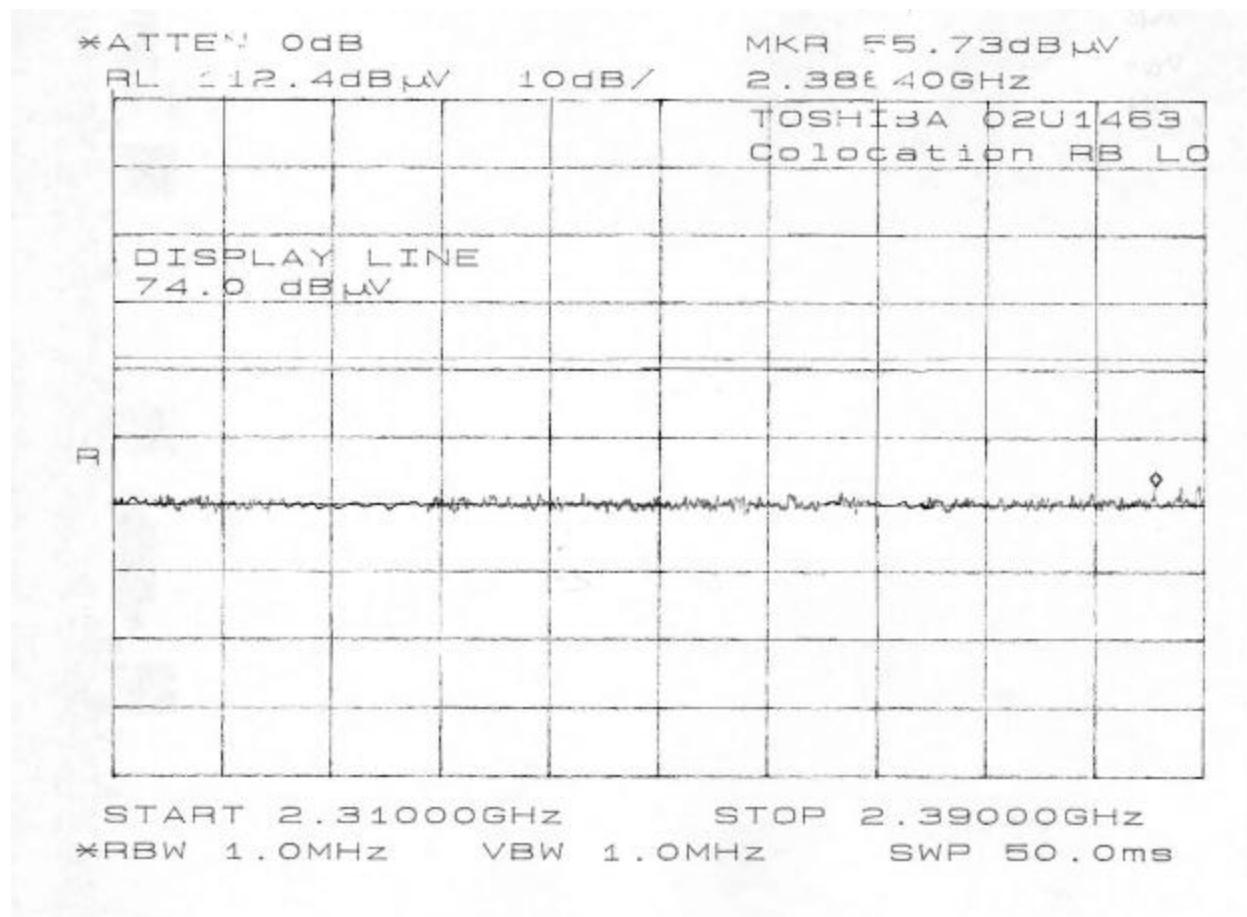


RADIATED EMISSIONS - LOWER RESTRICTED BAND EDGE WITH CO-LOCATED BLUETOOTH AND WLAN OPERATING SIMULTANEOUSLY AT THEIR LOW FREQUENCY CHANNELS; DUAL FILM ANTENNAS INSTALLED FOR WLAN – VERTICAL AVERAGE

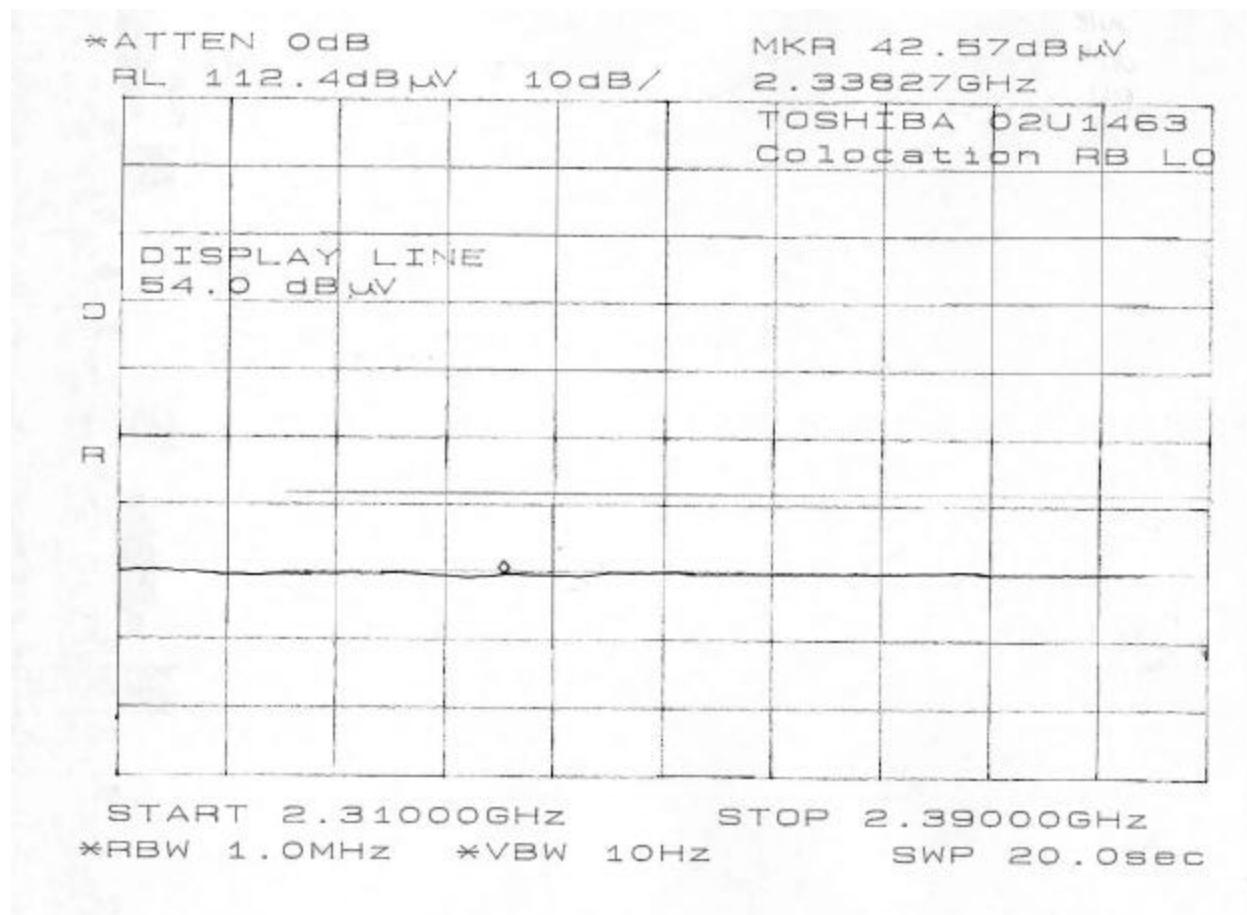


RADIATED EMISSIONS - LOWER RESTRICTED BAND EDGE WITH CO-LOCATED BLUETOOTH AND WLAN OPERATING SIMULTANEOUSLY AT THEIR LOW FREQUENCY CHANNELS; DUAL FILM ANTENNAS INSTALLED FOR WLAN – HORIZONTAL PEAK

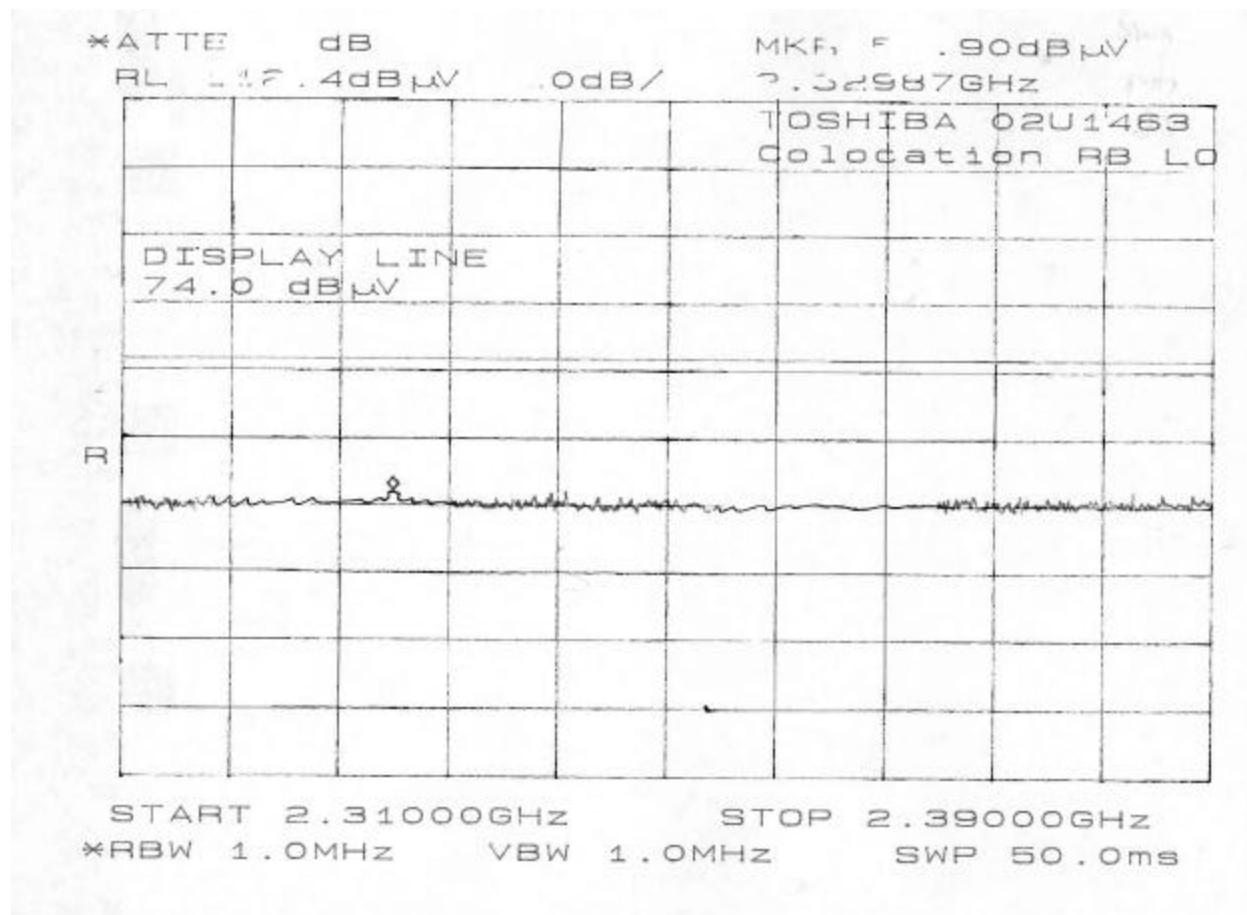


RADIATED EMISSIONS - LOWER RESTRICTED BAND EDGE WITH CO-LOCATED BLUETOOTH AND WLAN OPERATING SIMULTANEOUSLY AT THEIR LOW FREQUENCY CHANNELS; DUAL FILM ANTENNAS INSTALLED FOR WLAN – HORIZONTAL AVERAGE

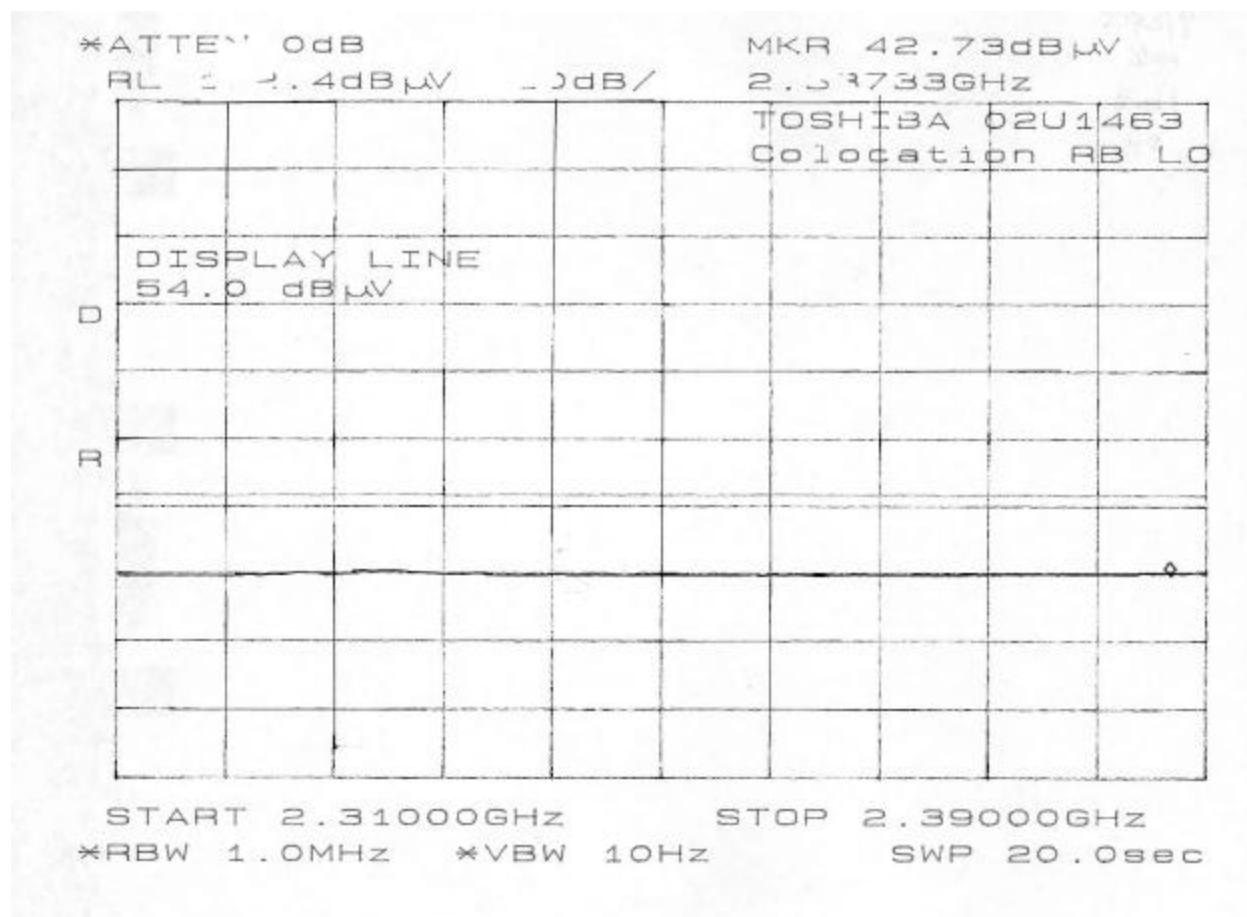


RADIATED EMISSIONS - UPPER RESTRICTED BAND EDGE WITH CO-LOCATED BLUETOOTH AND WLAN OPERATING SIMULTANEOUSLY AT THEIR HIGH FREQUENCY CHANNELS; DUAL FILM ANTENNAS INSTALLED FOR WLAN – VERTICAL PEAK

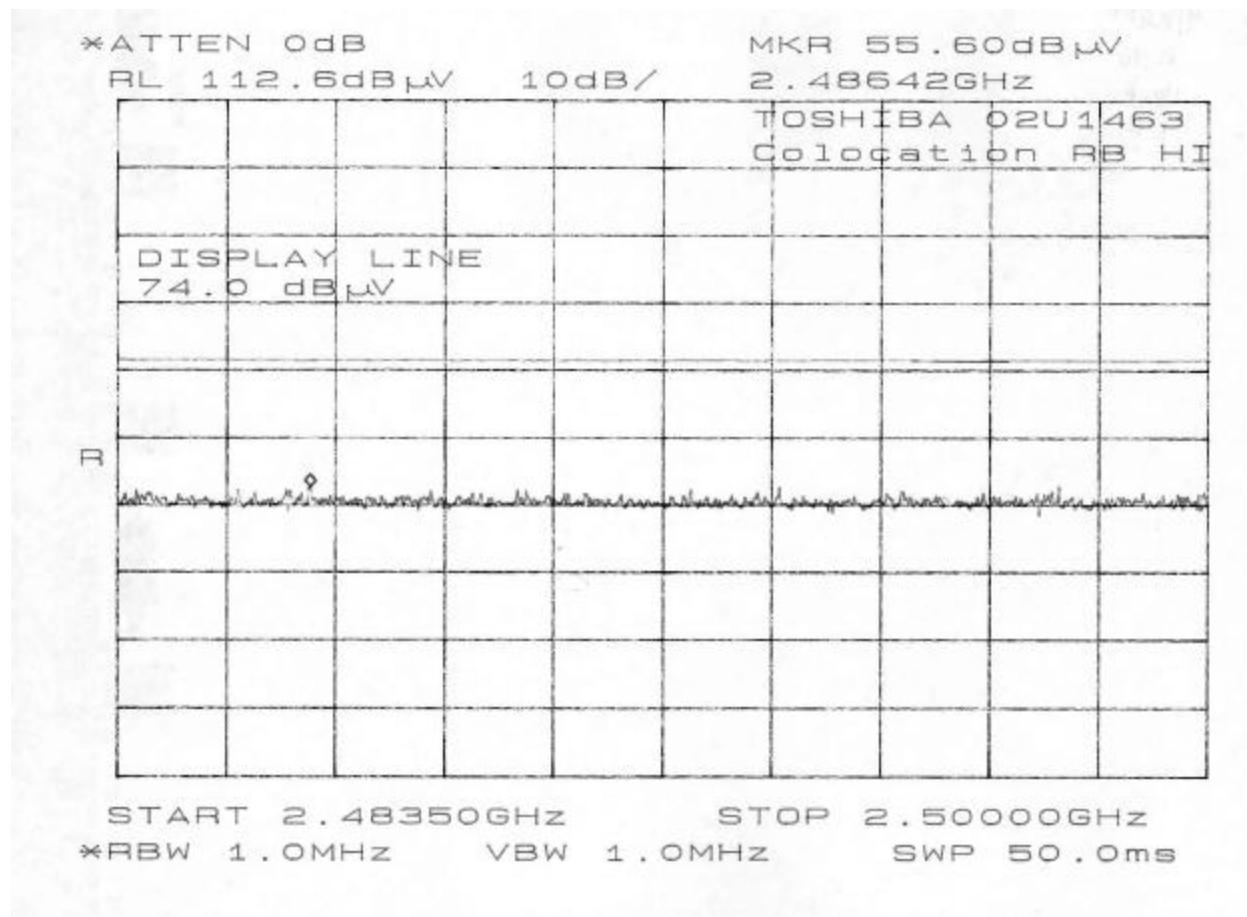


RADIATED EMISSIONS - UPPER RESTRICTED BAND EDGE WITH CO-LOCATED BLUETOOTH AND WLAN OPERATING SIMULTANEOUSLY AT THEIR HIGH FREQUENCY CHANNELS; DUAL FILM ANTENNAS INSTALLED FOR WLAN – VERTICAL AVERAGE

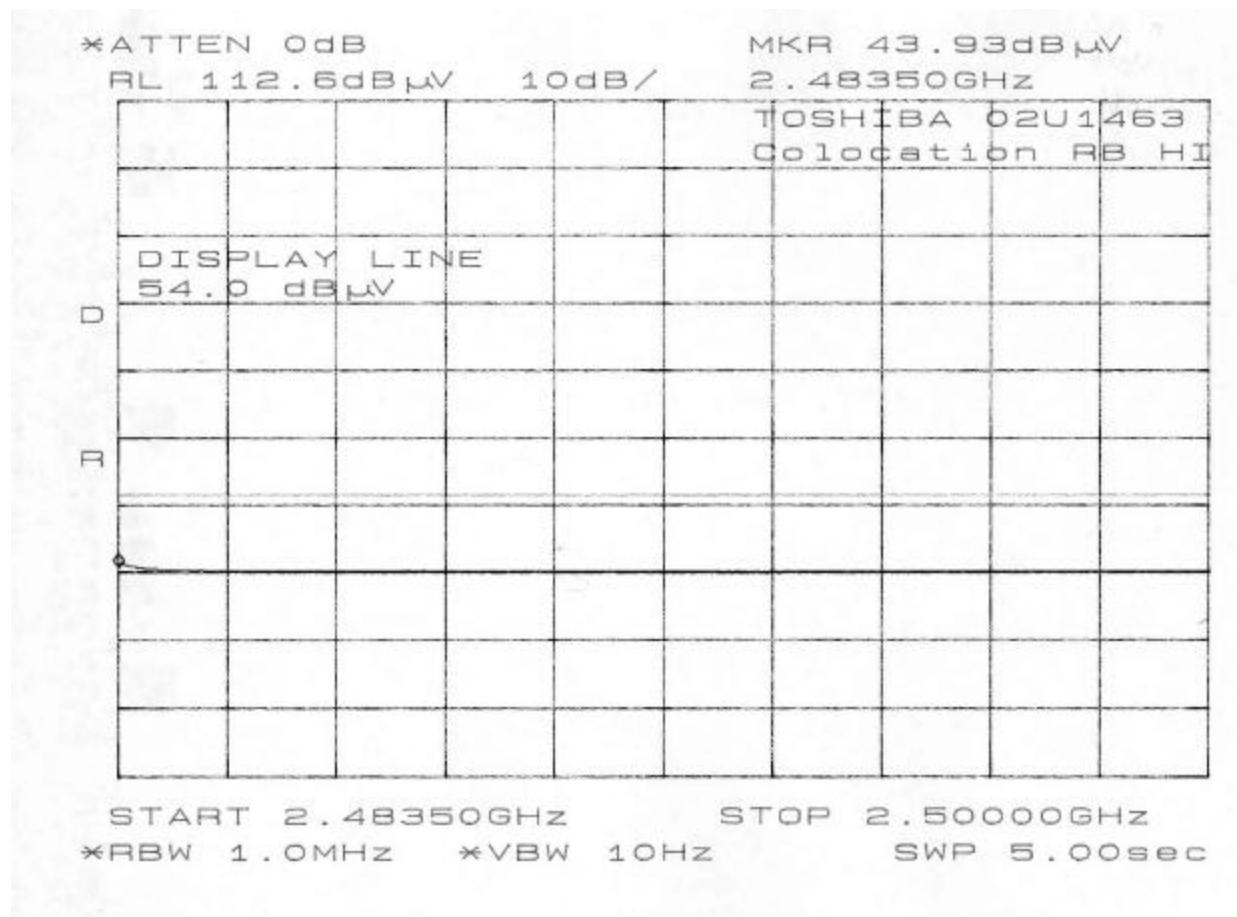


RADIATED EMISSIONS - UPPER RESTRICTED BAND EDGE WITH CO-LOCATED BLUETOOTH AND WLAN OPERATING SIMULTANEOUSLY AT THEIR HIGH FREQUENCY CHANNELS; DUAL FILM ANTENNAS INSTALLED FOR WLAN – HORIZONTAL PEAK

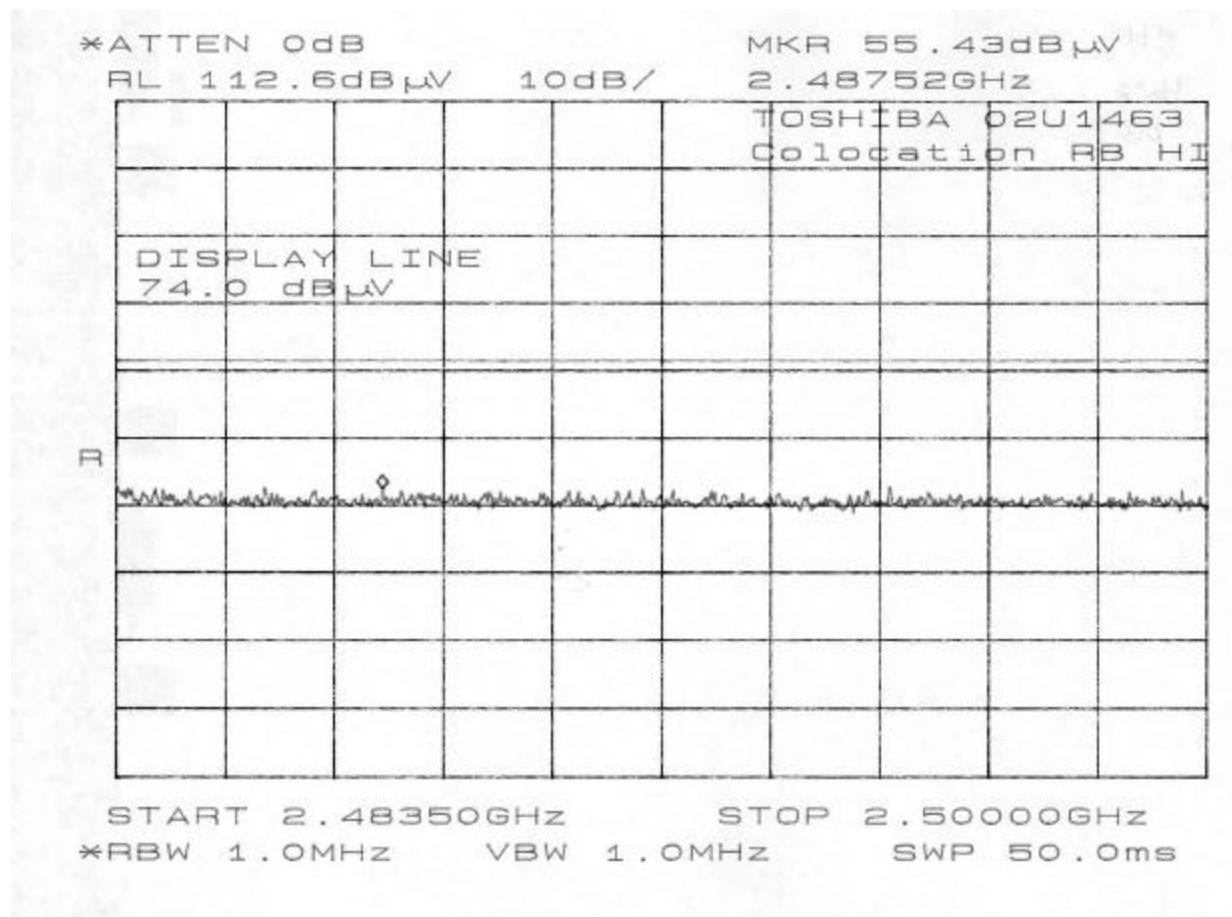


RADIATED EMISSIONS - UPPER RESTRICTED BAND EDGE WITH CO-LOCATED BLUETOOTH AND WLAN OPERATING SIMULTANEOUSLY AT THEIR HIGH FREQUENCY CHANNELS; DUAL FILM ANTENNAS INSTALLED FOR WLAN - HORIZONTAL AVERAGE

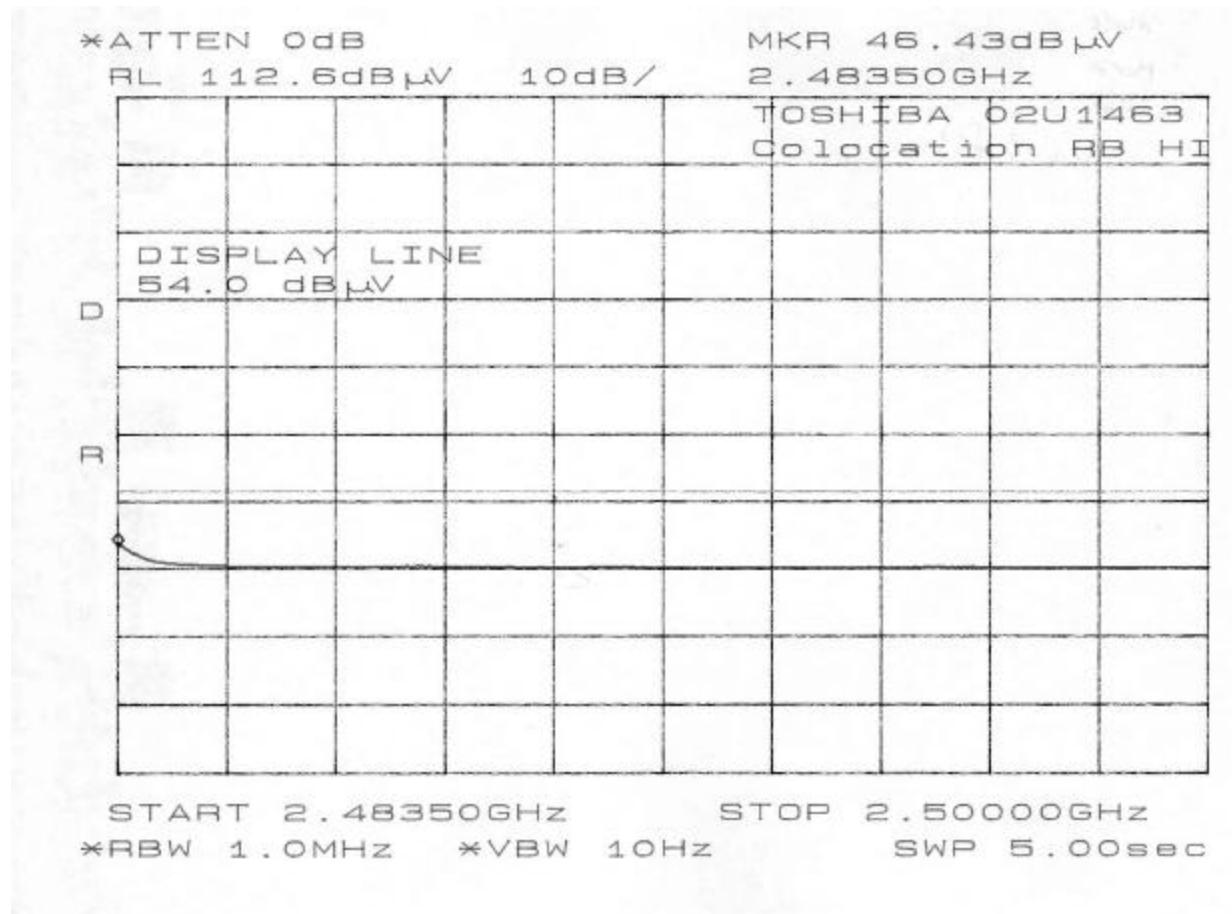


RADIATED EMISSIONS - LOWER RESTRICTED BAND EDGE WITH CO-LOCATED BLUETOOTH AND WLAN OPERATING SIMULTANEOUSLY AT THEIR LOW FREQUENCY CHANNELS; WIDE DUAL FILM ANTENNAS INSTALLED FOR WLAN – VERTICAL PEAK

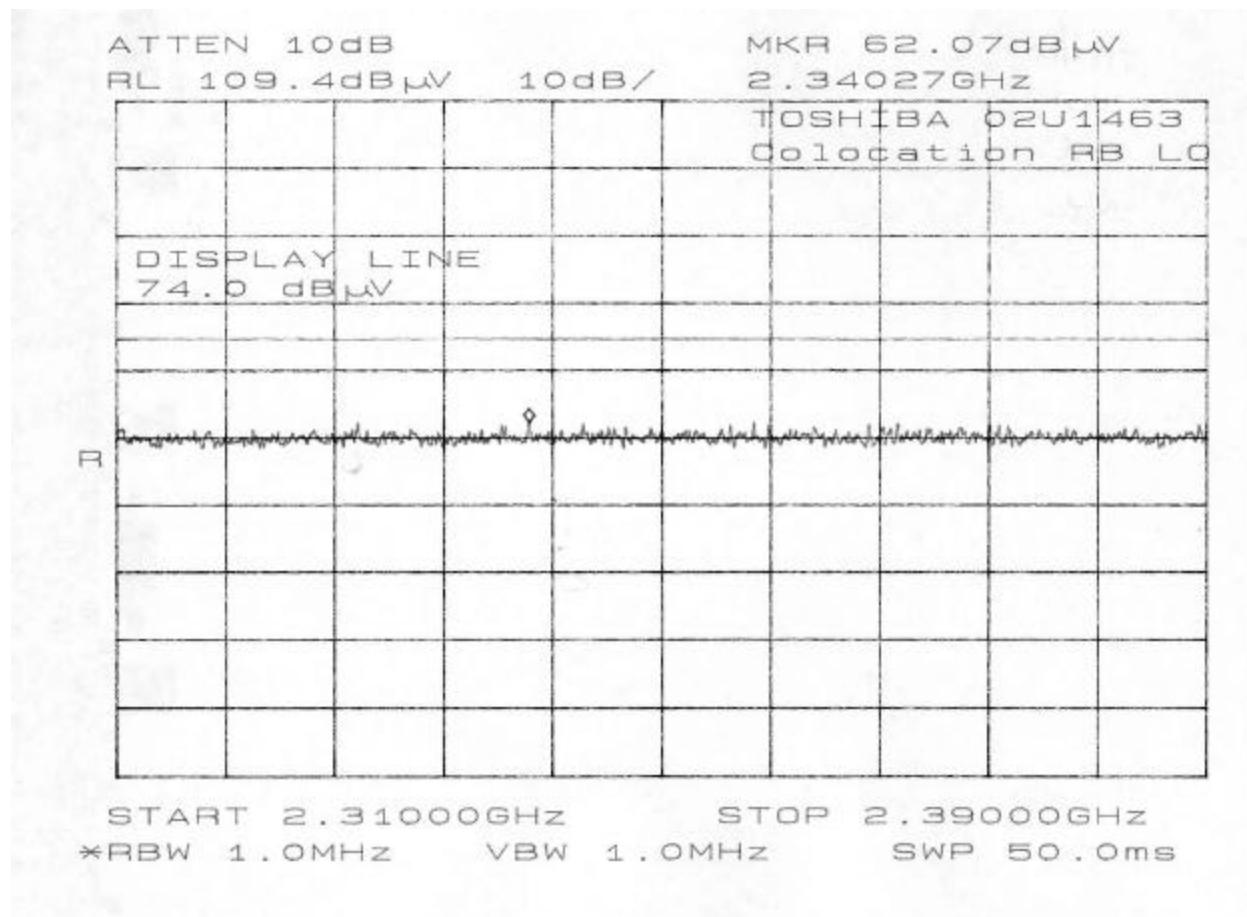


RADIATED EMISSIONS - LOWER RESTRICTED BAND EDGE WITH CO-LOCATED BLUETOOTH AND WLAN OPERATING SIMULTANEOUSLY AT THEIR LOW FREQUENCY CHANNELS; WIDE DUAL FILM ANTENNAS INSTALLED FOR WLAN – VERTICAL AVERAGE

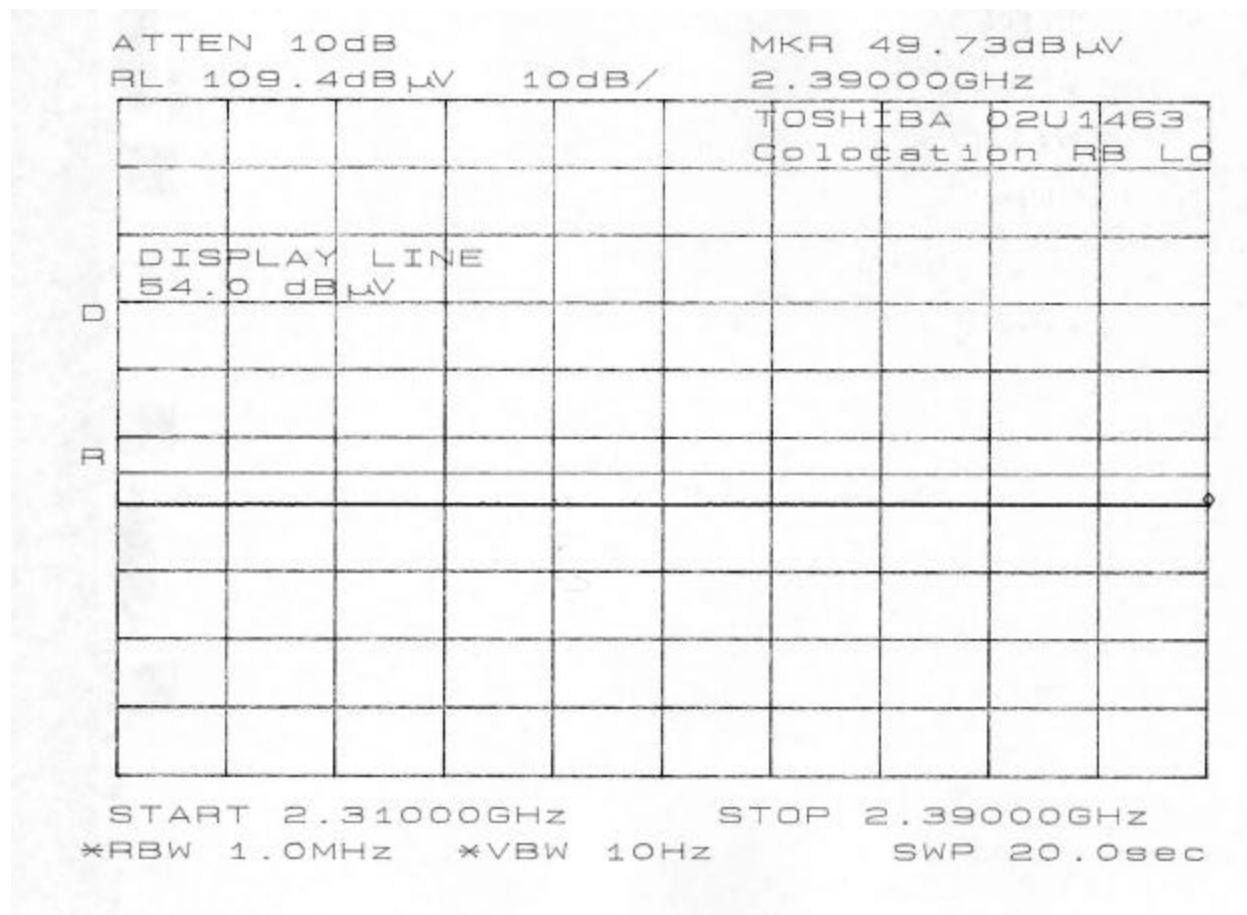


RADIATED EMISSIONS - LOWER RESTRICTED BAND EDGE WITH CO-LOCATED BLUETOOTH AND WLAN OPERATING SIMULTANEOUSLY AT THEIR LOW FREQUENCY CHANNELS; WIDE DUAL FILM ANTENNAS INSTALLED FOR WLAN – HORIZONTAL PEAK

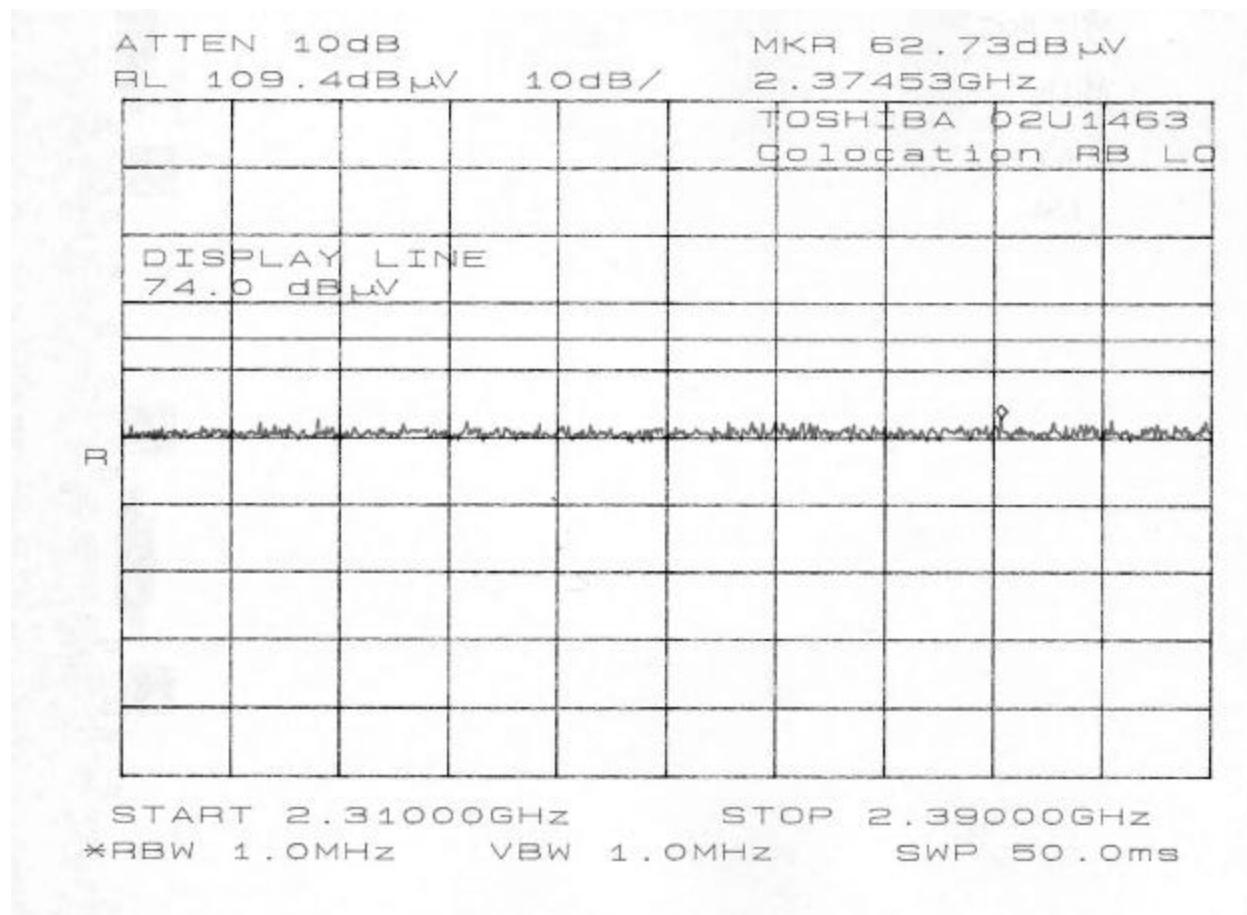


RADIATED EMISSIONS - LOWER RESTRICTED BAND EDGE WITH CO-LOCATED BLUETOOTH AND WLAN OPERATING SIMULTANEOUSLY AT THEIR LOW FREQUENCY CHANNELS; WIDE DUAL FILM ANTENNAS INSTALLED FOR WLAN – HORIZONTAL AVERAGE

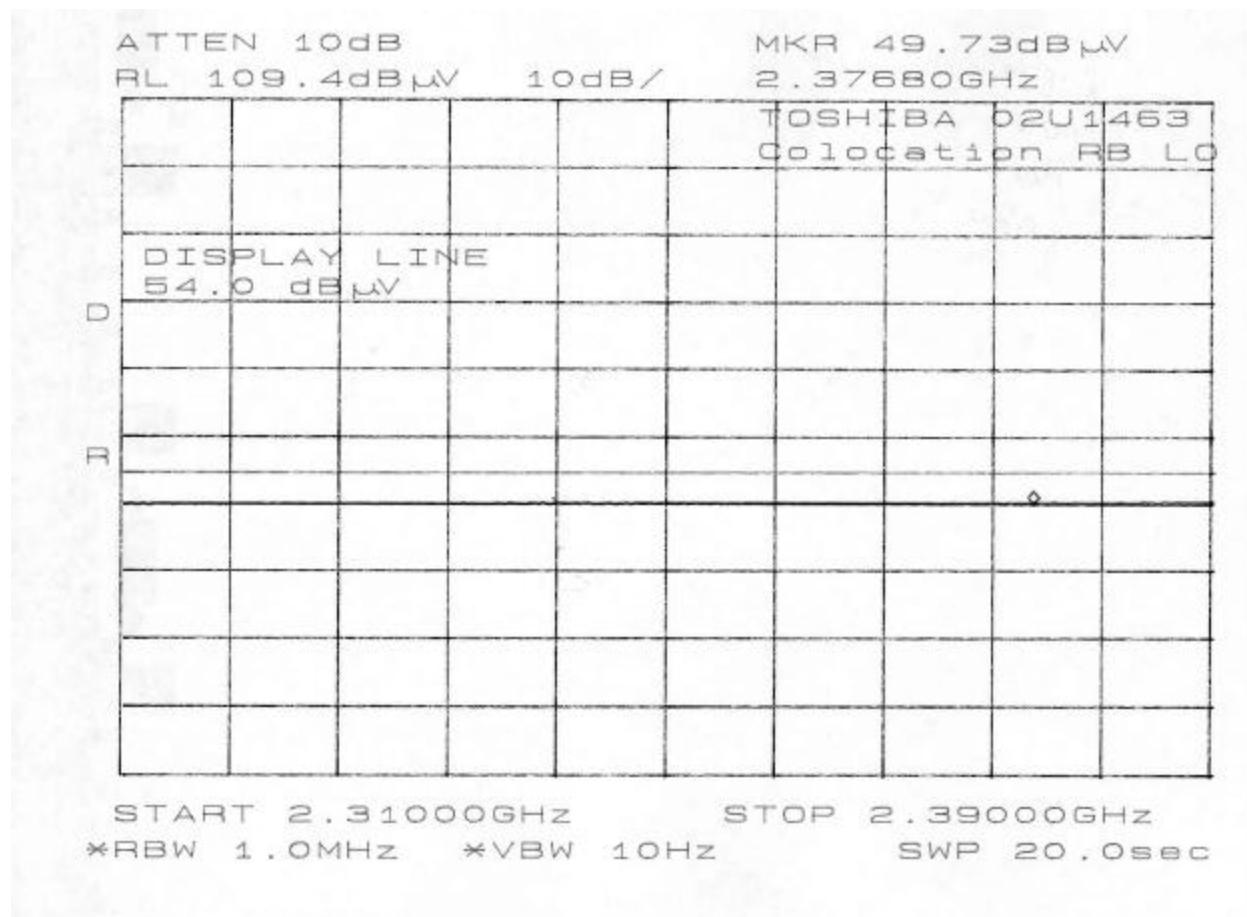


RADIATED EMISSIONS - UPPER RESTRICTED BAND EDGE WITH CO-LOCATED BLUETOOTH AND WLAN OPERATING SIMULTANEOUSLY AT THEIR HIGH FREQUENCY CHANNELS; WIDE DUAL FILM ANTENNAS INSTALLED FOR WLAN – VERTICAL PEAK

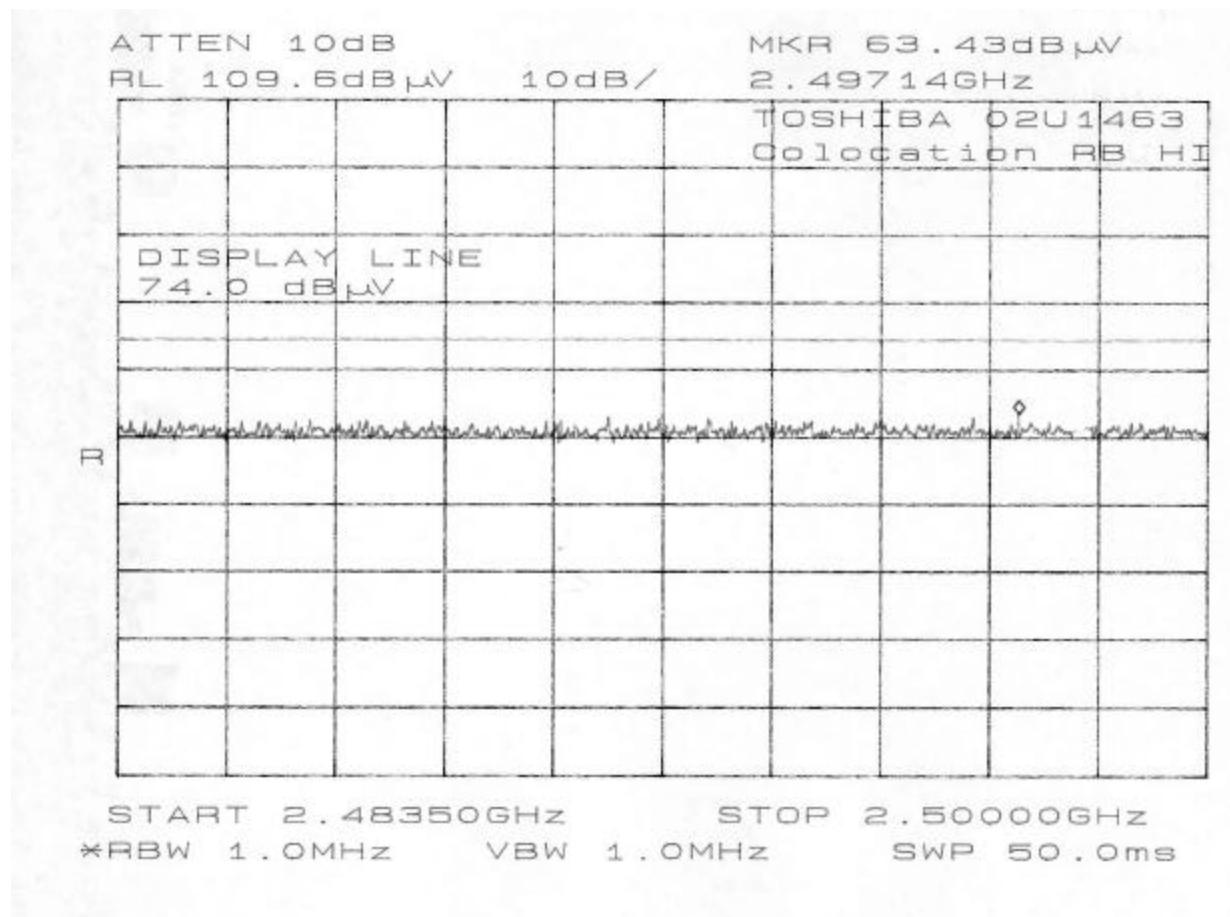


RADIATED EMISSIONS - UPPER RESTRICTED BAND EDGE WITH CO-LOCATED BLUETOOTH AND WLAN OPERATING SIMULTANEOUSLY AT THEIR HIGH FREQUENCY CHANNELS; WIDE DUAL FILM ANTENNAS INSTALLED FOR WLAN – VERTICAL AVERAGE

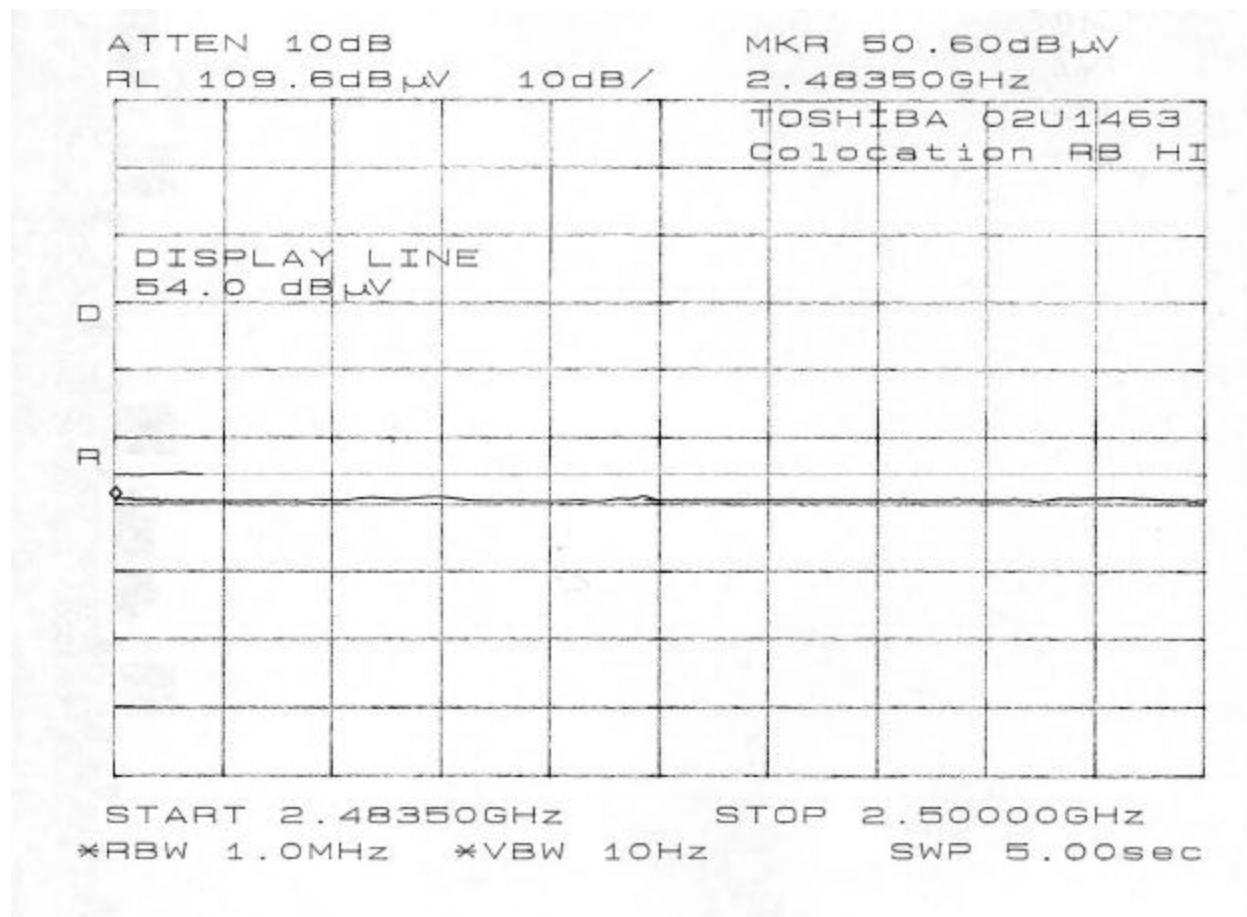

RADIATED EMISSIONS - UPPER RESTRICTED BAND EDGE WITH CO-LOCATED BLUETOOTH AND WLAN OPERATING SIMULTANEOUSLY AT THEIR HIGH FREQUENCY CHANNELS; WIDE DUAL FILM ANTENNAS INSTALLED FOR WLAN – HORIZONTAL PEAK

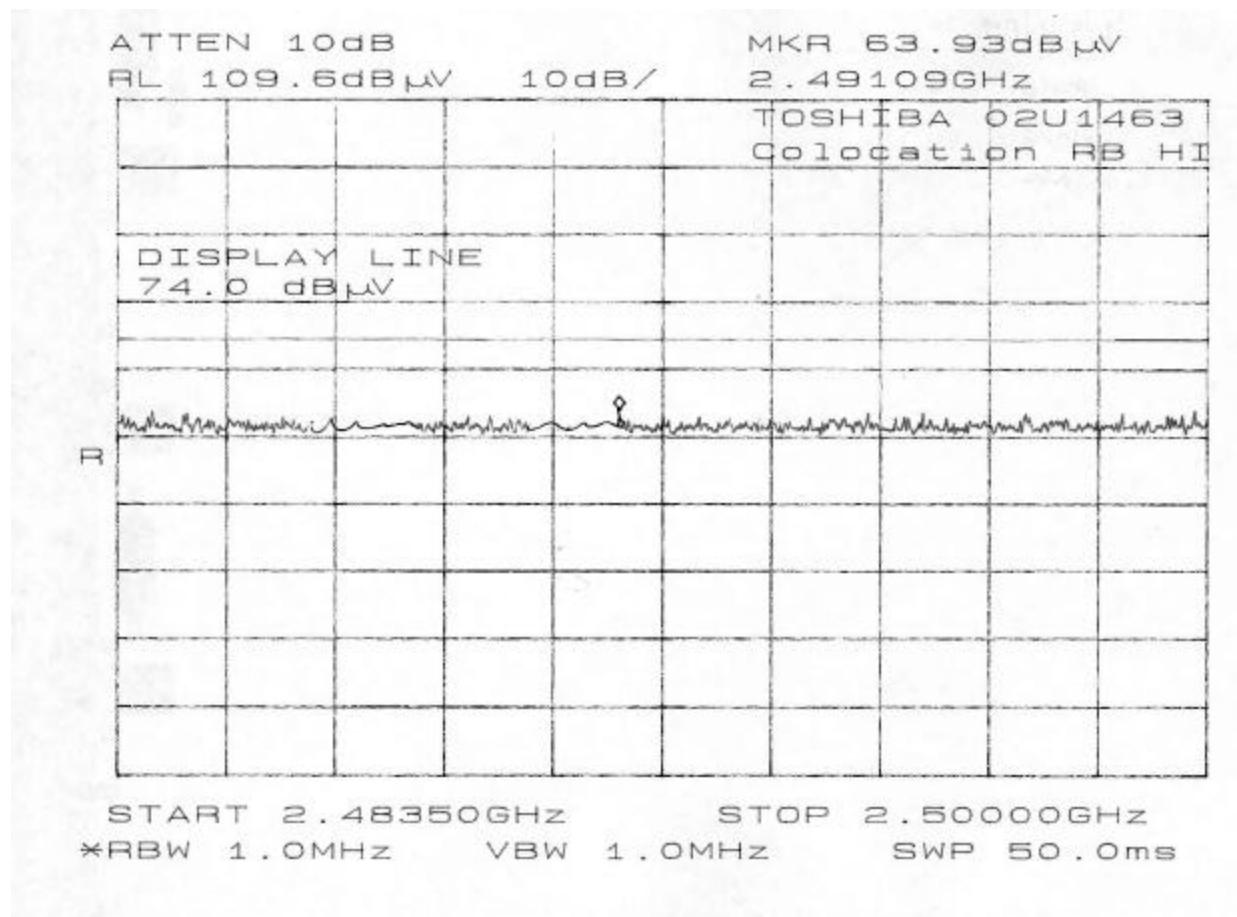

RADIATED EMISSIONS - UPPER RESTRICTED BAND EDGE WITH CO-LOCATED BLUETOOTH AND WLAN OPERATING SIMULTANEOUSLY AT THEIR HIGH FREQUENCY CHANNELS; WIDE DUAL FILM ANTENNAS INSTALLED FOR WLAN – HORIZONTAL AVERAGE

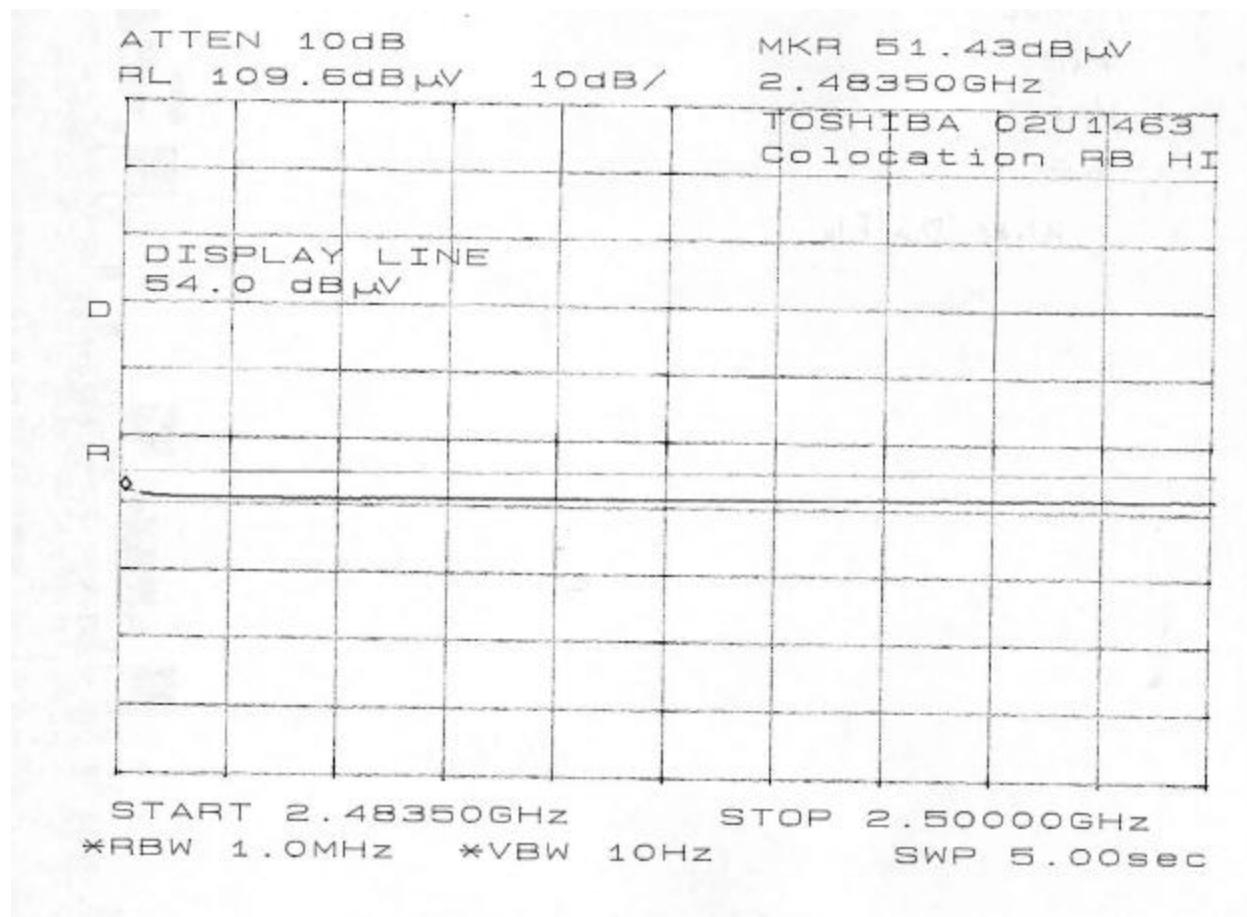

**SPURIOUS RADIATED EMISSIONS WITH WORST CASE CONFIGURATION OF CO-LOCATED
BLUETOOTH AND WLAN OPERATING SIMULTANEOUSLY**

Description of Test: Spurious Radiated Emissions											
Project Number:	02U1501										
Date:	09/24/02										
Test Engineer:	Mike Heckrotte										
Site:	B										
Company:	Toshiba										
EUT Description:	Touch Screen / Bluetooth / Single Film Antenna /										
	/ WLAN / Wide Dual Film Antenna										
Test Configuration:	EUT / AC Adapter / Laptop with WLAN / AC Adapter										
Mode of Operation:	Bluetooth transmitting at maximum power, Low channel										
	WLAN transmitting at maximum power in linked mode, Low channel										
Specification Distance:	3.0	meters									
Actual Distance:	1.0	meters			Cable Length:	15.0	feet				
Freq	Pol	Det	SA	Dist	AF	Preamp	Filter	Cable	Field	Limit	Margin
GHz	V/H		dBuV	dB	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
4.804	V	Peak	49.8	-9.5	33.8	34.5	1.0	5.7	46.2	74.0	-27.8
4.804	V	Peak*	49.8	-9.5	33.8	34.5	1.0	5.7	46.2	54.0	-7.8
4.804	H	Peak	51.6	-9.5	33.8	34.5	1.0	5.7	48.0	74.0	-26.0
4.804	H	Peak*	51.6	-9.5	33.8	34.5	1.0	5.7	48.0	54.0	-6.0
4.824	V	Peak	63.2	-9.5	33.8	34.5	1.0	5.7	59.7	74.0	-14.3
4.824	V	Avg	46.9	-9.5	33.8	34.5	1.0	5.7	43.4	54.0	-10.6
4.824	H	Peak	64.8	-9.5	33.8	34.5	1.0	5.7	61.3	74.0	-12.7
4.824	H	Avg	47.1	-9.5	33.8	34.5	1.0	5.7	43.6	54.0	-10.4
7.206	V	Peak	44.9	-9.5	37.0	34.5	1.0	7.2	46.0	74.0	-28.0
7.206	V	Peak*	44.9	-9.5	37.0	34.5	1.0	7.2	46.0	54.0	-8.0
7.206	H	Peak	47.9	-9.5	37.0	34.5	1.0	7.2	49.0	74.0	-25.0
7.206	H	Peak*	47.9	-9.5	37.0	34.5	1.0	7.2	49.0	54.0	-5.0
7.236	V	Peak	61.2	-9.5	37.0	34.5	1.0	7.2	62.4	74.0	-11.6
7.236	V	Avg	46.2	-9.5	37.0	34.5	1.0	7.2	47.4	54.0	-6.6
7.236	H	Peak	63.7	-9.5	37.0	34.5	1.0	7.2	64.9	74.0	-9.1
7.236	H	Avg	46.6	-9.5	37.0	34.5	1.0	7.2	47.8	54.0	-6.2
9.648	V	Peak	56.8	-9.5	39.7	34.9	1.0	8.5	61.5	74.0	-12.5
9.648	V	Avg	41.8	-9.5	39.7	34.9	1.0	8.5	46.5	54.0	-7.5
9.648	H	Peak	59.0	-9.5	39.7	34.9	1.0	8.5	63.7	74.0	-10.3
9.648	H	Avg	43.5	-9.5	39.7	34.9	1.0	8.5	48.2	54.0	-5.8
Note 1: No other spurious emissions were detected above the system noise floor.											
Note 2: * The Peak level was less than the Average limit.											

SETUP PHOTOS**COLOCATION RADIATED RF MEASUREMENT SETUP**



END OF REPORT