

CETECOM ICT Services GmbH

Radio Satellite Communication

Untertürkheimer Straße 6-10 . D-66117 Saarbrücken

Telephone: +49 (0)681 598-0

Telefax: -9075

RSC14

issue test report consist of 74 Pages

Page 1 (74)



TTI-P-G-166/98-30

Accredited Bluetooth Test Facility (BQTF)

Test report no.: 2-2730-1-4/01

FCC Part 15.247

Toshiba Wireless LAN Card

PA3171U-1MPC

FCC ID: CJ6PA3171WL

CETECOM – ICT Services GmbH

Untertürkheimerstr. 6-10

66117 Saarbrücken, Germany

Telephone: + 49 (0) 681 / 598-0

Fax: + 49 (0) 681 / 9075

Table of Contents

1 General information

1.1 Notes

1.2 Testing laboratory

1.3 Details of applicant

1.4 Application details

1.5 Test item

1.6 Test standards

2 Technical test

2.1 Summary of test results

2.2 Test report

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

1.2 Testing laboratory

CETECOM ICT Services GmbH

66117 Saarbrücken

Untertürkheimer Straße 6 - 10

Deutschland

Telefone : + 49 681 598 - 9100

Telefax : + 49 681 598 - 9075

E-mail : Harro.Ames@ict.cetecom.de

Internet : www.cetecom.de

Accredited testing laboratory

DAR-registration number : TTI-P-G 166/98-30

1.3 Details of applicant

Name : Toshiba Corporation, Digital Media Network Company
Street : 1-1 Shibaura , 1-Chome
City : Minato-ku, Tokyo 105-8001
Country : Japan
Telephone : +81 (3) 3457 2565
Telefax : +81 (3) 5444 9404
Contact : Mr. Hideo Abe
Telephone : +81 (3) 3457 2565

1.4 Application details

Date of receipt of application : 27.12.01
Date of receipt of test item : 27.12.01
Date of test : 27.12.01

1.5 Test item

Type of equipment : **WLAN Module for laptops (Mini PCI card)**
Type designation : PA3171U-1MPC (identical to AGERE Ruby miniPCI 8U354)
Manufacturer : - applicant -
Street :
City :
Country :
Serial number : MAC: 00022D35D35F

Additional informations:

Frequency : 2400 – 2483.5 MHz (here 2412 – 2462 MHz)
Type of modulation : 22M0P7D (DSSS)
Number of channels : 11
Antenna : Coax connection with 3 different external antennas
Power supply : 3.3V DC powered by PC / Laptop
Output power : 83.2 mW max conducted / 141 mW max radiated
Type of equipment : Class B
Temperature range : +5°C - +35°C
FCC-identifier : **CJ6PA3171WL**

1.6 Test standards: FCC Part 15 §15.247

2 Technical test

2.1 Summary of test results

The antenna gain measurement was performed by the difference between conducted and radiated output measurement.

All measurement settings were according to FCC 15.35, 15.209, 15.247 and the „Guidance on measurement for DSSS systems“.

The settings for RBW, VBW and sweep time are according to FCC requirements.

The radiated measurements were performed with a Toshiba Laptop Satellite PRO 4600.

The conducted and extreme tests were performed with an extender card in a Desktop PC.
For processing gain see separate paper.

Technical responsibility for area of testing :

27.12.01 RSC 8411 Berg



Date	Section	Name	Signature
------	---------	------	-----------

Technical responsibility for area of testing :

27.12.01 RSC8414 Ames



Date	Section	Name	Signature
------	---------	------	-----------

2.2 Testreport

TEST REPORT

Testreport no. : 2-2730-1-4/01

TEST REPORT REFERENCE**LIST OF MEASUREMENTS**

Paragraph	PARAMETER TO BE MEASURED	PAGE
	Transmitter parameters	
§ 15.247 (a)(2)	Spectrum Bandwidth of a DSSS System	7
§15.231 (d)	Frequency stability	11
§ 15.247 (b)(1)	Maximum peak output power	14
§ 15.247 (c)(1)	Emission limitations	22
§ 15.247 (d)	Power Spectral Density	52
§ 15.247 (e)	Processing Gain of DSSS System	56
§ 15.107	Conducted emissions	57
	Receiver parameters	
§ 15.209	Spurious radiations - Radiated	59
	Test equipment listing	63
	Photographs of the equipment	65

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

SPECTRUM BANDWIDTH OF DSSS-SYSTEM**SUBCLAUSE § 15.247 (a)(2)****6 dB bandwidth**

TEST CONDITIONS		6 dB BANDWIDTH (kHz)		
Frequency (MHz)		2412	2442	2462
T _{nom} (25)°C	V _{nom} (3.3)V	8727	9022	9371
Measurement uncertainty		±1kHz		

RBW / VBW as provided in the „Measurement Guidelines“ (DA 00-705, March 30, 2000)

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

SPECTRUM BANDWIDTH OF DSSS-SYSTEM
2412 MHz

SUBCLAUSE § 15.247 (a)(2)

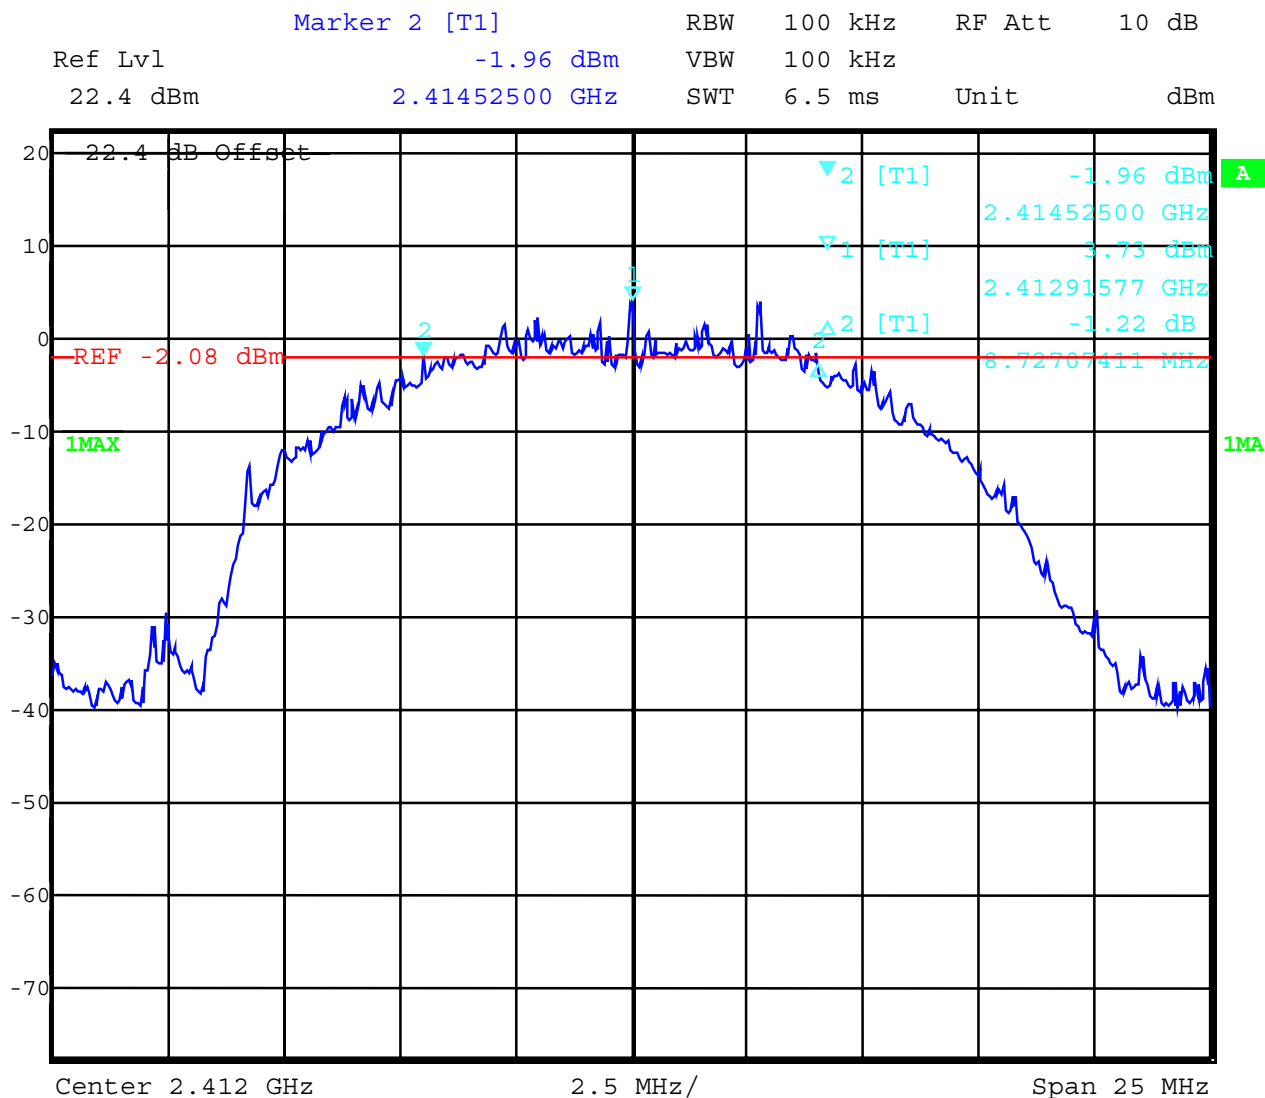

Date: 27.DEC.2001

RBW = 100 KHz, Span >> RBW, here 25 MHz

LIMIT


SUBCLAUSE §15.247(a) (2)

The minimum 6dB bandwidth shall be at least 500 KHz , here 8.721 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

SUBCLAUSE § 15.247 (a)(2)

Ref Lvl	Marker 2 [T1]	RBW	100 kHz	RF Att	10 dB
22.4 dBm	-3.37 dBm	VBW	100 kHz		
	2.43692242 GHz	SWT	6.5 ms	Unit	dBm

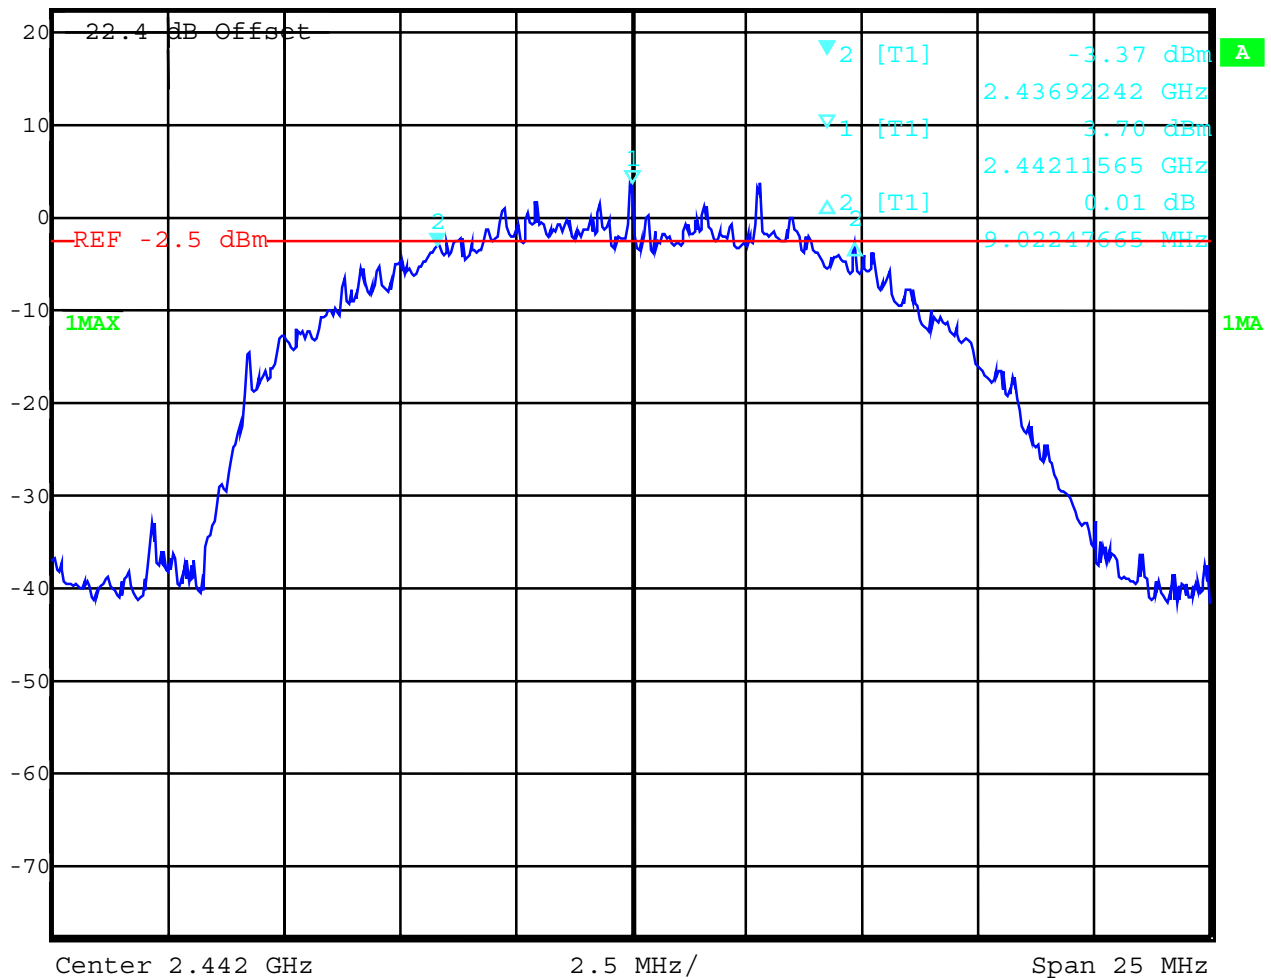

SUBCLAUSE §15.247(a) (2)

The minimum 6dB bandwidth shall be at least 500 KHz , here 9.022 MHz

64

Equipment under test : WLAN Module PA3171U-1MPC


Ambient temperature : 21°C

Relative humidity : 51%

SPECTRUM BANDWIDTH OF DSSS-SYSTEM

SUBCLAUSE § 15.247 (a)(2)

2462 MHz

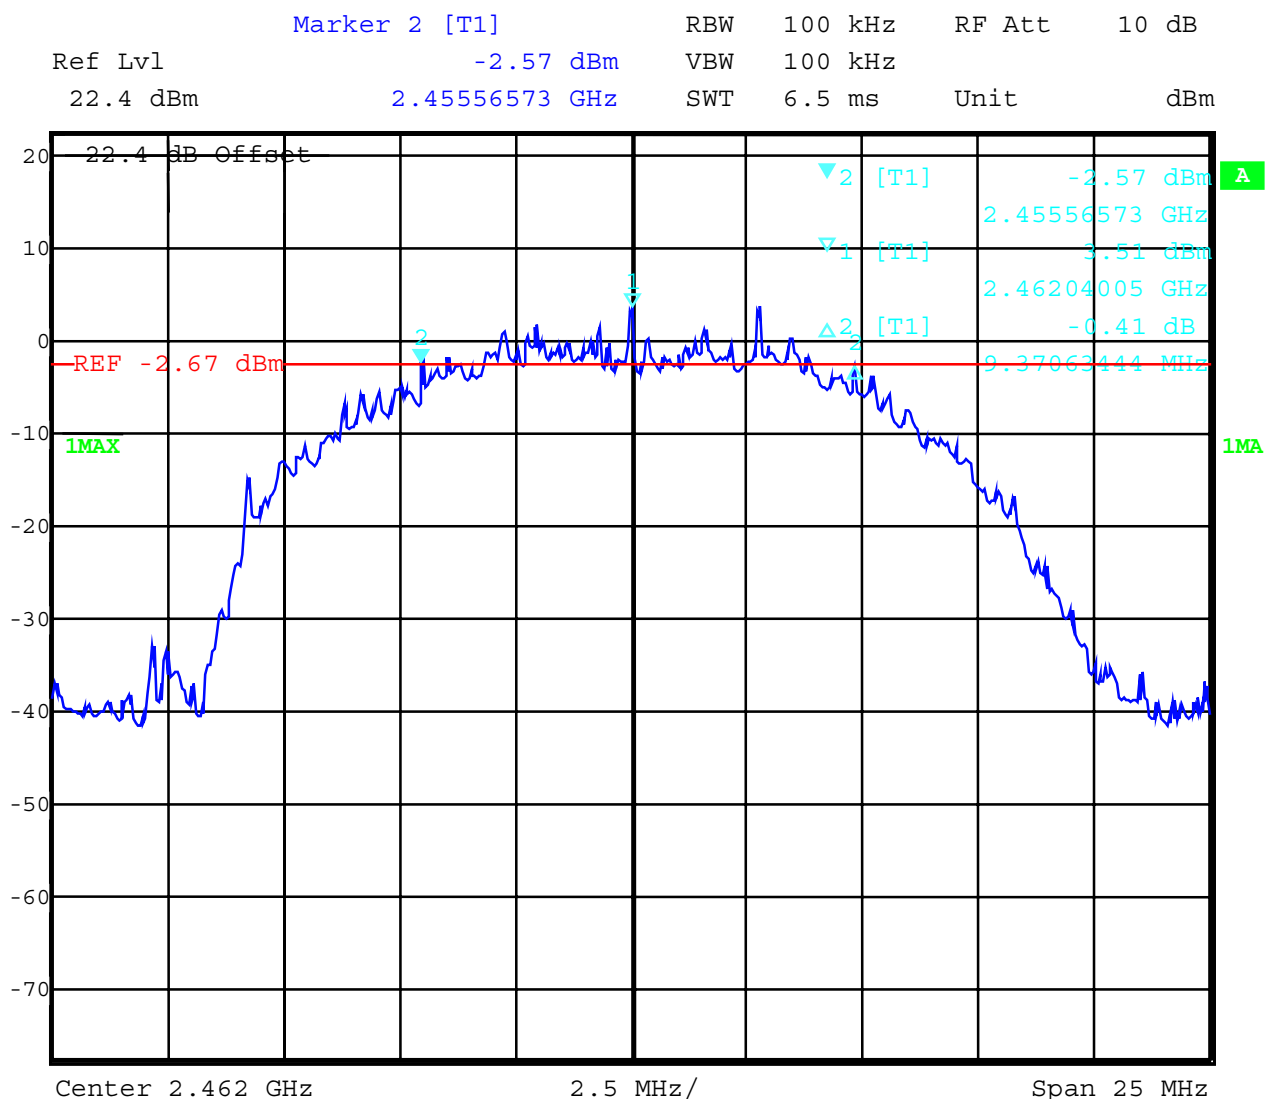

Date: 27.DEC.2001

RBW = 100 KHz, Span >> RBW, here 25 MHz

LIMIT

SUBCLAUSE §15.247(a) (2)

The minimum 6dB bandwidth shall be at least 500 KHz , here 9.371 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

FREQUENCY STABILITY

SUBCLAUSE §15.231 (d)

Method of Measurement:

In order to measure the carrier frequency of the MINI PCI Module under extreme conditions, it is necessary to make measurements with the use of a R&S FSIQ26 SIGNAL ANALYZER.

1. Measure the carrier frequency at room temperature.
2. Subject the card in an adapter connected to a desktop PC at + 20 degrees C.
3. With the card, powered via an external power supply at 3.135 Volt, connected to the FSIQ26 and in a continuous TX-mode at channel 7 (center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the card, to prevent significant self warming.
4. Repeat the measurement with a voltage variation of 0.05 Volt up to 3.465 Volt. (3.3 Volt $\pm$ 5%)
5. Repeat the above measurements at 5 C increments from +5 degrees C to +35 degrees C and a power voltage of 3.3V DC. Allow at least 1/2 hours at each temperature, unpowered, before making measurements.
6. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

Measurement Limit:

According to the FCC 15.231 standard the frequency stability of the carrier shall be $\pm$ 0.01% (244.2 kHz). This minipci card is specified to operate with an input voltage of between 3.135 Vdc and 3.465 Vdc, with a nominal voltage of 3.3 Vdc.. Operation above or below these voltage limits is prohibited. For the purposes of measuring frequency stability these voltage limits are to be used.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

FREQ ERROR vs. VOLTAGE at room temperature (20° C)

Voltage (V)	Frequency Error (Hz)	Frequency Error (%)
3,14	-3000	-0,00001229
3,17	-3000	-0,00001229
3,20	-3000	-0,00001229
3,23	-3000	-0,00001229
3,27	-3000	-0,00001229
3,30	-3100	-0,00001269
3,33	-3100	-0,00001269
3,37	-3100	-0,00001269
3,40	-3150	-0,00001290
3,43	-3150	-0,00001290
3,47	-3180	-0,00001302

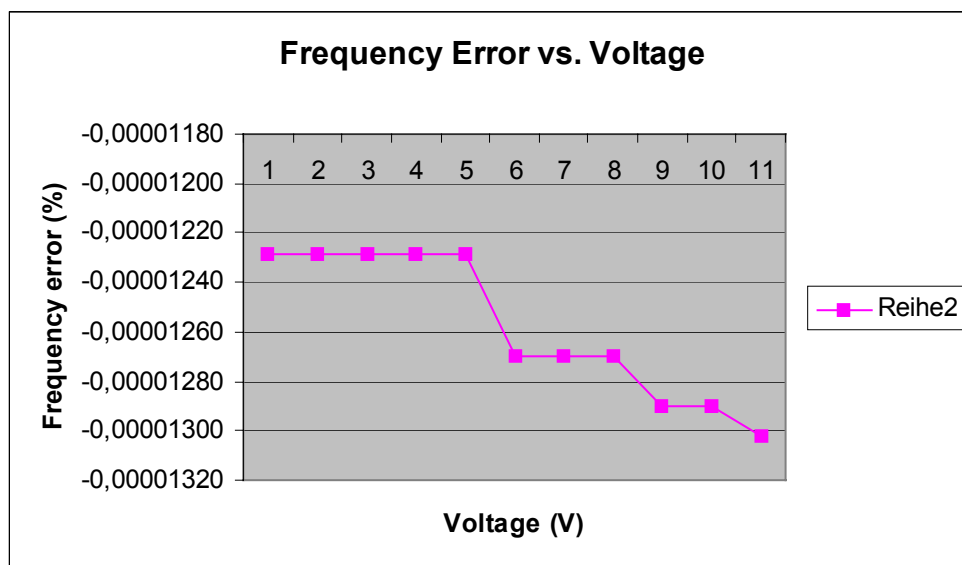

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


Equipment under test : WLAN Module RUBY MINIPCI 8U354

Ambient temperature : 21°C

Relative humidity : 51%

FREQ ERROR vs. TEMPERATURE at 3.3 V DC

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (%)
+ 5	- 5605	-0,00002253
+ 10	- 3700	-0,00001577
+ 15	- 3650	-0,00001487
+ 20	- 3200	-0,00001233
+ 25	- 2500	-0,00001100
+ 30	+ 840	0,00000326
+ 35	+ 5030	0,00002187

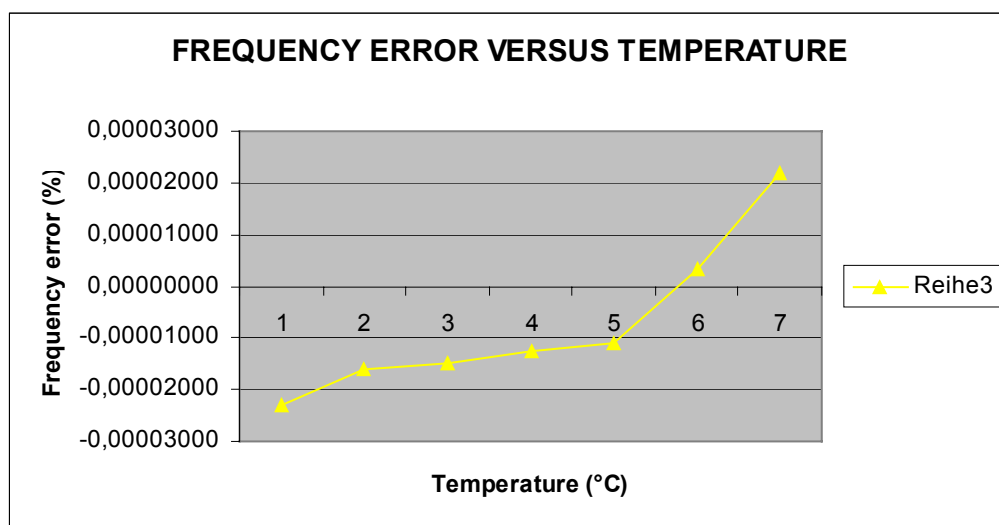

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Equipment under test : WLAN Module PA3171U-1MPC
Ambient temperature : 21°C
Relative humidity : 51%
**MAXIMUM PEAK OUTPUT POWER
(CONDUCTED)**
SUBCLAUSE § 15.247 (b) (1)

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)		2412	2442	2462
$T_{nom}(21)^{\circ}C$	$V_{nom}(3.3)V$	Peak: 19.3 dBm AV: 12.3 dBm	Peak 19.2 dBm AV: 12.3 dBm	Peak 19.1 dBm AV: 12.2 dBm
Maximum deviation from output power under extreme test conditions (dBc)		not performed	not performed	not performed
Measurement uncertainty		$\pm 3dB$		

Settings: RBW/VBW 10 MHz
LIMIT
SUBCLAUSE § 15.247 (b) (1)

Frequency range	RF power output
2400-2483.5 MHz / 5725 – 5850 MHz	30 dBm

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)
 18-31,64


Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

**MAXIMUM PEAK OUTPUT POWER
(CONDUCTED) (Peak)
2412 MHz**

SUBCLAUSE § 15.247 (b) (1)

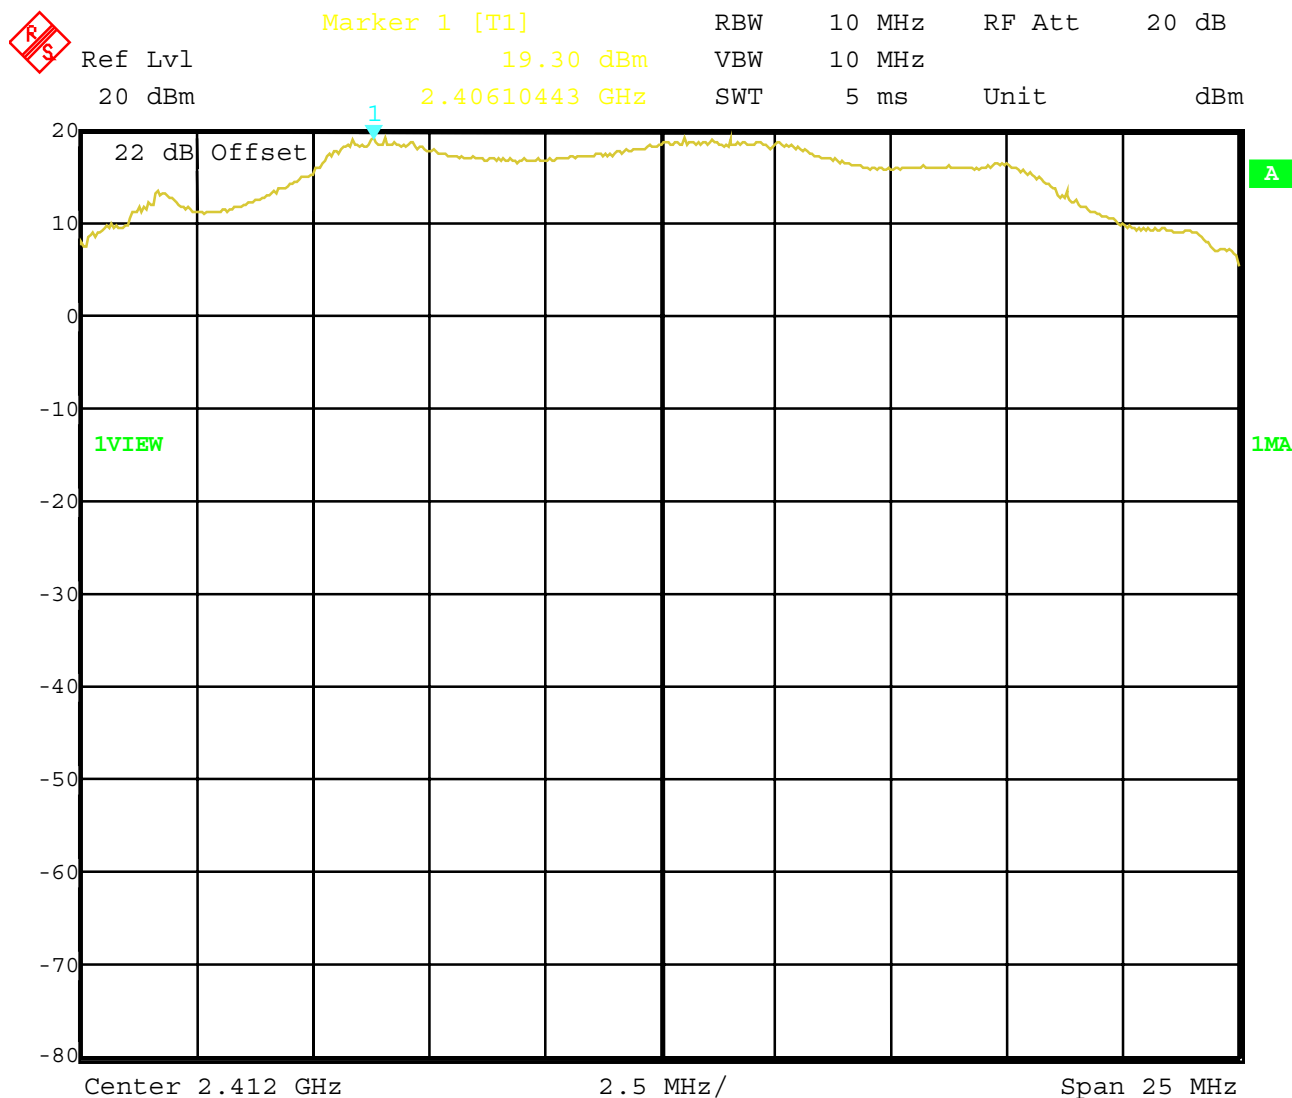

Date: 27.DEC.2001

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)
18-31,64

Equipment under test : WLAN Module PA3171U-1MPC


Ambient temperature : 21°C

Relative humidity : 51%

**MAXIMUM PEAK OUTPUT POWER
(CONDUCTED) (average)
2412 MHz**

SUBCLAUSE § 15.247 (b) (1)


 Marker 1 [T1] RBW 10 MHz RF Att 20 dB
 Ref Lvl 12.32 dBm VBW 10 MHz
 20 dBm 2.41868537 GHz SWT 5 ms Unit dBm

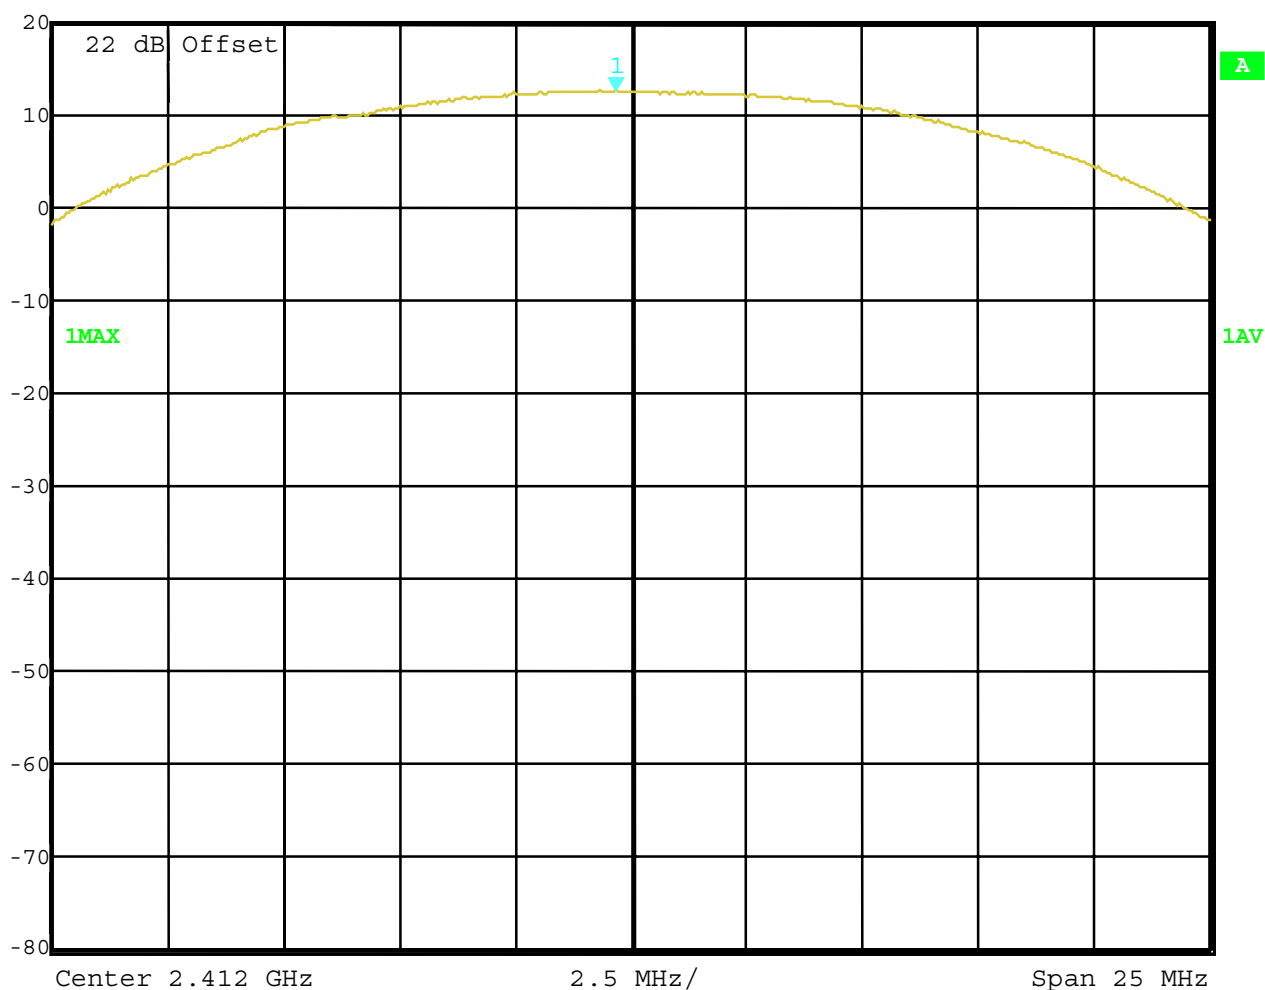

Date: 27.DEC.2001

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)
 18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C


Relative humidity : 51%

MAXIMUM PEAK OUTPUT POWER (CONDUCTED) (Peak)

SUBCLAUSE § 15.247 (b) (1)

2442 MHz


 Marker 1 [T1] RBW 10 MHz RF Att 20 dB
 Ref Lvl 19.19 dBm VBW 10 MHz
 20 dBm 2.44413216 GHz SWT 5 ms Unit dBm

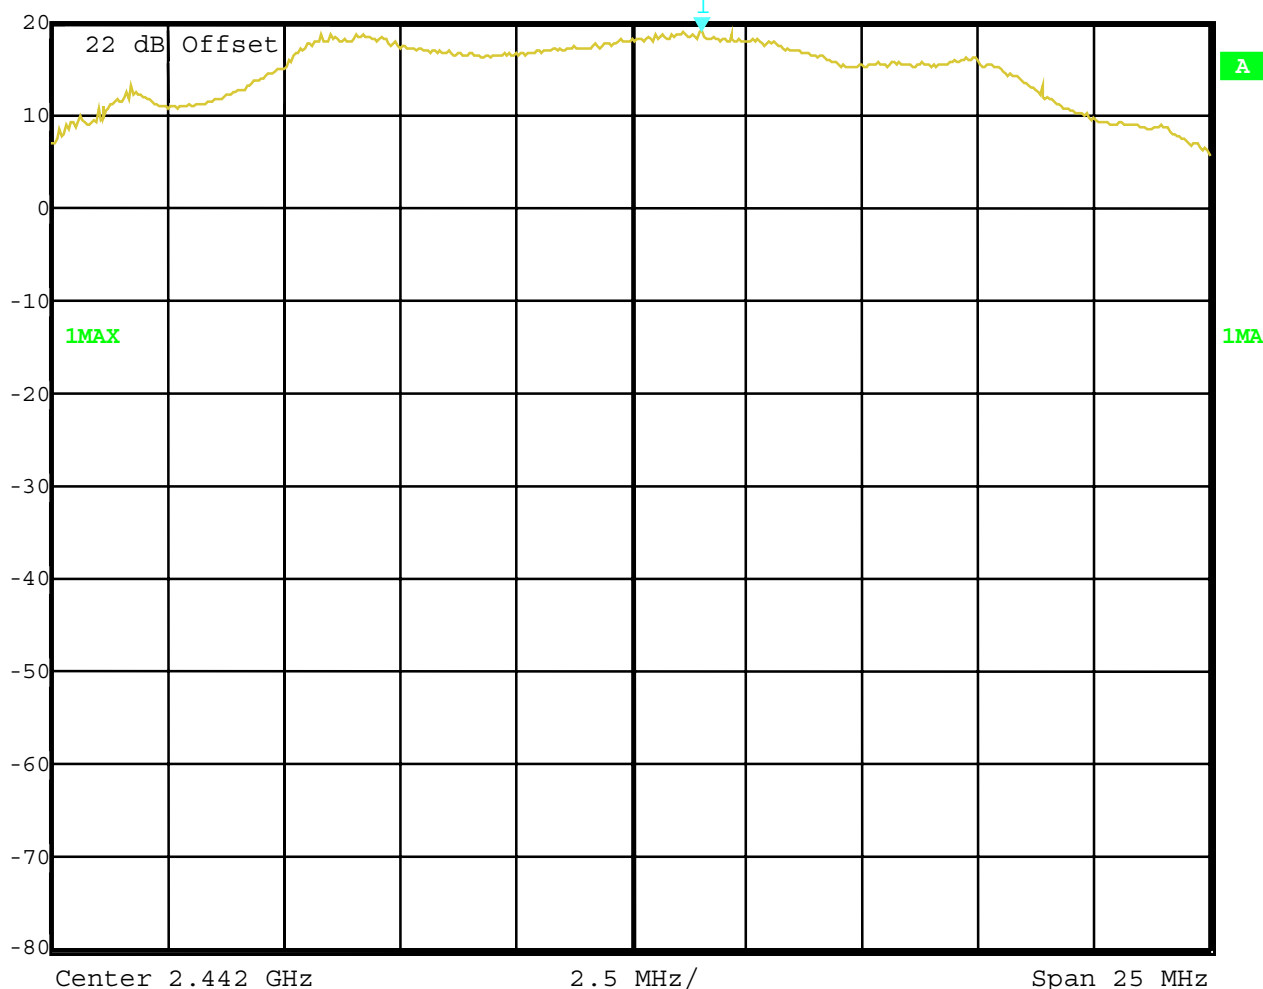

Date: 27.DEC.2001

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

MAXIMUM PEAK OUTPUT POWER (CONDUCTED) (average)

SUBCLAUSE § 15.247 (b) (1)

2442 MHz



Marker 1 [T1]

RBW 10 MHz RF Att 20 dB

Ref Lvl

12.27 dBm

VBW 10 MHz


20 dBm

2.44108315 GHz

SWT 5 ms

Unit

dBm

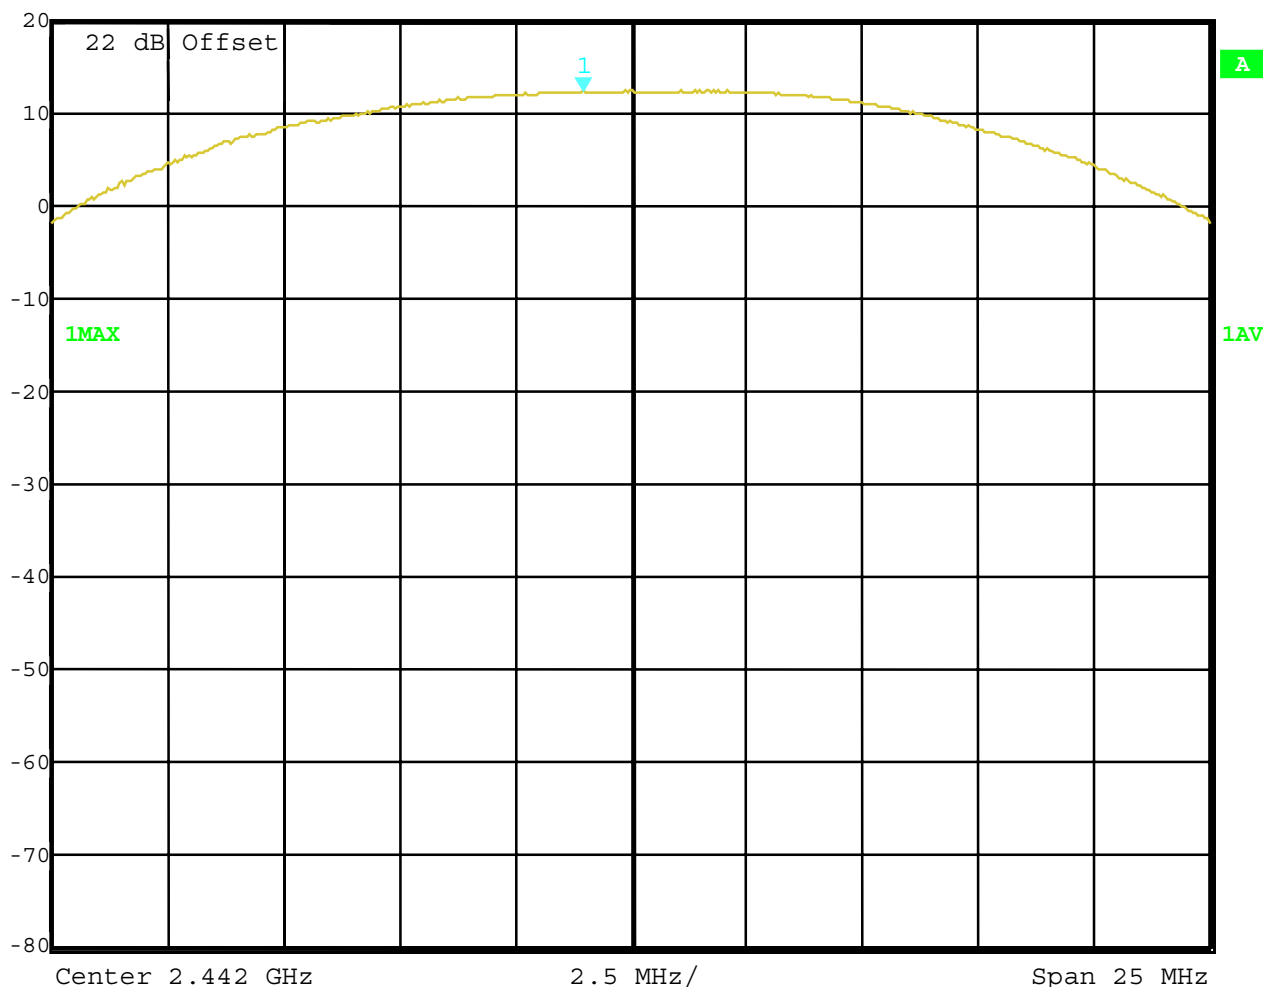

Date: 27.DEC.2001

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C


Relative humidity : 51%

MAXIMUM PEAK OUTPUT POWER (CONDUCTED) (Peak)

SUBCLAUSE § 15.247 (b) (1)

2462 MHz


 Marker 1 [T1] RBW 10 MHz RF Att 20 dB
 Ref Lvl 19.11 dBm VBW 10 MHz
 20 dBm 2.46299705 GHz SWT 5 ms Unit dBm

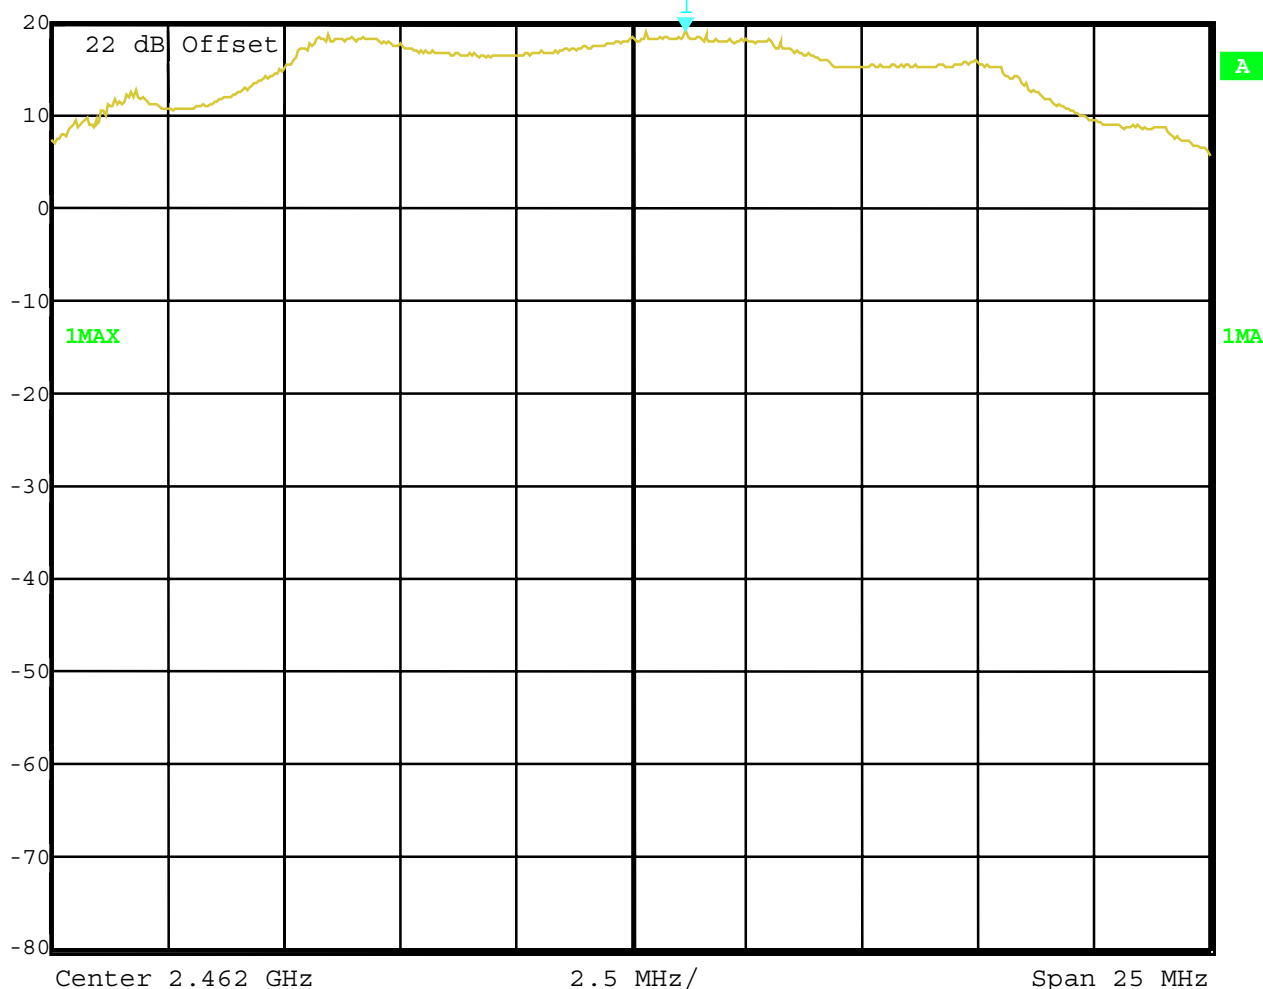

Date: 27.DEC.2001

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)
 18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C


Relative humidity : 51%

MAXIMUM PEAK OUTPUT POWER (CONDUCTED) (average)

SUBCLAUSE § 15.247 (b) (1)

2462 MHz

 Marker 1 [T1] RBW 10 MHz RF Att 20 dB
Ref Lvl 12.19 dBm VBW 10 MHz
20 dBm 2.46110056 GHz SWT 5 ms Unit dBm

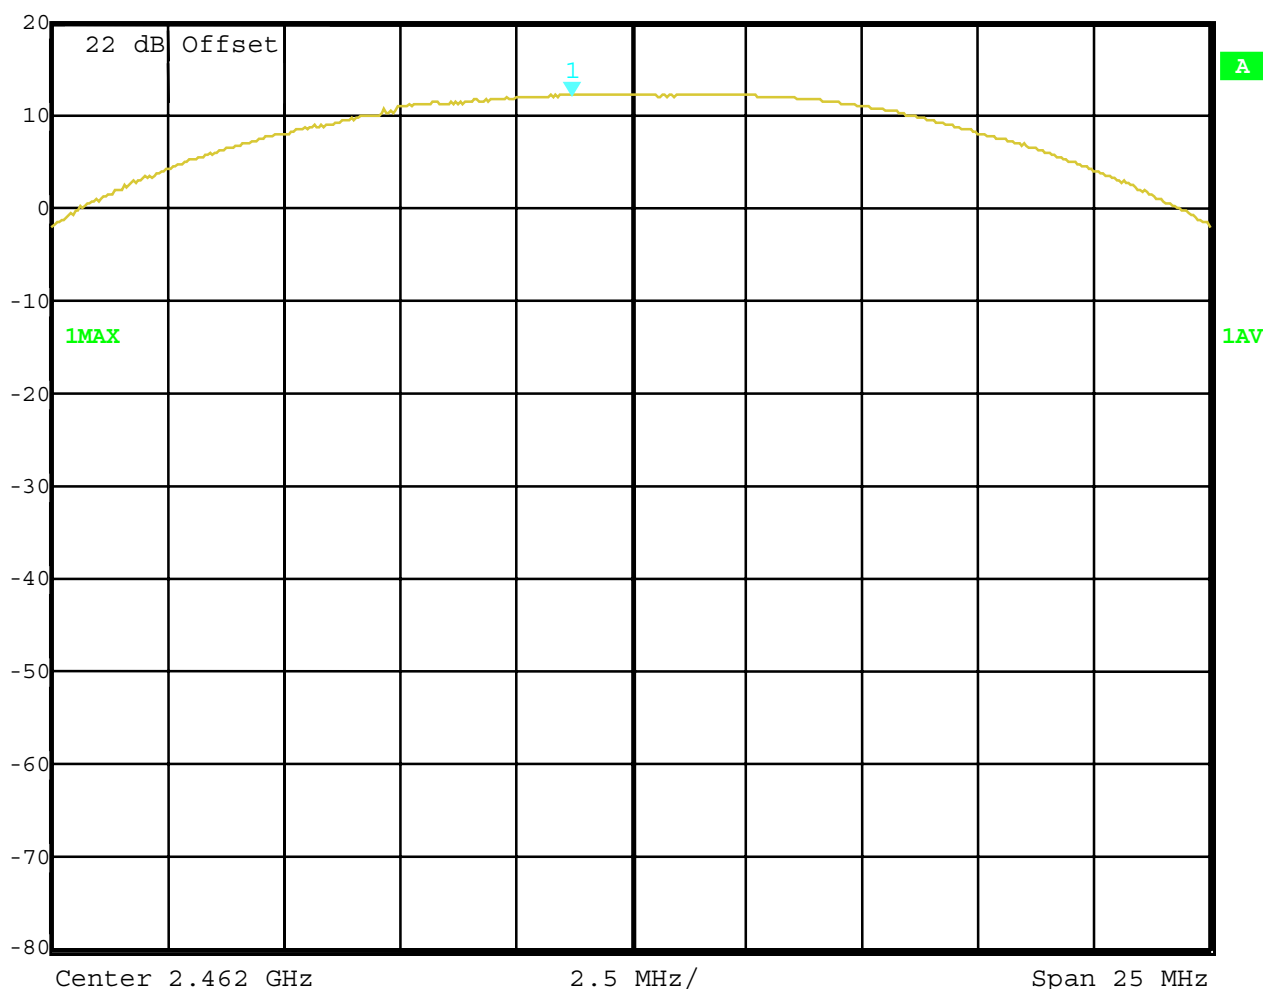

Date: 27.DEC.2001

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

MAXIMUM PEAK OUTPUT POWER (RADIATED)

SUBCLAUSE § 15.247 (b) (1)

This test was performed to find the antenna gain of this integrated system.

The maximum output was measured in vertikal polarisation with antenna outside laptop.
We tested all three different type of antennas with the same WLAN module.

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (W)		
Frequency (MHz)		2412	2442	2462
T _{nom} (21)°C	V _{nom} (3.3)V	cond. Peak: 19.3 dB	cond. Peak 19.2 dBm	cond. Peak 19.1 dBm
Antenna HTL-004		17.9 dB (gain -1.4dB)	17.9 dB (gain -1.3 dB)	18.3 dB (gain -0.8 dB)
Antenna HTL-007		17.5 dB (gain -1.7 dB)	17.8 dB (gain -1.4 dB)	18.5 dB (gain -0.6 dB)
Antenna HTL-008		20.0 dB (gain +0.7 dB)	21.5 dB (gain +2.3 dB)	21.2 dB (gain +2.1 dB)
Antenna Gain Power cond. – Power rad.		-1.4dB - +0.7dB	-1.3dB - +2.3dB	-0.8dB - +2.1dB
Measurement uncertainty		±3dB		

The gain is measured with antennas outside housing. We expect lower gain with build-in antennas.

Settings: RBW/VBW 10 MHz

LIMIT

SUBCLAUSE § 15.247 (b) (1)

Frequency range	RF power output
2400-2483.5 MHz / 5725 – 5850 MHz	1.0 Watt / 30 dBm

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

EMISSION LIMITATIONS (Transmitter)

SUBCLAUSE § 15.247 (c) (1)

conducted (radiated emissions in restricted bands see next table)

2412 MHz

SPURIOUS LIMITATIONS					
f (MHz)		amplitude of emission (dBm)	limit max. allowed emmission		results
2412	cond.	19.3	30.0 dBm		Operating frequency
all	peaks	<<20 dB	below	limits	
Measurement uncertainty		± 3dB			

RBW/VBW according to FCC requirements.

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

EMISSION LIMITATIONS (Transmitter) SUBCLAUSE § 15.247 (c) (2)

radiated (Antenna horizontal polarisation, vertical emissions were up to 20dB lower)

2412 MHz

SPURIOUS LIMITATIONS					
f (MHz)		amplitude of emission (dBµV/m)	limit max. allowed emission		results
56.4	rad.	QP:23.8	40.0 dBµV/m		complies
60.7	rad.	QP:22.8	40.0 dBµV/m		complies
62.5	rad.	QP:21.5	40.0 dBµV/m		complies
456.6	rad.	QP:32.1	46.0 dBµV/m		complies
461.1	rad.	QP:31.2	46.0 dBµV/m		complies
5281	rad.	AV:16.6	54.0 dBµV/m		complies
no	radiated	spurs	above	5300 MHz	
Measurement uncertainty		± 3dB			

Measurement were performed up to 1 GHz with a CISPR quasi peak adapter and 100/120 kHz BW.

Measurements above 1 GHz were performed with RBW/VBW 1 MHz in Peak and Average.

LIMITS SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

2412 MHz radiated up to 4000 MHz

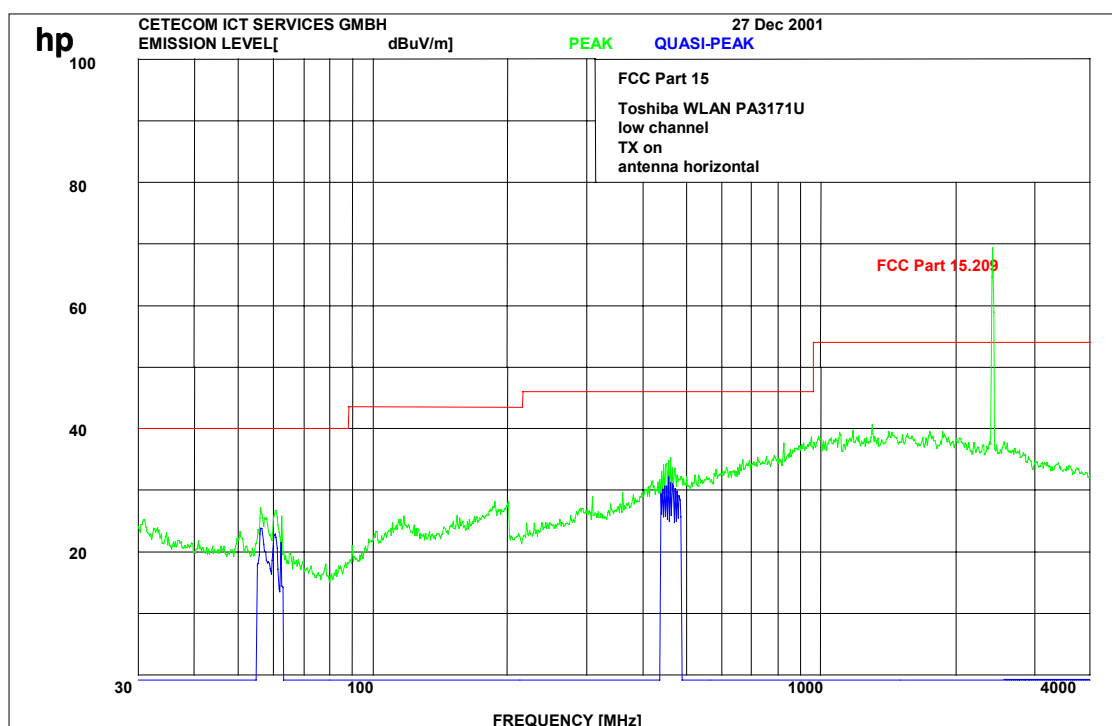

This is only a scan:

Measurements were performed with a CISPR quasi peak adapter and 100/120 kHz BW up to 1 GHz (blue lines), higher frequencies with average (yellow lines) and peak (green lines) and RBW/VBW 1MHz.

Carrier is suppresses by a stub tuner to avoid oversteering of the lownoise amplifier of the measuring system.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

2412 MHz up to 12 GHz radiated

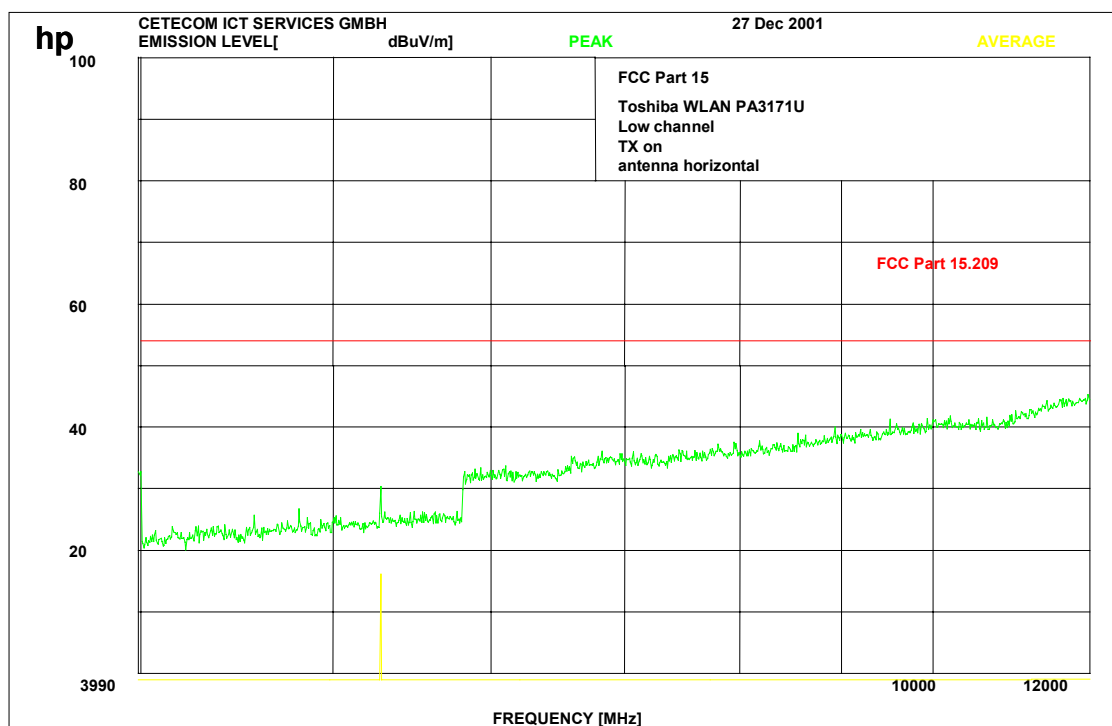

This is only a scan.

Manual measurements were performed with 1MHz RBW/VBW

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C


Relative humidity : 51%

2412 MHz up to 18GHz radiated (This plot is valid for all 3 channels, there were no peaks found)

Average



Ref Lvl 97 dBμV
Marker 1 [T1] 16.92 dBμV
12.00000000 GHz
RBW 1 MHz
VBW 1 MHz
SWT 40 ms
RF Att 0 dB
Unit dBμV

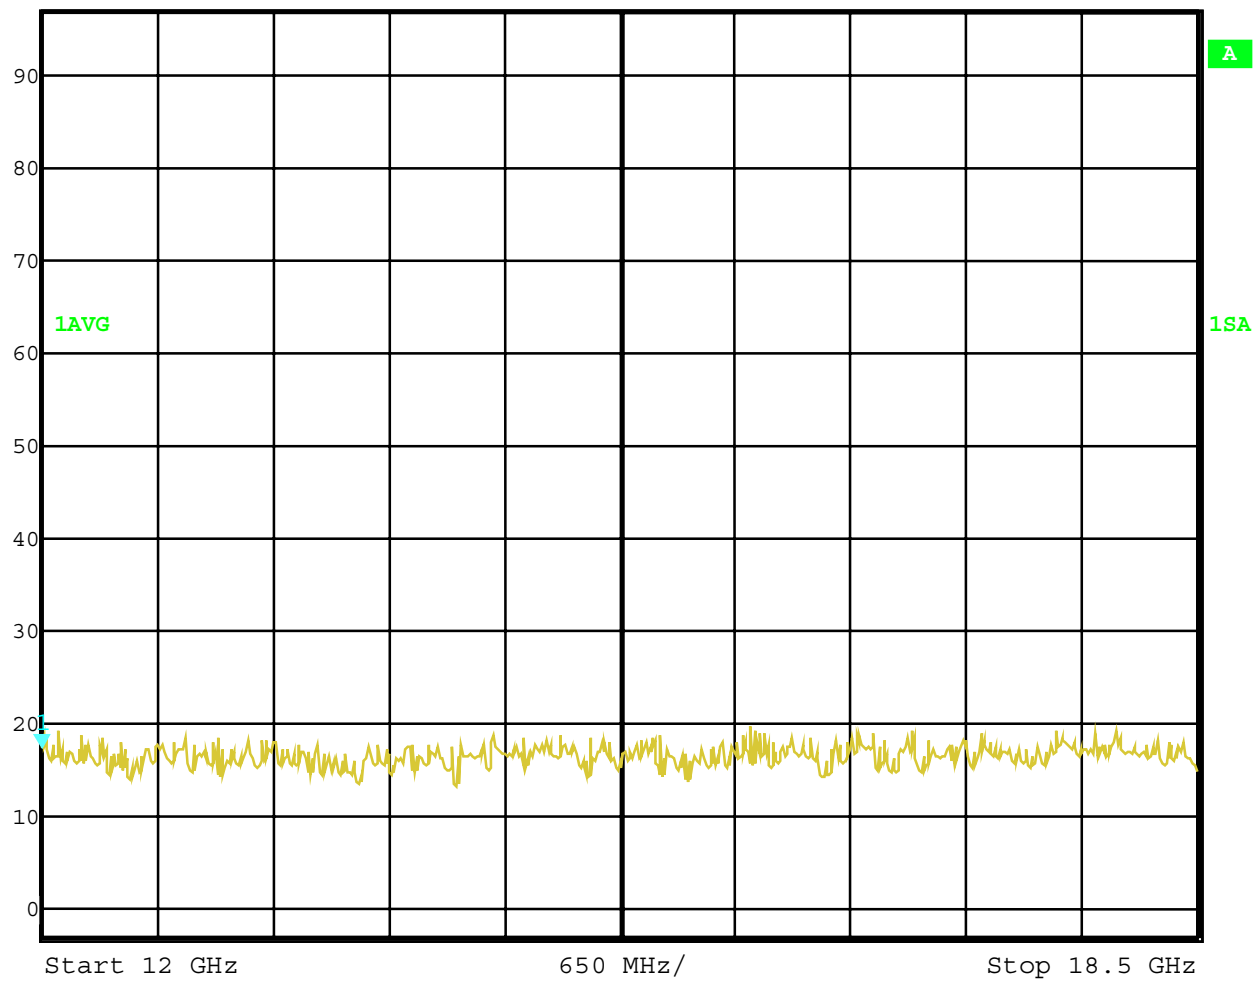

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)
18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

2412 MHz up to 25GHz radiated (This plot is valid for all 3 channels, there were no peaks found)

Average



Marker 1 [T1]


RBW 1 MHz RF Att 0 dB

Ref Lvl 16.47 dBμV

VBW 1 MHz

97 dBμV 17.50000000 GHz

SWT 45 ms Unit dBμV

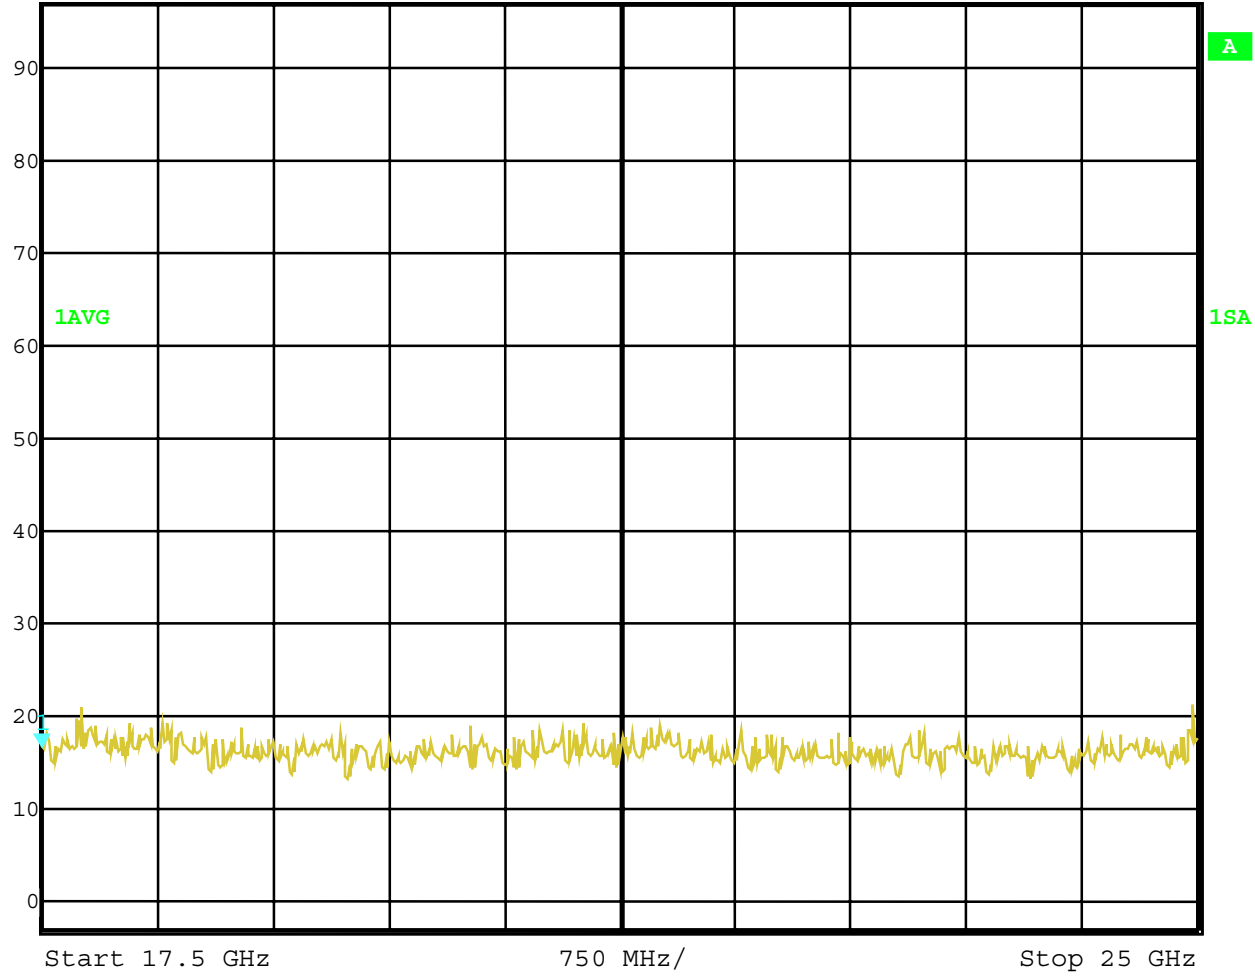


Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

2412 MHz conducted up to 1 GHz

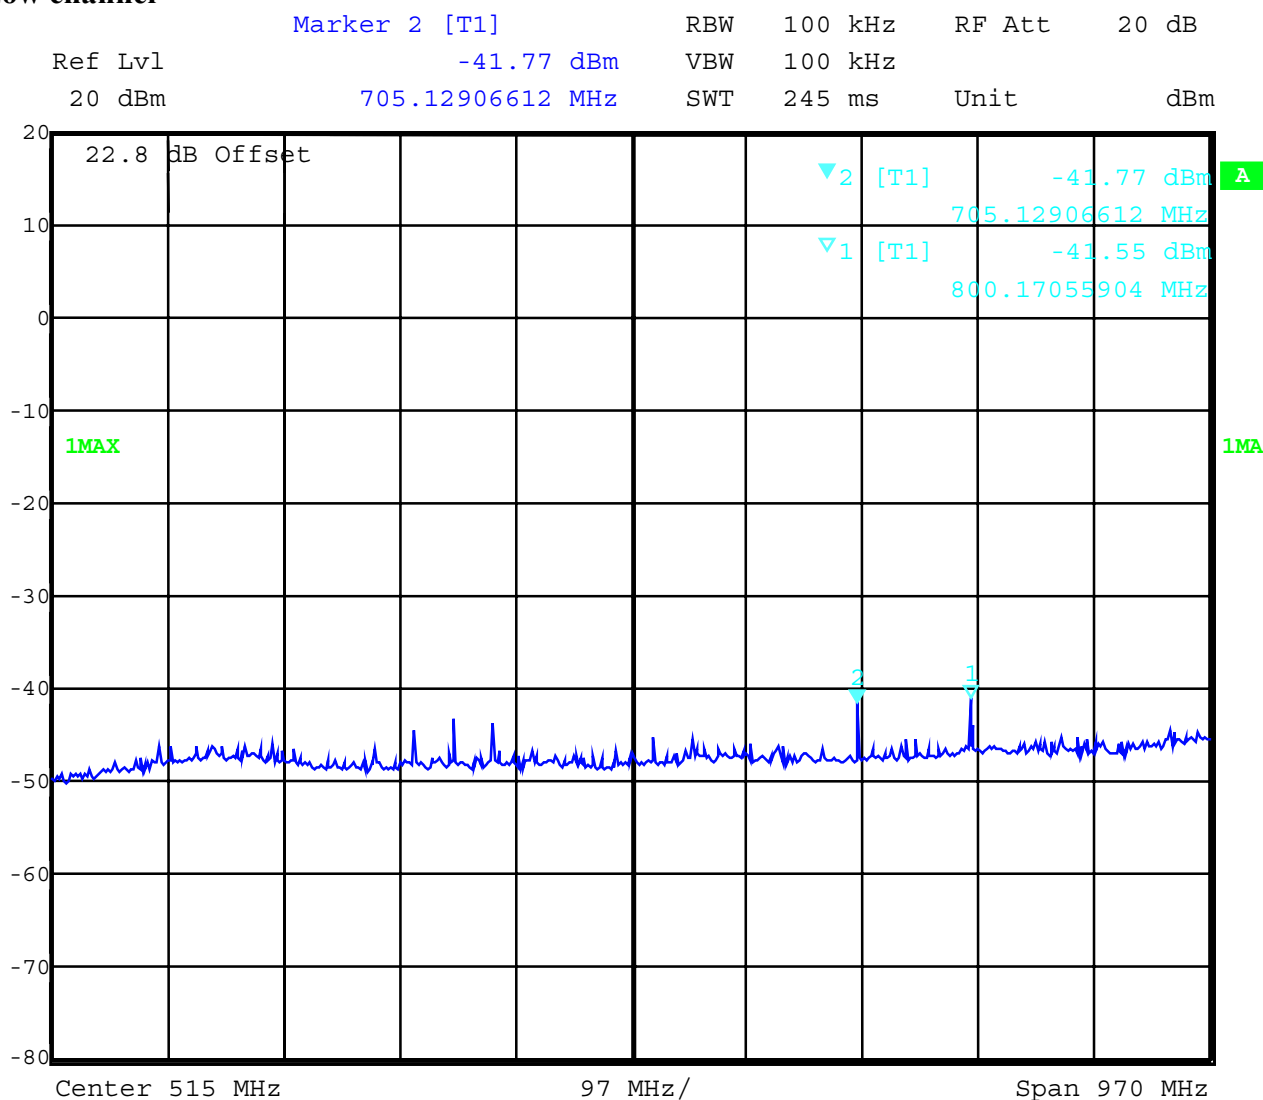All unwanted conducted emissions are << 20 dBc.**Low channel**

Date: 27.DEC.2001

The ref level is set to 20 dBm, that is the output of the card at nominal frequency.

Manual measurements were performed with a CISPR quasi peak adapter and 100/120 kHz.

LIMITS**SUBCLAUSE § 15.247 (c)**

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

2412 MHz conducted up to 5 GHz Peak

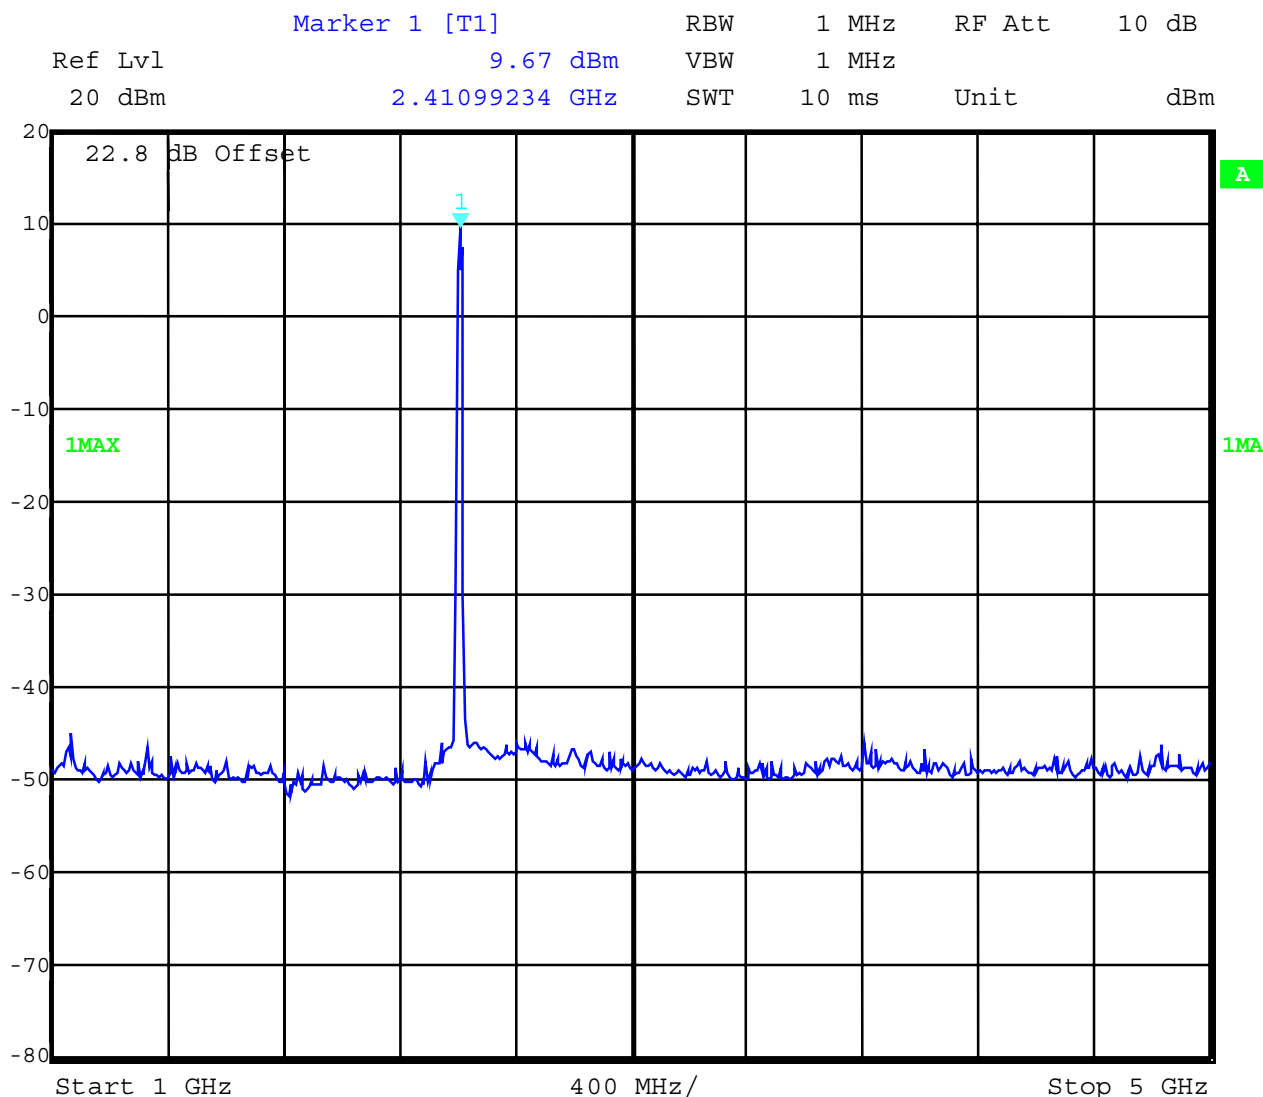

Date: 27.DEC.2001

This is only a scan.

Manual measurements were performed with 1MHz RBW/VBW

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

2412 MHz conducted up to 5 GHz Average

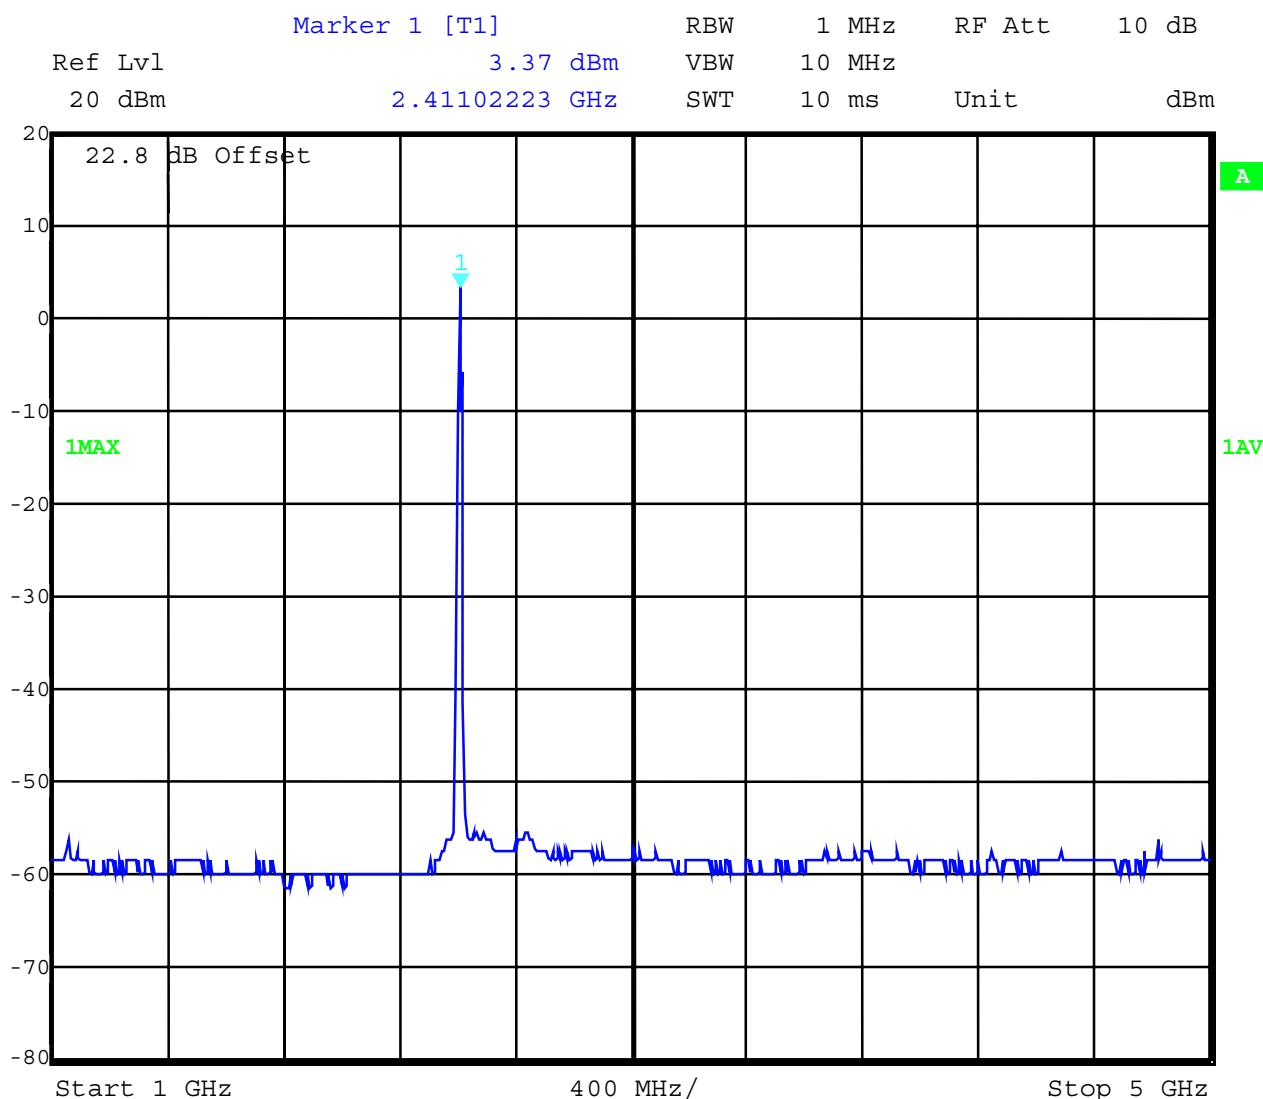

Date: 27.DEC.2001

This is only a scan.

Manual measurements were performed with 1MHz RBW/VBW.

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

2412 MHz conducted up to 25 GHz Peak

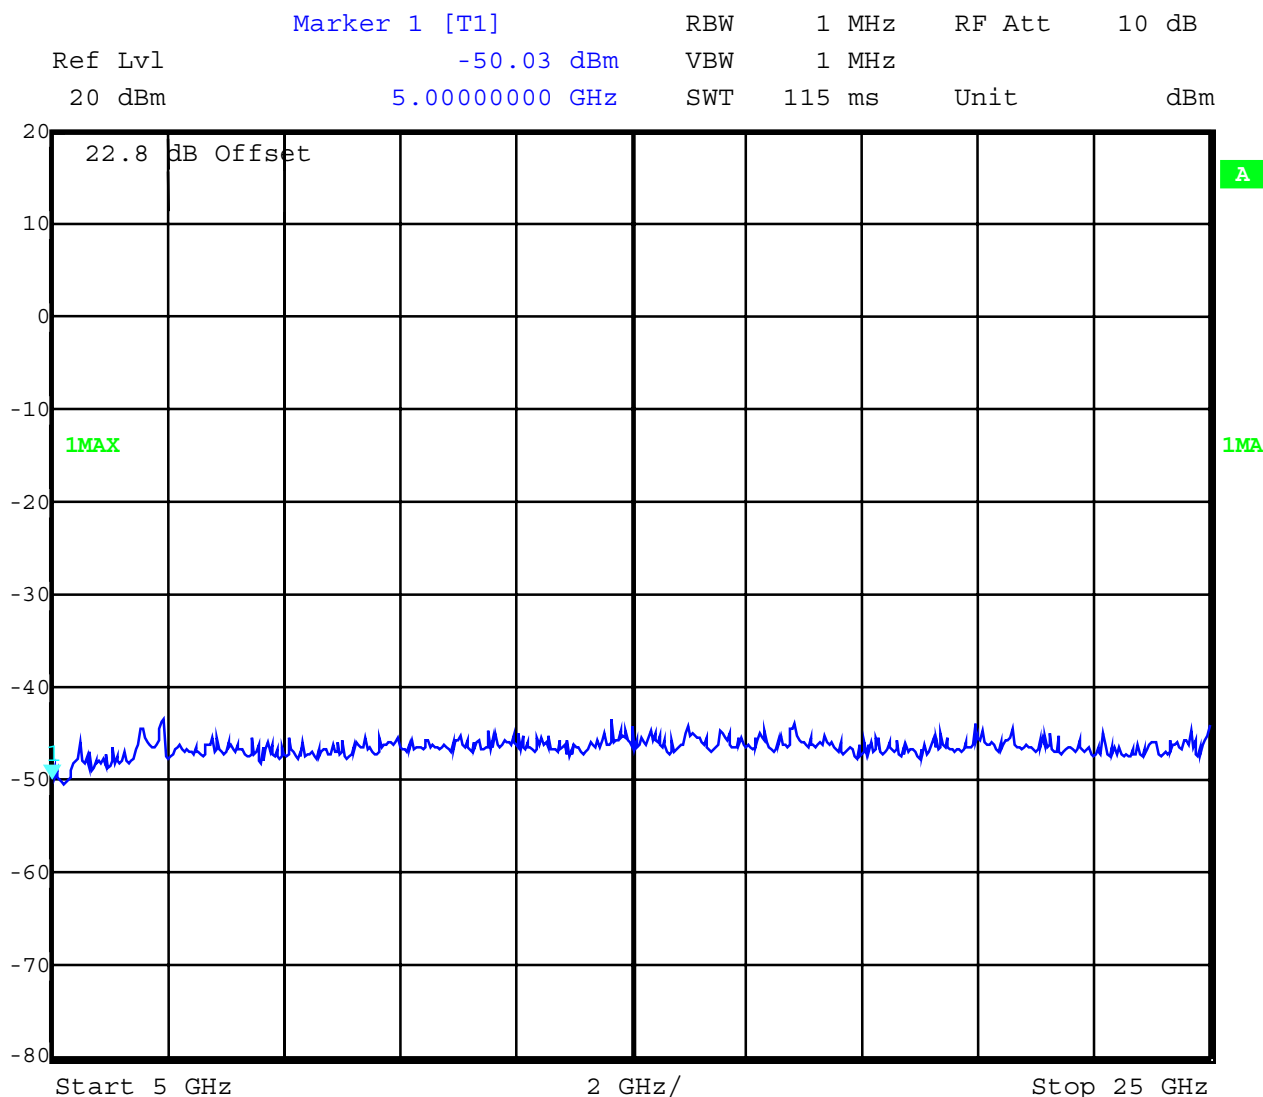

Date: 27.DEC.2001

This is only a scan.

Manual measurements were performed with 1MHz RBW/VBW

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

2412 MHz conducted up to 25 GHz Average



Date: 27.DEC.2001

This is only a scan.

Manual measurements were performed with 1MHz RBW/VBW

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

EMISSION LIMITATIONS (Transmitter)

SUBCLAUSE § 15.247 (c) (1)

conducted (radiated emissions in restricted bands see next table)

2442 MHz

SPURIOUS LIMITATIONS					
f (MHz)		amplitude of emission (dBm)	limit max. allowed emmission		results
2442	cond.	19.2	30.0 dBm		Operating frequency
no	peaks	found	above	2442 MHz	
Measurement uncertainty		± 3dB			

RBW/VBW according to FCC requirements.

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

EMISSION LIMITATIONS (Transmitter) SUBCLAUSE § 15.247 (c) (2)

radiated (Antenna horizontal polarisation, vertical emissions were up to 20dB lower)

2442 MHz

SPURIOUS LIMITATIONS					
f (MHz)		amplitude of emission (dBµV/m)	limit max. allowed emission		results
56.4	rad.	QP:23.8	40.0 dBµV/m		complies
60.7	rad.	QP:22.8	40.0 dBµV/m		complies
62.5	rad.	QP:21.5	40.0 dBµV/m		complies
456.6	rad.	QP:32.1	46.0 dBµV/m		complies
461.1	rad.	QP:31.2	46.0 dBµV/m		complies
no	radiated	spurs	above	2442 MHz	
Measurement uncertainty		± 3dB			

Measurement were performed up to 1 GHz with a CISPR quasi peak adapter and 100/120 kHz BW.

Measurements above 1 GHz were performed with RBW/VBW 1 MHz in Peak and Average.

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

2442 MHz radiated up to 4000 MHz

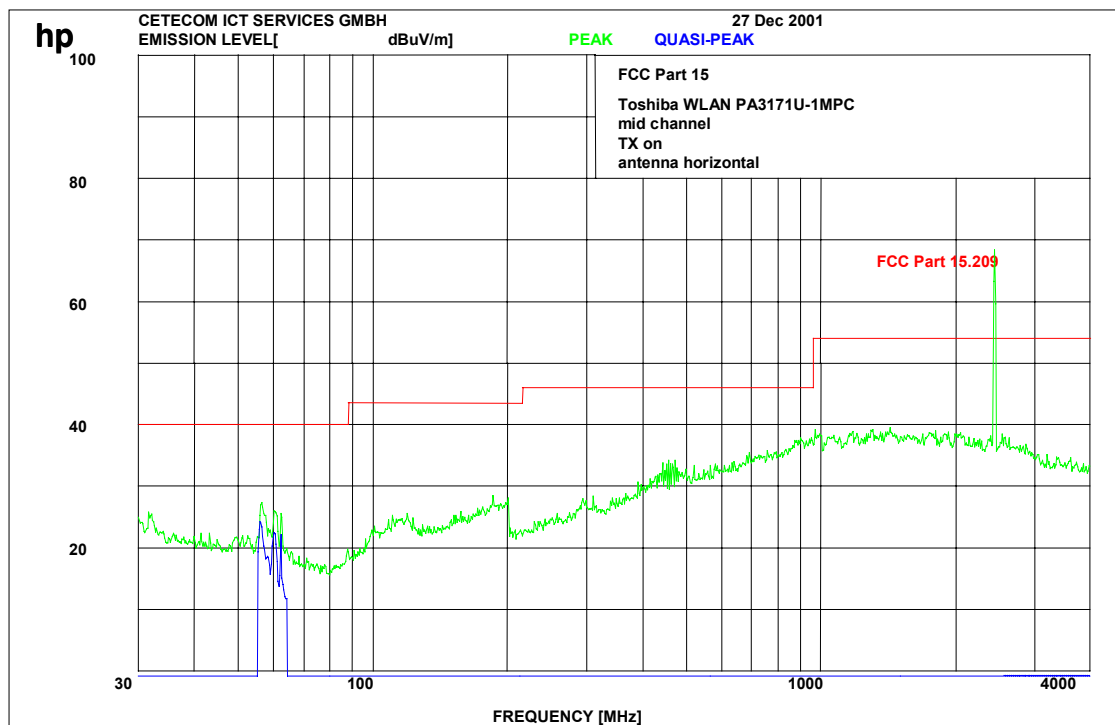

This is only a scan:

Measurements were performed with a CISPR quasi peak adapter and 100/120 kHz BW up to 1 GHz (blue lines), higher frequencies with average (yellow lines) and peak (green lines) and RBW/VBW 1MHz.

Carrier is suppressed by a stub tuner to avoid oversteering of the lownoise amplifier of the measuring system.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

2442 MHz up to 12 GHz radiated

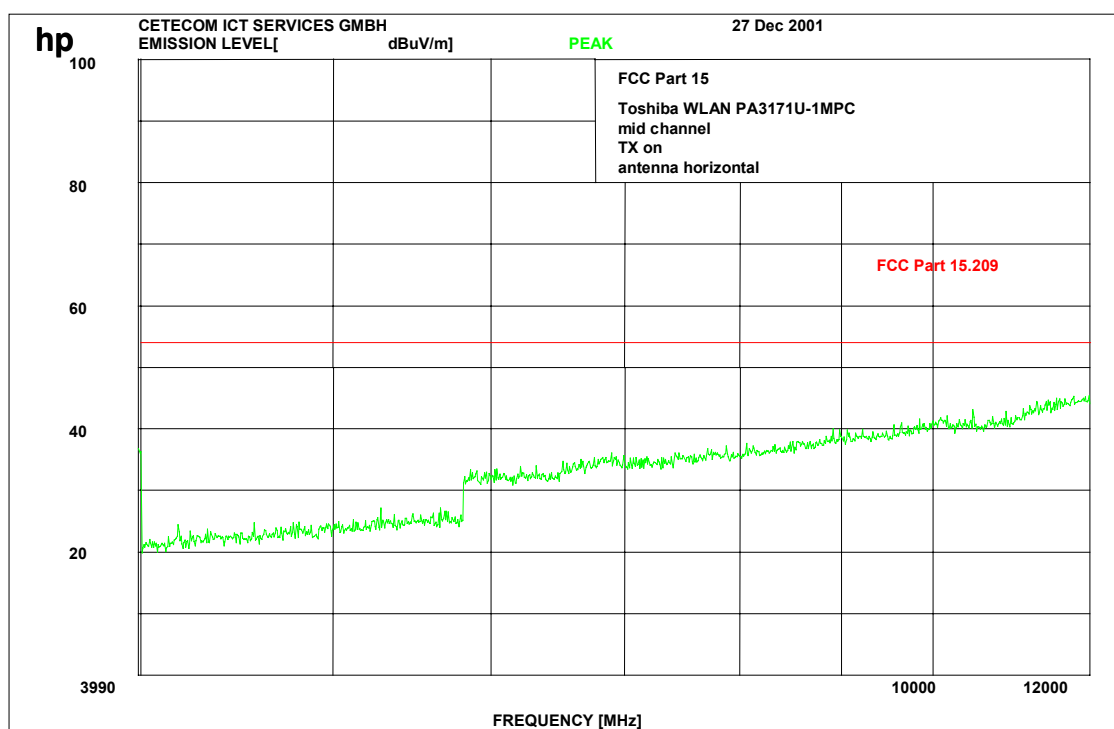

This is only a scan.

Measurements were performed with 1MHz RBW/VBW

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

2442 MHz conducted up to 1 GHz

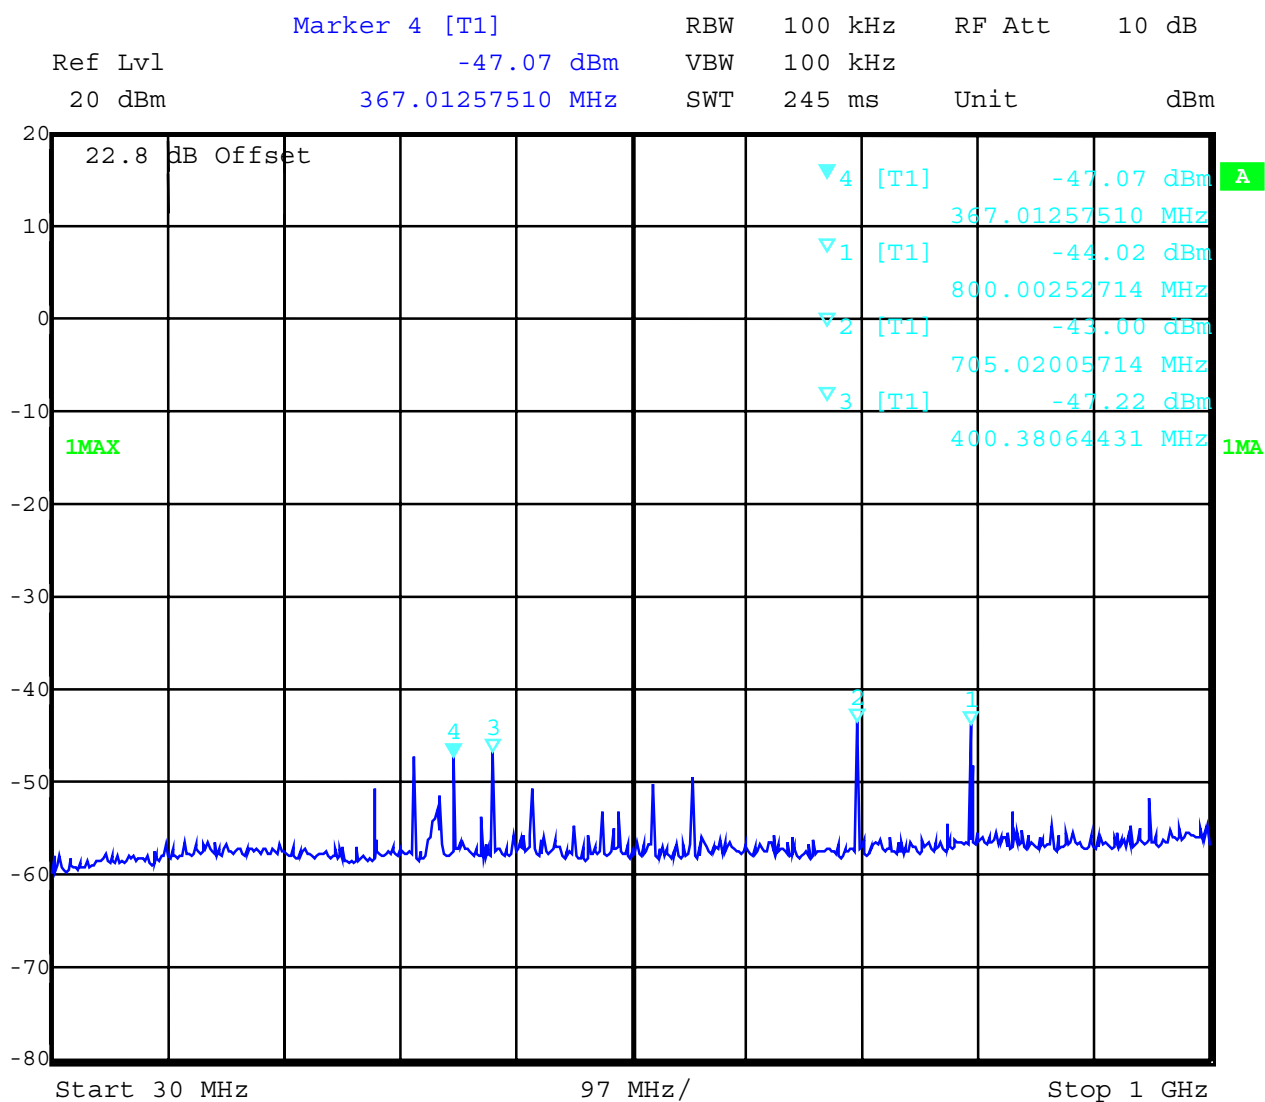

Date: 27.DEC.2001

This is only a scan.

Manual measurements were performed with a CISPR quasi peak adapter and 100/120 kHz.

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

2412 MHz conducted up to 5 GHz Peak

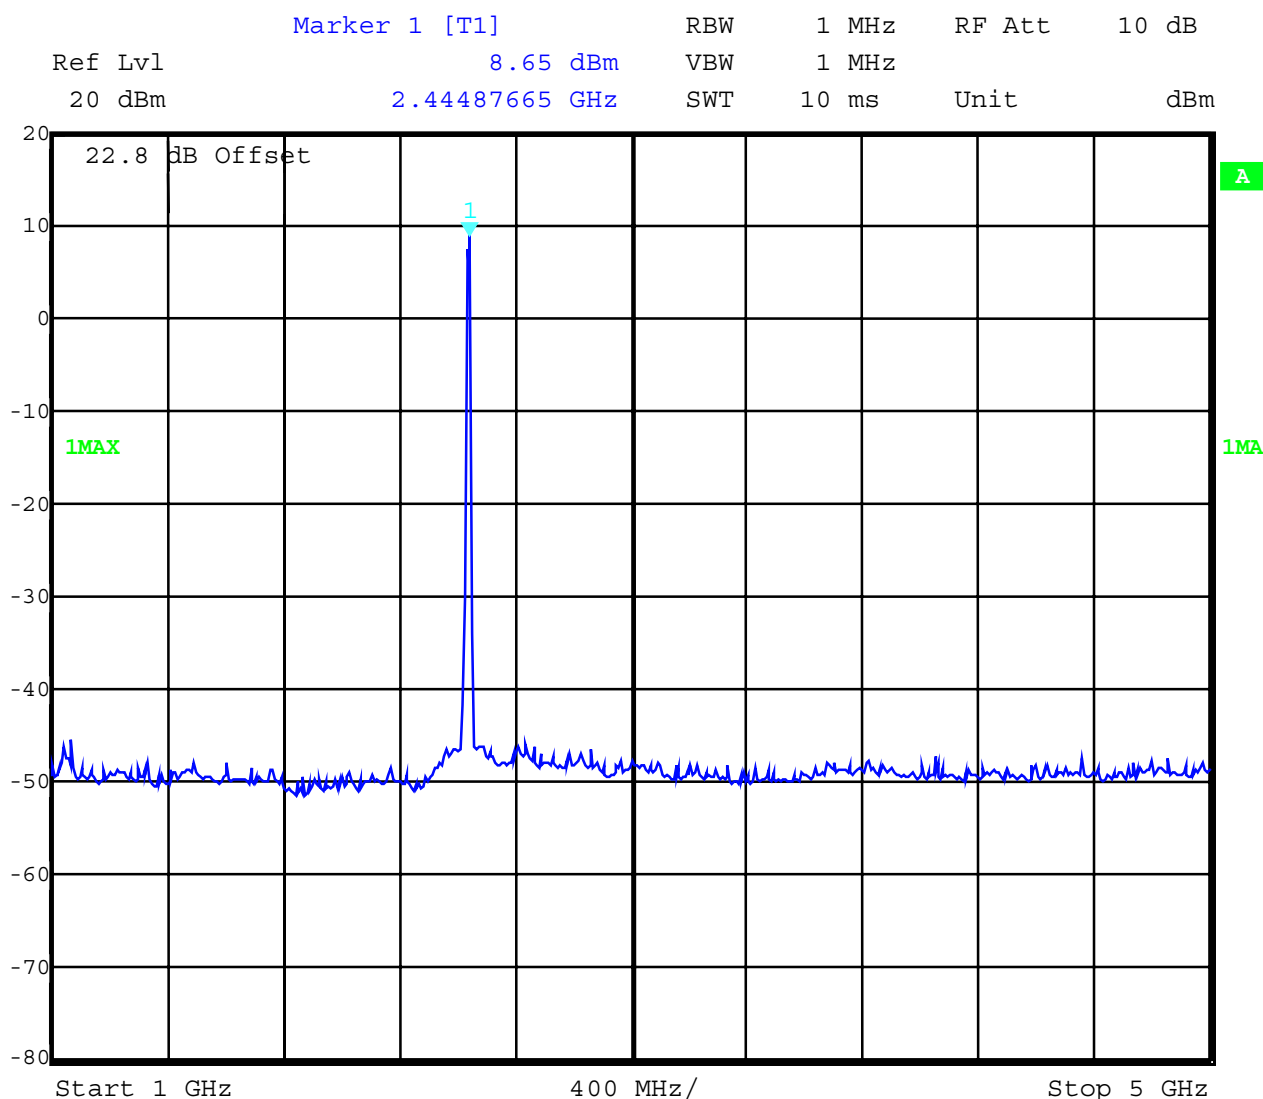

Date: 27.DEC.2001

This is only a scan.

Manual measurements were performed with 1MHz RBW/VBW

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

2442 MHz conducted up to 5 GHz Average

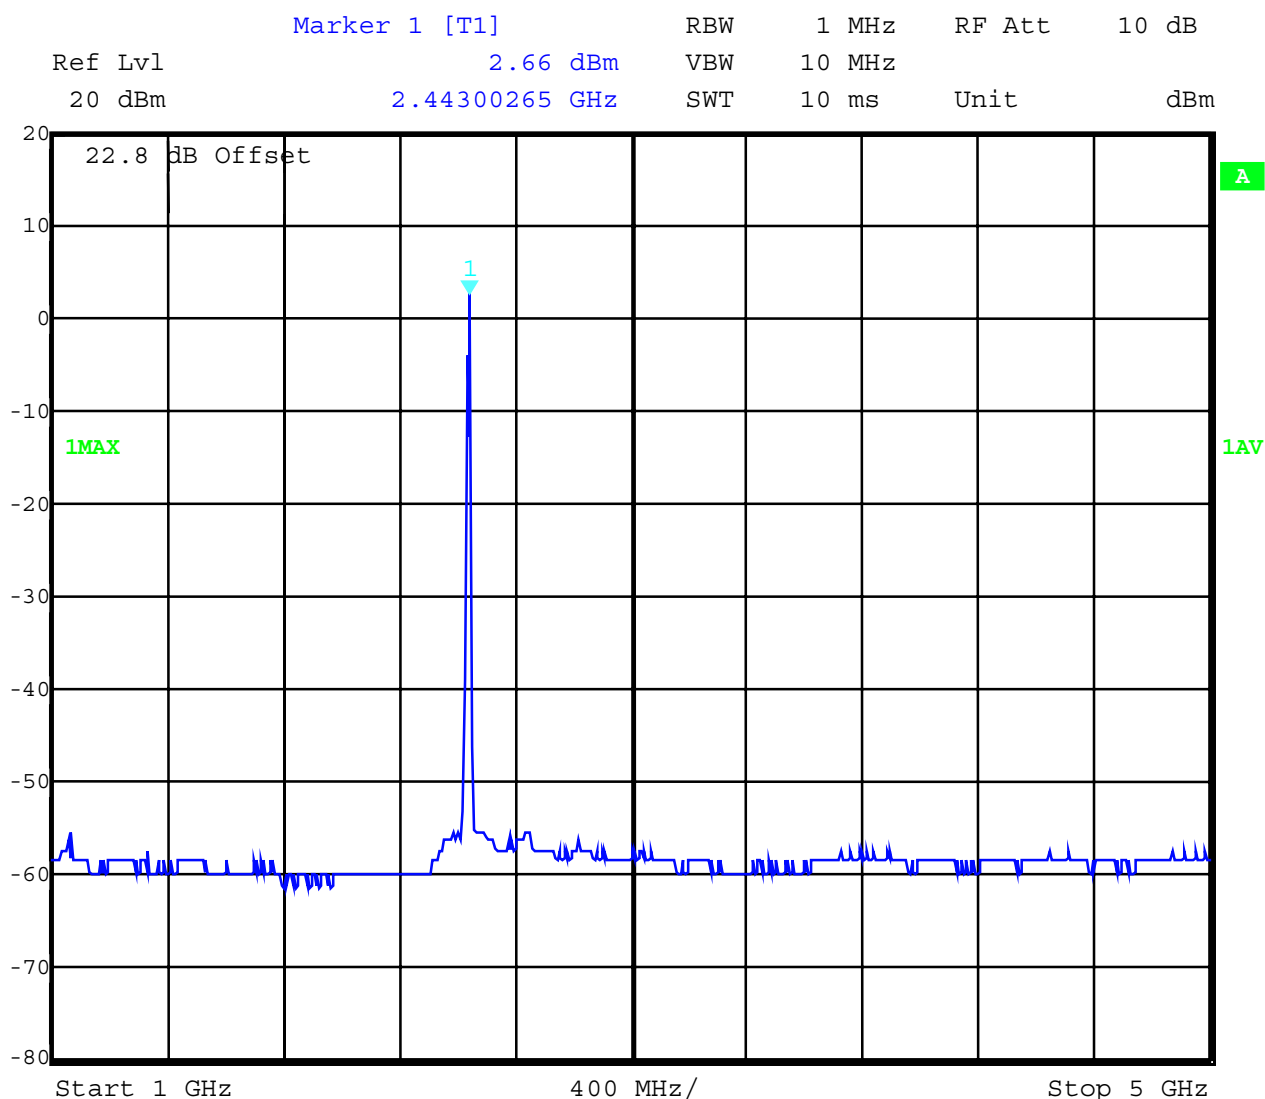

Date: 27.DEC.2001

This is only a scan.

Manual measurements were performed with 1MHz RBW/VBW

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

2442 MHz conducted up to 25 GHz Peak

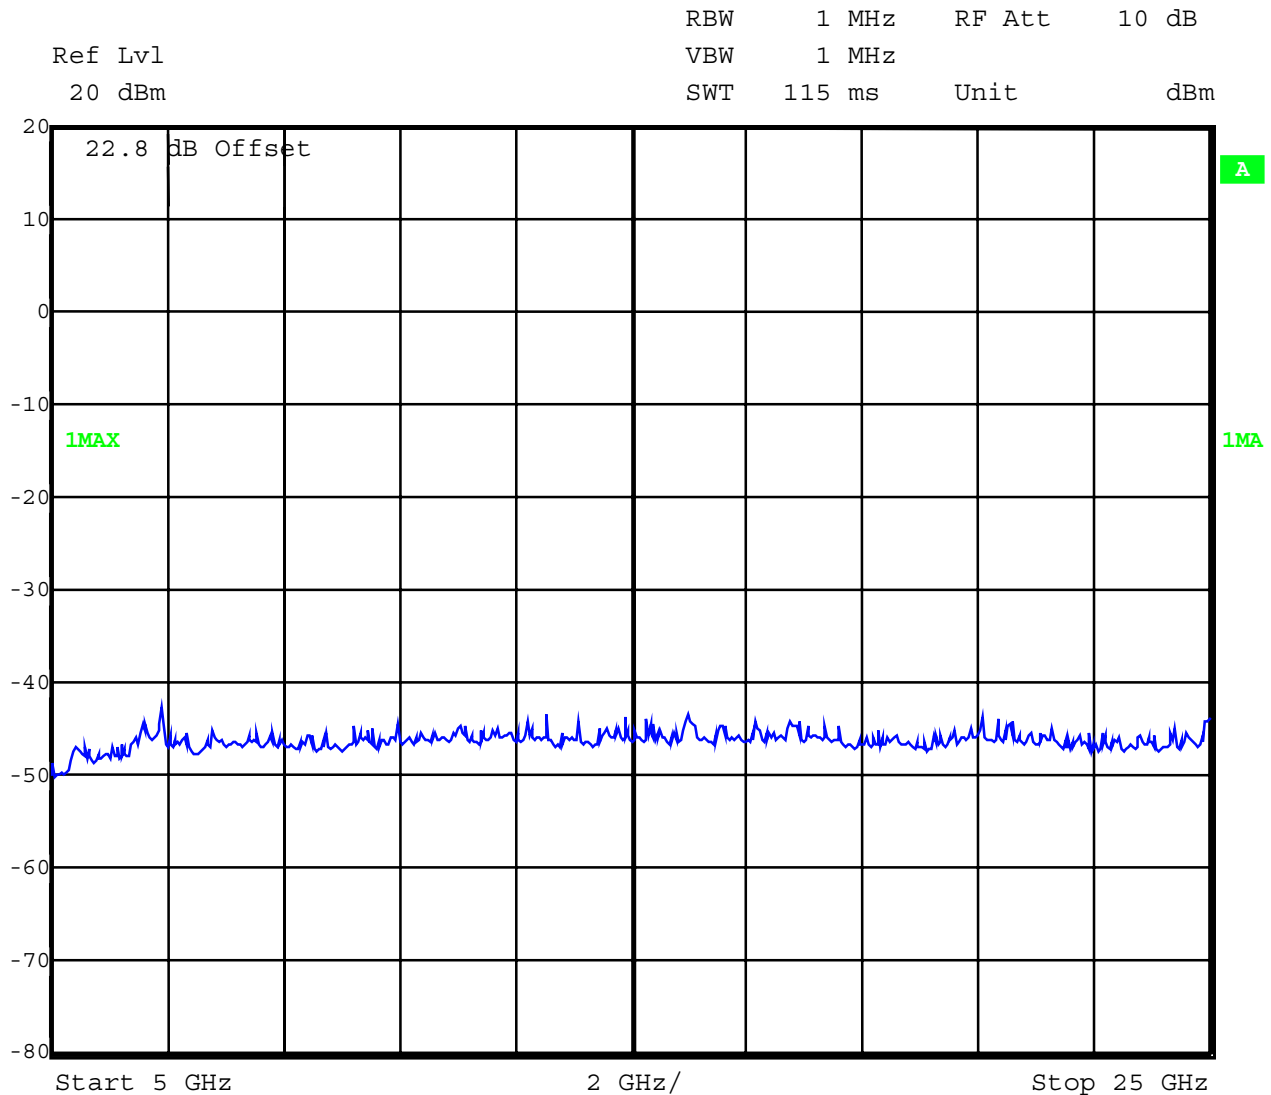

Date: 27.DEC.2001

This is only a scan.

Manual measurements were performed with 1MHz RBW/VBW

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

2442 MHz conducted up to 25 GHz Average



Date: 27.DEC.2001

This is only a scan.

Manual measurements were performed with 1MHz RBW/VBW

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

EMISSION LIMITATIONS (Transmitter) SUBCLAUSE § 15.247 (c) (1)

conducted (radiated emissions in restricted bands see next table)

2462 MHz

SPURIOUS LIMITATIONS					
f (MHz)		amplitude of emission (dBm)	limit max. allowed emission		results
2462	cond.	19.1	30.0 dBm		Operating frequency
no	peaks	found	above	2462 MHz	
Measurement uncertainty		± 3dB			

RBW/VBW according to FCC requirements.

LIMITS SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

EMISSION LIMITATIONS (Transmitter) SUBCLAUSE § 15.247 (c) (2)

radiated (Antenna horizontal polarisation, vertical emissions were up to 20dB lower)

2462 MHz

SPURIOUS LIMITATIONS					
f (MHz)		amplitude of emission (dBµV/m)	limit max. allowed emmission		results
56.4	rad.	QP:23.8	40.0 dBµV/m		complies
60.7	rad.	QP:22.8	40.0 dBµV/m		complies
62.5	rad.	QP:21.5	40.0 dBµV/m		complies
456.6	rad.	QP:32.3	46.0 dBµV/m		complies
461.1	rad.	QP:31.4	46.0 dBµV/m		complies
no	radiated	spurs	above	2462 MHz	
Measurement uncertainty		± 3dB			

Measurement were performed up to 1 GHz with a CISPR quasi peak adapter and 100/120 kHz BW.

Measurements above 1 GHz were performed with RBW/VBW 1 MHz in Peak and Average.

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

2462 MHz up to 4 GHz radiated

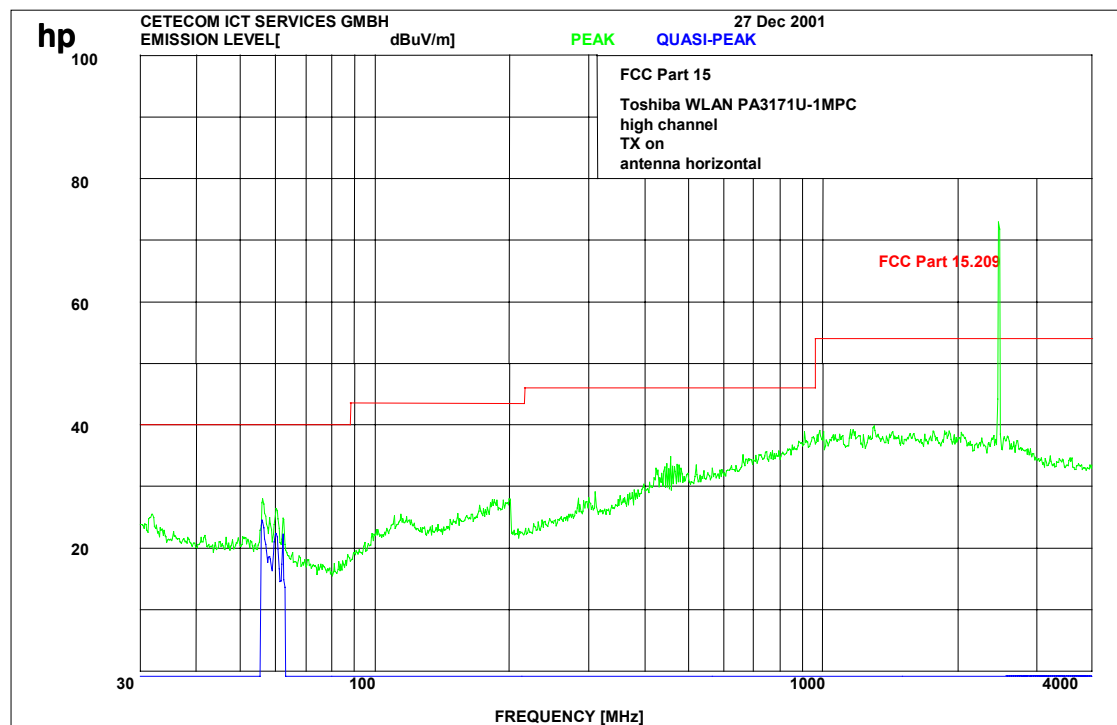

This is only a scan:

Measurements were performed with a CISPR quasi peak adapter and 100/120 kHz BW up to 1 GHz (blue lines), higher frequencies with average (yellow lines) and peak (green lines) and RBW/VBW 1MHz.

Carrier is suppressed by a stub tuner to avoid oversteering of the low noise amplifier of the measuring system.

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

2462 MHz up to 12 GHz radiated

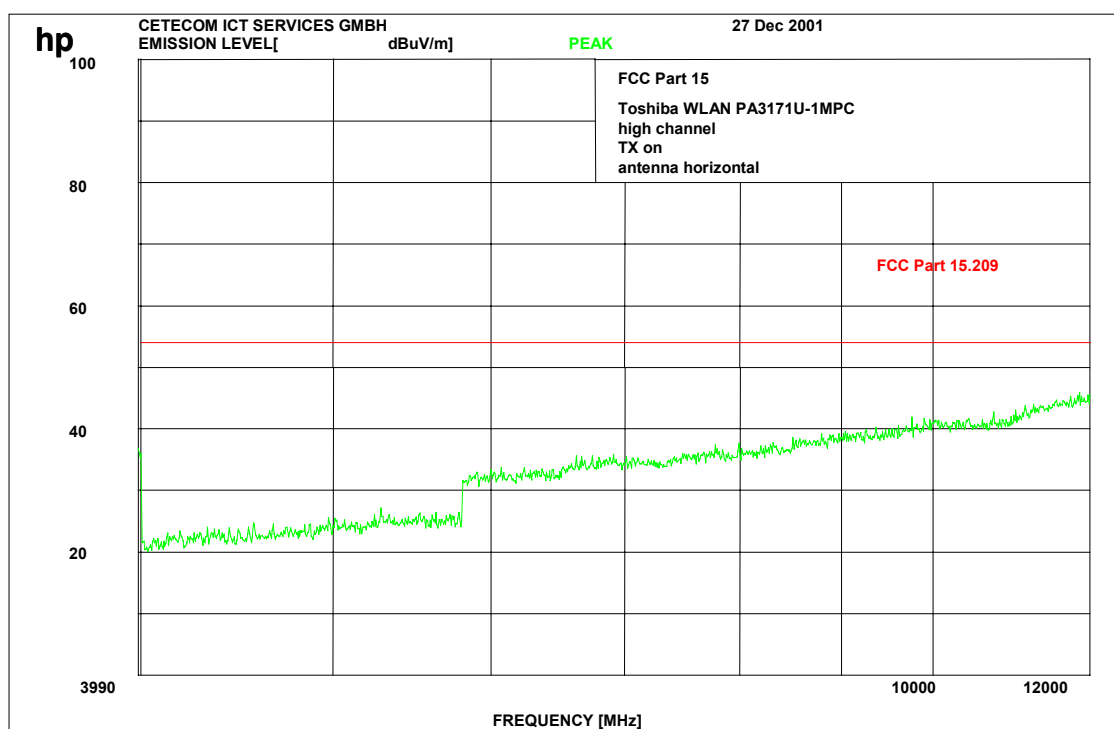

This is only a scan.

Measurements were performed with 1MHz RBW/VBW

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED


(for reference numbers see test equipment listing)

18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

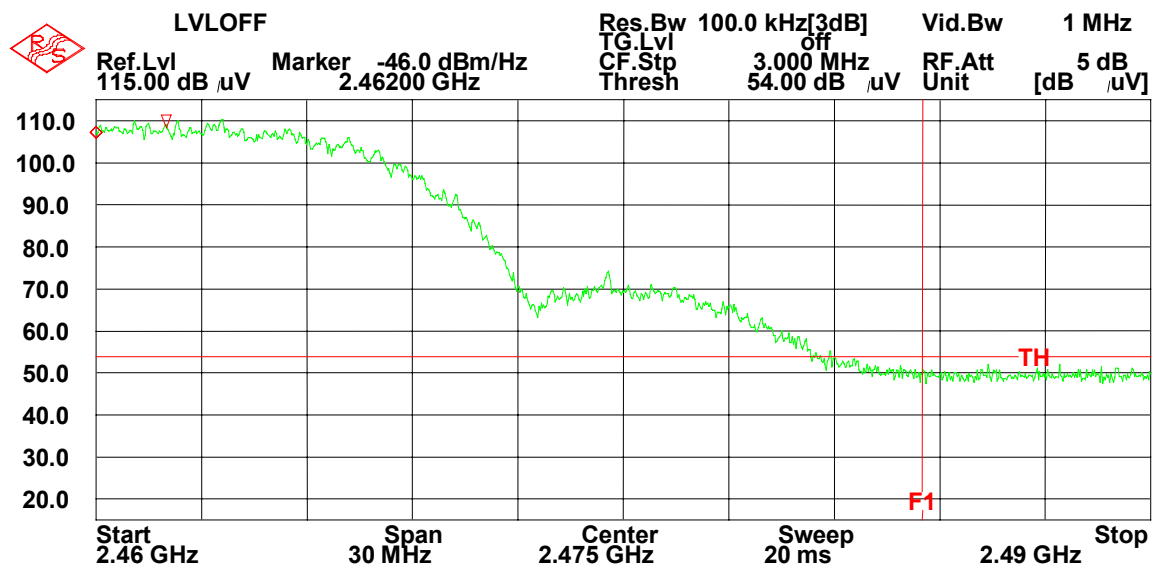Spurious radiations in the restricted band 2483.5 to 2500 MHz**Average****LIMITS****SUBCLAUSE § 15.247 (c)**

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

2462 MHz conducted up to 1 GHz

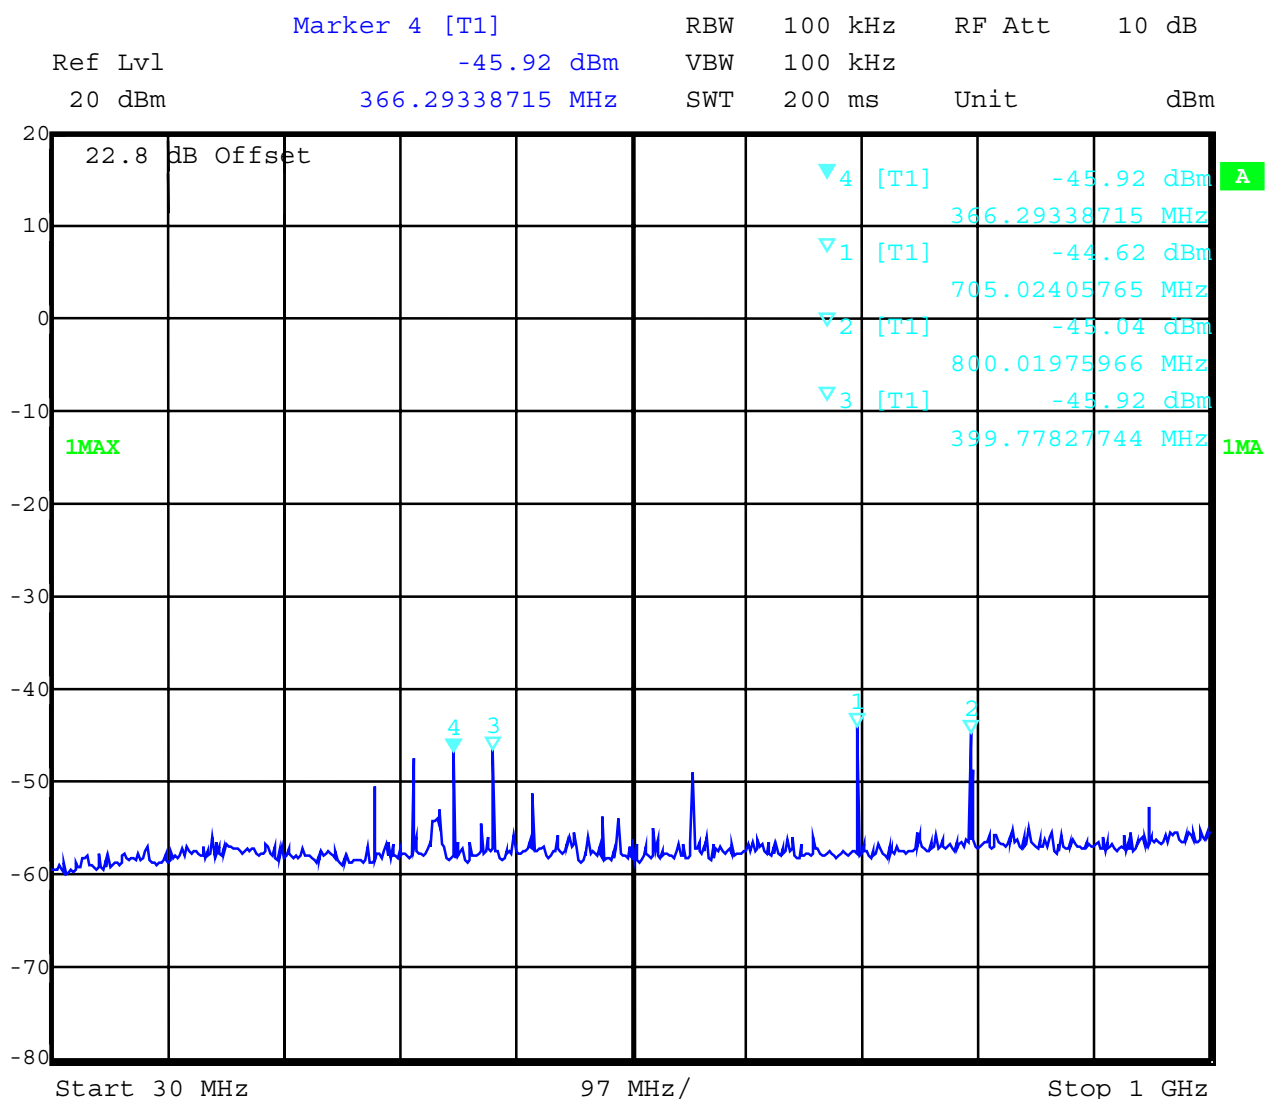

Date: 27.DEC.2001

This is only a scan.

Manual measurements were performed with a CISPR quasi peak adapter and 100/120 kHz.

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

2462 MHz conducted up to 5 GHz Peak

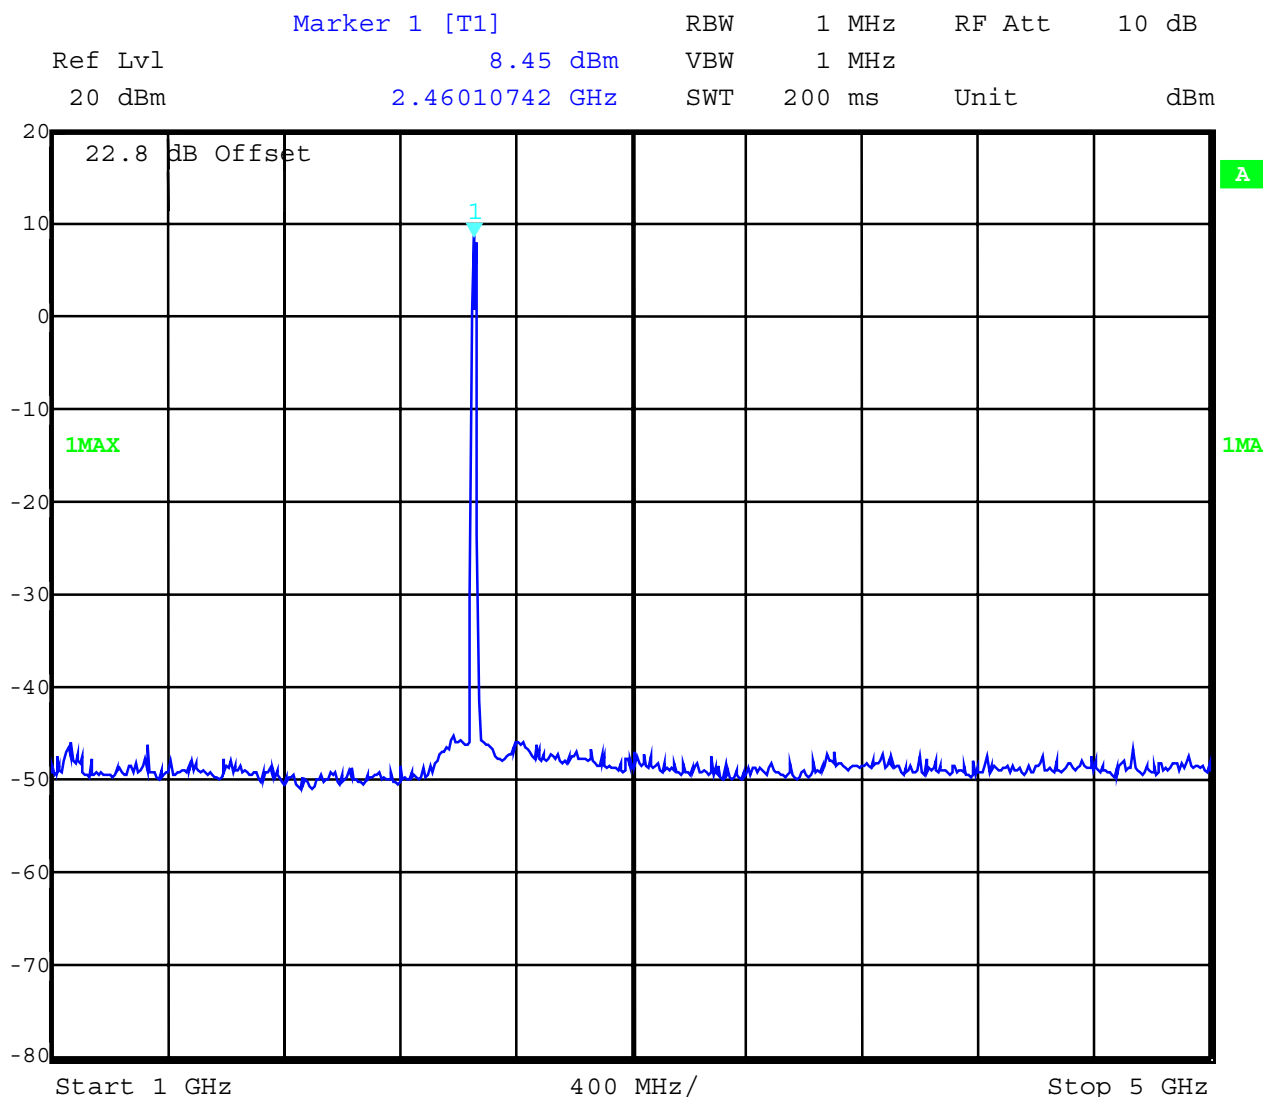

Date: 27.DEC.2001

This is only a scan.

Manual measurements were performed with 1MHz RBW/VBW

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

2462 MHz conducted up to 5 GHz Average

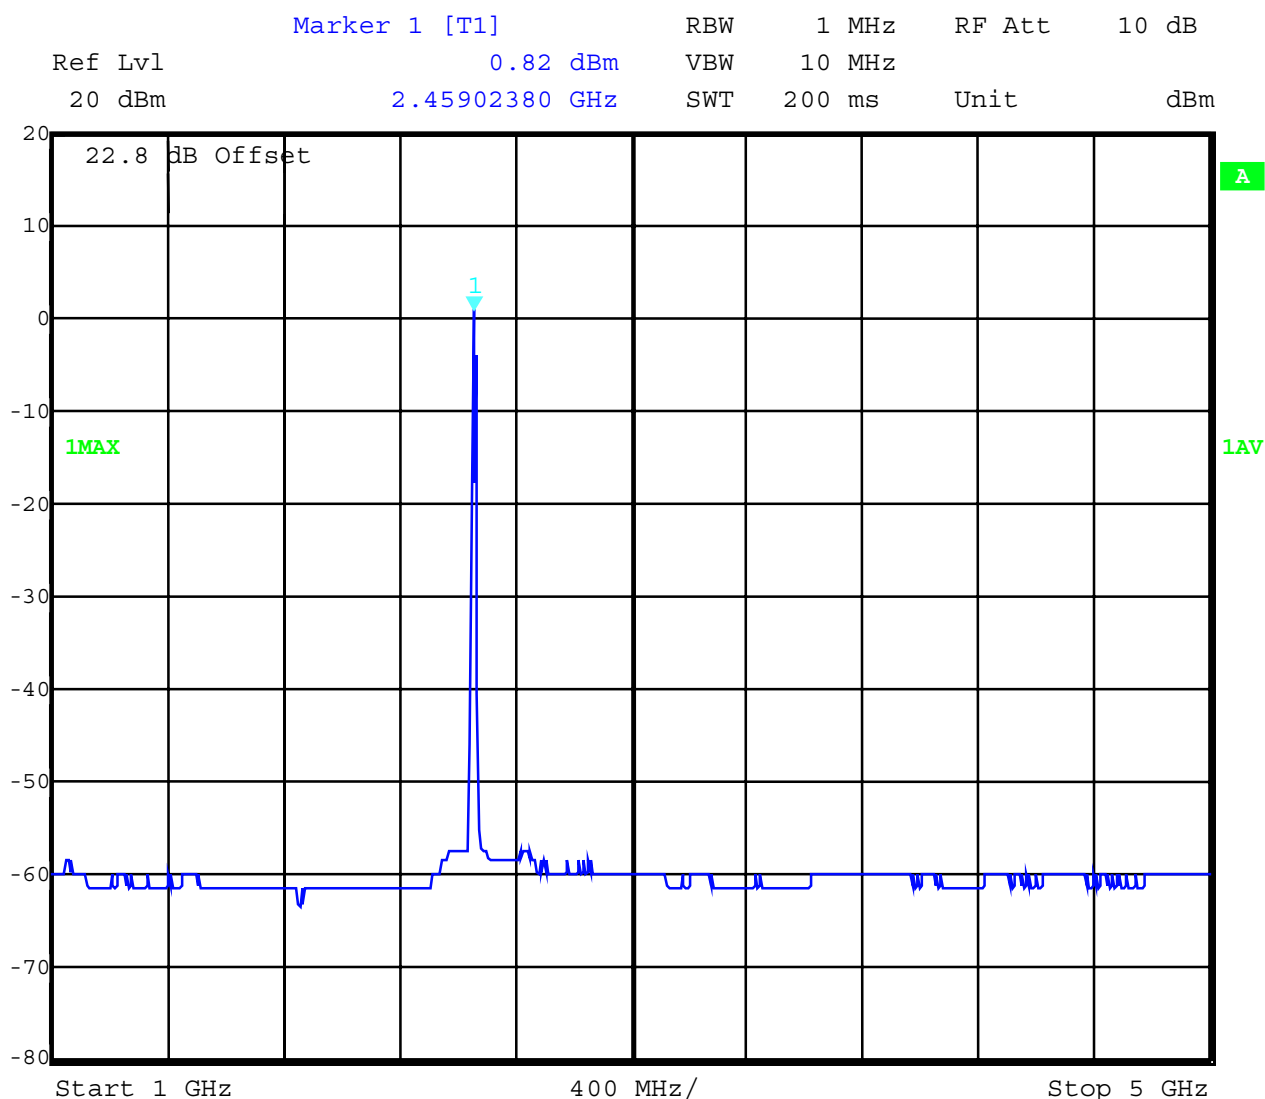

Date: 27.DEC.2001

This is only a scan.

Manual measurements were performed with 1MHz RBW/VBW

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

2462 MHz conducted up to 25 GHz Peak

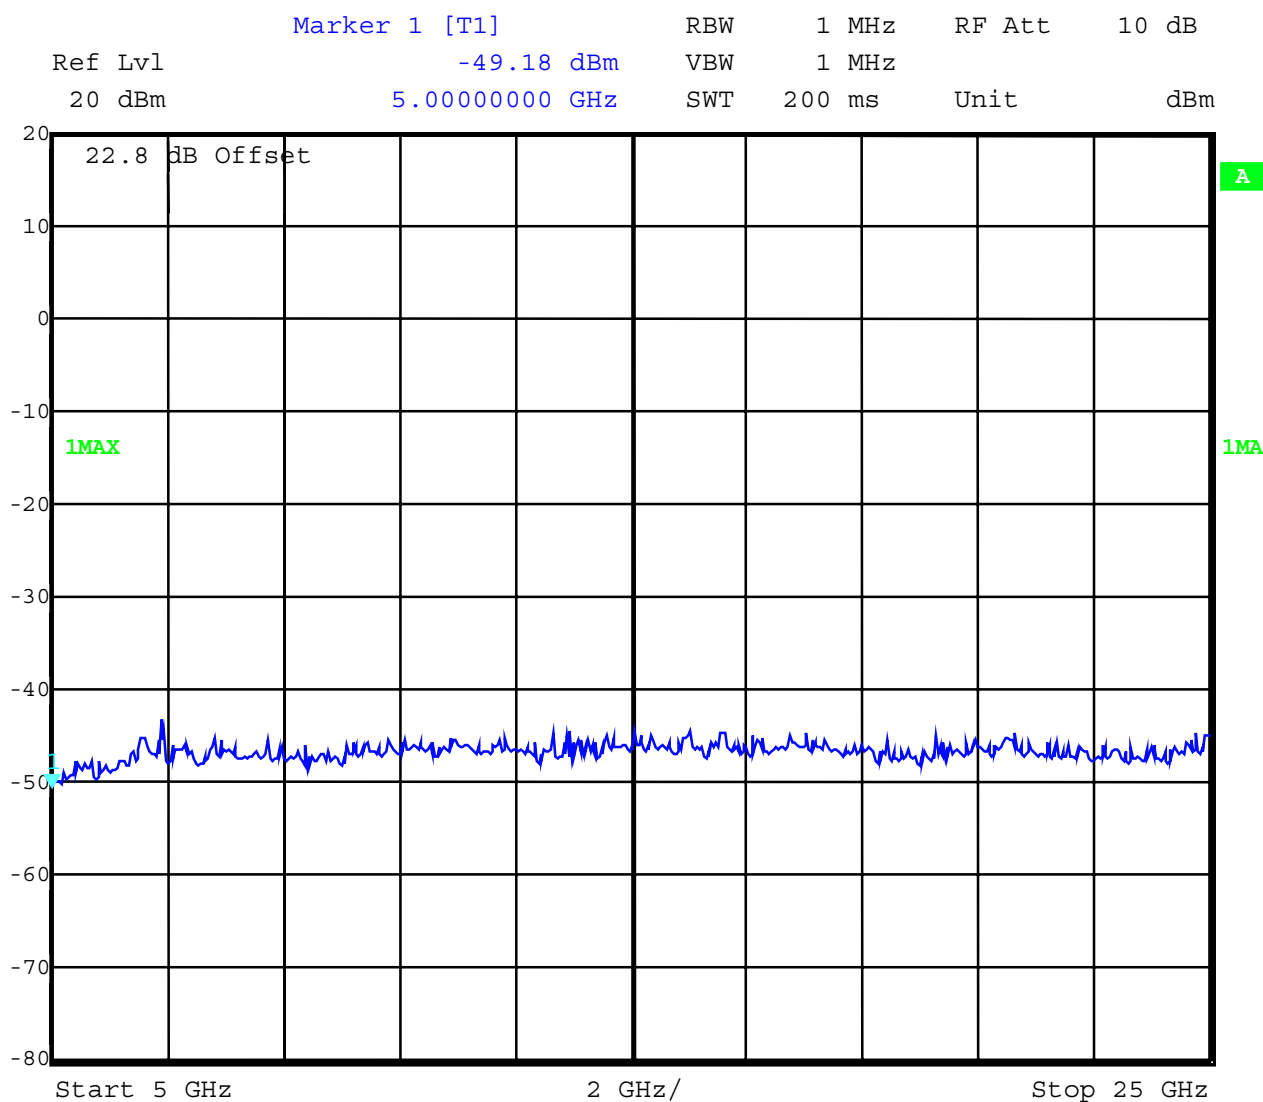

Date: 27.DEC.2001

This is only a scan.

Manual measurements were performed with 1MHz RBW/VBW

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

2462 MHz conducted up to 25 GHz Average

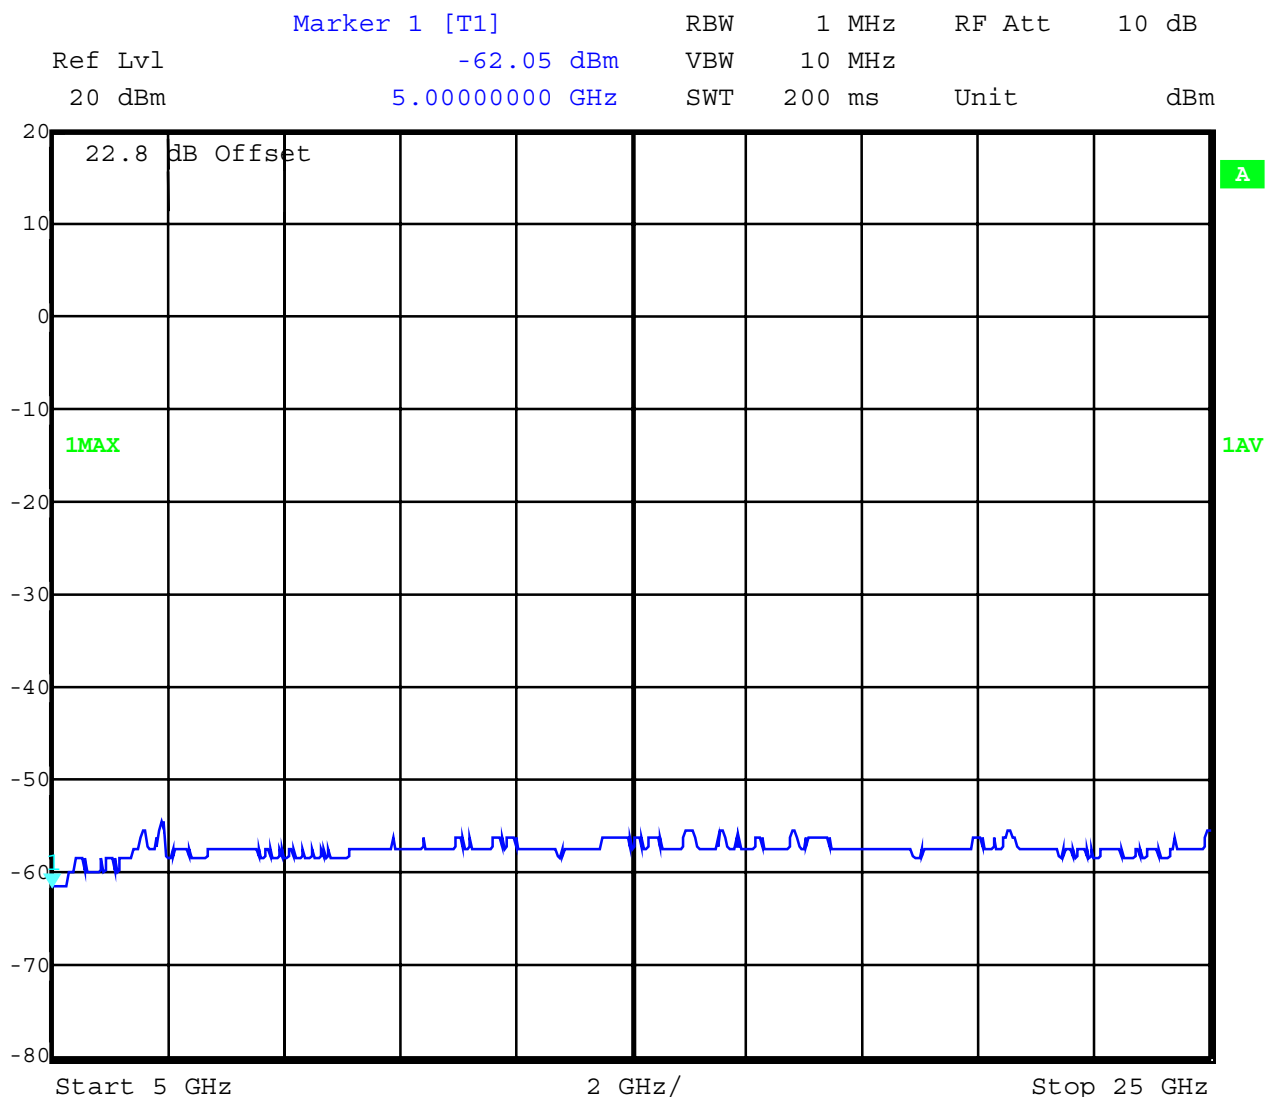

Date: 27.DEC.2001

This is only a scan.

Manual measurements were performed with 1MHz RBW/VBW

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

18-31,64

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

POWER SPECTRAL DENSITY**SUBCLAUSE § 15.247 (d)**

TEST CONDITIONS		RF POWER LEVEL IN 3 kHz BW		
Frequency (MHz)		2412	2442	2462
T _{nom} (23)°C	V _{nom} (3.3)V	-2.5 dBm	-3.4 dBm	-3.5 dBm
Maximum deviation from output power under extreme test conditions (dBc)				
Measurement uncertainty		±3dB		

The measurement was performed with the power density function of the analyzer.
The readout is related to 1 Hz BW. For 3kHz BW we have to add 34.8 dB.

LIMIT**SUBCLAUSE §15.247(d)**

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

18-31,64


Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

POWER SPECTRAL DENSITY 2412 MHz

SUBCLAUSE § 15.247 (d)

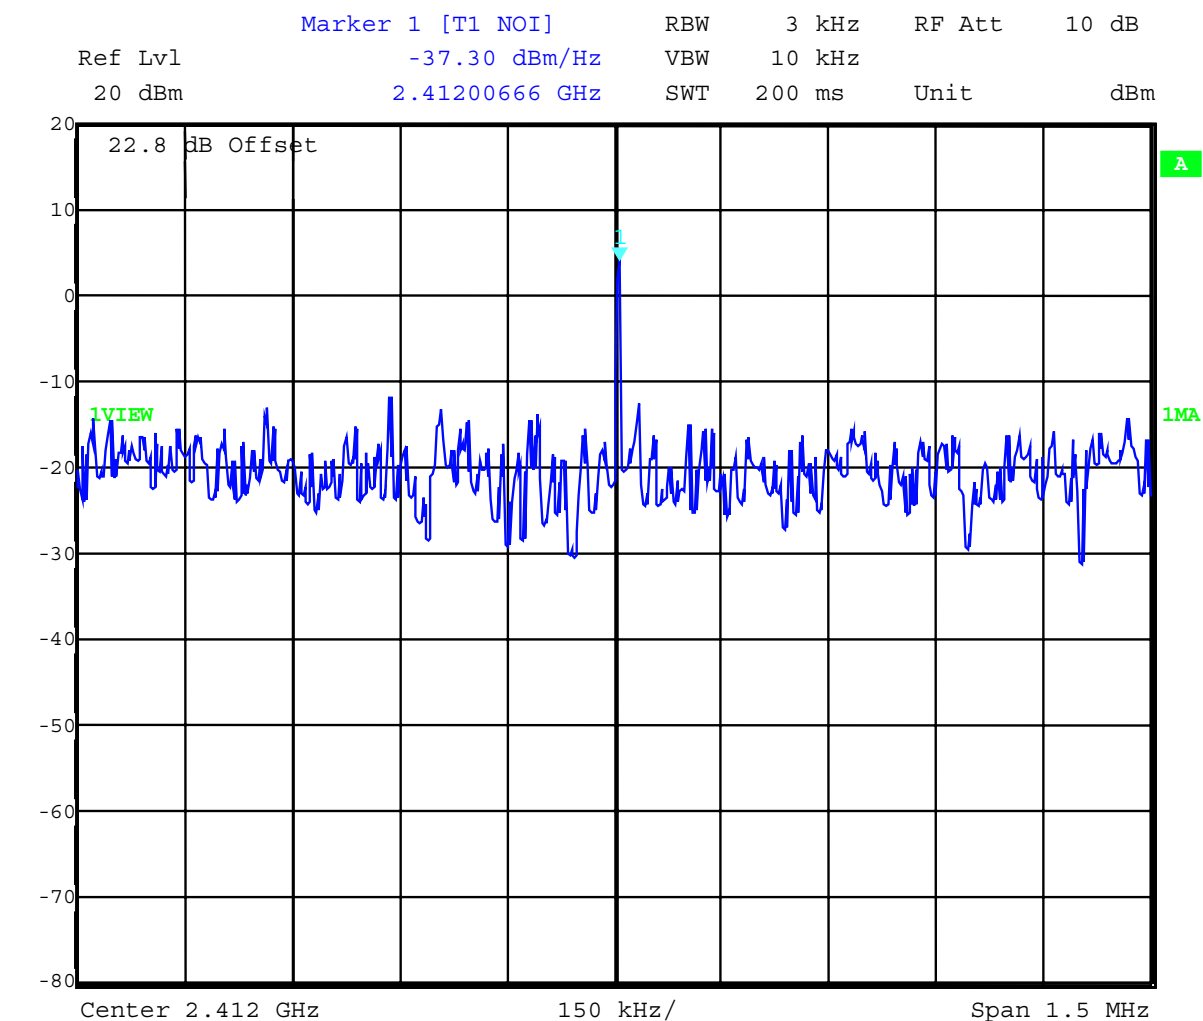

Date: 27.DEC.2001

LIMIT

SUBCLAUSE §15.247(d)

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Equipment under test : WLAN Module PA3171U-1MPC


Ambient temperature : 21°C

Relative humidity : 51%

2442 MHz

POWER SPECTRAL DENSITY

SUBCLAUSE § 15.247 (d)

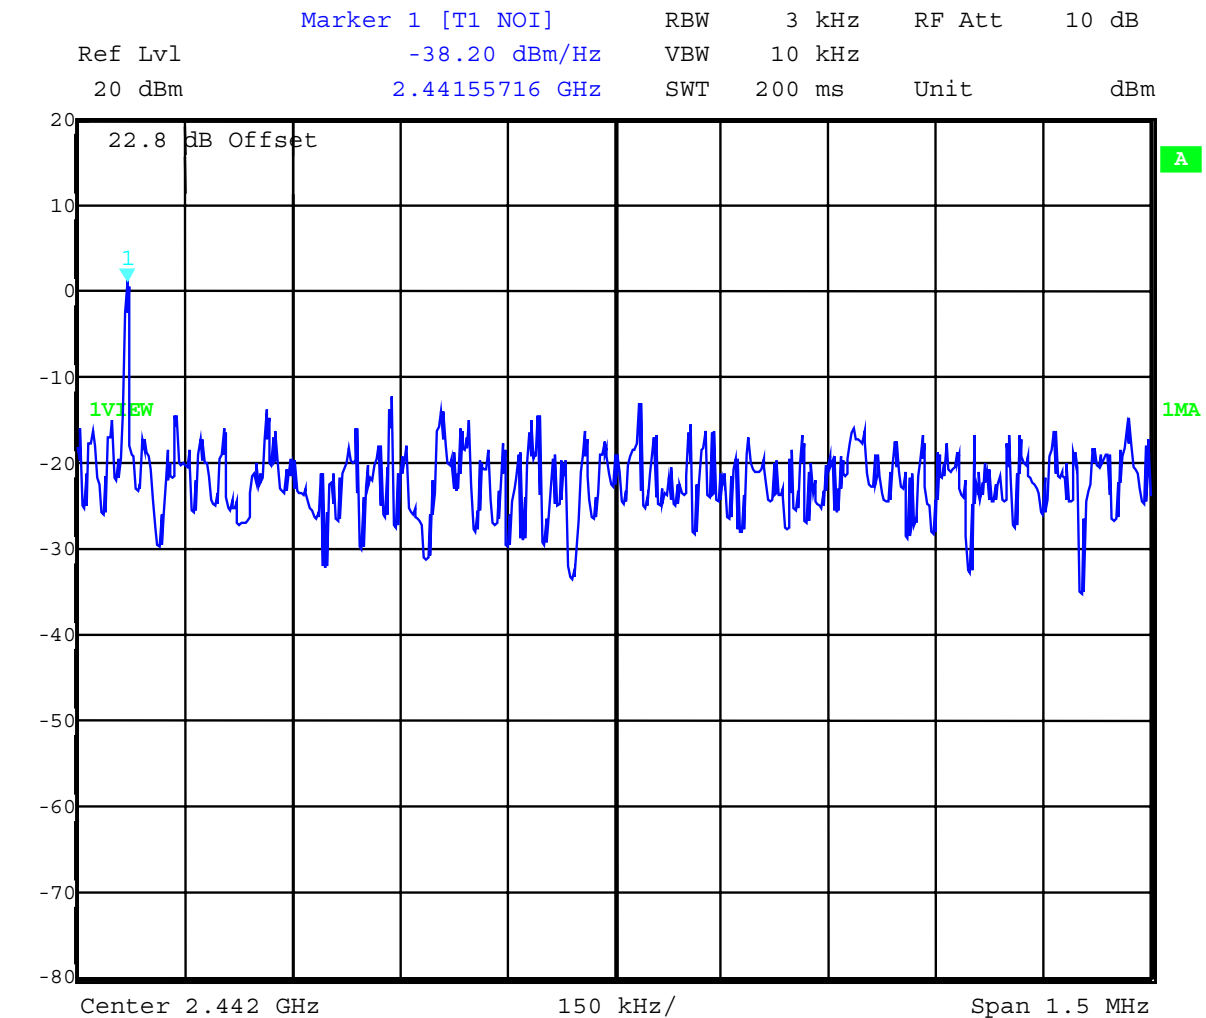

Date: 27.DEC.2001

LIMIT

SUBCLAUSE §15.247(d)

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Equipment under test : WLAN Module PA3171U-1MPC


Ambient temperature : 21°C

Relative humidity : 51%

POWER SPECTRAL DENSITY

2462 MHz

SUBCLAUSE § 15.247 (d)

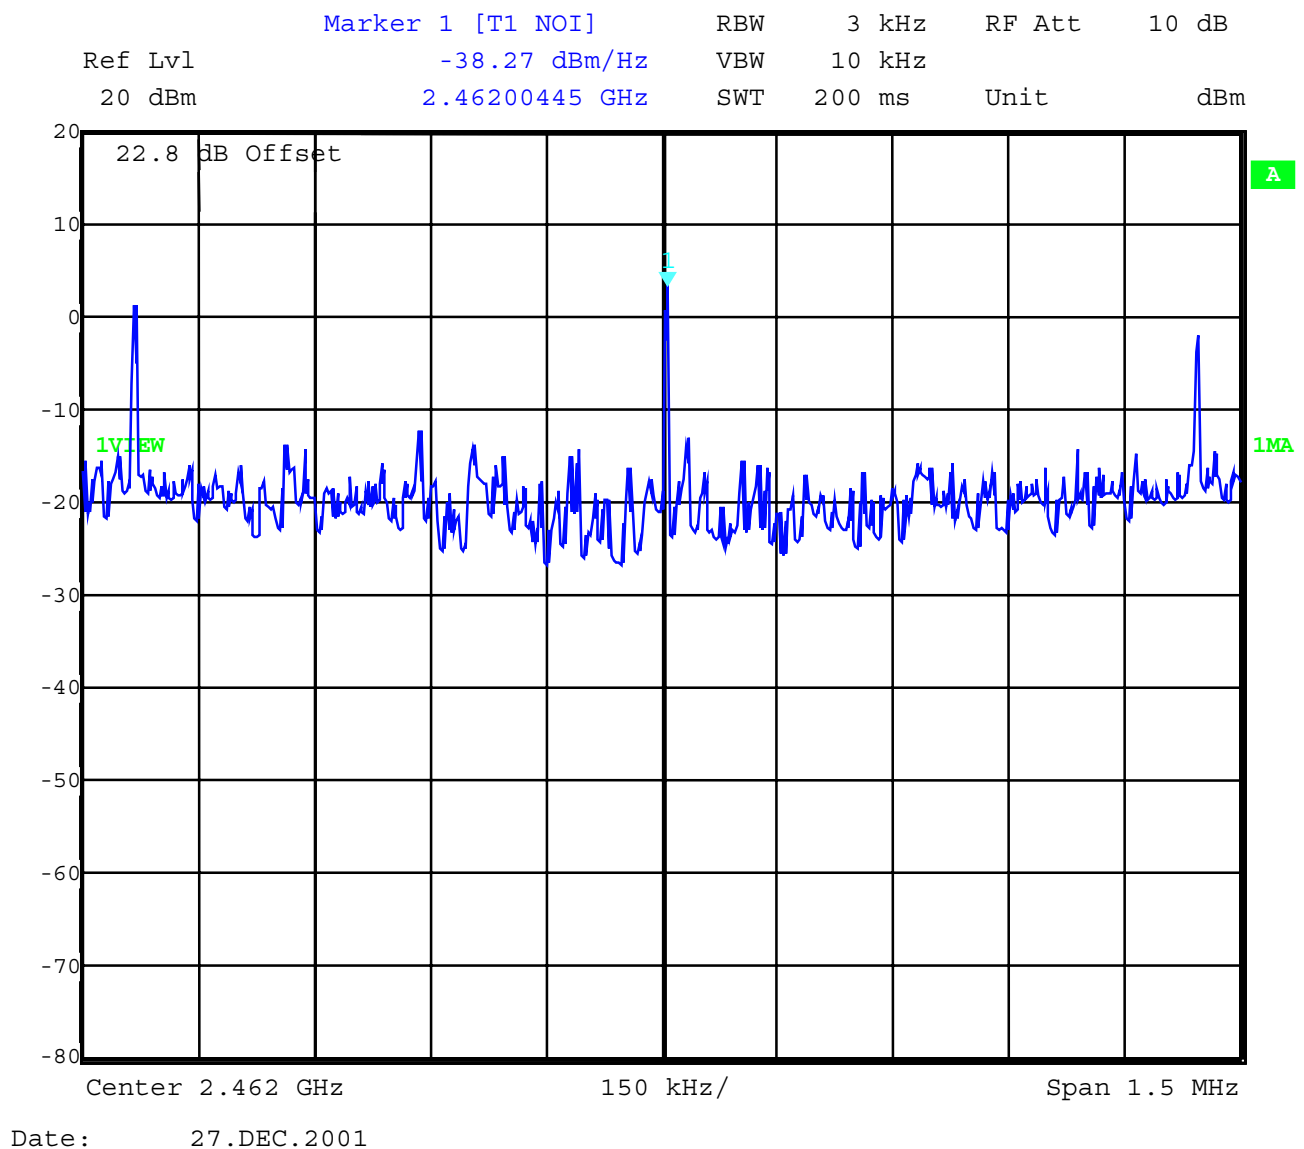

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

PROCESSING GAIN OF DSSS SYSTEMS SUBCLAUSE §15.247 (e)

It will be provided in an external paper.

It is in all cases over 10 dB.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

-


Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C

Relative humidity : 51%

CONDUCTED EMISSIONS

FCC Rule 47 Part 15

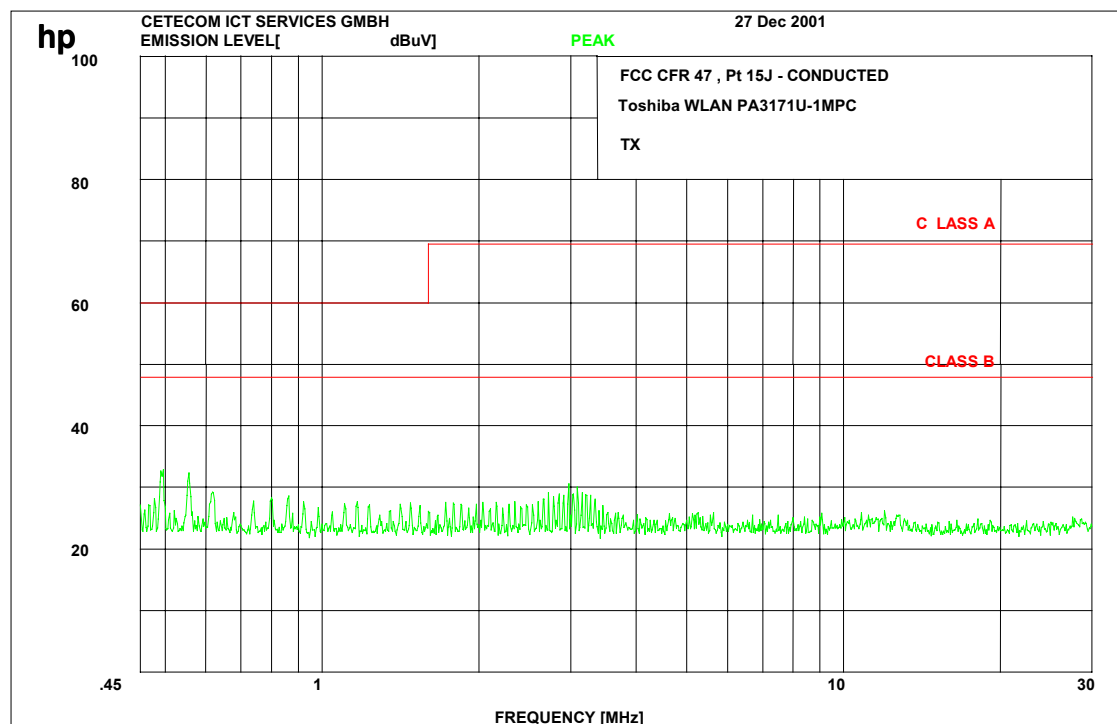

The test was performed with a CISPR quasi peak adapter to show that no spurs were distributed via DC power connection.

All spurious were << below limit.

Limits were for AC measurements.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Equipment under test : WLAN Module PA3171U-1MPC
Ambient temperature : 21°C
Relative humidity : 51%
RECEIVER SPURIOUS RADIATION
§ 15.209
Radiated

SPURIOUS EMISSIONS LEVEL (dBμV/m)								
2412 MHz			2442 MHz			2472 MHz		
f (MHz)	Detector	Level dBμV/m	f (MHz)	Detector	Level (μV/m)	f (MHz)	Detector	Level (μV/m)
56.1	QP	24.3	56.1	QP	24.3	56.1	QP	24.3
62.5	QP	22.3	62.5	QP	22.3	62.5	QP	22.3
456.6	QP	32.5	456.6	QP	32.5	456.6	QP	32.5
461.1	QP	31.2	461.1	QP	31.2	461.1	QP	31.2
465.6	QP	31.1	465.6	QP	31.1	465.6	QP	31.1
no	peaks	above	486	MHz				
Measurement uncertainty			± 3 dB					

All spurious including such in restricted bands are below the limits.
Measurement distance see table
Limits
SUBCLAUSE § 15.209

Frequency (MHz)	Field strength (dBμV/m)	Measurement distance (m)
30 - 88	40	3
88 - 216	43.5	3
216 - 960	46	3
above 960	54	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Equipment under test : WLAN Module PA3171U-1MPC

Ambient temperature : 21°C


Relative humidity : 51%

RECEIVER SPURIOUS RADIATION

§ 15.209

up to 4 GHz, mid channel

The following plots are valid for all three measured frequencies.

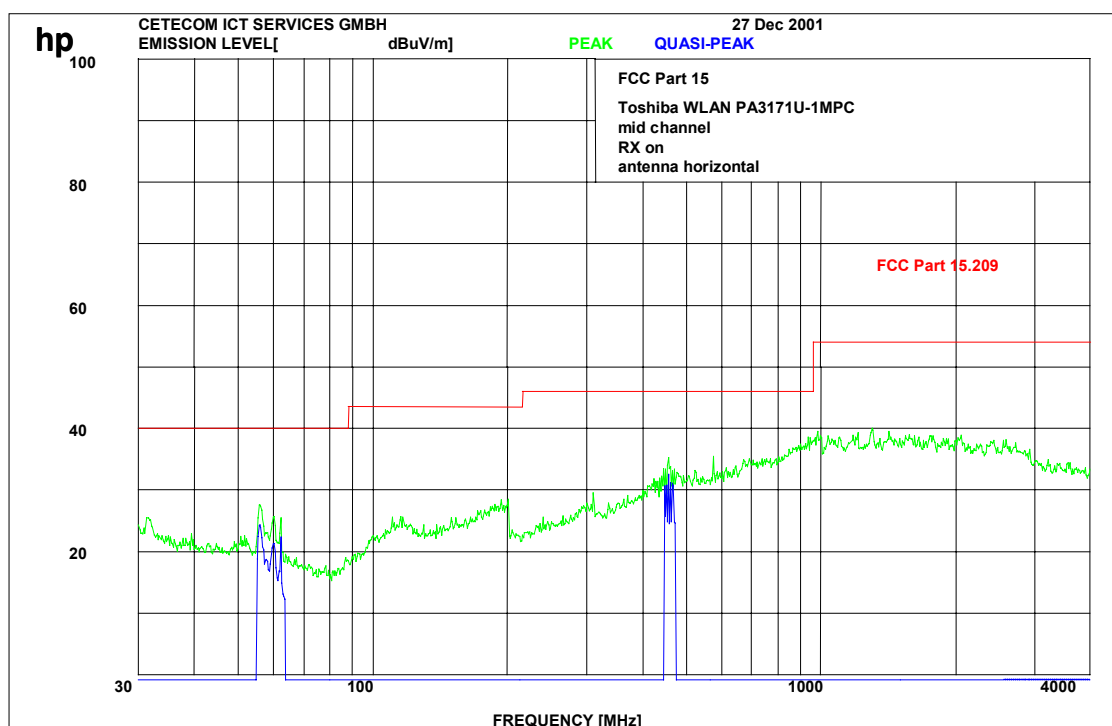

This is only a scan:

Measurements were performed with a CISPR quasi peak adapter and 100/120 kHz BW up to 1 GHz (blue lines), higher frequencies with average (yellow lines) and peak (green lines) and RBW/VBW 1MHz.

Limits

SUBCLAUSE § 15.209

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 - 24

Equipment under test : WLAN Module PA3171U-1MPC


Ambient temperature : 21°C

Relative humidity : 51%

RECEIVER SPURIOUS RADIATION

§ 15.209

up to 12 GHz

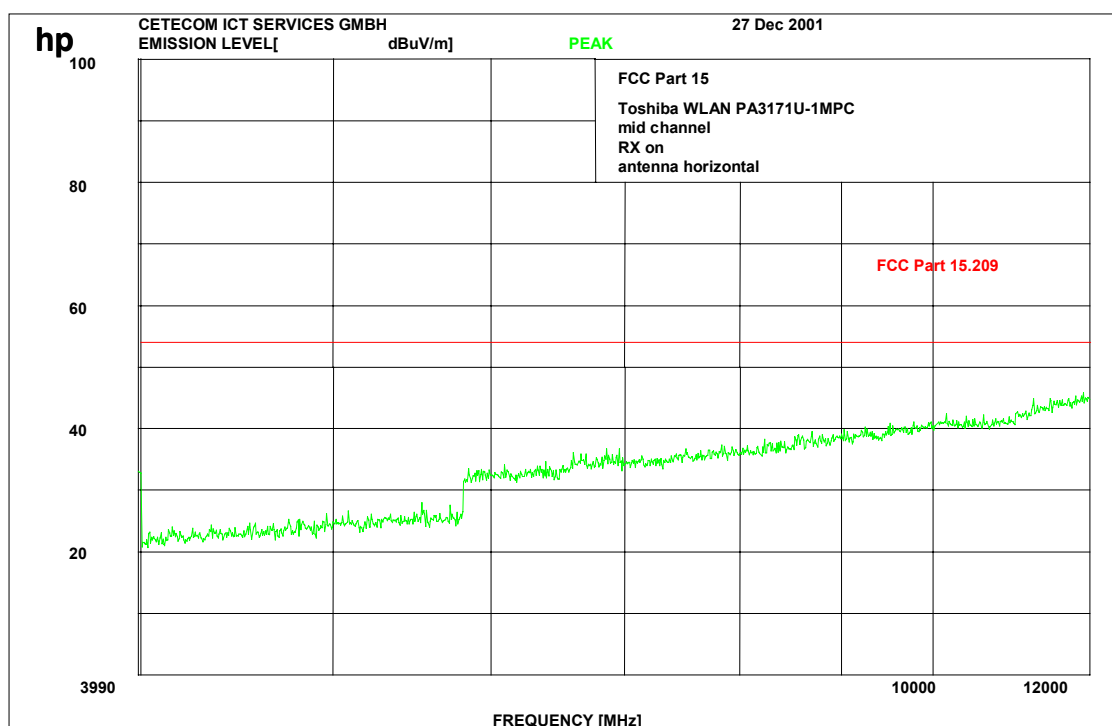

The measurements were performed up to 25 GHz. There were no peaks found.

Measurements were performed with RBW/VBW 1 MHz.

Limits

SUBCLAUSE § 15.209

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	8566 A	Hewlett-Packard	1925A00257
02	Analyzer Display	8566 A	Hewlett-Packard	1925A00860
03	Oscilloscope	7633	Tektronix	230054
04	Radio Analyzer	CMTA 54	Rohde & Schwarz	894 043/010
05	System Power Supply	6038 A	Hewlett-Packard	2848A07027
06	Signal Generator	8111 A	Hewlett-Packard	2215G00867
07	Signal Generator	8662 A	Hewlett-Packard	2224A01012
08	Funktionsgenerator	AFGU	Rohde & Schwarz	862 480/032
09	Regeltrenntrafo	MPL	Erfi	91350
10	Netznachbildung	NNLA 8120	Schwarzbeck	8120331
11	Relais-Matrix	PSU	Rohde & Schwarz	893 285/020
12	Power-Meter	436 A	Hewlett-Packard	2101A12378
13	Power-Sensor	8484 A	Hewlett-Packard	2237A10156
14	Power-Sensor	8482 A	Hewlett-Packard	2237A00616
15	Modulationsmeter	9008	Racal-Dana	2647
16	Frequenzzähler	5340 A	Hewlett-Packard	1532A03899
17	Absorber Schirmkabine	---	MWB	87400/002
18	Spectrum Analyzer	85660 B	Hewlett-Packard	2747A05306
19	Analyzer Display	85662 A	Hewlett-Packard	2816A16541
20	Quasi Peak Adapter	85650 A	Hewlett-Packard	2811A01131
21	RF-Preselector	85685 A	Hewlett-Packard	2833A00768
22	Biconical Antenne	3104	Emco	3758
23	Log. Per. Antenne	3146	Emco	2130
24	Double Ridge Horn	3115	Emco	3088
25	EMI-Testreceiver	ESAI	Rohde & Schwarz	863 180/013
26	EMI-Analyzer-Display	ESAI-D	Rohde & Schwarz	862 771/008
27	Biconical Antenne	HK 116	Rohde & Schwarz	888 945/013
28	Log. Per. Antenne	HL 223	Rohde & Schwarz	825 584/002
29	Relais-Switch-Unit	RSU	Rohde & Schwarz	375 339/002
30	Highpass	HM985955	FSY Microwave	001
31	Amplifier	P42-GA29	Tron-Tech	B 23602
32	Absorber Schirmkabine		Frankonia	
33	Steuerrechner	PSM 7	Rohde & Schwarz	834 621/004
34	EMI Test Reciever	ESMI	Rohde & Schwarz	827 063/010
35	EMI Test Receiver	Display	Rohde & Schwarz	829 808/010

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
36	Controler	HD 100	Deisel	100/322/93
37	Relais Matrix	PSN	Rohde & Schwarz	829 065/003
38	Control Unit	GB 016 A2	Rohde & Schwarz	344 122/008
39	Relais Switch Unit	RSU	Rohde & Schwarz	316 790/001
40	Power Supply	6032A	Hewlett Packard	2846A04063
41	Spektrum Monitor	EZM	Rohde & Schwarz	883 720/006
42	Meßempfänger	ESH 3	Rohde & Schwarz	890 174/002
43	Meßempfänger	ESVP	Rohde & Schwarz	891 752/005
44	Biconi Ant. 20-300MHz	HK 116	Rohde & Schwarz	833 162/011
45	Logper Ant. 0.3-1 GHz	HL 223	Rohde & Schwarz	832 914/010
46	Amplifier 0.1-4 GHz	AFS4	Miteq Inc.	206461
47	Logper Ant. 1-18 GHz	HL 024 A2	Rohde & Schwarz	342 662/002
48	Polarisationsnetzwerk	HL 024 Z1	Rohde & Schwarz	341 570/002
49	Double Ridge G Horn Antenne 1-26.5 GHz	3115	EMCO	9107-3696
50	Microw. Sys. Amplifier 0.5- 26.5 GHz	8317A	Hewlett Packard	3123A00105
51	Audio Analyzer	UPD	Rohde & Schwarz	1030.7500.04
52	Steuerrechner	PSM 7	Rohde & Schwarz	883 086/026
53	DC V-Netzwerk	ESH3-Z6	Rohde & Schwarz	861 406/005
54	DC V-Netzwerk	ESH3-Z6	Rohde & Schwarz	893 689/012
55	AC 2 Phasen V-Netzwerk	ESH3-Z5	Rohde & Schwarz	861 189/014
56	AC 2 Phasen V-Netzwerk	ESH3-Z5	Rohde & Schwarz	894 981/019
57	AC-3 Phasen V-Netzwerk	ESH2-Z5	Rohde & Schwarz	882 394/007
58	Stromversorgung	6032A	Rohde & Schwarz	2933A05441
59	HF-Test Empfänger	ESVP.52	Rohde & Schwarz	881 487/021
60	Spectrum Monitor	EZM	Rohde & Schwarz	883 086/026
61	HF-Test Empfänger	ESH3	Rohde & Schwarz	881 515/002
62	Relais Matrix	PSU	Rohde & Schwarz	882 943/029
63	Relais Matrix	PSU	Rohde & Schwarz	828 628/007
64	Spectrum Analyzer	FSIQ 26	Rohde & Schwarz	119.6001.27
67				