

TEST REPORT

Report number : Z101C-14064

Issue date : October 2, 2014

The device, as described herewith, was tested pursuant to applicable test procedure and complies with the requirements of;

FCC Part24 Subpart E IC RSS-133

The test results are traceable to the international or national standards.

Applicant : Japan Radio Co., Ltd.

Equipment under test (EUT) : 3G/GSM IT Controller

Model number : JRN-130K

FCC ID : CKEJRN-130K

IC Certification Number : 768B-JRN130K

Date of test : September 8, 9, 2014

Test place : TÜV SÜD Zacta Ltd. Yonezawa Testing Center
4149-7 Hachimanpara 5-chome
Yonezawa-shi Yamagata 992-1128 Japan
Phone: +81-238-28-2880 Fax: +81-238-28-2888

Test results : Complied

The results in this report are applicable only to the equipment tested.


This report shall not be re-produced except in full without the written approval of TÜV SÜD Zacta Ltd.

Tested by



Taiki Watanabe

Authorized by

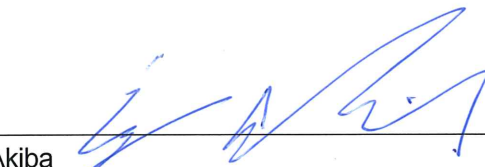

Eiji Akiba

Deputy General Manager of EMC Technical Department

Table of contents

	Page
1. Summary of Test	3
1.1 Purpose of test.....	3
1.2 Standards	3
1.3 List of applied test to the EUT	3
1.4 Modification to the EUT by laboratory.....	3
2. Equipment Under Test	4
2.1 General Description of equipment.....	4
2.2 EUT information	4
2.3 Variation of the family model(s).....	5
2.4 Description of Test mode	5
3. Configuration of equipment	6
3.1 Equipment(s) used.....	6
3.2 Cable(s) used	6
3.2 System configuration	7
4. Equivalent Isotropic Radiated Power	8
4.1 Measurement procedure	8
4.2 Calculation method.....	8
4.3 Limit.....	8
4.4 Test data.....	9
5. Radiated Emissions and Harmonic Emissions.....	10
5.1 Measurement procedure	10
5.2 Calculation method.....	10
5.3 Limit.....	10
5.4 Test data.....	11
6. Uncertainty of measurement.....	14
7. Laboratory description	15
Appendix A. Test equipment	16

1. Summary of Test

1.1 Purpose of test

It is the original test in order to verify conformance to FCC Part 24 Subpart E / IC RSS-133.

1.2 Standards

CFR47 FCC Part 24 Subpart E, IC RSS-133

1.2.1 Test Methods

ANSI/TIA/EIA-603-C-2004

1.2.2 Deviation from standards

None

1.3 List of applied test to the EUT

Test items Section	Test items	Condition	Result
2.1046 RSS-133(6.4)	Conducted Output Power	Conducted	N/A *
24.232(c) RSS-133(6.4)	Effective Radiated Power Equivalent Isotropic Radiated Power	Radiated	PASS
24.232(d) RSS-133(6.4)	Peak to Average Ratio	Conducted	N/A *
24.238(a) 2.1049 RSS-133(2.3)	Occupied Bandwidth	Conducted	N/A *
24.238(a) 2.1051 RSS-133(6.5.1)	Band Edge Spurious and Harmonic at Antenna Terminal	Conducted	N/A *
24.238(a) 2.1053 RSS-133(6.5.1)	Radiated emissions and Harmonic Emissions	Radiated	PASS
24.235 2.1055 RSS-133(6.3)	Frequency Stability	Conducted	N/A *

*: This product has a certified module inside it. (FCC ID: QIPPHS8-P, IC: 7830A-PHS8P)
Therefore, it was only measured radiated test.

1.3.1 Test set up

Table-Top

1.4 Modification to the EUT by laboratory

None

2. Equipment Under Test

2.1 General Description of equipment

The EUT is 3G/GSM IT Controller.

2.2 EUT information

Applicant	: Japan Radio Co., Ltd. 1011 SW Klickitat Way Bldg. B Suite 201B Seattle Washington 98134 United Phone: +1-206-654-5644 Fax: +1-206-654-7030
Equipment under test	: 3G/GSM IT Controller
Trade name	: JRC
Model number	: JRN-130K
Serial number	: No.1
EUT condition	: Pre-Production
Power ratings	: DC 24 V
Size	: (W) 136.4 × (D) 43.6 × (H) 220.0 mm
Environment	: Indoor and Outdoor use
Terminal limitation	: -30°C to 70°C
RF Specification	
Frequency of Operation	: Up Link GSM1900: 1850.2-1909.8MHz EDGE1900: 1850.2-1909.8MHz WCDMA Band II: 1852.4-1907.6MHz Down Link GSM1900: 1930.2-1989.8MHz EDGE1900: 1930.2-1989.8MHz WCDMA Band II: 1932.4-1987.6MHz
Modulation type	: GSM1900: GMSK EDGE1900: 8-PSK WCDMA Band II: QPSK, 16QAM
Output power	: GSM1900: 1.094W EIRP (30.4dBm) EDGE1900: 0.871W EIRP (29.4dBm) WCDMA Band II: 0.603W EIRP (27.8dBm)
Antenna type	: $\lambda/2$ Shortened type Dipole antenna
Antenna gain	: 1.05dBi

2.3 Variation of the family model(s)

Not applicable

2.4 Description of Test mode

The EUT had been tested under operating condition.
There are three channels have been tested as following:

Band	Channel	Frequency
GSM1900 EDGE1900	512	1850.2MHz
	661	1880.0MHz
	810	1909.8MHz
WCDMA Band II	9262	1852.4MHz
	9400	1880.0MHz
	9538	1907.6MHz

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in X axis and the worst case recorded.

3. Configuration of equipment


3.1 Equipment(s) used

No.	Equipment	Company	Model No.	Serial No.	FCC ID / DoC	Comment
1	3G/GSM IT Controller	JRC	JRN-130K	No.1	CKEJRN-130K	EUT
2	GPS Antenna	YOKOWO	NAY-3930G	12740036	N/A	Accessory
3	Antenna	NIPPON ANTENNA	DP-BRO-DCS (BNC)	W000058	N/A	Accessory
4	Personal Computer	FUJITSU	FMVNC4DC3	R7101676	DoC	-
5	Personal Computer	FUJITSU	FMVNC4DC3	R7106610	DoC	-
6	AC Adapter	FUJITSU	ADP-60ZH A	06837981A	N/A	-
7	AC Adapter	FUJITSU	ADP-60ZH A	07108697A	N/A	-
8	DC power supply	KIKUSUI	PAB	47306490	N/A	-

3.2 Cable(s) used

No.	Cable	Length[m]	Shield	Connector	Comment
a	DC cable	2.0	No	Plastic	-
b	GPS Antenna cable	5.0	Yes	Metal	-
c	Antenna cable	2.5	Yes	Metal	-
d	Serial cable	2.0	No	Plastic	-
e	Serial cable	2.0	No	Plastic	-
f	USB-Serial cable	1.0	Yes	Metal	-
g	USB-Serial cable	0.5	No	Metal	-
h	DC cable for PC AC Adapter	1.9	Yes	Metal	-
i	DC cable for PC AC Adapter	1.9	Yes	Metal	-
j	AC power cord	2.0	No	Plastic	-
k	AC power cord	1.0	No	Plastic	-
l	AC power cord for DC power supply	2.0	No	Plastic	-

3.2 System configuration

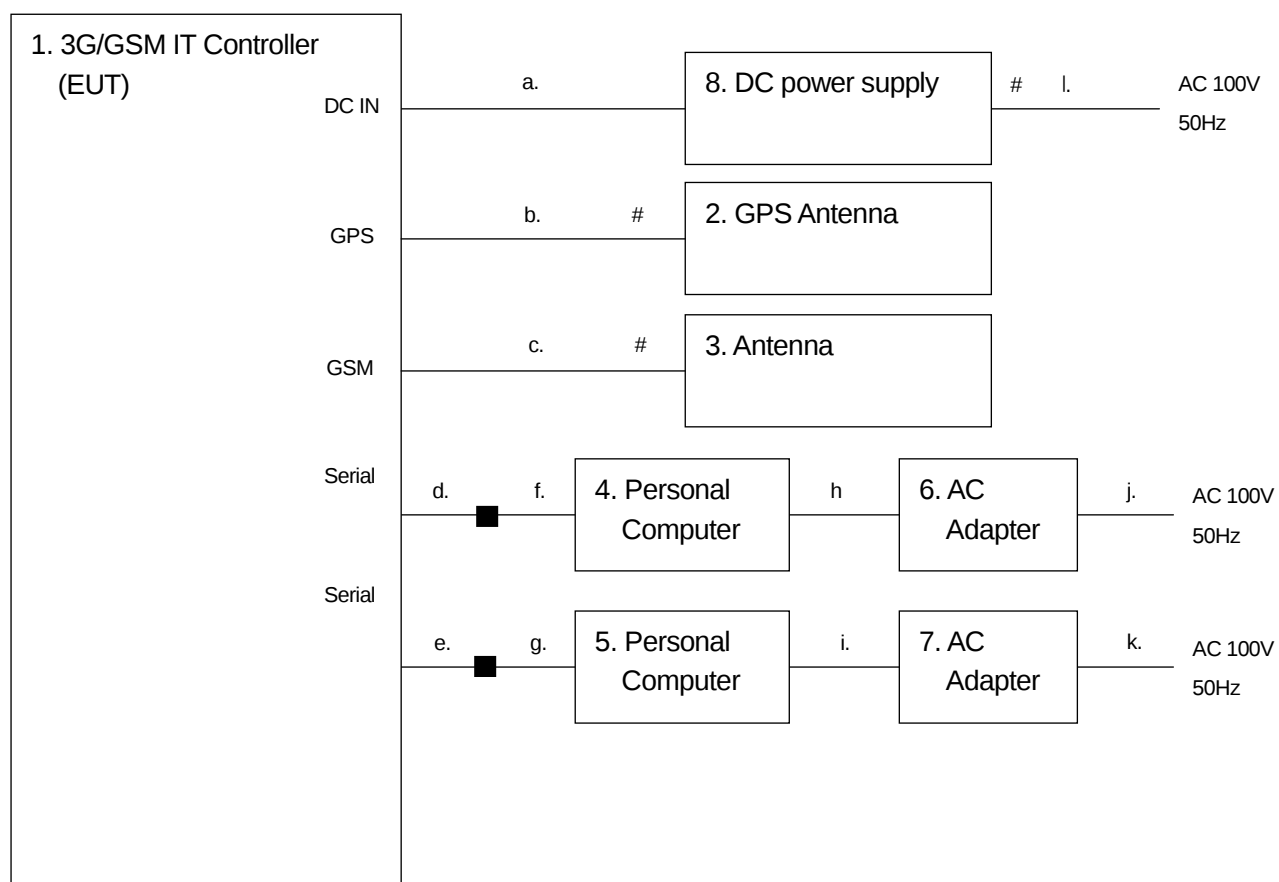

: Un-detachable cable

■ : Connector

Note1: Numbers assigned to equipment or cables on this diagram correspond to the list in "3.1 Equipment(s) used" and "3.2 Cable(s) used".

4. Equivalent Isotropic Radiated Power

4.1 Measurement procedure

[FCC 24.232(c), RSS-133(6.4)]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1.5 meter surface, 0.8 meter height FRP table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission. The bandwidth of the spectrum analyzer is set to 1MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission.


<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT). The frequency of the signal generator is adjusted to the measurement frequency. Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

Spectrum analyzer setting

- Detector: Peak (RBW: 3MHz, VBW: 8MHz): GSM
- Detector: Peak (RBW: 5MHz, VBW: 8MHz): WCDMA

- Test configuration

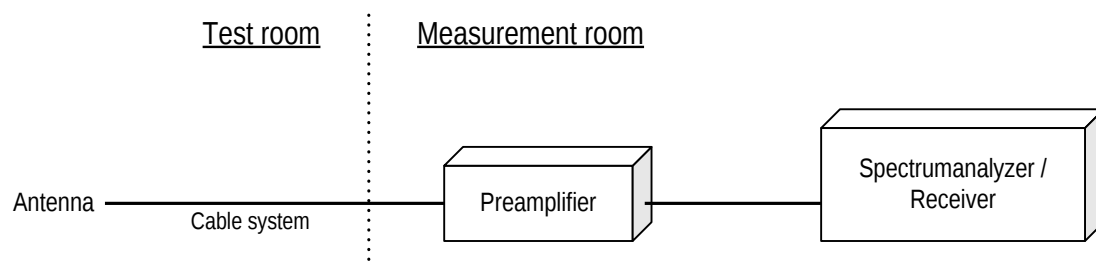

4.2 Calculation method

Result (EIRP) = S.G Reading – Cable loss + Antenna Gain

Margin = Limit – Result (EIRP)

4.3 Limit

2 W (33dBm)

4.4 Test data

Date : Sep. 8, 2014
 Temperature : 24.9 [°C]
 Humidity : 58.4 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer : Taiki Watanabe

Date : Sep. 9, 2014
 Temperature : 23.0 [°C]
 Humidity : 47.0 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer : Taiki Watanabe

[GSM1900]

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1850.2	15.6	19.0	1.1	8.2	26.1	33.0	6.9
H	1880.1	17.4	21.0	1.1	8.4	28.2	33.0	4.8
H	1909.9	17.5	23.0	1.1	8.5	30.4	33.0	2.6

[EDGE1900]

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1850.1	14.3	18.0	1.1	8.2	25.1	33.0	7.9
H	1880.0	15.3	18.9	1.1	8.4	26.1	33.0	6.9
H	1909.7	16.0	22.0	1.1	8.5	29.4	33.0	3.6

[WCDMA Band II]

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1852.9	14.6	18.0	1.1	8.2	25.1	33.0	7.9
H	1879.4	14.6	18.5	1.1	8.4	25.7	33.0	7.3
H	1907.0	15.6	20.5	1.1	8.5	27.8	33.0	5.2

5. Radiated Emissions and Harmonic Emissions

5.1 Measurement procedure

[FCC 24.238(a), 2.1053, RSS-133(6.5.1)]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1.5 meter surface, 0.8 meter height FRP table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (Biconical antenna, Log periodic antenna and double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission.

The bandwidth of the spectrum analyzer is set to 1MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission. The frequency is investigated up to 20GHz.

<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).


The frequency of the signal generator is adjusted to the measurement frequency.

Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

Spectrum analyzer setting

- Detector: Peak (RBW: 1MHz, VBW: 3MHz)

- Test configuration

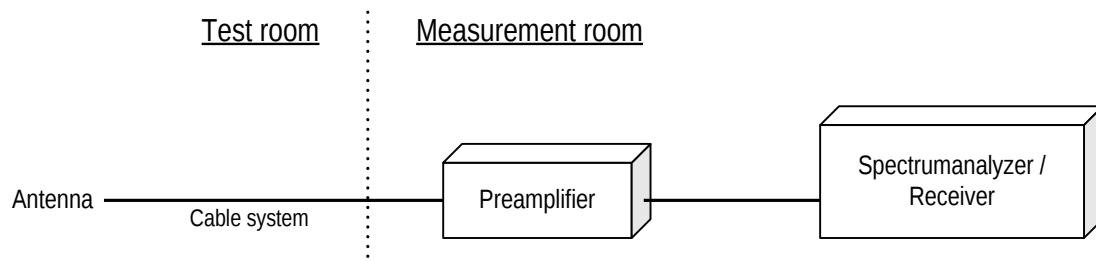

5.2 Calculation method

Result = S.G Reading – Cable loss + Antenna Gain

Margin = Limit – Result (EIRP)

5.3 Limit

-13dBm or less

5.4 Test data

Date : Sep. 9, 2014
 Temperature : 23.0 [°C]
 Humidity : 47.0 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer : Taiki Watanabe

[GSM1900] (Channel: 512)

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3700.4	-66.0	-57.5	1.6	9.4	-49.7	-13.0	36.7
V	3700.4	-66.3	-57.5	1.6	9.4	-49.7	-13.0	36.7

(Channel: 661)

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-66.1	-57.2	1.6	9.3	-49.5	-13.0	36.5
V	3760.0	-66.1	-57.6	1.6	9.3	-49.9	-13.0	36.9

(Channel: 810)

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3819.6	-66.2	-57.1	1.6	9.3	-49.4	-13.0	36.4
V	3819.6	-66.2	-57.2	1.6	9.3	-49.5	-13.0	36.5

[EDGE1900]
(Channel: 512)

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3700.4	-66.1	-57.3	1.6	9.4	-49.5	-13.0	36.5
V	3700.4	-66.4	-57.3	1.6	9.4	-49.5	-13.0	36.5

(Channel: 661)

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-66.3	-57.7	1.6	9.3	-50.0	-13.0	37.0
V	3760.0	-66.4	-58.2	1.6	9.3	-50.5	-13.0	37.5

(Channel: 810)

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3819.6	-66.8	-57.4	1.6	9.3	-49.7	-13.0	36.7
V	3819.6	-66.6	-57.6	1.6	9.3	-49.9	-13.0	36.9



Zacta

**[WCDMA Band II]
(Channel: 9262)**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3706.9	-52.6	-42.7	1.6	9.4	-34.9	-13.0	21.9
V	3706.4	-52.9	-41.7	1.6	9.4	-33.9	-13.0	20.9

(Channel: 9400)

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3761.4	-60.7	-50.2	1.6	9.3	-42.5	-13.0	29.5
V	3762.5	-61.6	-50.3	1.6	9.3	-42.6	-13.0	29.6

(Channel: 9538)

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3817.5	-58.8	-48.3	1.6	9.3	-40.6	-13.0	27.6
V	3817.6	-60.5	-49.3	1.6	9.3	-41.6	-13.0	28.6

6. Uncertainty of measurement

Expanded uncertainties stated are calculated with a coverage Factor $k=2$.

Please note that these results are not taken into account when determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission at mains port	$\pm 3.0\text{dB}$
Radiated emission (9kHz – 30MHz)	$\pm 4.4\text{dB}$
Radiated emission (30MHz – 1000MHz)	$\pm 4.5\text{dB}$
Radiated emission (1000MHz – 26GHz)	$\pm 3.9\text{dB}$

7. Laboratory description

1. Location:

TÜV SÜD Zacta Ltd. Yonezawa Testing Center
4149-7 Hachimanpara 5-chome Yonezawa-shi Yamagata 992-1128 Japan
Phone: +81-238-28-2880 Fax: +81-238-28-2888

2. Facility filing information:

1) NVLAP accreditation: NVLAP Lab. code: 200306-0

2) VLAC accreditation: Lab. code: VLAC-013

Site name	Radiated emission	Conducted emission for mains port	Conducted emission for telecom port	Radiated emission (CMAD)	Expiry Date
3m Semi-anechoic chamber	VLAC-013	VLAC-013	VLAC-013	-	Jul. 3, 2015
10m Semi-anechoic chamber No.1				VLAC-013	
10m Semi-anechoic chamber No.2				VLAC-013	
Shielded room No.1	-	VLAC-013	-	-	

3) FCC filing:

Site name	Registration Number	Expiry Date
Site 3	91065	Oct.31, 2014
3m Semi-anechoic chamber	540072	Feb. 20, 2017
10m Semi-anechoic chamber No.1		
10m Semi-anechoic chamber No.2		
Shielded room No.1		

4) Industry Canada Oats site filing:

Site name	Sites on file: Oats 3m/10m	Expiry Date
Site 3	4224A-3	Jan. 23, 2015
3m Semi-anechoic chamber	4224A-4	
10m Semi-anechoic chamber No.1	4224A-5	
10m Semi-anechoic chamber No.2	4224A-6	Jan. 15, 2017

5) VCCI site filing:

Site name	Radiated emission	Conducted emission for mains port	Conducted emission for telecom port	Expiry Date
Site 3	R-138	C-134	T-1222	Nov. 16, 2014 Nov. 28, 2014* (*:Telecom port)
3m Semi-anechoic chamber	A-0166	A-0166	A-0166	Jul. 3, 2015
10m Semi-anechoic chamber No.1				
10m Semi-anechoic chamber No.2				
Shielded room No.1	-	A-0166		

6) TÜV SÜD PS authorization:

Authorized as an EMC test laboratory

7) TÜV Rheinland authorization:

Authorized as an EMC test laboratory

Appendix A. Test equipment

Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ECSI	100451	Nov. 30, 2014	Nov. 16, 2013
Preamplifier	ANRITSU	MH648A	M96057	Jun. 30, 2015	Jun. 12, 2014
Biconical antenna	Schwarzbeck	VHA9103/BBA9106	2125	May 31, 2015	May 7, 2014
Log periodic antenna	Schwarzbeck	UHALP9108A	0560	May 31, 2015	May 7, 2014
Attenuator	TME	CFA-01NPJ-6	N/A (S275)	Jun. 30, 2015	Jun. 9, 2014
Attenuator	TME	CFA-01NPJ-3	N/A (S272)	Jun. 30, 2015	Jun. 9, 2014
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	May 31, 2015	May 30, 2014
Preamplifier	Agilent Technologies	8449B	3008A1008	Dec. 31, 2014	Dec. 9, 2013
Dipole antenna	Schwarzbeck	VHAP	1021	Sep. 30, 2014	Sep. 19, 2013
Dipole antenna	Schwarzbeck	UHAP	993	Sep. 30, 2014	Sep. 19, 2013
Double ridged guide antenna	EMCO	3115	5205	Dec. 31, 2014	Dec. 10, 2013
Attenuator	Agilent Technologies	8491B	MY39268633	Jan. 31, 2015	Jan. 15, 2013
Double ridged guide antenna	EMCO	3115	00058532	Sep. 30, 2014	Sep. 6, 2013
Signal generator	ROHDE&SCHWARZ	SMB100A	177525	Feb. 28, 2015	Feb. 18, 2014
Microwave cable	SUHNER	SUCOFLEX102/2m	31648/2	Feb. 28, 2015	Feb. 13, 2014
High pass filter	Micro-Tronics	HPM50115	004	Jul. 31, 2015	Jul. 12, 2014
High pass filter	Wainwright	WHKX2.8/18G-6SS	1	Jul. 31, 2015	Jul. 17, 2014
Wideband radio frequency tester	ROHDE&SCHWARZ	CMW500	116338	Mar. 31, 2015	Mar. 7, 2014
Microwave cable	SUHNER	SUCOFLEX104/9m	346316/4	Oct. 31, 2015	Oct. 31, 2014
		SUCOFLEX104/1m	322084/4	Oct. 31, 2015	Oct. 31, 2014
		SUCOFLEX104/1.5m	317226/4	Oct. 31, 2015	Oct. 31, 2014
		SUCOFLEX104/7m	41625/6	Oct. 31, 2015	Oct. 31, 2014
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.3.61	N/A	N/A
3m Semi-anechoic chamber	TOKIN	N/A	N/A (9002-NSA)	May 31, 2015	May 6, 2014
3m Semi-anechoic chamber	TOKIN	N/A	N/A (9002-SVSWR)	May 31, 2015	May 6, 2014

*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.