

EMC TEST REPORT



Report No.: 17071442-FCC-E

Supersede Report No: N/A

Applicant	MFOURTEL MEXICO S.A. DE C.V.	
Product Name	Smart Phone	
Model No.	M4 B2	
Serial No.	N/A	
Test Standard	FCC Part 15 Subpart B Class B:2016, ANSI C63.4: 2014	
Test Date	December 22 to January 14, 2018	
Issue Date	January 15, 2018	
Test Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
Equipment complied with the specification		<input checked="" type="checkbox"/>
Equipment did not comply with the specification		<input type="checkbox"/>
Evans He	David Huang	
Evans He Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION.....	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS.....	9
6.1 AC POWER LINE CONDUCTED EMISSIONS.....	9
6.2 RADIATED EMISSIONS.....	15
ANNEX A. TEST INSTRUMENT.....	20
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	21
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	33
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	36
ANNEX E. DECLARATION OF SIMILARITY	37

1. Report Revision History

Report No.	Report Version	Description	Issue Date
17071442-FCC-E	NONE	Original	January 15, 2018

2. Customer information

Applicant Name	MFOURTEL MEXICO S.A. DE C.V.
Applicant Add	Av. Ejército Nacional 436 Piso 3 Chapultepec Morales Miguel Hidalgo Distrito Federal 11570.
Manufacturer	CK Telecom Limited
Manufacturer Add	Technology Road.High-Tech Development Zone. Heyuan, Guangdong,P.R.China.

3. Test site information

Test Lab A:

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	535293
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

Test Lab B:

Lab performing tests	SIEMIC (Nanjing-China) Laboratories
Lab Address	2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China
FCC Test Site No.	694825
IC Test Site No.	4842B-1
Test Software	EZ_EMC(ver.lcp-03A1)

Note: We just perform Radiated Spurious Emission above 18GHz in the test Lab. B.

4. Equipment under Test (EUT) Information

Description of EUT: Smart Phone

Main Model: M4 B2

Serial Model: N/A

GSM850: -3dBi

PCS1900: -1dBi

UMTS-FDD Band V: -3dBi

UMTS-FDD Band II: -1dBi

LTE Band II: -1dBi

Antenna Gain: LTE Band IV: -3dBi

LTE Band VII: 0 dBi

LTE Band XII: -4dBi

Bluetooth/BLE: 1dBi

WIFI: 1dBi

GPS: -1dBi

Antenna Type: PIFA Antenna

Adapter:

Model: M4

Input: AC100-240V~50/60Hz,150mA

Input Power: Output: DC 5V, 1000mA

Battery:

Model: M2400A

Spec: 3.7V, 2400mAh, 8.88Wh

Equipment Category : JBP

GSM / GPRS: GMSK

EGPRS: GMSK,8PSK

UMTS-FDD: QPSK

Type of Modulation: LTE Band: QPSK, 16QAM

802.11b/g/n: DSSS, OFDM

Bluetooth: GFSK, π /4DQPSK, 8DPSK

BLE: GFSK

Test Report	17071442-FCC-E
Page	7 of 37

GPS:BPSK

GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz
 PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz
 UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz
 UMTS-FDD Band II TX: 1852.4 ~ 1907.6 MHz;
 RX: 1932.4 ~ 1987.6 MHz

RF Operating Frequency (ies):
 LTE Band II TX: 1850.7 ~ 1909.3MHz; RX : 1930.7 ~ 1989.3 MHz
 LTE Band IV TX: 1710.7 ~ 1754.3 MHz; RX : 2110.7~ 2154.3 MHz
 LTE Band VII TX: 2502.5 ~ 2567.5 MHz; RX : 2622.5 ~ 2687.5 MHz
 LTE Band XII TX: 699.7 ~ 715.3 MHz; RX : 729.7~ 745.3MHz
 WIFI: 802.11b/g/n(20M): 2412-2462 MHz
 WIFI: 802.11n(40M): 2422-2452 MHz
 Bluetooth& BLE: 2402-2480 MHz
 GPS: 1575.42 MHz

GSM 850: 124CH
 PCS1900: 299CH
 UMTS-FDD Band V: 102CH
 UMTS-FDD Band II: 277CH
 WIFI :802.11b/g/n(20M): 11CH
 WIFI :802.11n(40M): 7CH
 Bluetooth: 79CH
 BLE: 40CH
 GPS:1CH

Port: USB Port, Earphone Port

Trade Name : M4

GPRS/EGPRS Multi-slot class 8/10/11/12

FCC ID: CLNM4B2

Date EUT received: December 21, 2017

Test Date(s): December 22 to January 14, 2018

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.107; ANSI C63.4: 2014	AC Power Line Conducted Emissions	Compliance
§15.109; ANSI C63.4: 2014	Radiated Emissions	Compliance

Measurement Uncertainty


Parameter	Uncertainty
AC Power Line Conducted Emissions (150kHz~30MHz)	±3.11dB
Radiated Emission(30MHz~1GHz)	±5.12dB
Radiated Emission(1GHz~6GHz)	±5.34dB

6. Measurements, Examination And Derived Results

6.1 AC Power Line Conducted Emissions

Temperature	25 °C
Relative Humidity	55%
Atmospheric Pressure	1017mbar
Test date :	December 23, 2017
Tested By :	Evans He

Requirement(s):

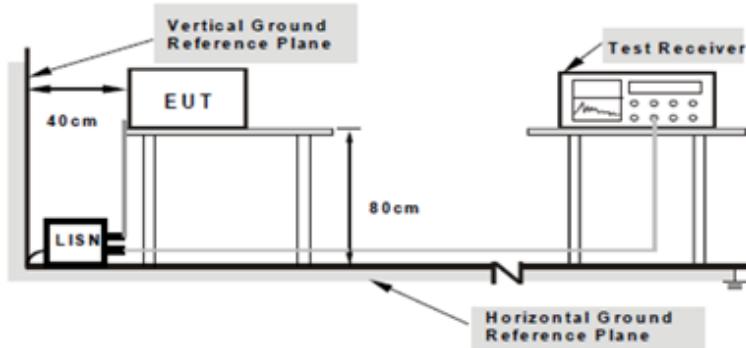
Spec	Item	Requirement	Applicable														
47CFR§15.107	a)	<p>For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency ranges (MHz)	Limit (dB μ V)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50	<input checked="" type="checkbox"/>
Frequency ranges (MHz)	Limit (dB μ V)																
	QP	Average															
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															
Test Setup	 <p>The diagram illustrates the test setup. A 'Vertical Ground Reference Plane' is shown as a horizontal line. A 'Horizontal Ground Reference Plane' is shown as a horizontal line at the bottom. An 'EUT' (Equipment Under Test) is placed on a table. A 'LISN' (Line Impedance Stabilization Network) is connected between the EUT and the power source. A 'Test Receiver' is connected to the LISN. The distance between the LISN and the EUT is 40 cm. The distance between the LISN and the test receiver is 80 cm. A note at the bottom states: 'Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.'</p>																
Procedure	<ol style="list-style-type: none"> The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. The power supply for the EUT was fed through a 50Ω /50mH EUT LISN, connected to filtered mains. 																

	<ol style="list-style-type: none"> 3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A


Test Mode : USB Mode

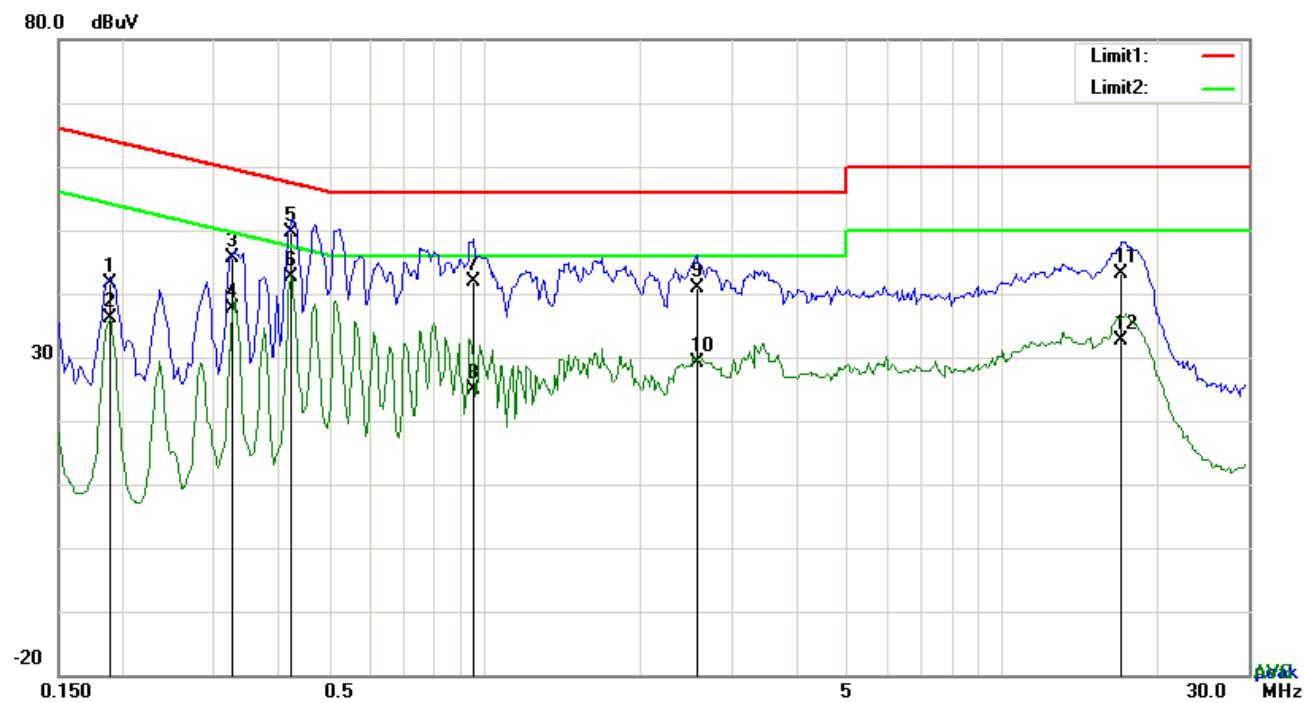

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	L1	0.1890	31.52	QP	10.03	41.55	64.08	-22.53
2	L1	0.1890	25.98	AVG	10.03	36.01	54.08	-18.07
3	L1	0.3255	35.59	QP	10.03	45.62	59.57	-13.95
4	L1	0.3255	27.52	AVG	10.03	37.55	49.57	-12.02
5	L1	0.4230	39.65	QP	10.03	49.68	57.39	-7.71
6	L1	0.4230	32.58	AVG	10.03	42.61	47.39	-4.78
7	L1	0.9534	31.79	QP	10.03	41.82	56.00	-14.18
8	L1	0.9534	14.82	AVG	10.03	24.85	46.00	-21.15
9	L1	2.5680	30.76	QP	10.05	40.81	56.00	-15.19
10	L1	2.5680	19.17	AVG	10.05	29.22	46.00	-16.78
11	L1	17.0673	32.87	QP	10.26	43.13	60.00	-16.87
12	L1	17.0673	22.27	AVG	10.26	32.53	50.00	-17.47


Test Mode: USB Mode

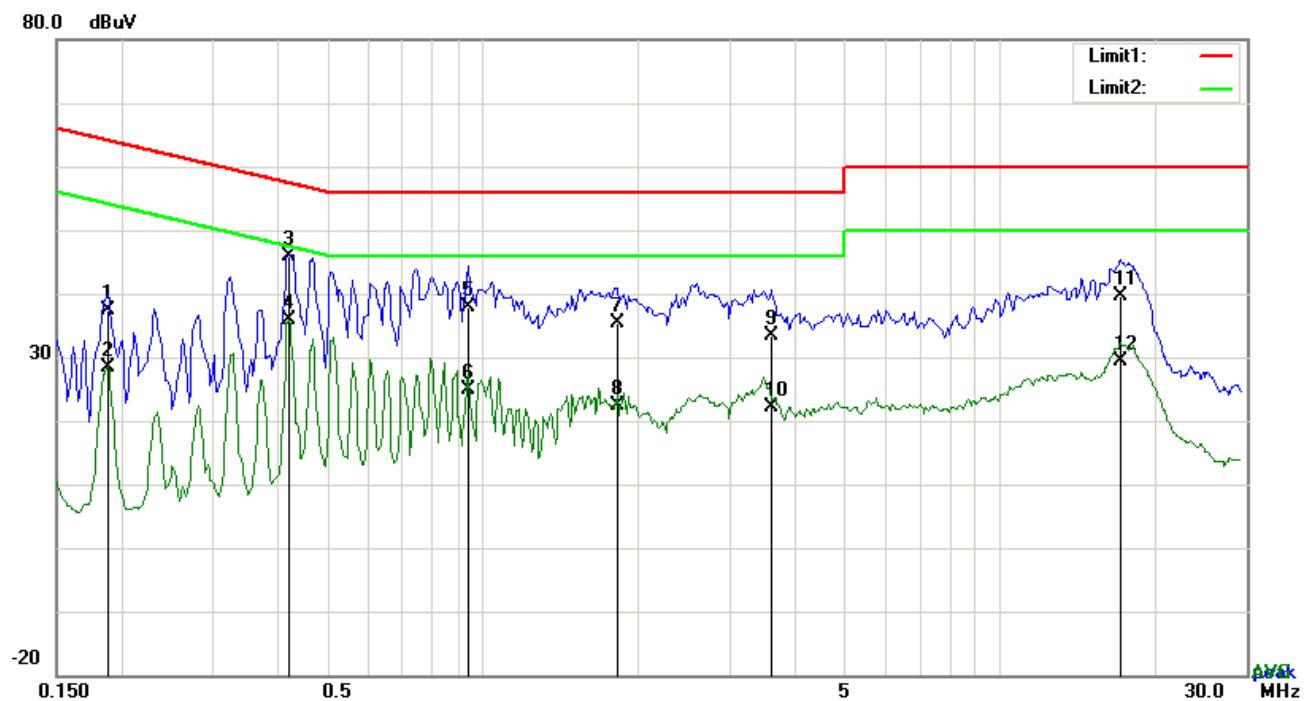

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	N	0.1890	27.27	QP	10.02	37.29	64.08	-26.79
2	N	0.1890	18.38	AVG	10.02	28.40	54.08	-25.68
3	N	0.4230	35.82	QP	10.02	45.84	57.39	-11.55
4	N	0.4230	25.91	AVG	10.02	35.93	47.39	-11.46
5	N	0.9417	27.89	QP	10.03	37.92	56.00	-18.08
6	N	0.9417	14.90	AVG	10.03	24.93	46.00	-21.07
7	N	1.8270	25.35	QP	10.04	35.39	56.00	-20.61
8	N	1.8270	12.25	AVG	10.04	22.29	46.00	-23.71
9	N	3.6045	23.27	QP	10.06	33.33	56.00	-22.67
10	N	3.6045	11.98	AVG	10.06	22.04	46.00	-23.96
11	N	17.1921	29.51	QP	10.23	39.74	60.00	-20.26
12	N	17.1921	19.06	AVG	10.23	29.29	50.00	-20.71

Test Mode : **USB Mode**

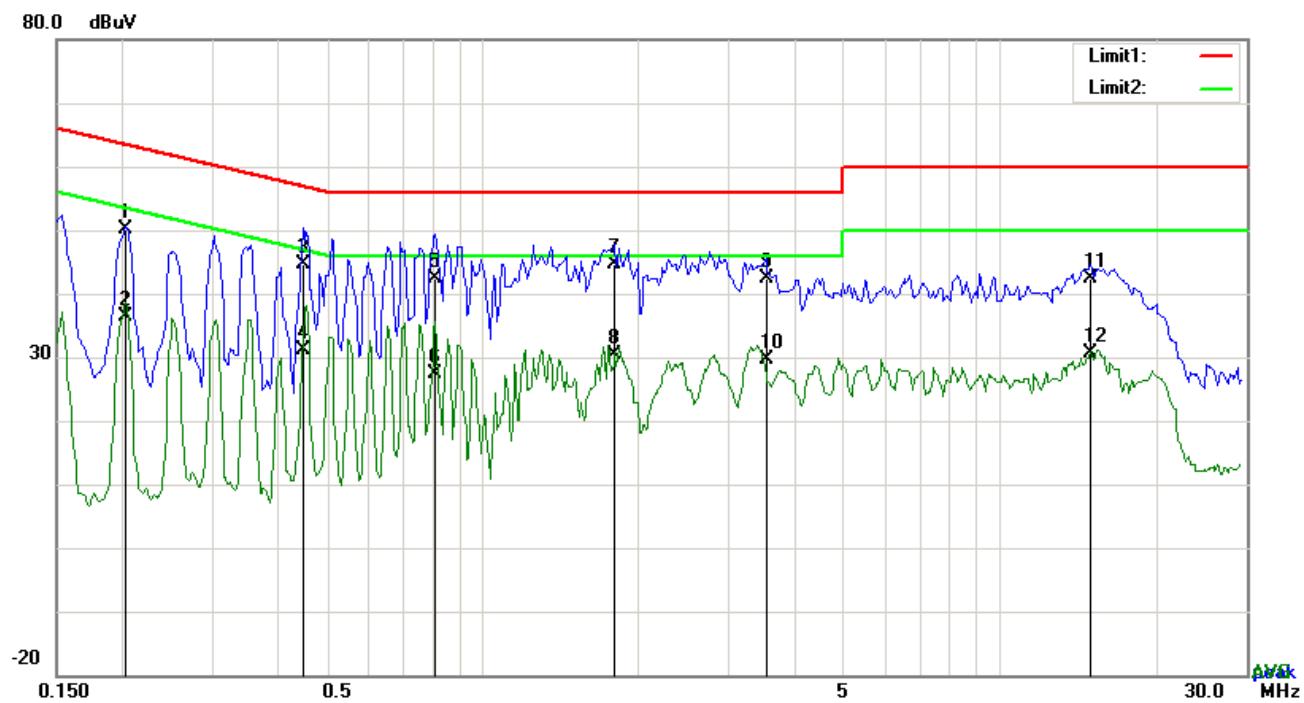


Test Data

Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	L1	0.2046	40.10	QP	10.03	50.13	63.42	-13.29
2	L1	0.2046	26.40	AVG	10.03	36.43	53.42	-16.99
3	L1	0.4503	34.64	QP	10.03	44.67	56.87	-12.20
4	L1	0.4503	21.03	AVG	10.03	31.06	46.87	-15.81
5	L1	0.8091	32.47	QP	10.03	42.50	56.00	-13.50
6	L1	0.8091	17.37	AVG	10.03	27.40	46.00	-18.60
7	L1	1.8075	34.68	QP	10.04	44.72	56.00	-11.28
8	L1	1.8075	20.36	AVG	10.04	30.40	46.00	-15.60
9	L1	3.5460	32.38	QP	10.06	42.44	56.00	-13.56
10	L1	3.5460	19.49	AVG	10.06	29.55	46.00	-16.45
11	L1	14.9769	32.17	QP	10.22	42.39	60.00	-17.61
12	L1	14.9769	20.53	AVG	10.22	30.75	50.00	-19.25

Test Mode : **USB Mode**

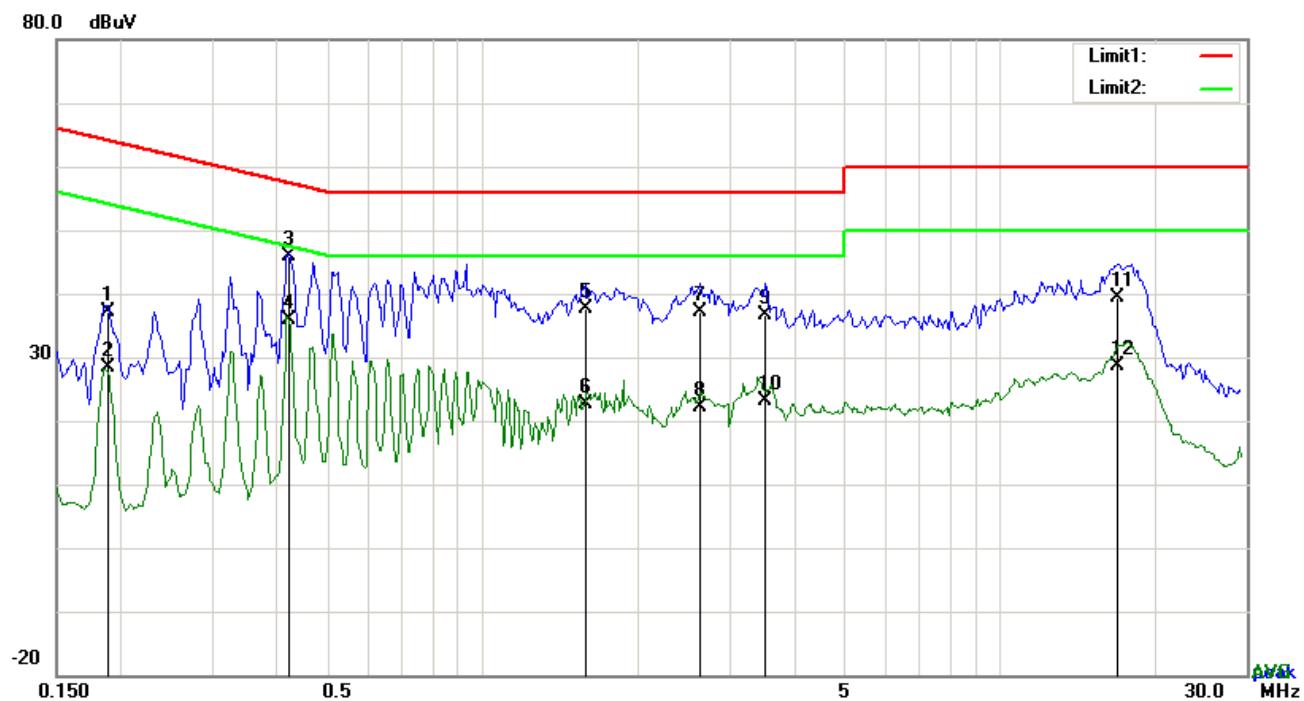

Test Data


Phase Neutral Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	N	0.1890	27.12	QP	10.02	37.14	64.08	-26.94
2	N	0.1890	18.38	AVG	10.02	28.40	54.08	-25.68
3	N	0.4230	35.74	QP	10.02	45.76	57.39	-11.63
4	N	0.4230	25.91	AVG	10.02	35.93	47.39	-11.46
5	N	1.5813	27.49	QP	10.04	37.53	56.00	-18.47
6	N	1.5813	12.65	AVG	10.04	22.69	46.00	-23.31
7	N	2.6382	27.09	QP	10.05	37.14	56.00	-18.86
8	N	2.6382	12.14	AVG	10.05	22.19	46.00	-23.81
9	N	3.5187	26.58	QP	10.06	36.64	56.00	-19.36
10	N	3.5187	13.00	AVG	10.06	23.06	46.00	-22.94
11	N	16.9074	29.11	QP	10.22	39.33	60.00	-20.67
12	N	16.9074	18.46	AVG	10.22	28.68	50.00	-21.32

6.2 Radiated Emissions

Temperature	26 °C
Relative Humidity	57%
Atmospheric Pressure	1025mbar
Test date :	December 25, 2017
Tested By :	Evans He

Requirement(s):

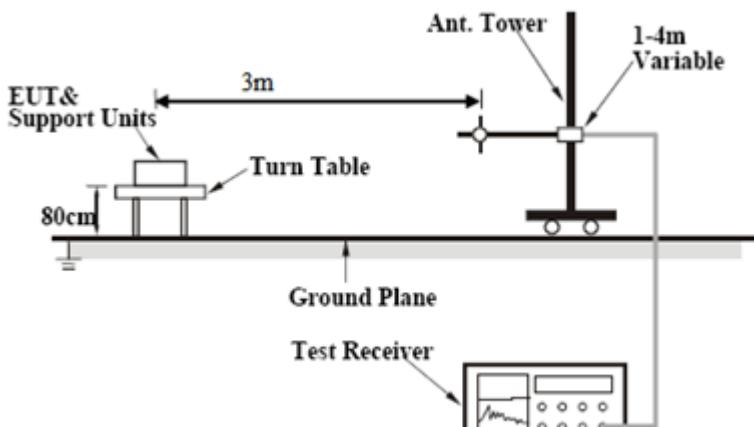Spec	Item	Requirement	Applicable										
47CFR§15. 109(d)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (µV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 - 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (µV/m)	30 – 88	100	88 – 216	150	216 - 960	200	Above 960	500	<input checked="" type="checkbox"/>
Frequency range (MHz)	Field Strength (µV/m)												
30 – 88	100												
88 – 216	150												
216 - 960	200												
Above 960	500												
Test Setup		 <p>The diagram illustrates the test setup. A 'Turn Table' is positioned on a 'Ground Plane'. An 'EUT & Support Units' is mounted on the turn table. A vertical 'Ant. Tower' is connected to the turn table. The distance between the EUT and the Ant. Tower is 3m. The height of the EUT is 80cm. The height of the Ant. Tower is adjustable, indicated as '1-4m Variable'. A 'Test Receiver' is connected to the Ant. Tower.</p>											
Procedure		<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarization (whichever gave the higher emission level) 											


	<p>over a full rotation of the EUT) was chosen.</p> <p>b. The EUT was then rotated to the direction that gave the maximum emission.</p> <p>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</p> <p>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</p> <p>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</p> <p>The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth with Peak detection for Average Measurement as below at frequency above 1GHz.</p> <ul style="list-style-type: none"> ■ 1 kHz (Duty cycle < 98%) <input type="checkbox"/> 10 Hz (Duty cycle > 98%) <p>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode : USB Mode

Below 1GHz

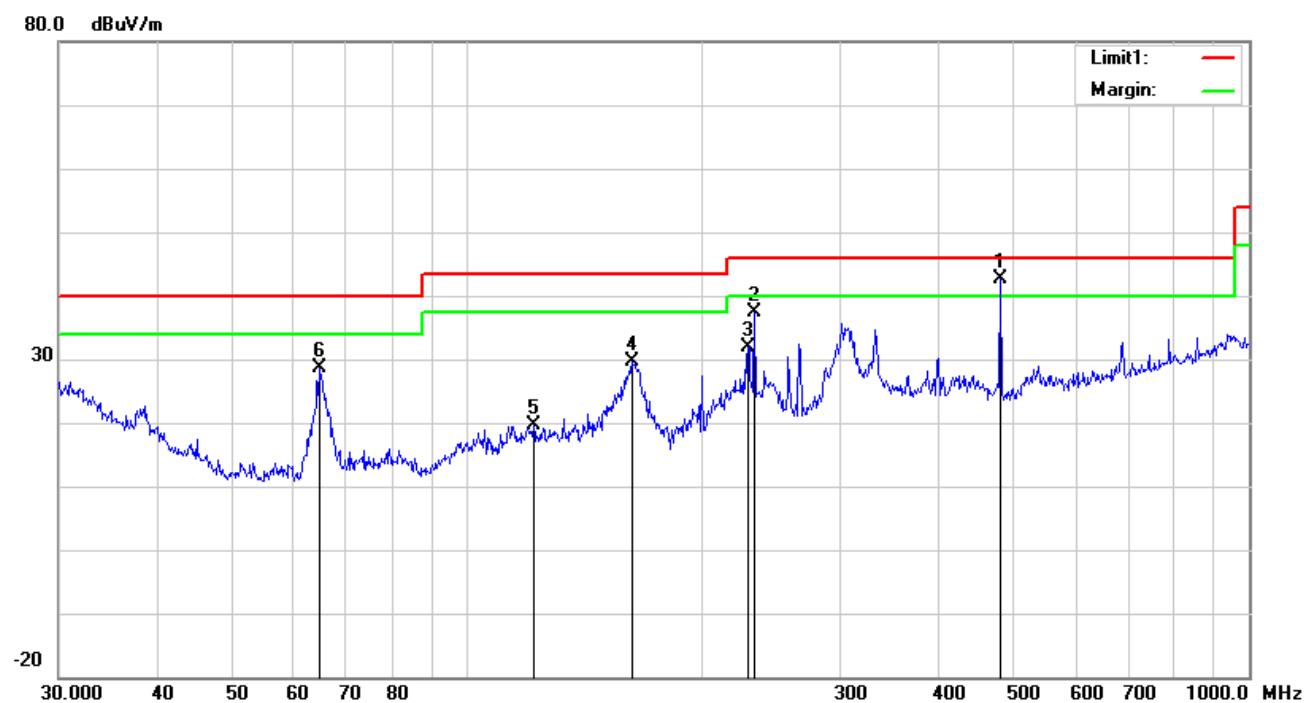


Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)		(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)
1	H	480.5276	44.87	QP	17.31	21.85	2.31	42.64	46.00	-3.36	100	59
2	H	232.5318	46.43	peak	11.64	22.32	1.64	37.39	46.00	-8.61	100	296
3	H	228.4904	40.90	peak	11.70	22.33	1.63	31.90	46.00	-14.10	200	253
4	H	162.6106	38.12	peak	12.39	22.27	1.38	29.62	43.50	-13.88	100	128
5	H	121.5486	27.09	peak	13.80	22.36	1.17	19.70	43.50	-23.80	100	159
6	H	64.6594	42.54	peak	7.53	22.40	0.87	28.54	40.00	-11.46	100	78

Below 1GHz

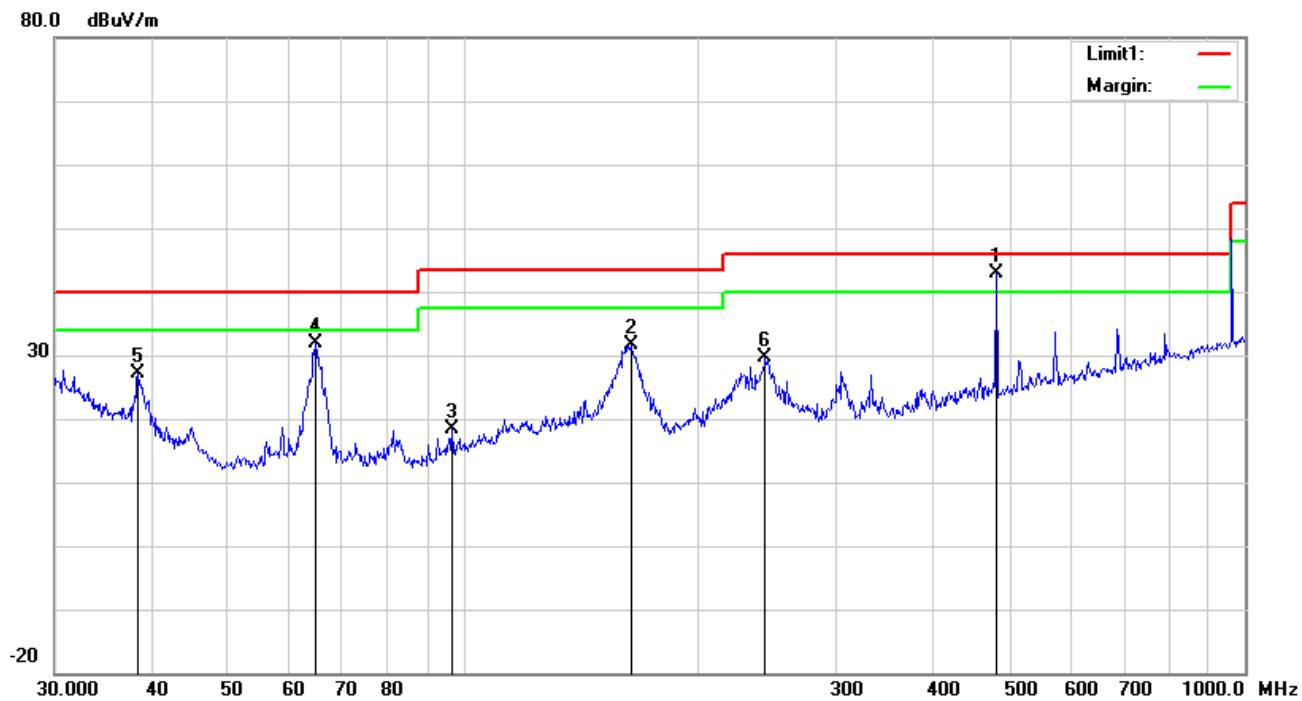

Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)		(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)
1	V	480.5276	45.01	QP	17.31	21.85	2.31	42.78	46.00	-3.22	100	21
2	V	163.7550	40.13	peak	12.30	22.27	1.38	31.54	43.50	-11.96	100	113
3	V	96.7749	30.06	peak	9.63	22.32	1.04	18.41	43.50	-25.09	100	123
4	V	64.6594	45.87	peak	7.53	22.40	0.87	31.87	40.00	-8.13	100	126
5	V	38.3462	33.39	peak	15.11	22.27	0.78	27.01	40.00	-12.99	100	100
6	V	243.3772	38.84	peak	11.49	22.30	1.68	29.71	46.00	-16.29	100	96

Above 1GHz

Frequency (MHz)	Read_level (dB μ V/m)	Azimuth	Height (cm)	Polarity (H/V)	Level (dB μ V/m)	Factors (dB)	Limit (dB μ V/m)	Margin (dB)	Detector (PK/AV)
1658.55	65.37	80	100	V	-16.81	48.56	74	-25.44	PK
2915.37	59.41	276	100	V	-13.04	46.37	74	-27.63	PK
4594.33	54.46	161	100	V	-6.18	48.28	74	-25.72	PK
1511.05	64.94	324	100	H	-18.62	46.32	74	-27.68	PK
3214.71	61.78	146	100	H	-13.09	48.69	74	-25.31	PK
5088.95	49.6	169	100	H	-2.81	46.79	74	-27.21	PK

Note1: The highest frequency of the EUT is 2567.5 MHz, so the testing has been conformed to
 $5*2567.5\text{MHz}=12,838\text{MHz}$.

Note2: The frequency that above 3GHz is mainly from the environment noise.

Note3: The AV measurement performed, more than 20dB below limit so AV test data was not presented.

Note4: The radiated spurious test above 18GHz is subcontracted to SIEMIC (Nanjing-China) Laboratories. and found 30dB below the limit at least.

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted Emissions					
EMI test receiver	ESCS30	8471241027	09/15/2017	09/14/2018	<input checked="" type="checkbox"/>
Line Impedance Stabilization Network	LI-125A	191106	09/23/2017	09/22/2018	<input checked="" type="checkbox"/>
Line Impedance Stabilization Network	LI-125A	191107	09/23/2017	09/22/2018	<input checked="" type="checkbox"/>
ISN	ISN T800	34373	09/23/2017	09/22/2018	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	08/30/2017	08/29/2018	<input checked="" type="checkbox"/>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/15/2017	09/14/2018	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/30/2017	08/29/2018	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/23/2017	03/22/2018	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/19/2017	09/18/2018	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna	AH-118	71259	09/22/2017	09/21/2018	<input checked="" type="checkbox"/>
Horn Antenna	BBHA9170	3145226D1	09/27/2017	09/26/2018	<input checked="" type="checkbox"/>

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

Whole Package View




Adapter - Lable View




EUT - Front View




EUT - Rear View

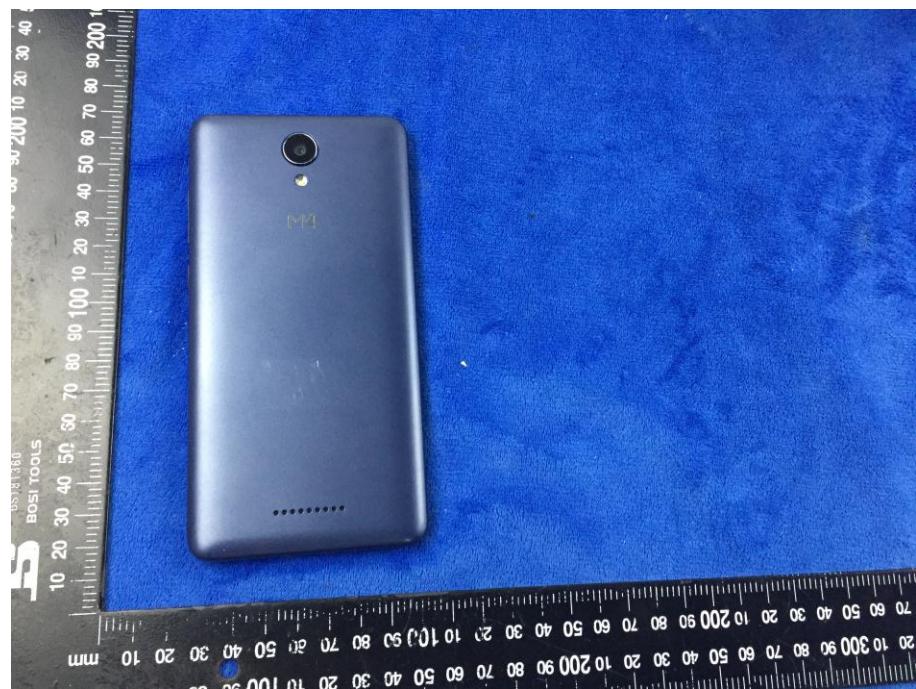


EUT - Top View

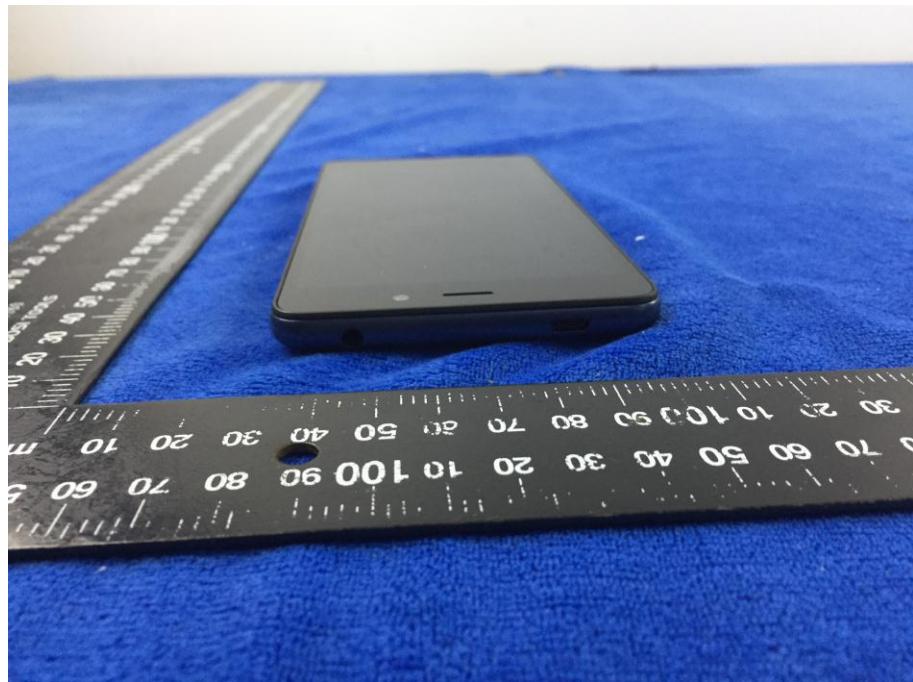

EUT - Bottom View

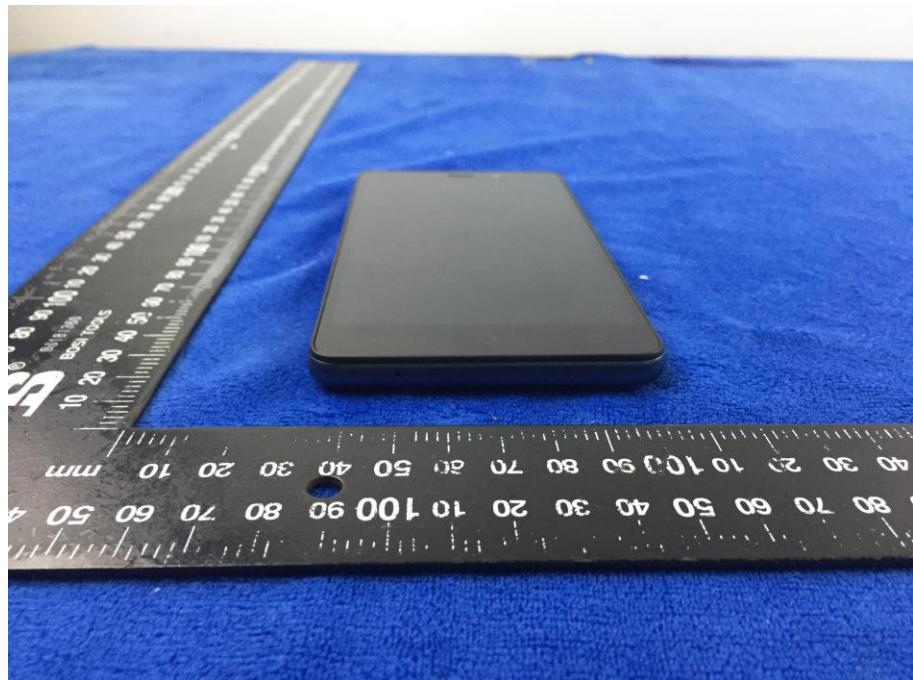

EUT - Left View

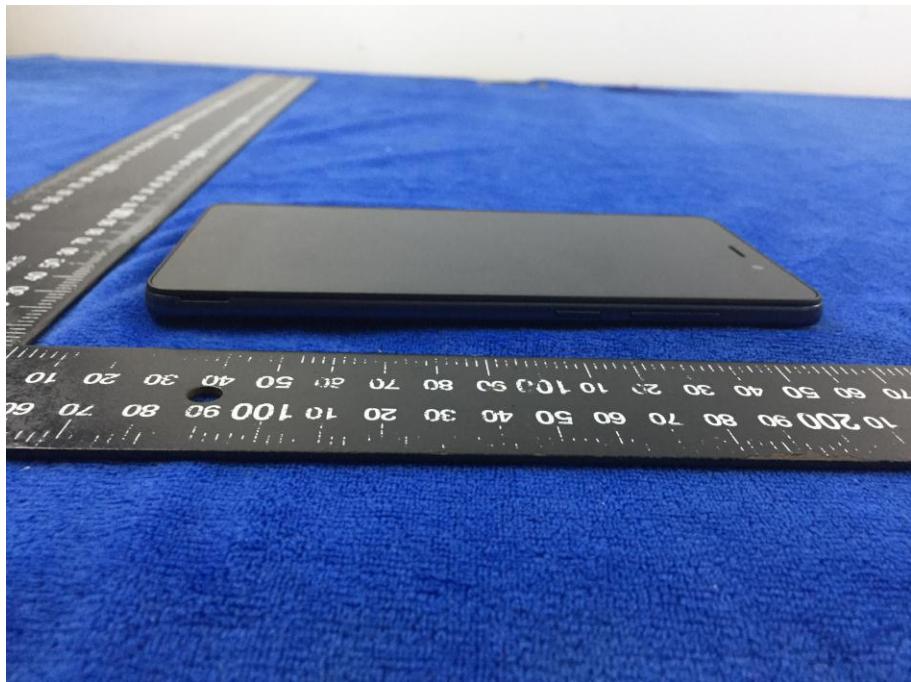

EUT - Right View



Annex B.ii. Photograph: EUT Internal Photo

Cover Off - Top View 1



Cover Off - Top View 2




Battery - Front View




Battery - Rear View




Mainboard with Shielding - Front View

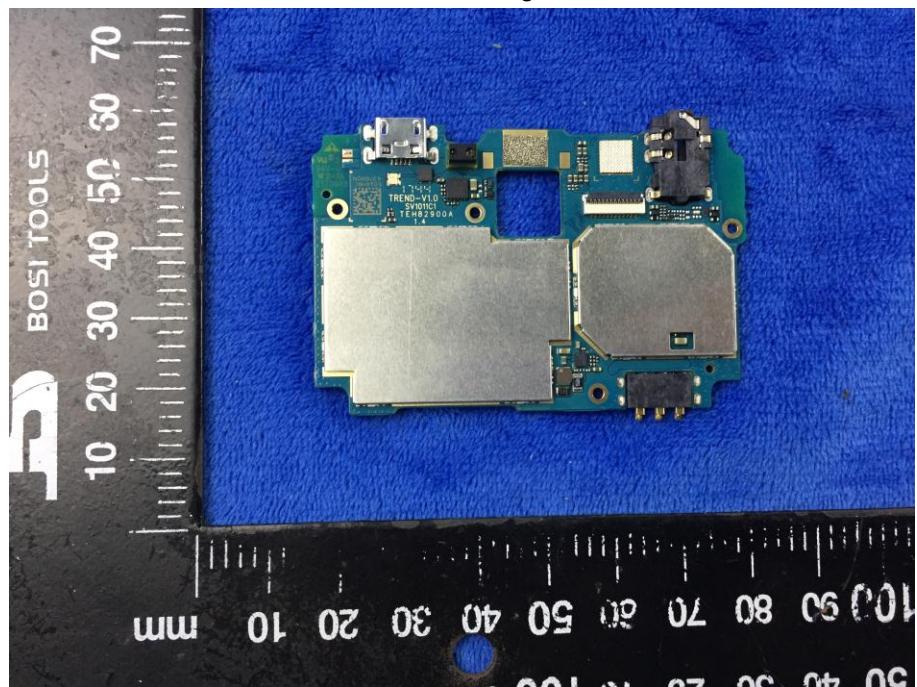


Mainboard with Shielding - Rear View

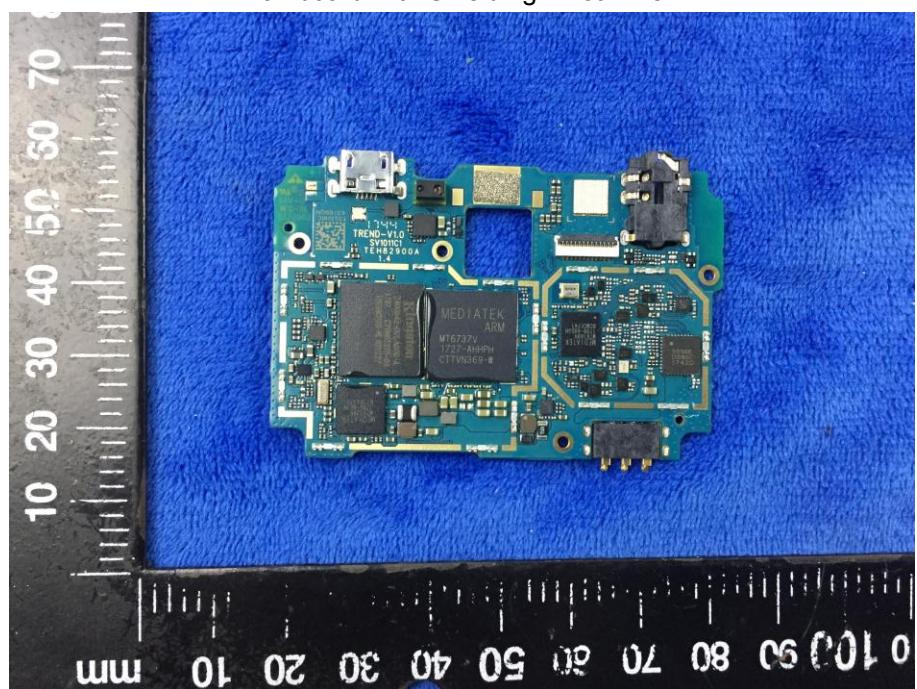


Mainboard without Shielding – Front View

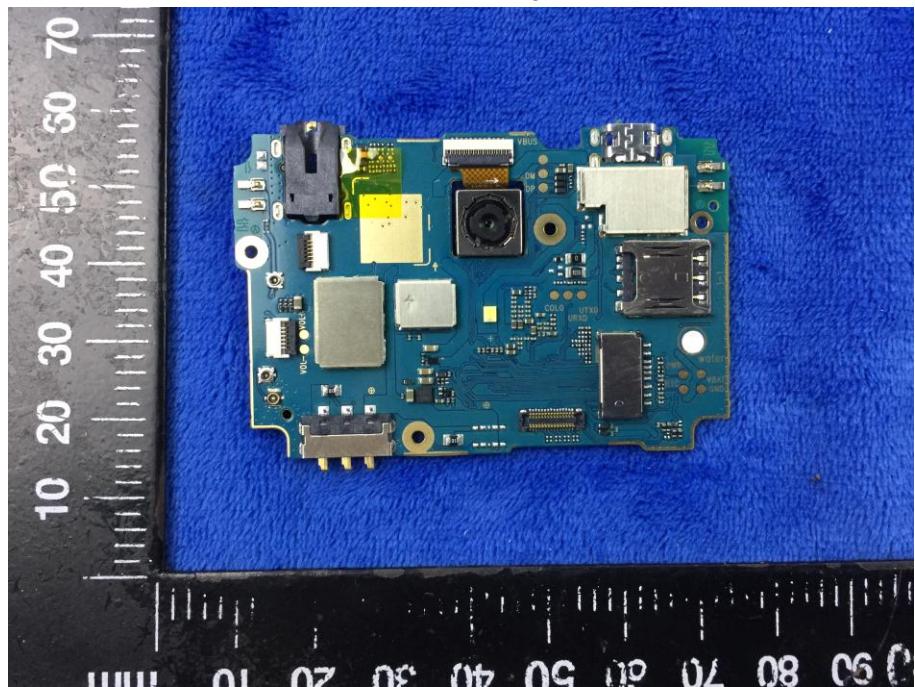

Smallboard – Front View

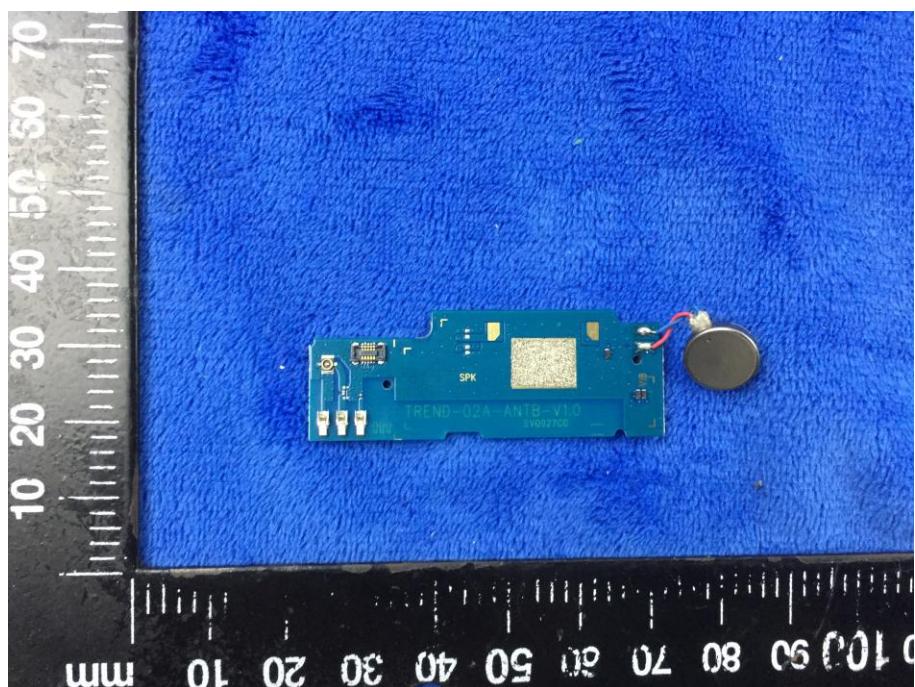

Smallboard – Rear View

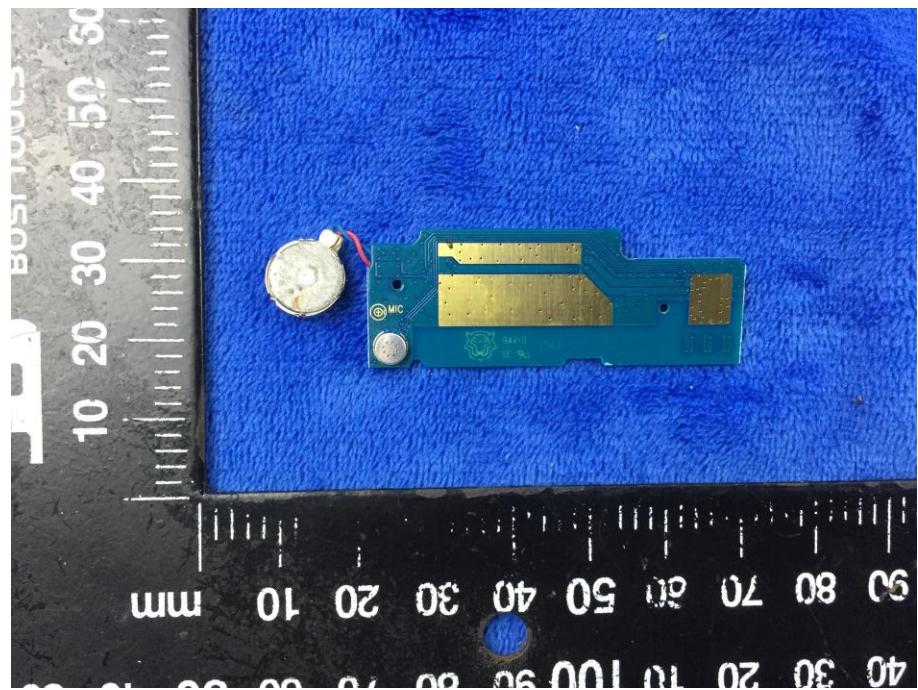

LCD – Front View



LCD – Rear View



GSM/PCS/UMTS-FDD/LTE Antenna View




WIFI/BT/BLE/GPS - Antenna View



RXD- Antenna View




Annex B.iii. Photograph: Test Setup Photo

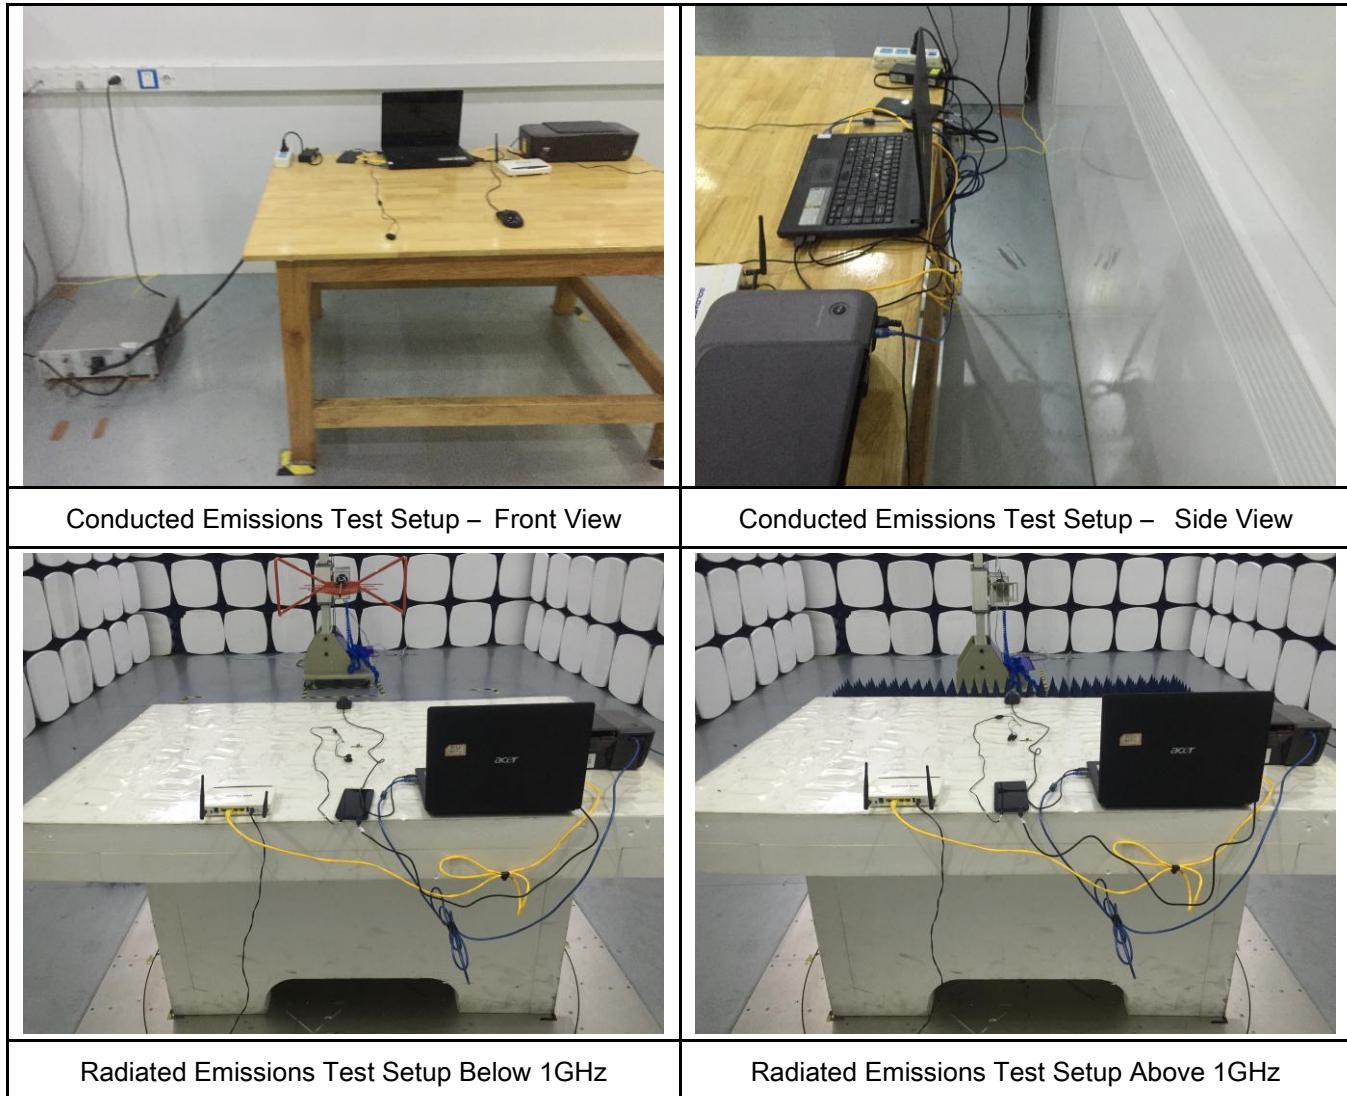


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for Conducted Emissions

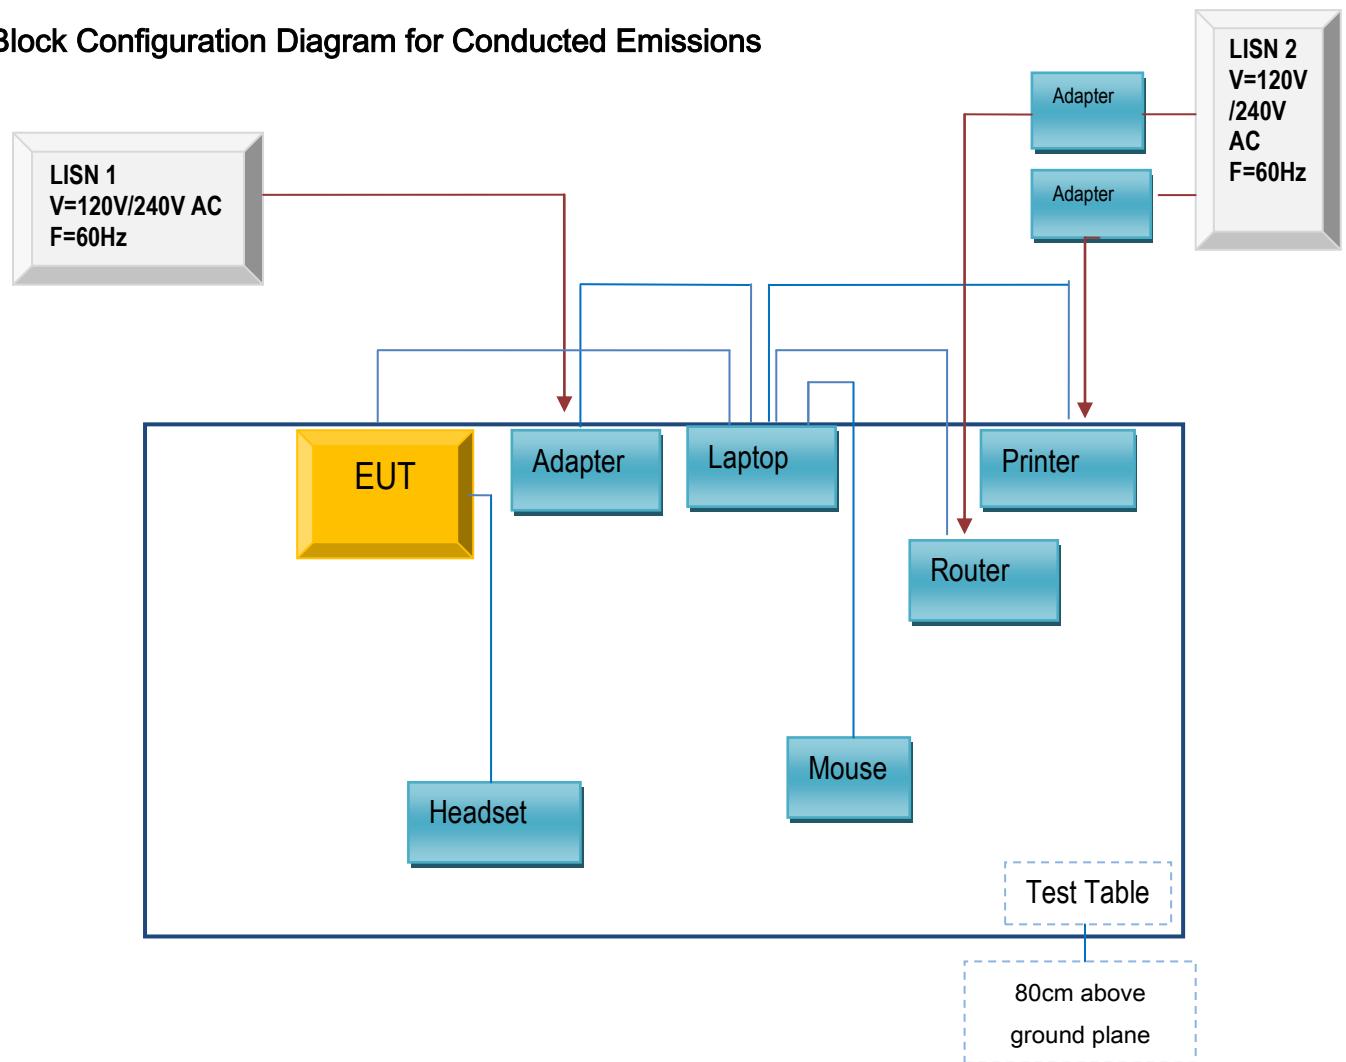

Block Configuration Diagram for Radiated Emissions

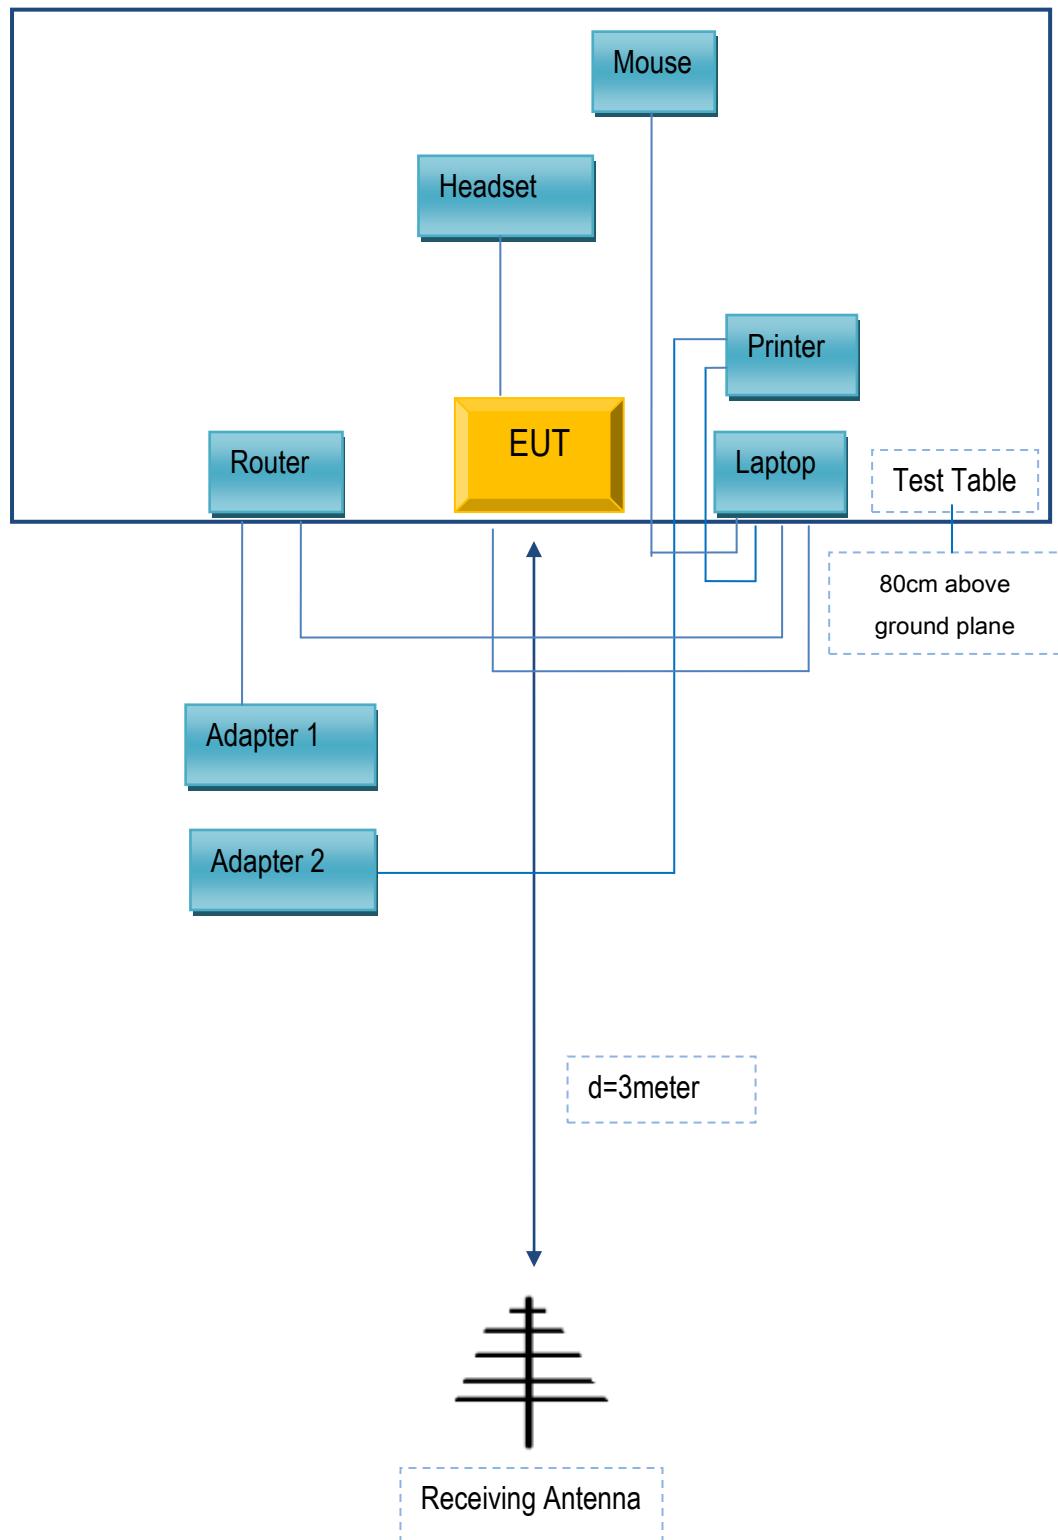

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
Lenovo	Laptop	E40	LR-1EHRX
GOLDWEB	Router	R102	1202032094
Lenovo	AC Adapter	42T4416	21D9JU
HP	Printer	VCVRA-1003	CN36M19JWX
DELL	Mouse	E100	912NMTUT41481
BULL	Socket	GN-403	GN201203
MFOURTEL MEXICO S.A. DE C.V.	headset	M4 B2	N/A

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	2m	JX120051274
USB Cable	Un-shielding	No	2m	CBA3000AH0C1
RJ45 Cable	Un-shielding	No	2m	KX156327541
Router Power cable	Un-shielding	No	2m	13274630Z
Printer Power cable	Un-shielding	No	2m	127581031
Power Cable	Un-shielding	No	0.8m	GT211032

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment

Annex E. DECLARATION OF SIMILARITY

N/A