



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.247

TEST REPORT

For

MFOURTEL MEXICO S.A. DE C.V.

Av. Ejercito Nacional 436 Piso 3 Chapultepec, Morales Miguel Hidalgo D.F 11570, Mexico

FCC ID:CLNM4CONNECT1-L

Report Type: Original Report	Product Name: M4 Connect 1-L
Report Number: RDG181114008-00A	
Report Date: 2018-12-03	
Jerry Zhang	
Reviewed By:	EMC Manager <i>Jerry Zhang</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	9
SUPPORT EQUIPMENT LIST AND DETAILS	9
SUPPORT CABLE LIST AND DETAILS	9
BLOCK DIAGRAM OF TEST SETUP	9
SUMMARY OF TEST RESULTS	10
FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	11
APPLICABLE STANDARD	11
FCC §15.203 - ANTENNA REQUIREMENT.....	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	15
CORRECTED AMPLITUDE & MARGIN CALCULATION	15
TEST EQUIPMENT LIST AND DETAILS.....	15
TEST DATA	16
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	18
APPLICABLE STANDARD	18
EUT SETUP	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	19
TEST PROCEDURE	19
CORRECTED AMPLITUDE & MARGIN CALCULATION	19
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST DATA	20
FCC §15.247(a) (2)–6 dB EMISSION BANDWIDTH.....	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31
TEST EQUIPMENT LIST AND DETAILS.....	31
TEST DATA	31
FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	45
APPLICABLE STANDARD	45
TEST PROCEDURE	45
TEST EQUIPMENT LIST AND DETAILS.....	45

TEST DATA	46
FCC §15.247(d)– 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	47
APPLICABLE STANDARD	47
TEST PROCEDURE	47
TEST EQUIPMENT LIST AND DETAILS.....	47
TEST DATA	48
FCC §15.247(e) - POWER SPECTRAL DENSITY	57
APPLICABLE STANDARD	57
TEST PROCEDURE	57
TEST EQUIPMENT LIST AND DETAILS.....	57
TEST DATA	57

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:		M4 Connect 1-L
EUT Model:		M4 Connect 1-L
FCC ID:		CLNM4CONNECT1-L
Rated Input Voltage:		12 VDC from adapter
Adapter Information	Model:	RD1201000-C55-91MG
	Input:	100-240VAC~50/60Hz 0.5A
	Output:	DC 12V, 1A
External Dimension:		115mm(L)*118.5mm(W)*46mm(H)
Serial Number:		181114008
EUT Received Date:		2018.11.22

Objective

This report is prepared on behalf of *MFOURTEL MEXICO S.A. DE C.V.* in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the compliance of the EUT with FCC Rules Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 22H, 24E, Part 27 PCB submissions with FCC ID: CLNM4CONNECT1-L.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And 558074 D01 15.247 Meas Guidance v05.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier : CN0022.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

For 2.4GHz band, total 11 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, and 802.11n ht20 modes were test with channel 1,6,11. For 802.11n ht40 mode was tested with channel 3, 6, 9.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations. The device supports SISO in all modes, and MIMO in 802.11n modes, per pretest, MIMO mode was the worst mode and reported for 802.11n modes.

EUT Exercise Software


The software “MT7628 QA 0.0.0.96” was used for testing, which was provided by manufacturer. The maximum power was configured as below table, that provided by the manufacturer:

Mode	Channel	Frequency (MHz)	Data rate	Power level setting	
				Chain 0	Chain 1
802.11b	Low	2412	1 Mbps	23	24
	Middle	2437	1 Mbps	25	23
	High	2462	1 Mbps	25	24
802.11g	Low	2412	6 Mbps	21	21
	Middle	2437	6 Mbps	21	21
	High	2462	6 Mbps	20	21
802.11n ht20	Low	2412	MCS0	1D	1D
	Middle	2437	MCS0	20	20
	High	2462	MCS0	1C	1C
802.11n ht40	Low	2422	MCS0	1F	1F
	Middle	2437	MCS0	20	20
	High	2452	MCS0	1E	1E


The maximum duty cycle as following table:

Test mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)
802.11b	100	100	100
802.11g	1.391	1.455	95.60
802.11n ht20	1.311	1.375	95.35
802.11n ht40	0.649	0.733	88.54


802.11b

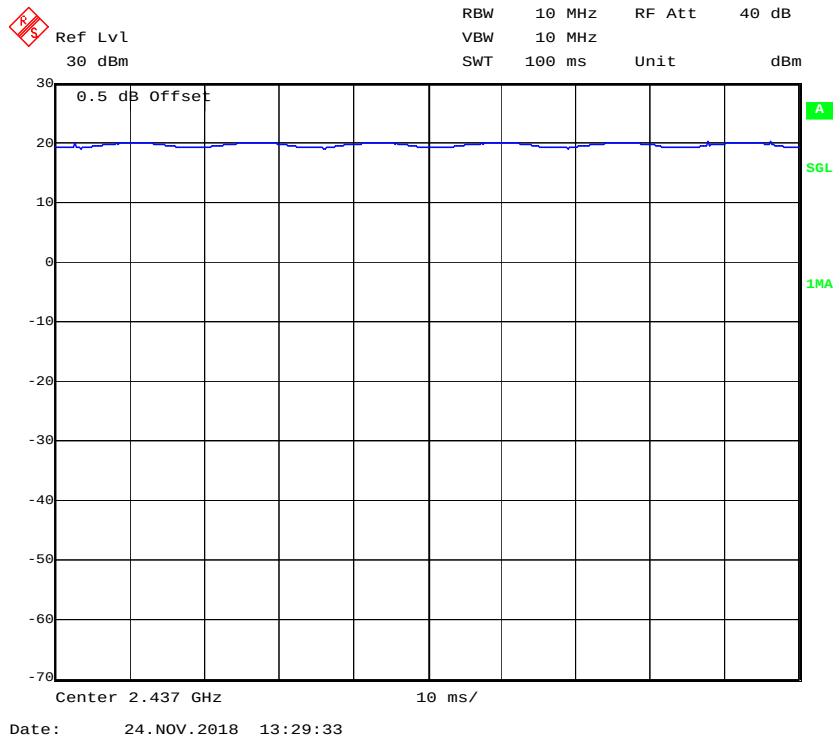

802.11g

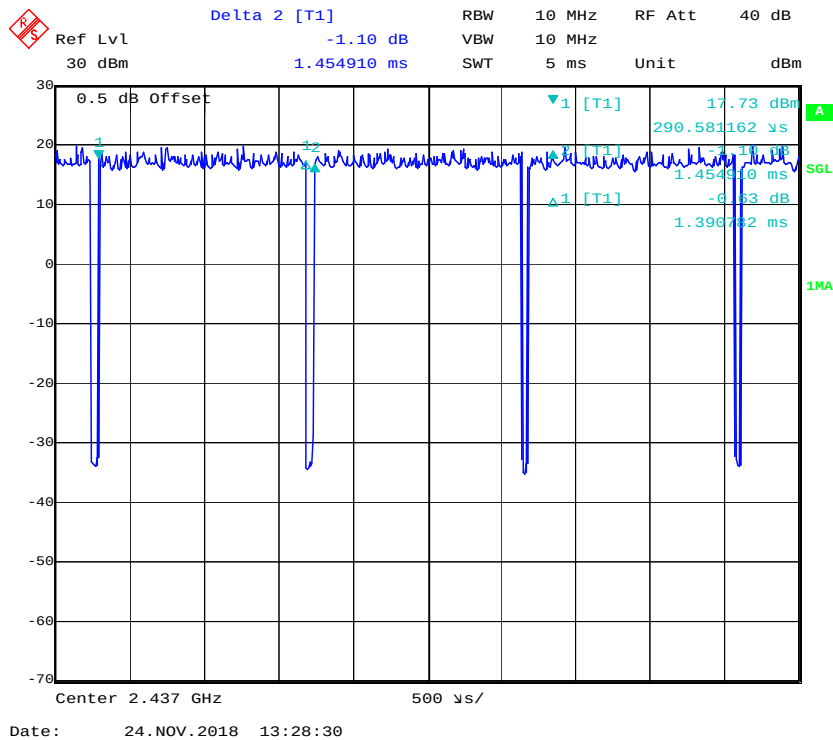


802.11n ht20

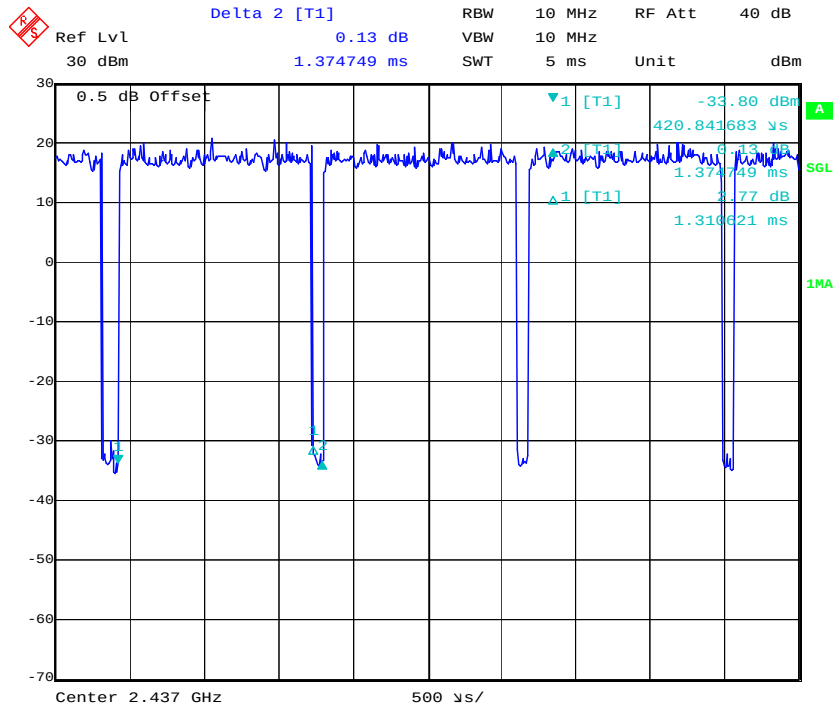

Date: 24.NOV.2018 13:27:31

802.11n ht40

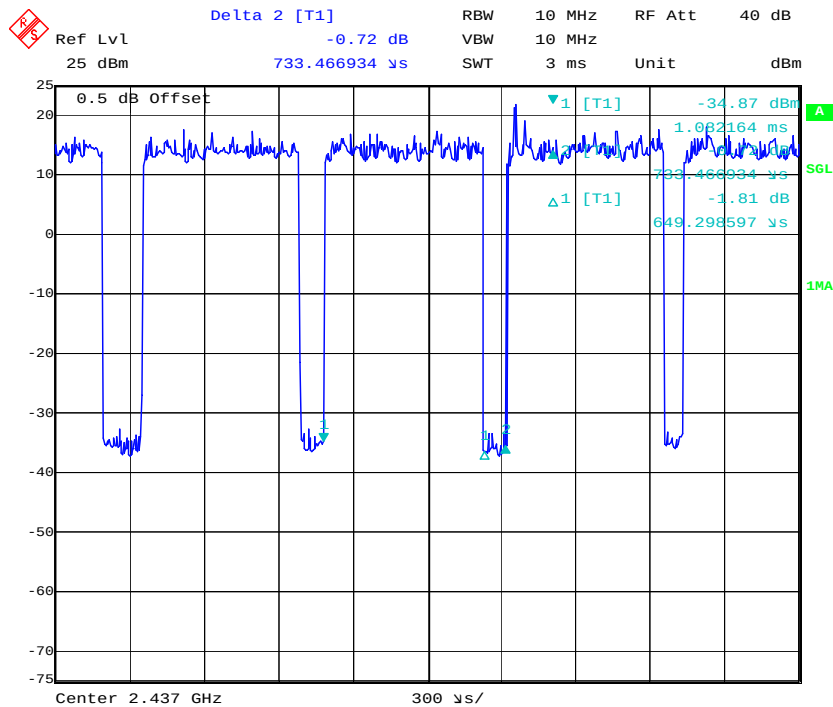

Date: 24.NOV.2018 13:26:24

Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From	To
RJ 45 Cable	Yes	No	10	EUT	Laptop

Block Diagram of Test Setup

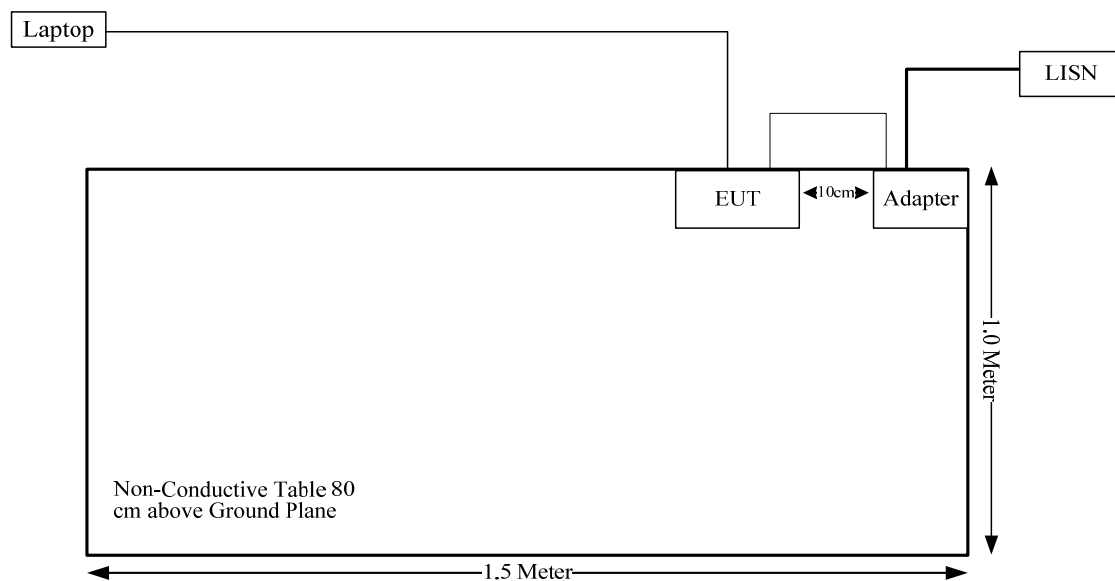

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Calculated Data:

Mode	Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
WLAN	2412-2462	4	2.51	25	316.23	20.00	0.16	1.0
WCDMA band 2	1850-1910	3	2.00	23	199.53	20.00	0.08	1.0
WCDMA Band 5	824-849	2.5	1.78	23	199.53	20.00	0.07	0.55
LTE band 4	1710-1755	3	2.00	23	199.53	20.00	0.08	1.0

The WLAN and WWAN can transmit simultaneously:

$$\sum_i \frac{S_i}{S_{Limit,i}}$$

$$= S_{WLAN}/S_{limit-WLAN} + S_{WWAN}/S_{limit-WWAN}$$

$$= 0.16/1 + 0.07/0.55$$

$$= 0.29$$

$$< 1.0$$

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has 2 internal PCB antenna permanently attached to the unit for WiFi, fulfill the requirement of this section. Please refer to the EUT photos and below information:

Antenna	Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
WIFI Chain 0	PCB	50	4.0 dBi/2.4-2.5GHz
WIFI Chain 1	PCB	50	4.0 dBi/2.4-2.5GHz


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a)

EUT Setup

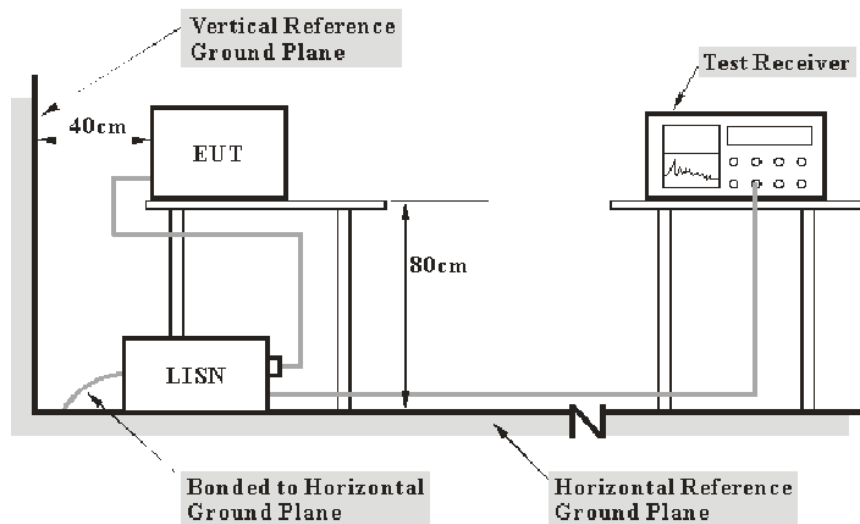

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main lisn with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2018-09-05	2019-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2017-12-08	2018-12-08

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data**Environmental Conditions**

Temperature:	25.6°C
Relative Humidity:	42 %
ATM Pressure:	100.6 kPa

The testing was performed by Lily Xie on 2018-11-22.


Test Mode: Transmitting (Wi-Fi mode 802.11b middle channel was the worst)

AC120 V, 60 Hz, Line:

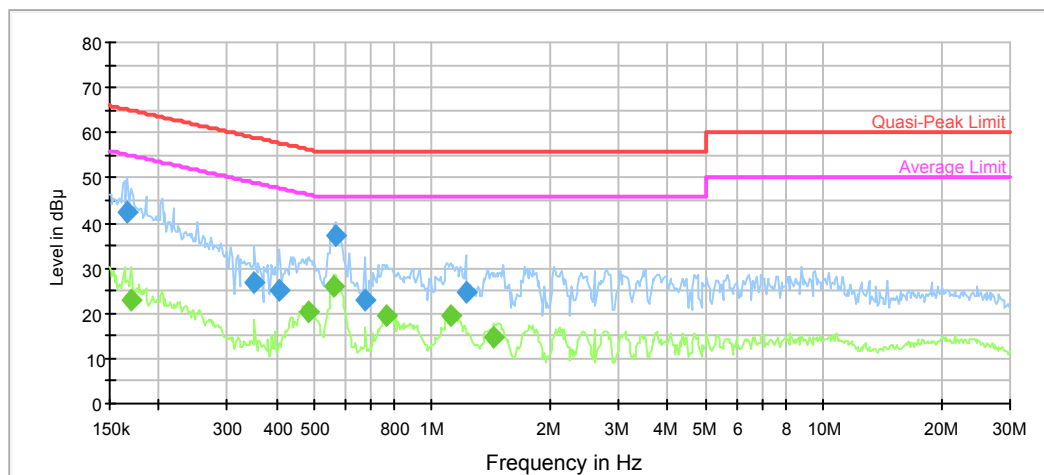

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.166371	42.2	9.000	L1	11.0	22.9	65.1
0.351859	26.6	9.000	L1	10.0	32.3	58.9
0.406123	25.1	9.000	L1	10.0	32.6	57.7
0.567545	37.2	9.000	L1	9.8	18.8	56.0
0.676289	23.1	9.000	L1	9.8	32.9	56.0
1.219583	24.7	9.000	L1	9.8	31.3	56.0

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.170396	23.1	9.000	L1	10.9	31.8	54.9
0.483938	20.5	9.000	L1	9.9	25.8	46.3
0.563041	26.2	9.000	L1	9.8	19.8	46.0
0.768247	19.3	9.000	L1	9.8	26.7	46.0
1.117238	19.7	9.000	L1	9.8	26.3	46.0
1.441726	14.8	9.000	L1	9.8	31.2	46.0


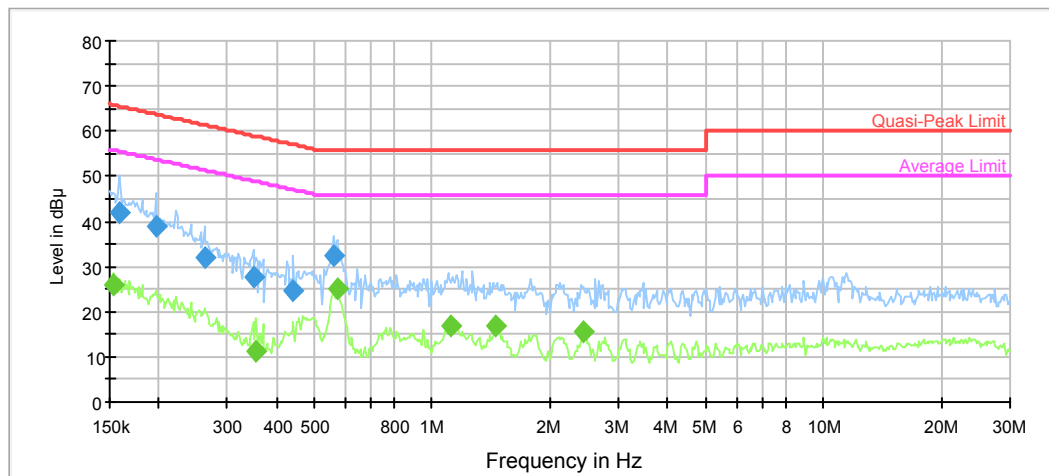
AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.158604	41.9	9.000	N	11.0	23.6	65.5
0.196675	39.0	9.000	N	10.6	24.7	63.7
0.262017	32.1	9.000	N	10.3	29.3	61.4
0.349066	27.6	9.000	N	10.0	31.4	59.0
0.443327	24.5	9.000	N	9.9	32.5	57.0
0.558572	32.5	9.000	N	9.8	23.5	56.0

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.153629	25.8	9.000	N	11.1	30.0	55.8
0.354674	11.2	9.000	N	10.0	37.7	48.9
0.572086	25.2	9.000	N	9.8	20.8	46.0
1.117238	16.7	9.000	N	9.8	29.3	46.0
1.453260	16.7	9.000	N	9.8	29.3	46.0
2.439371	15.6	9.000	N	9.8	30.4	46.0

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

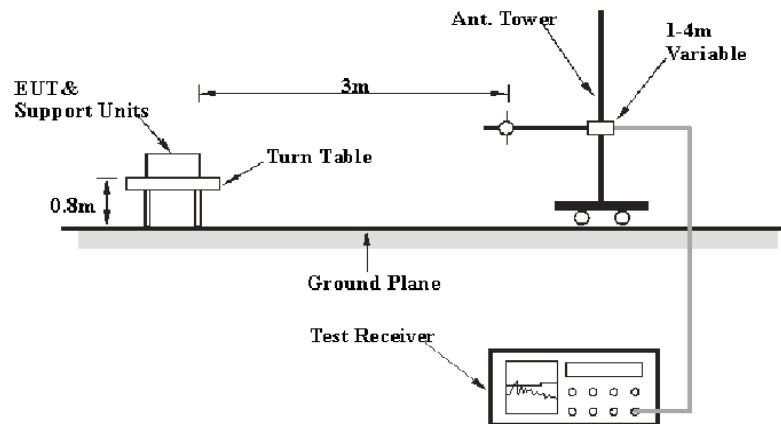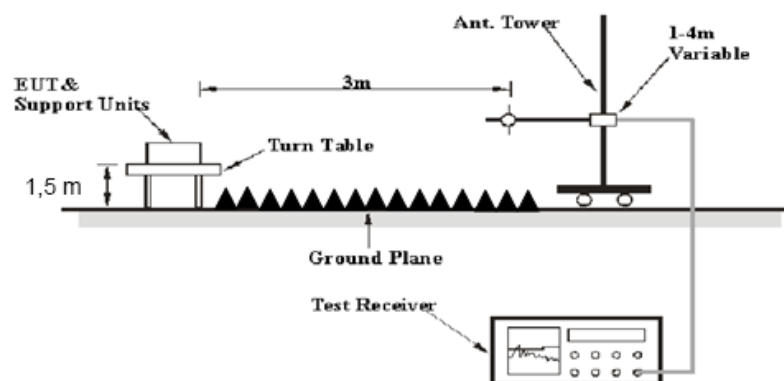EUT Setup**Below 1GHz:****Above 1GHz:**

The radiated emission Below 1GHz tests were performed in the 3 meters chamber test site A, above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-12-11	2018-12-11
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2018-09-05	2019-09-05
HP	Amplifier	8447D	2727A05902	2018-09-05	2019-09-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2018-01-04	2019-01-04
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	000 527 35	2016-01-05	2019-01-04
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2018-06-27	2019-06-27
MITEQ	Amplifier	AFS42-00101800- 25-S-42	2001271	2018-09-05	2019-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2018-06-27	2019-06-27
E-Microwave	Band-stop Filters	OBSF-2400-2483.5- S	OE01601525	2018-06-16	2019-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2018-06-16	2019-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25.8 °C
Relative Humidity:	39 ~ 45 %
ATM Pressure:	100.2 ~ 100.5 kPa


* The testing was performed by Tyler Pan & Vern Shen from 2018-11-27 to 2018-11-29.

Test Result: Compliance, please Refer to the following data


Test Mode: Transmitting

1) 30MHz-1GHz(802.11b Chain 0 Low channel was the worst)

Horizontal:

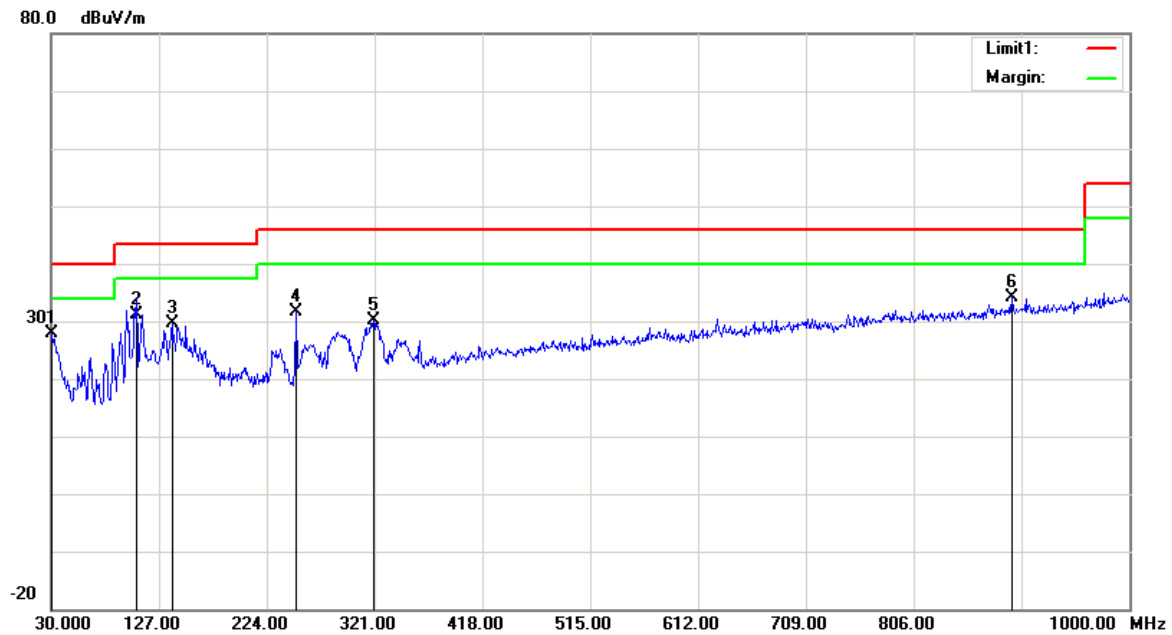

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	26.14	QP	1.76	27.90	40.00	12.10
106.6300	38.26	QP	-7.06	31.20	43.50	12.30
138.6400	35.23	QP	-5.55	29.68	43.50	13.82
250.1900	37.55	QP	-6.03	31.52	46.00	14.48
320.0300	33.50	QP	-3.47	30.03	46.00	15.97
894.2700	38.20	QP	-3.95	34.25	46.00	11.75

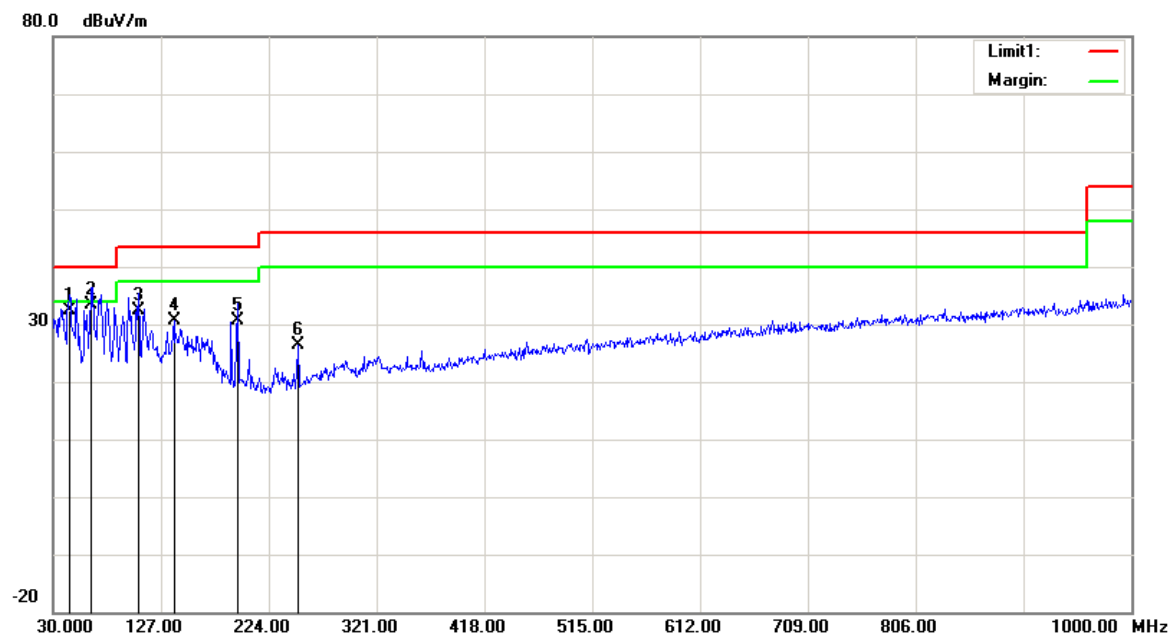Vertical:

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
44.5500	41.42	QP	-8.92	32.50	40.00	7.50
63.9500	44.96	QP	-11.66	33.30	40.00	6.70
106.6300	39.46	QP	-7.06	32.40	43.50	11.10
138.6400	36.09	QP	-5.55	30.54	43.50	12.96
195.8700	37.30	QP	-6.60	30.70	43.50	12.80
250.1900	32.46	QP	-6.03	26.43	46.00	19.57

**2) 1-25GHz:
802.11b Mode, Chain 0**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	70.24	PK	H	28.12	1.81	0.00	100.17	N/A	N/A
2412.00	67.04	AV	H	28.12	1.81	0.00	96.97	N/A	N/A
2412.00	76.53	PK	V	28.12	1.81	0.00	106.46	N/A	N/A
2412.00	73.26	AV	V	28.12	1.81	0.00	103.19	N/A	N/A
2390.00	26.54	PK	V	28.08	1.80	0.00	56.42	74.00	17.58
2390.00	16.10	AV	V	28.08	1.80	0.00	45.98	54.00	8.02
4824.00	56.50	PK	V	32.95	3.19	37.20	55.44	74.00	18.56
4824.00	53.73	AV	V	32.95	3.19	37.20	52.67	54.00	1.33
7236.00	46.59	PK	V	35.81	4.77	37.27	49.90	74.00	24.10
7236.00	34.20	AV	V	35.81	4.77	37.27	37.51	54.00	16.49
Middle Channel: 2437 MHz									
2437.00	69.28	PK	H	28.17	1.82	0.00	99.27	N/A	N/A
2437.00	66.12	AV	H	28.17	1.82	0.00	96.11	N/A	N/A
2437.00	75.93	PK	V	28.17	1.82	0.00	105.92	N/A	N/A
2437.00	72.88	AV	V	28.17	1.82	0.00	102.87	N/A	N/A
4874.00	55.27	PK	V	33.05	3.26	37.21	54.37	74.00	19.63
4874.00	52.31	AV	V	33.05	3.26	37.21	51.41	54.00	2.59
7311.00	45.87	PK	V	36.01	4.64	37.36	49.16	74.00	24.84
7311.00	33.36	AV	V	36.01	4.64	37.36	36.65	54.00	17.35
High Channel: 2462 MHz									
2462.00	70.34	PK	H	28.22	1.83	0.00	100.39	N/A	N/A
2462.00	67.26	AV	H	28.22	1.83	0.00	97.31	N/A	N/A
2462.00	76.32	PK	V	28.22	1.83	0.00	106.37	N/A	N/A
2462.00	73.15	AV	V	28.22	1.83	0.00	103.20	N/A	N/A
2483.50	27.55	PK	V	28.27	1.84	0.00	57.66	74.00	16.34
2483.50	18.78	AV	V	28.27	1.84	0.00	48.89	54.00	5.11
4924.00	55.77	PK	V	33.15	3.27	37.22	54.97	74.00	19.03
4924.00	52.84	AV	V	33.15	3.27	37.22	52.04	54.00	1.96
7386.00	45.63	PK	V	36.20	4.51	37.46	48.88	74.00	25.12
7386.00	33.21	AV	V	36.20	4.51	37.46	36.46	54.00	17.54

802.11b Mode, Chain 1

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	76.25	PK	H	28.12	1.81	0.00	106.18	N/A	N/A
2412.00	73.10	AV	H	28.12	1.81	0.00	103.03	N/A	N/A
2412.00	73.51	PK	V	28.12	1.81	0.00	103.44	N/A	N/A
2412.00	70.34	AV	V	28.12	1.81	0.00	100.27	N/A	N/A
2390.00	25.64	PK	H	28.08	1.80	0.00	55.52	74.00	18.48
2390.00	13.86	AV	H	28.08	1.80	0.00	43.74	54.00	10.26
4824.00	51.89	PK	H	32.95	3.19	37.20	50.83	74.00	23.17
4824.00	44.67	AV	H	32.95	3.19	37.20	43.61	54.00	10.39
7236.00	45.63	PK	H	35.81	4.77	37.27	48.94	74.00	25.06
7236.00	33.10	AV	H	35.81	4.77	37.27	36.41	54.00	17.59
Middle Channel: 2437 MHz									
2437.00	75.36	PK	H	28.17	1.82	0.00	105.35	N/A	N/A
2437.00	72.23	AV	H	28.17	1.82	0.00	102.22	N/A	N/A
2437.00	72.13	PK	V	28.17	1.82	0.00	102.12	N/A	N/A
2437.00	69.04	AV	V	28.17	1.82	0.00	99.03	N/A	N/A
4874.00	51.67	PK	H	33.05	3.26	37.21	50.77	74.00	23.23
4874.00	44.30	AV	H	33.05	3.26	37.21	43.40	54.00	10.60
7311.00	45.70	PK	H	36.01	4.64	37.36	48.99	74.00	25.01
7311.00	33.26	AV	H	36.01	4.64	37.36	36.55	54.00	17.45
High Channel: 2462 MHz									
2462.00	76.47	PK	H	28.22	1.83	0.00	106.52	N/A	N/A
2462.00	73.30	AV	H	28.22	1.83	0.00	103.35	N/A	N/A
2462.00	73.96	PK	V	28.22	1.83	0.00	104.01	N/A	N/A
2462.00	70.86	AV	V	28.22	1.83	0.00	100.91	N/A	N/A
2483.50	26.16	PK	H	28.27	1.84	0.00	56.27	74.00	17.73
2483.50	14.38	AV	H	28.27	1.84	0.00	44.49	54.00	9.51
4924.00	51.93	PK	H	33.15	3.27	37.22	51.13	74.00	22.87
4924.00	44.65	AV	H	33.15	3.27	37.22	43.85	54.00	10.15
7386.00	45.62	PK	H	36.20	4.51	37.46	48.87	74.00	25.13
7386.00	33.21	AV	H	36.20	4.51	37.46	36.46	54.00	17.54

802.11g Mode, Chain 0

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	72.61	PK	H	28.12	1.81	0.00	102.54	N/A	N/A
2412.00	63.45	AV	H	28.12	1.81	0.00	93.38	N/A	N/A
2412.00	78.63	PK	V	28.12	1.81	0.00	108.56	N/A	N/A
2412.00	69.79	AV	V	28.12	1.81	0.00	99.72	N/A	N/A
2390.00	40.66	PK	V	28.08	1.80	0.00	70.54	74.00	3.46
2390.00	22.78	AV	V	28.08	1.80	0.00	52.66	54.00	1.34
4824.00	52.81	PK	V	32.95	3.19	37.20	51.75	74.00	22.25
4824.00	40.77	AV	V	32.95	3.19	37.20	39.71	54.00	14.29
7236.00	45.76	PK	V	35.81	4.77	37.27	49.07	74.00	24.93
7236.00	33.32	AV	V	35.81	4.77	37.27	36.63	54.00	17.37
Middle Channel: 2437 MHz									
2437.00	71.10	PK	H	28.17	1.82	0.00	101.09	N/A	N/A
2437.00	62.04	AV	H	28.17	1.82	0.00	92.03	N/A	N/A
2437.00	77.23	PK	V	28.17	1.82	0.00	107.22	N/A	N/A
2437.00	68.14	AV	V	28.17	1.82	0.00	98.13	N/A	N/A
4874.00	51.63	PK	V	33.05	3.26	37.21	50.73	74.00	23.27
4874.00	39.46	AV	V	33.05	3.26	37.21	38.56	54.00	15.44
7311.00	45.52	PK	V	36.01	4.64	37.36	48.81	74.00	25.19
7311.00	33.10	AV	V	36.01	4.64	37.36	36.39	54.00	17.61
High Channel: 2462 MHz									
2462.00	71.54	PK	H	28.22	1.83	0.00	101.59	N/A	N/A
2462.00	62.37	AV	H	28.22	1.83	0.00	92.42	N/A	N/A
2462.00	77.29	PK	V	28.22	1.83	0.00	107.34	N/A	N/A
2462.00	68.16	AV	V	28.22	1.83	0.00	98.21	N/A	N/A
2483.50	39.46	PK	V	28.27	1.84	0.00	69.57	74.00	4.43
2483.50	21.93	AV	V	28.27	1.84	0.00	52.04	54.00	1.96
4924.00	52.96	PK	V	33.15	3.27	37.22	52.16	74.00	21.84
4924.00	40.87	AV	V	33.15	3.27	37.22	40.07	54.00	13.93
7386.00	45.67	PK	V	36.20	4.51	37.46	48.92	74.00	25.08
7386.00	33.26	AV	V	36.20	4.51	37.46	36.51	54.00	17.49

802.11g Mode, Chain 1

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	77.34	PK	H	28.12	1.81	0.00	107.27	N/A	N/A
2412.00	68.16	AV	H	28.12	1.81	0.00	98.09	N/A	N/A
2412.00	73.85	PK	V	28.12	1.81	0.00	103.78	N/A	N/A
2412.00	64.75	AV	V	28.12	1.81	0.00	94.68	N/A	N/A
2390.00	26.13	PK	H	28.08	1.80	0.00	56.01	74.00	17.99
2390.00	13.75	AV	H	28.08	1.80	0.00	43.63	54.00	10.37
4824.00	50.87	PK	H	32.95	3.19	37.20	49.81	74.00	24.19
4824.00	38.46	AV	H	32.95	3.19	37.20	37.40	54.00	16.60
7236.00	45.50	PK	H	35.81	4.77	37.27	48.81	74.00	25.19
7236.00	33.07	AV	H	35.81	4.77	37.27	36.38	54.00	17.62
Middle Channel: 2437 MHz									
2437.00	77.04	PK	H	28.17	1.82	0.00	107.03	N/A	N/A
2437.00	67.88	AV	H	28.17	1.82	0.00	97.87	N/A	N/A
2437.00	73.65	PK	V	28.17	1.82	0.00	103.64	N/A	N/A
2437.00	64.53	AV	V	28.17	1.82	0.00	94.52	N/A	N/A
4874.00	50.54	PK	H	33.05	3.26	37.21	49.64	74.00	24.36
4874.00	38.13	AV	H	33.05	3.26	37.21	37.23	54.00	16.77
7311.00	45.69	PK	H	36.01	4.64	37.36	48.98	74.00	25.02
7311.00	33.25	AV	H	36.01	4.64	37.36	36.54	54.00	17.46
High Channel: 2462 MHz									
2462.00	77.45	PK	H	28.22	1.83	0.00	107.50	N/A	N/A
2462.00	68.34	AV	H	28.22	1.83	0.00	98.39	N/A	N/A
2462.00	74.09	PK	V	28.22	1.83	0.00	104.14	N/A	N/A
2462.00	64.87	AV	V	28.22	1.83	0.00	94.92	N/A	N/A
2483.50	37.69	PK	H	28.27	1.84	0.00	67.80	74.00	6.20
2483.50	20.02	AV	H	28.27	1.84	0.00	50.13	54.00	3.87
4924.00	51.12	PK	H	33.15	3.27	37.22	50.32	74.00	23.68
4924.00	38.96	AV	H	33.15	3.27	37.22	38.16	54.00	15.84
7386.00	45.40	PK	H	36.20	4.51	37.46	48.65	74.00	25.35
7386.00	32.98	AV	H	36.20	4.51	37.46	36.23	54.00	17.77

802.11n ht20 Mode(MIMO was the worst):




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	77.36	PK	H	28.12	1.81	0.00	107.29	N/A	N/A
2412.00	68.10	AV	H	28.12	1.81	0.00	98.03	N/A	N/A
2412.00	78.99	PK	V	28.12	1.81	0.00	108.92	N/A	N/A
2412.00	69.87	AV	V	28.12	1.81	0.00	99.80	N/A	N/A
2390.00	34.85	PK	V	28.08	1.80	0.00	64.73	74.00	9.27
2390.00	22.73	AV	V	28.08	1.80	0.00	52.61	54.00	1.39
4824.00	54.27	PK	V	32.95	3.19	37.20	53.21	74.00	20.79
4824.00	42.44	AV	V	32.95	3.19	37.20	41.38	54.00	12.62
7236.00	45.68	PK	V	35.81	4.77	37.27	48.99	74.00	25.01
7236.00	33.30	AV	V	35.81	4.77	37.27	36.61	54.00	17.39
Middle Channel: 2437 MHz									
2437.00	76.39	PK	H	28.17	1.82	0.00	106.38	N/A	N/A
2437.00	66.40	AV	H	28.17	1.82	0.00	96.39	N/A	N/A
2437.00	77.33	PK	V	28.17	1.82	0.00	107.32	N/A	N/A
2437.00	67.38	AV	V	28.17	1.82	0.00	97.37	N/A	N/A
4874.00	54.36	PK	V	33.05	3.26	37.21	53.46	74.00	20.54
4874.00	42.30	AV	V	33.05	3.26	37.21	41.40	54.00	12.60
7311.00	46.10	PK	V	36.01	4.64	37.36	49.39	74.00	24.61
7311.00	33.54	AV	V	36.01	4.64	37.36	36.83	54.00	17.17
High Channel: 2462 MHz									
2462.00	75.94	PK	H	28.22	1.83	0.00	105.99	N/A	N/A
2462.00	66.04	AV	H	28.22	1.83	0.00	96.09	N/A	N/A
2462.00	77.55	PK	V	28.22	1.83	0.00	107.60	N/A	N/A
2462.00	67.49	AV	V	28.22	1.83	0.00	97.54	N/A	N/A
2483.50	39.01	PK	V	28.27	1.84	0.00	69.12	74.00	4.88
2483.50	22.51	AV	V	28.27	1.84	0.00	52.62	54.00	1.38
4924.00	54.89	PK	V	33.15	3.27	37.22	54.09	74.00	19.91
4924.00	42.57	AV	V	33.15	3.27	37.22	41.77	54.00	12.23
7386.00	45.67	PK	V	36.20	4.51	37.46	48.92	74.00	25.08
7386.00	33.24	AV	V	36.20	4.51	37.46	36.49	54.00	17.51

802.11n ht40 Mode(MIMO was the worst):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2422 MHz									
2422.00	73.34	PK	H	28.14	1.81	0.00	103.29	N/A	N/A
2422.00	63.13	AV	H	28.14	1.81	0.00	93.08	N/A	N/A
2422.00	73.77	PK	V	28.14	1.81	0.00	103.72	N/A	N/A
2422.00	63.37	AV	V	28.14	1.81	0.00	93.32	N/A	N/A
2390.00	38.42	PK	V	28.08	1.80	0.00	68.30	74.00	5.70
2390.00	21.66	AV	V	28.08	1.80	0.00	51.54	54.00	2.46
4844.00	49.81	PK	V	32.99	3.22	37.20	48.82	74.00	25.18
4844.00	37.45	AV	V	32.99	3.22	37.20	36.46	54.00	17.54
7266.00	45.63	PK	V	35.89	4.72	37.31	48.93	74.00	25.07
7266.00	33.24	AV	V	35.89	4.72	37.31	36.54	54.00	17.46
Middle Channel: 2437 MHz									
2437.00	72.55	PK	H	28.17	1.82	0.00	102.54	N/A	N/A
2437.00	62.34	AV	H	28.17	1.82	0.00	92.33	N/A	N/A
2437.00	73.04	PK	V	28.17	1.82	0.00	103.03	N/A	N/A
2437.00	62.89	AV	V	28.17	1.82	0.00	92.88	N/A	N/A
4874.00	49.66	PK	V	33.05	3.26	37.21	48.76	74.00	25.24
4874.00	37.19	AV	V	33.05	3.26	37.21	36.29	54.00	17.71
7311.00	45.70	PK	V	36.01	4.64	37.36	48.99	74.00	25.01
7311.00	33.35	AV	V	36.01	4.64	37.36	36.64	54.00	17.36
High Channel: 2452 MHz									
2452.00	73.36	PK	H	28.20	1.83	0.00	103.39	N/A	N/A
2452.00	63.20	AV	H	28.20	1.83	0.00	93.23	N/A	N/A
2452.00	73.83	PK	V	28.20	1.83	0.00	103.86	N/A	N/A
2452.00	63.76	AV	V	28.20	1.83	0.00	93.79	N/A	N/A
2483.50	37.61	PK	V	28.27	1.84	0.00	67.72	74.00	6.28
2483.50	22.77	AV	V	28.27	1.84	0.00	52.88	54.00	1.12
4904.00	50.01	PK	V	33.11	3.30	37.21	49.21	74.00	24.79
4904.00	37.86	AV	V	33.11	3.30	37.21	37.06	54.00	16.94
7356.00	45.83	PK	V	36.13	4.56	37.42	49.10	74.00	24.91
7356.00	33.46	AV	V	36.13	4.56	37.42	36.73	54.00	17.27




Test plots(Chain 0, 802.11 b mode Low channel was the worst)
Horizontal:

Fundamental
Test with Band
Rejection Filter

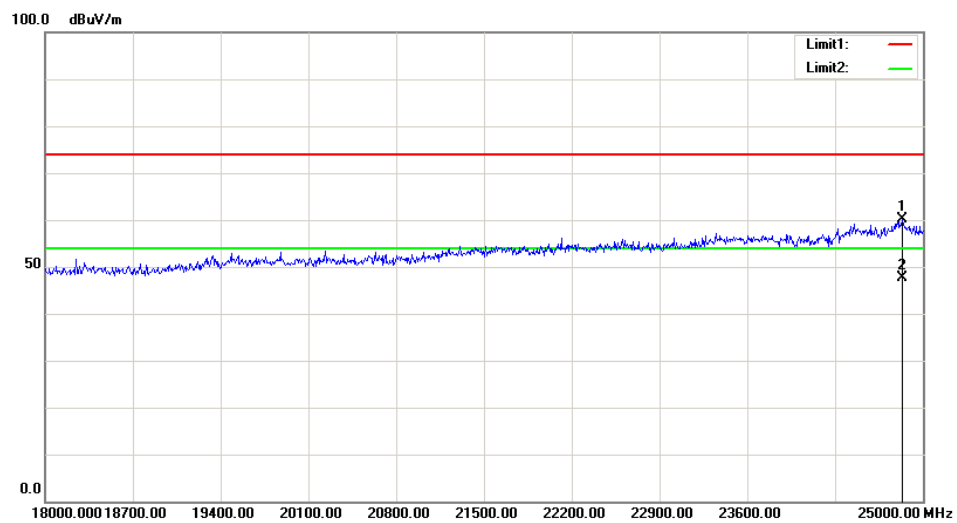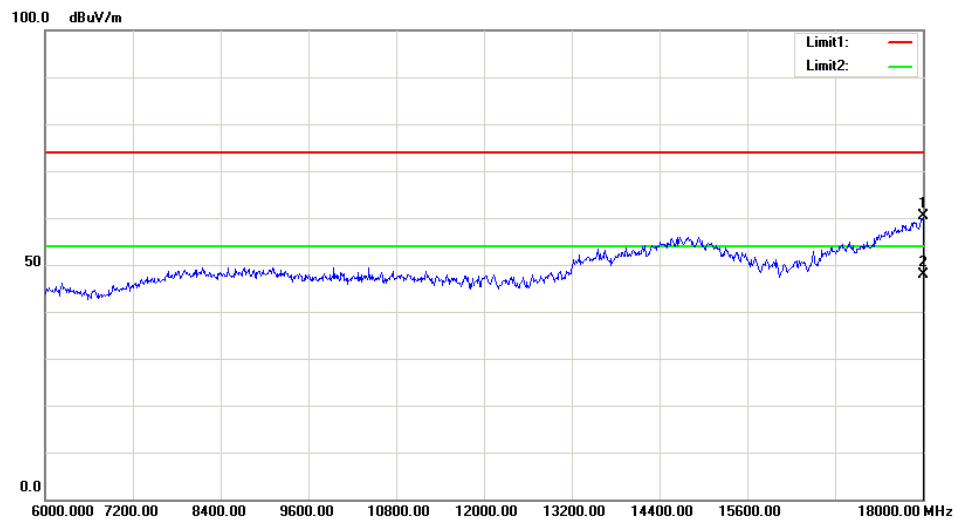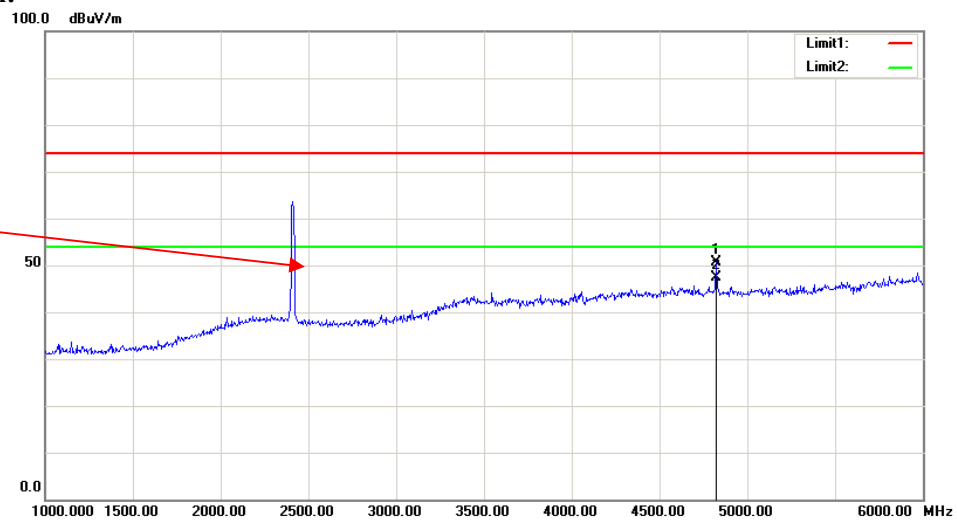

Vertical:

Fundamental
Test with Band
Rejection Filter

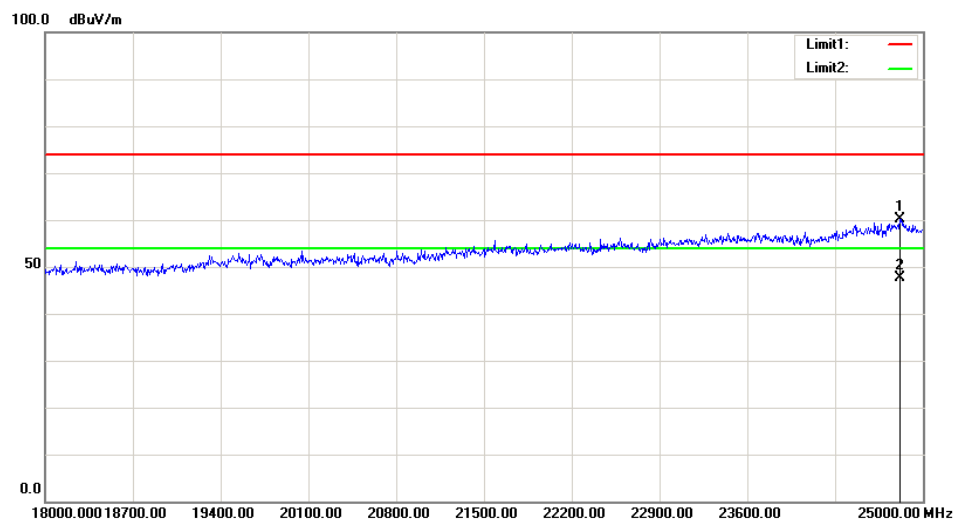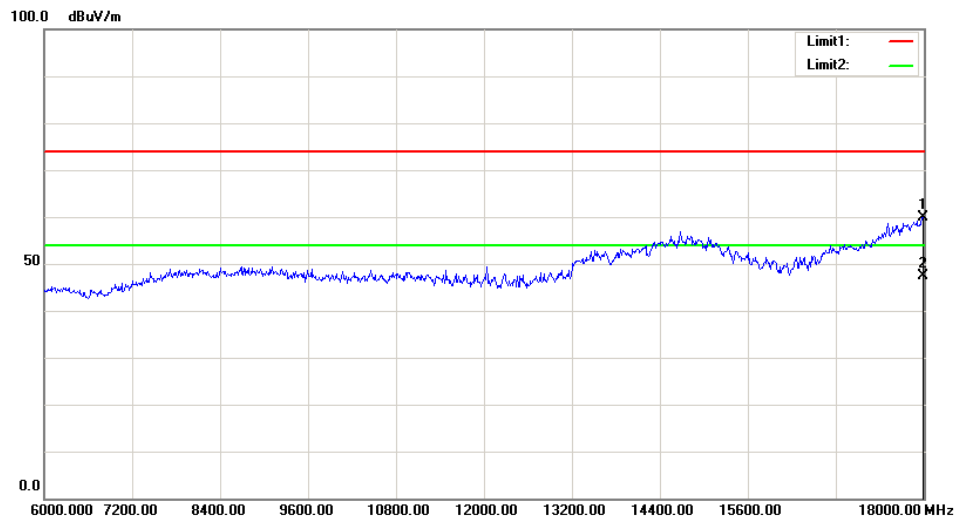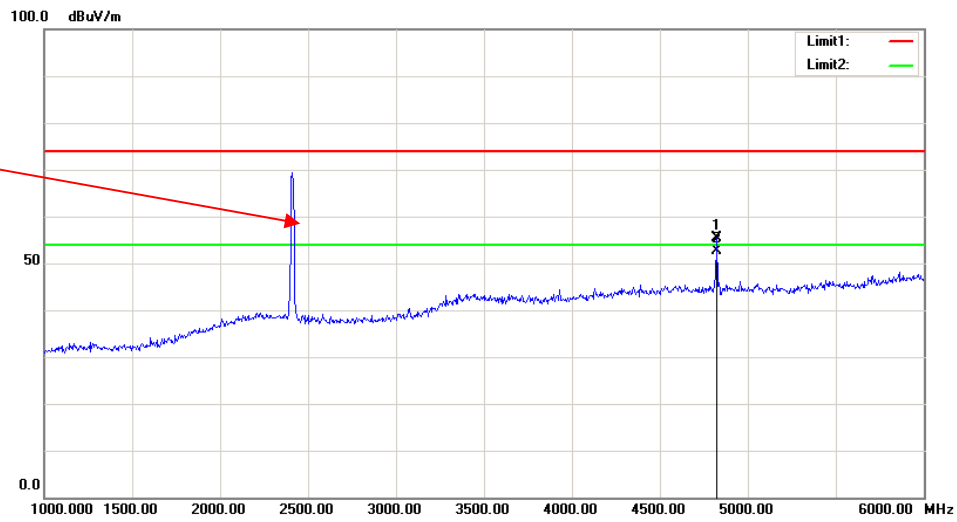

FCC §15.247(a) (2)–6 dB EMISSION BANDWIDTH


Applicable Standard

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2018-08-03	2019-08-03
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.9 °C
Relative Humidity:	43 %
ATM Pressure:	100.5 kPa

* The testing was performed by Tiago Huang on 2018-11-24& 2018-12-08.


Test Mode: Transmitting

Test Result: Compliant. Test only performed at chain 0, please refer to the following table and plots.


Test mode	Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (MHz)
802.11b	Low	2412	9.459	14.749	≥ 0.5
	Middle	2437	9.940	16.754	≥ 0.5
	High	2462	8.898	14.589	≥ 0.5
802.11g	Low	2412	15.150	16.673	≥ 0.5
	Middle	2437	15.230	18.196	≥ 0.5
	High	2462	13.868	16.673	≥ 0.5
802.11n ht20	Low	2412	15.150	17.395	≥ 0.5
	Middle	2437	15.952	19.479	≥ 0.5
	High	2462	13.868	17.796	≥ 0.5
802.11n ht40	Low	2422	32.866	37.034	≥ 0.5
	Middle	2437	36.232	38.317	≥ 0.5
	High	2452	22.605	35.591	≥ 0.5

6dB bandwidth


802.11b Low Channel

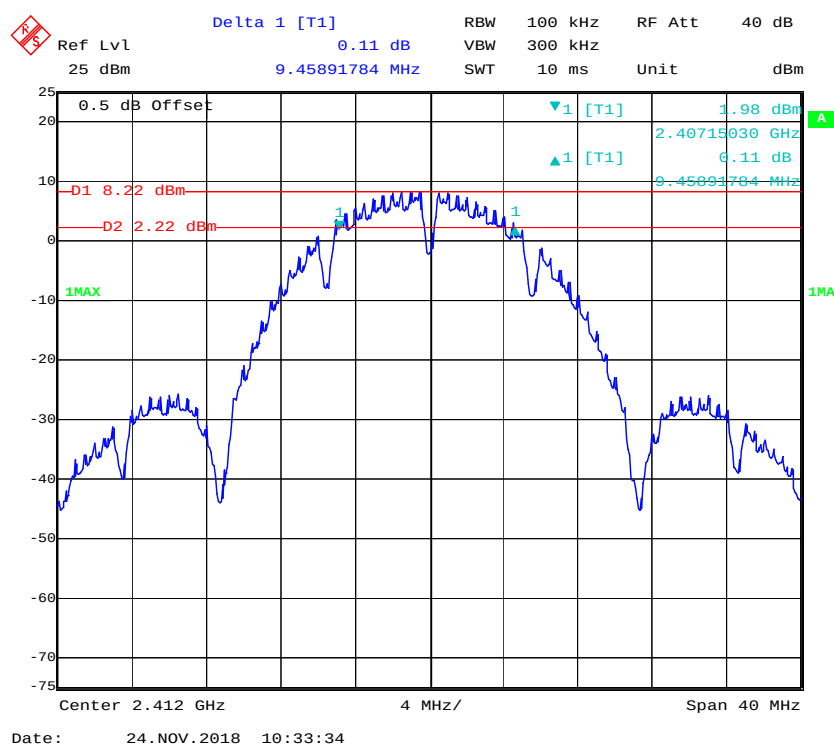


802.11b Middle Channel

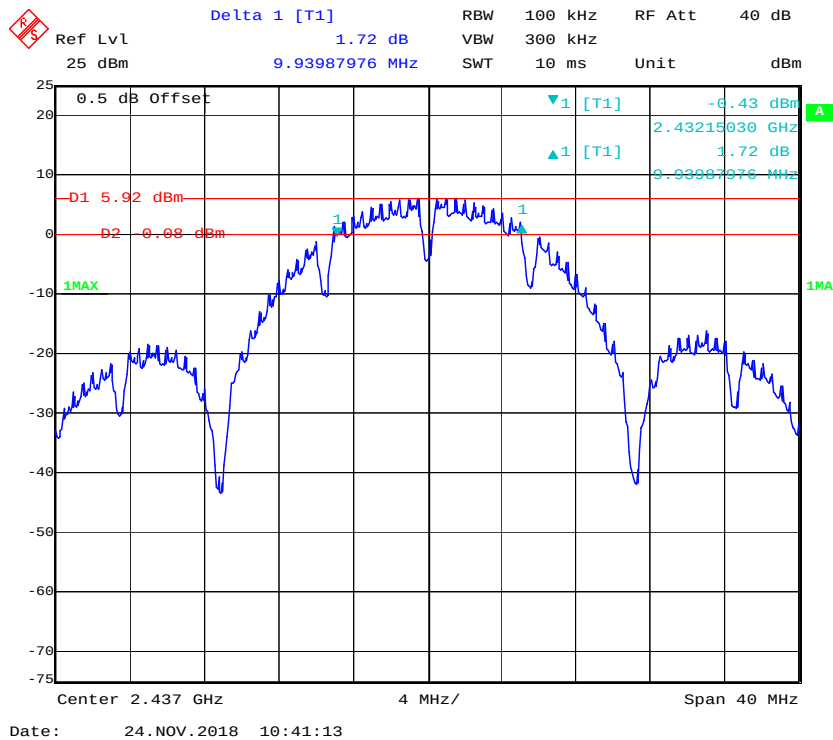

802.11b High Channel

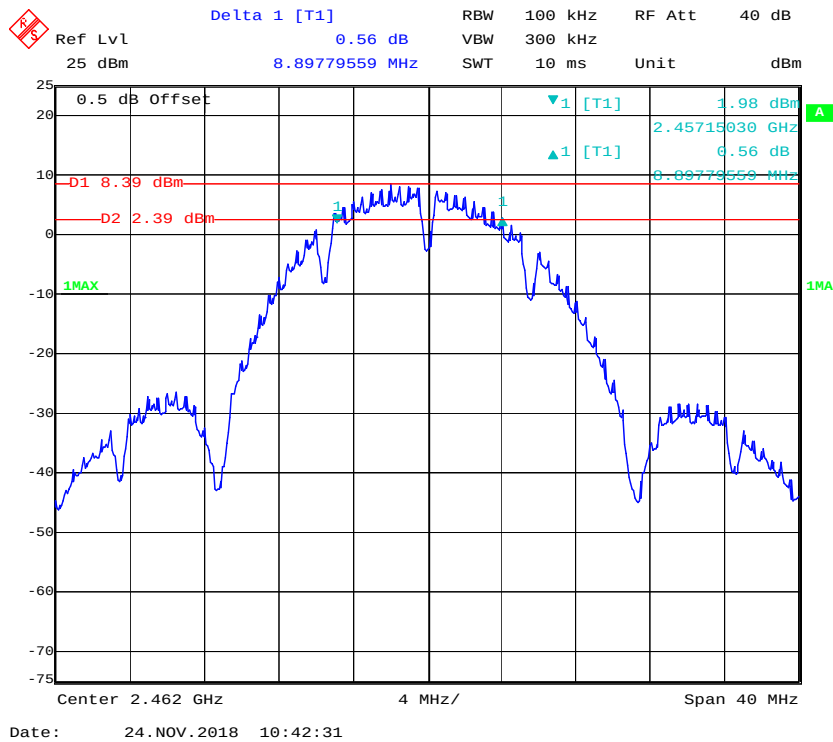


802.11g Low Channel

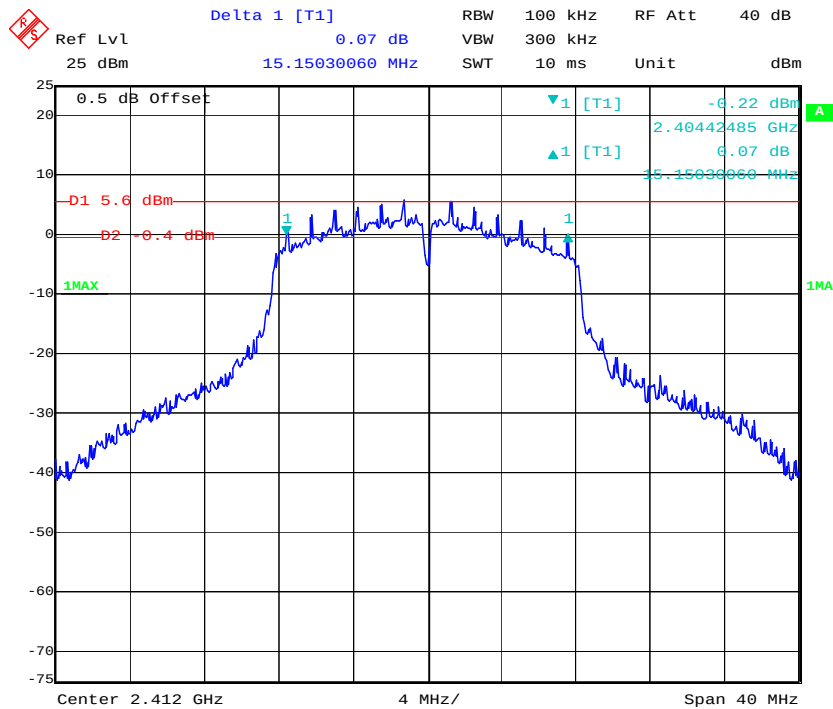


Date: 24.NOV.2018 12:08:19


802.11g Middle Channel

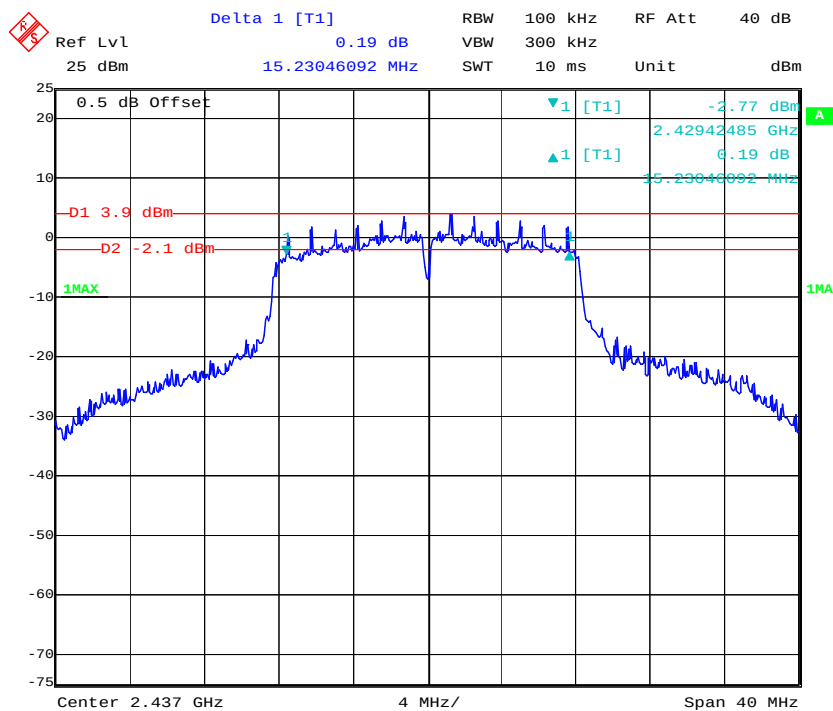

Date: 24.NOV.2018 12:12:26

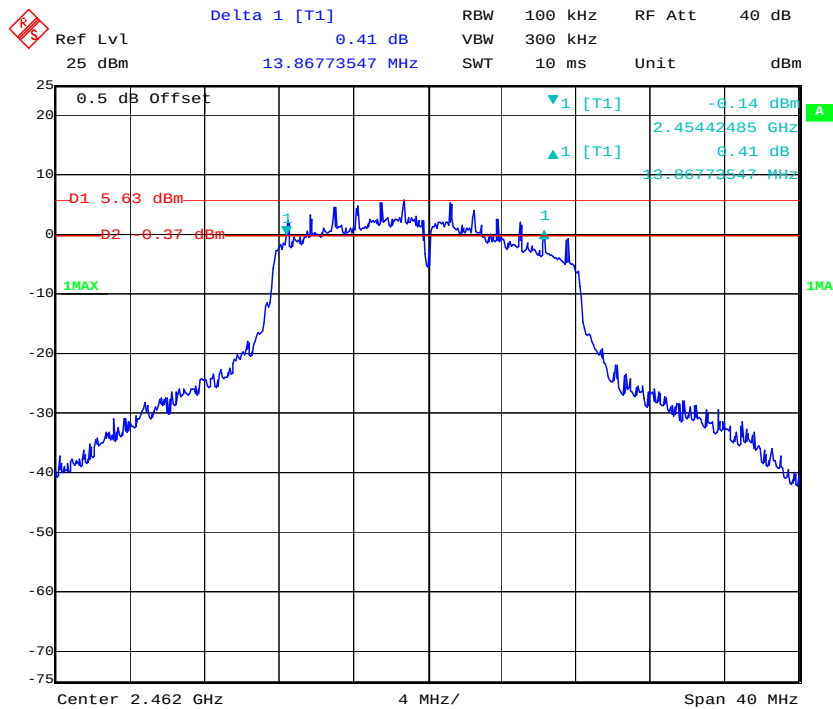
802.11g High Channel

Date: 24.NOV.2018 12:15:59

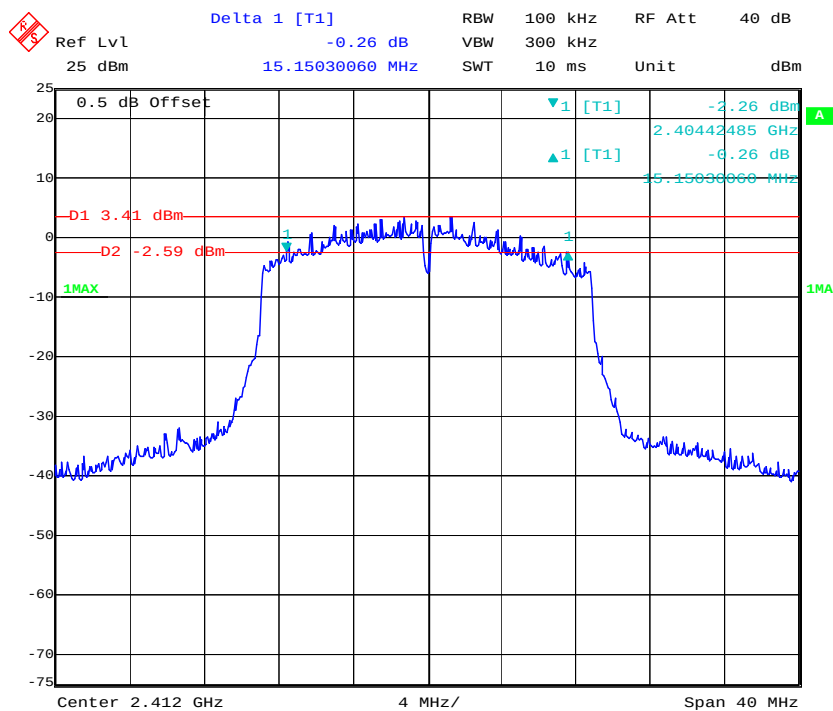802.11n ht20 Low Channel


Date: 24.NOV.2018 12:20:17

802.11n ht20 Middle Channel

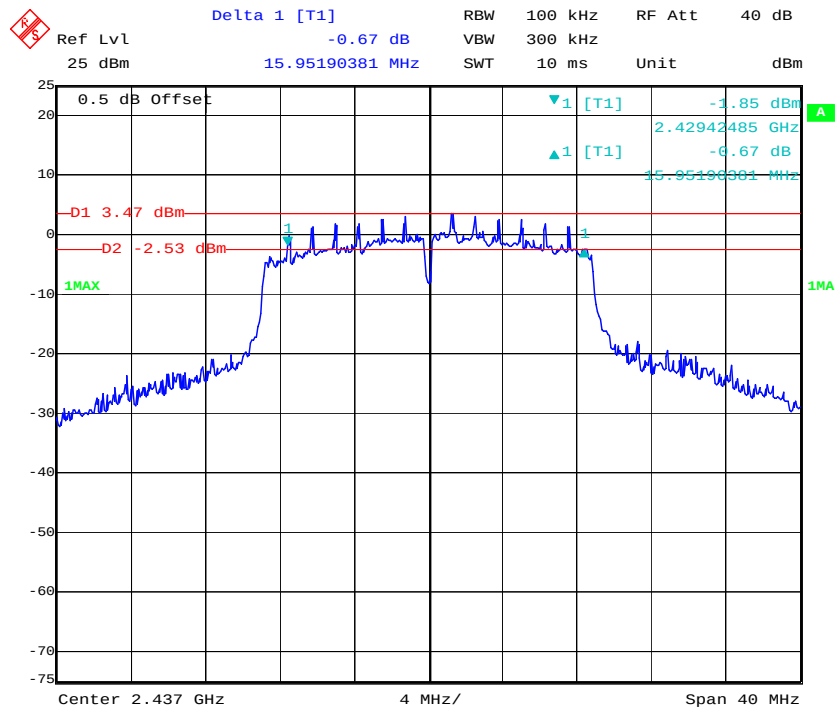


Date: 24.NOV.2018 12:23:55

802.11n ht20 High Channel

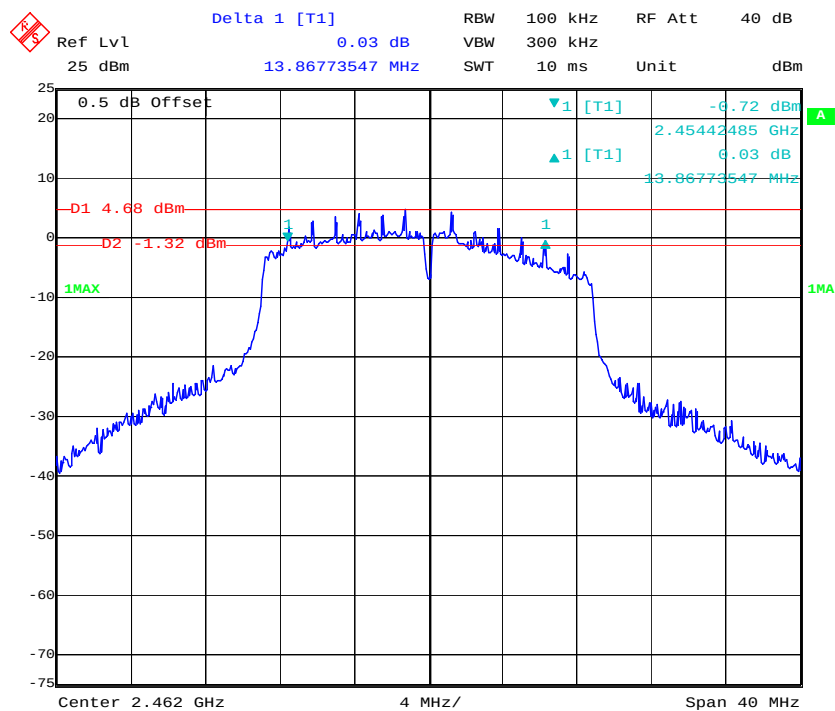


Date: 24.NOV.2018 12:27:43

802.11n ht40 Low Channel

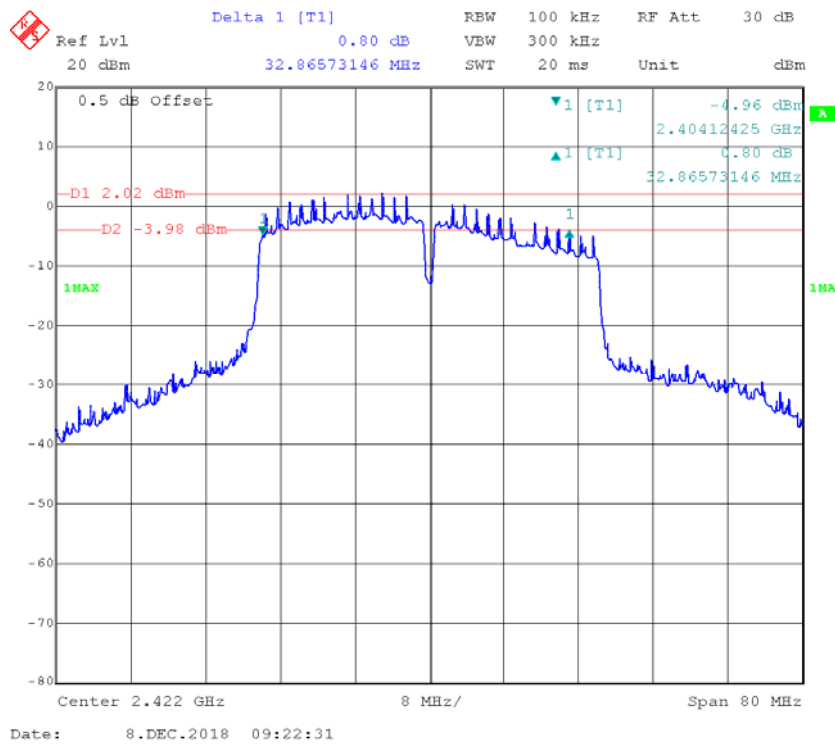


802.11n ht40 Middle Channel

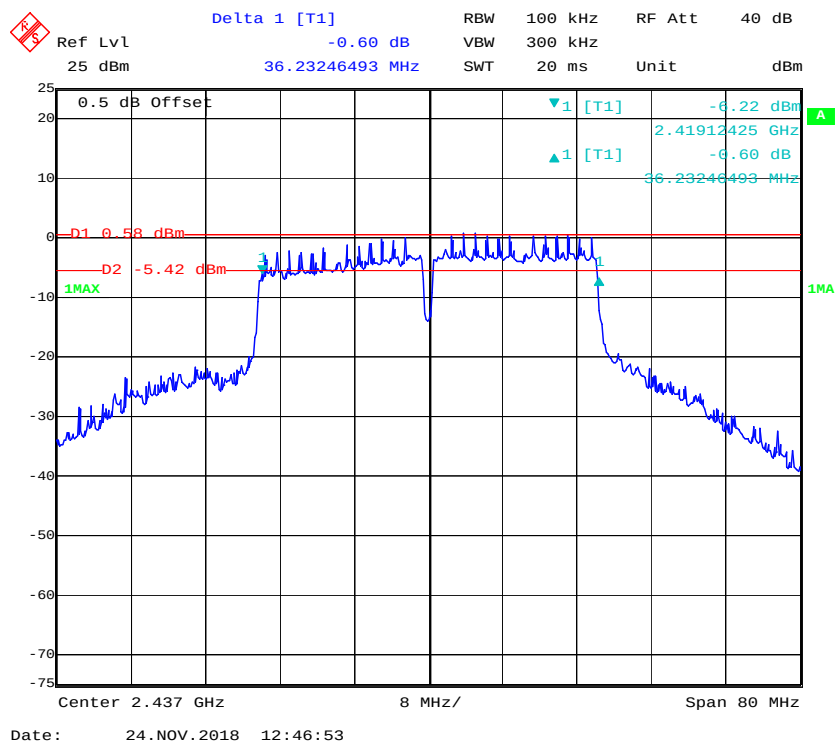

[illegible]

802.11b Low Channel

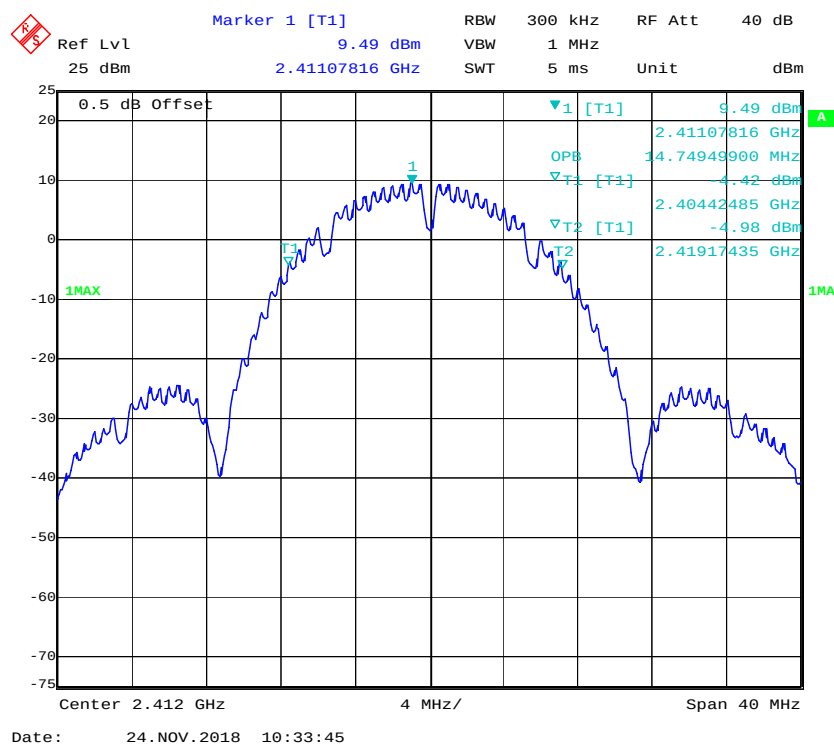

Marker 1 [T1]

Ref Lvl 25 dBm

7.14 dBm

2.43806200 GHz

RBW 300 kHz

VBW 1 MHz

SWT 5 ms

RF Att 40 dB

Unit dBm

0.5 dB Offset

1 [T1] 7.14 dBm

2.43806200 GHz

OPB 16.75356701 MHz

T1 [T1] -6.47 dBm

2.42886373 GHz

T2 [T1] -8.23 dBm

2.44561723 GHz

1MAX

1MA

Center 2.437 GHz

4 MHz/

Span 40 MHz

Date: 24.NOV.2018 10:41:20

Marker 1 [T1]

Ref Lvl 25 dBm

9.05 dBm

2.46107816 GHz

RBW 300 kHz

VBW 1 MHz

SWT 5 ms

RF Att 40 dB

Unit dBm

0.5 dB Offset

1MAX

1

▼1 [T1] 9.05 dBm

OPB 2.46107816 GHz

▼T1 [T1] 2.458917836 MHz

▼T2 [T1] 2.45434469 GHz


2.46893387 GHz

Center 2.462 GHz


4 MHz/

Span 40 MHz



Date: 24.NOV.2018 10:42:41

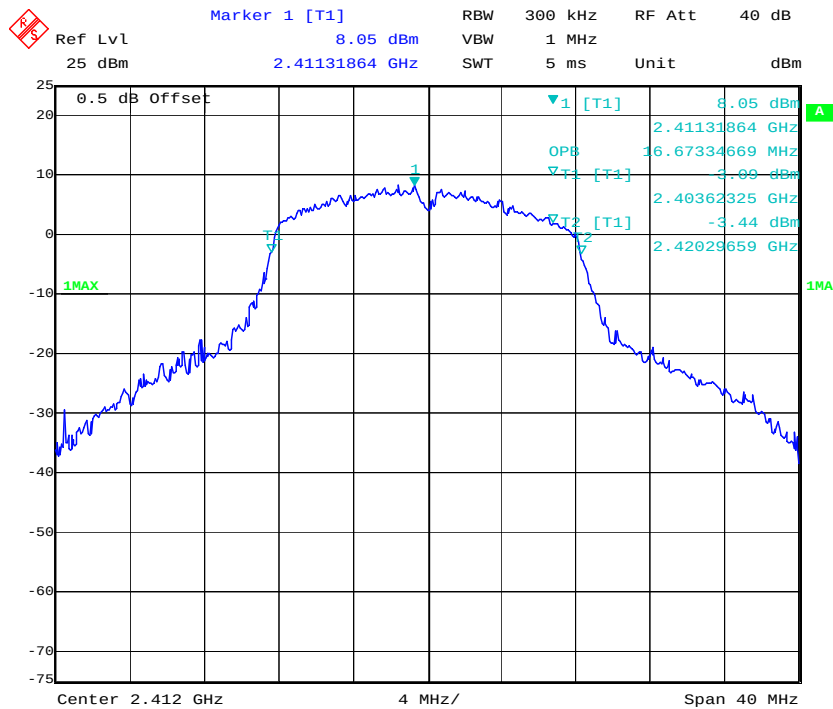802.11g Low Channel


Date: 24.NOV.2018 12:08:41

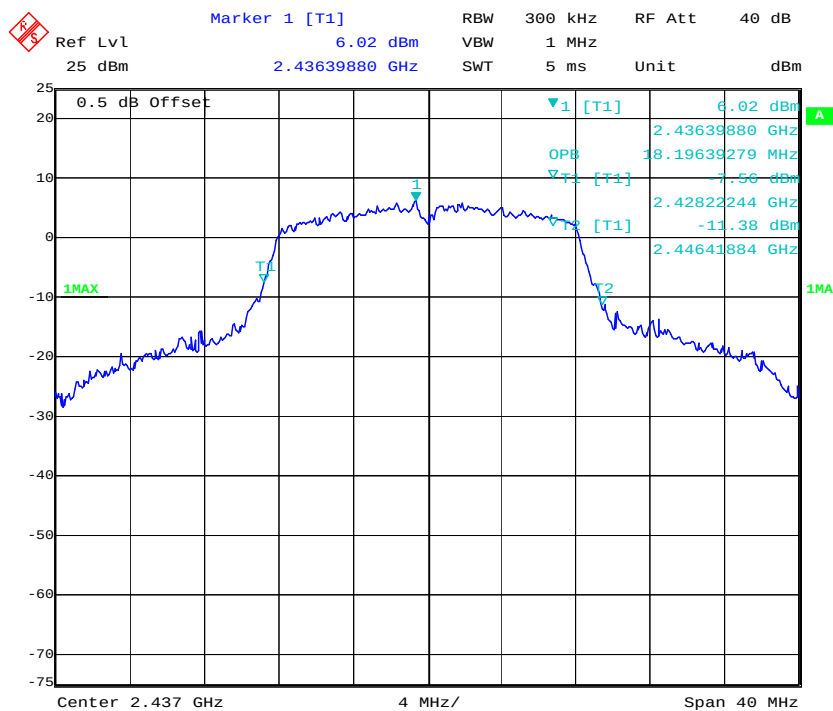802.11g Middle Channel


Date: 24.NOV.2018 12:12:49

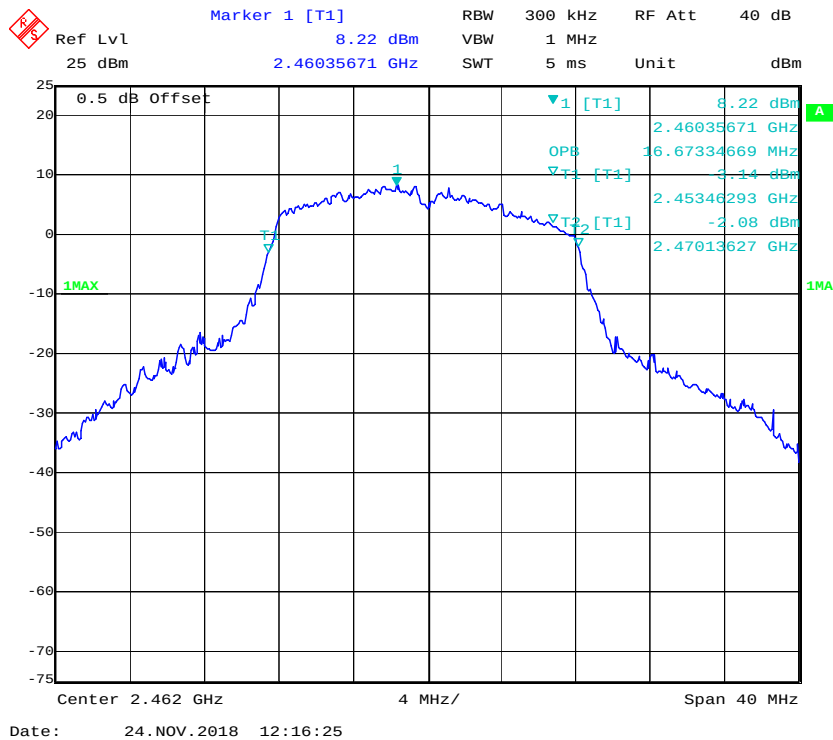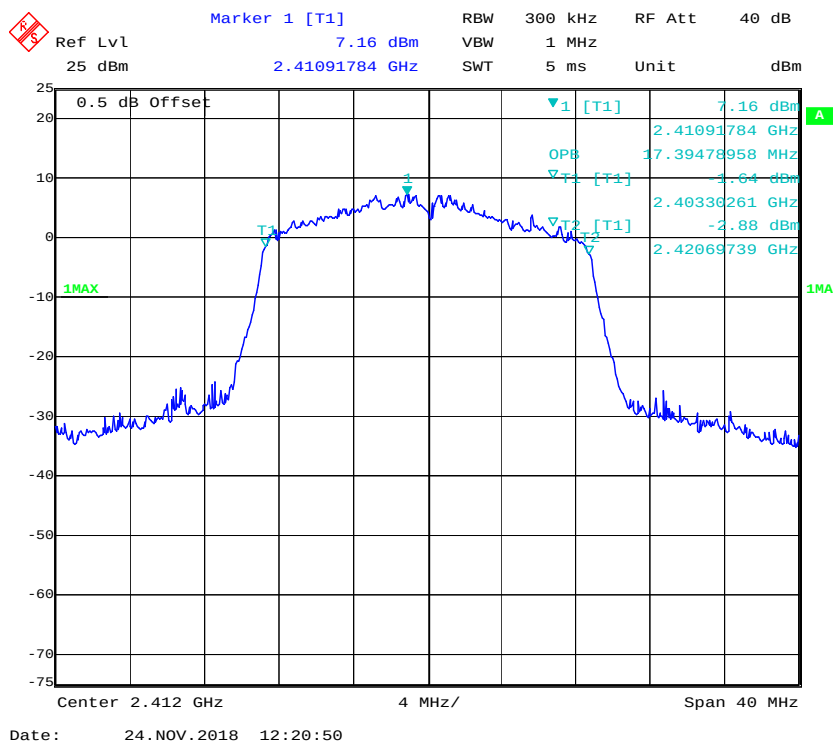802.11g High Channel**802.11n ht20 Low Channel**

802.11n ht20 Middle Channel

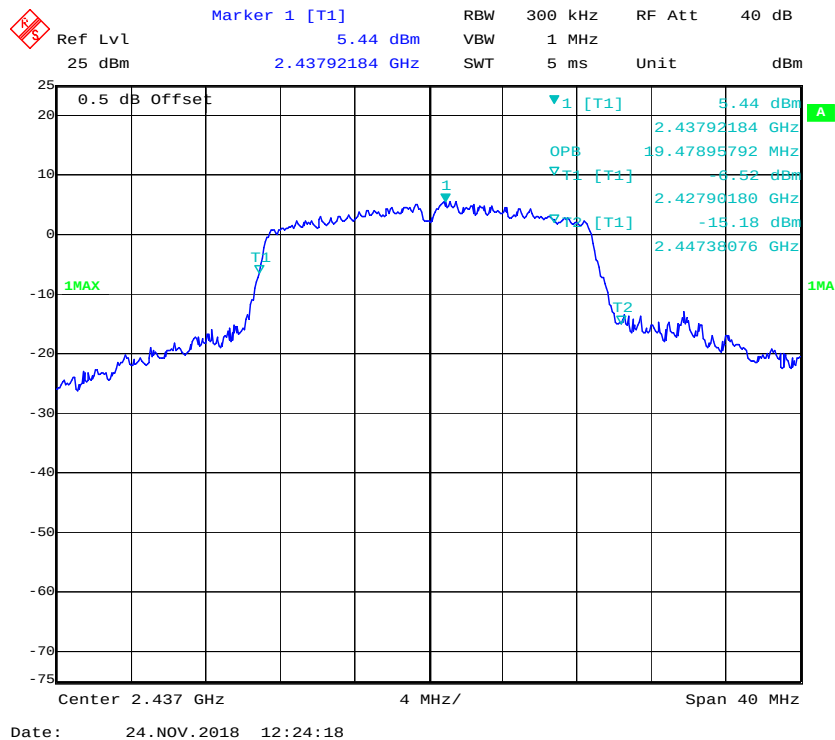

802.11n ht20 High Channel

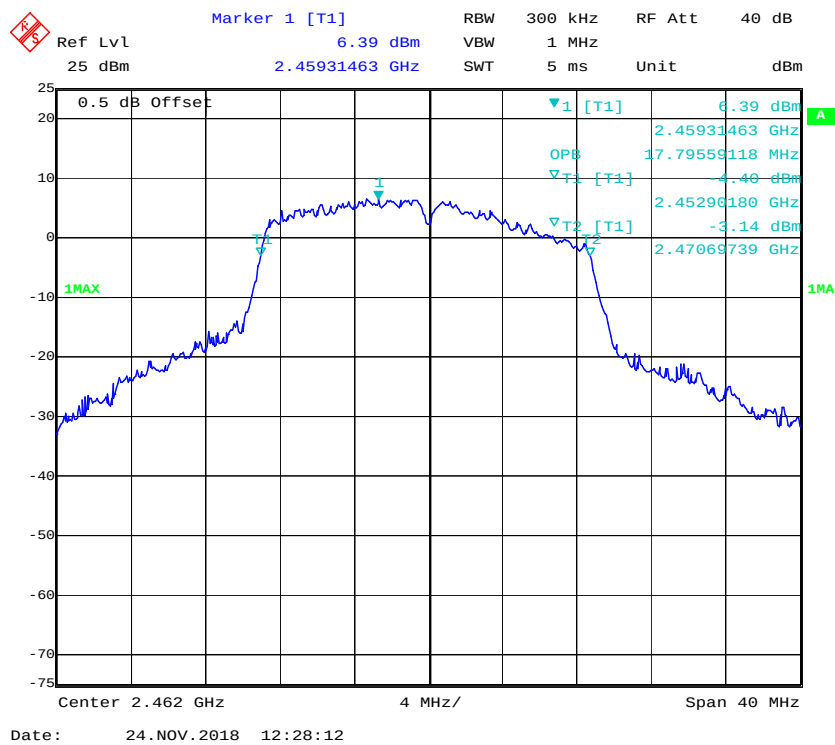

Ref Lvl 25 dBm

Marker 1 [T1] 10.09 dBm

RBW 1 MHz

VBW 3 MHz

SWT 5 ms

RF Att 40 dB

Unit dBm

0.5 dB Offset

10.09 dBm

2.41518637 GHz

37.03406814 MHz

6.96 dBm

2.40332265 GHz

-1.58 dBm

2.44035671 GHz

1MAX

1MA

Center 2.422 GHz

8 MHz/

Span 80 MHz

Date: 24.NOV.2018 12:40:04

Ref Lvl 25 dBm

Marker 1 [T1] 8.23 dBm

RBW 1 MHz

VBW 3 MHz

RF Att 40 dB

SWT 5 ms

Unit dBm

0.5 dB Offset

1MAX

1MA

Center 2.437 GHz

8 MHz/

Span 80 MHz

2.44509619 GHz

8.23 dBm

2.41806200 GHz

-2.05 dBm

2.45631864 GHz

2.44509619 GHz

38.31663327 MHz

3.53 dBm


1 [T1]

OPB

T1 [T1]

T2 [T1]

802.11n ht40 High Channel

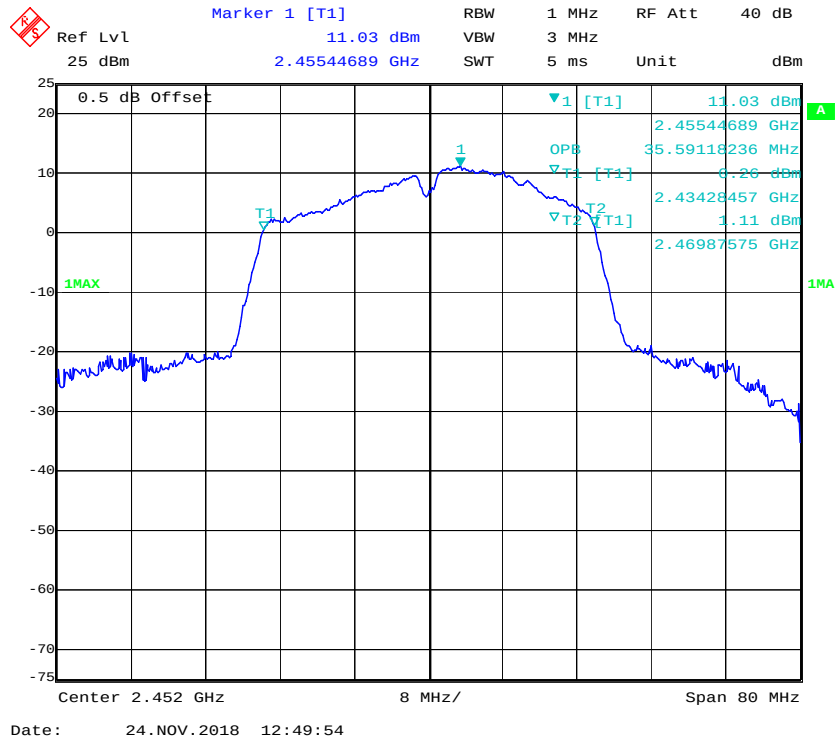


FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER**Applicable Standard**

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.
4. Set the power Meter to test Peak output power, record the result as peak power.
5. Set the power meter to test average output power, record the result as average power.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
E-Microwave	Blocking Control	EMDCB-00036	OE01203218	2018-05-06	2019-05-06
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2017-12-11	2018-12-11

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25.9 °C
Relative Humidity:	43%
ATM Pressure:	100.5 kPa

* The testing was performed by Tiago Huang on 2018-11-24.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table.

Test mode	Channel	Frequency (MHz)	Max Peak Conducted Output Power (dBm)			Limit (dBm)
			Chain 0	Chain 1	Total	
802.11b	Low	2412	19.86	19.65	/	30
	Middle	2437	18.38	19.35	/	30
	High	2462	19.87	19.47	/	30
802.11g	Low	2412	21.25	21.93	/	30
	Middle	2437	19.94	19.75	/	30
	High	2462	21.37	21.87	/	30
802.11n ht20	Low	2412	21.73	21.17	24.47	30
	Middle	2437	19.11	19.63	22.39	30
	High	2462	21.17	21.72	24.46	30
802.11n ht40	Low	2422	21.26	21.14	24.21	30
	Middle	2437	20.71	20.79	23.76	30
	High	2452	21.56	20.98	24.29	30

Note:

The duty cycle was calculated into the reading already.

The maximum antenna gain is 4.0 dBi. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

So:

Directional gain = $G_{ANT} + \text{Array Gain} = 4.0 \text{ dBi} < 6 \text{ dBi}$

FCC §15.247(d)– 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

According to FCC§15.247(d):In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2018-08-03	2019-08-03
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	25.9 °C
Relative Humidity:	43 %
ATM Pressure:	100.5 kPa



The testing was performed by Tiago Huang on 2018-11-24

Test mode: Transmitting


Test Result: Compliant. Please refer to following plots.

Chain 0

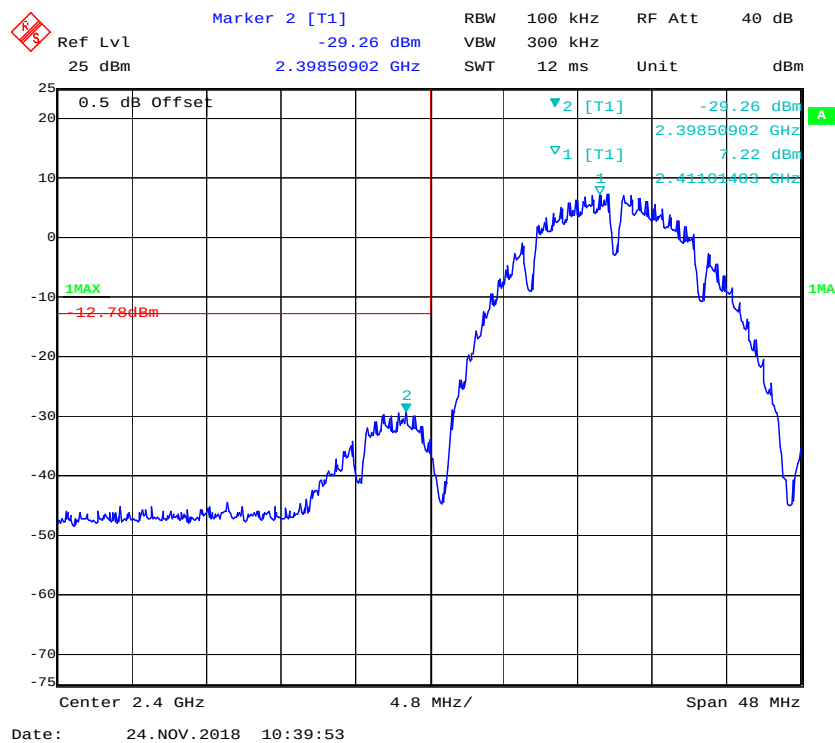
802.11b: Band Edge, Left Side

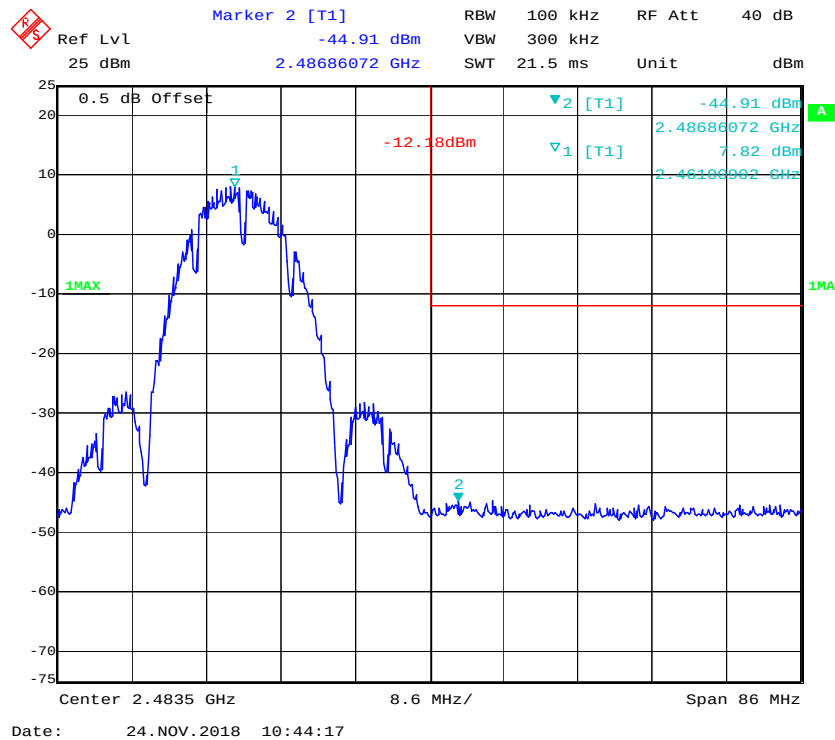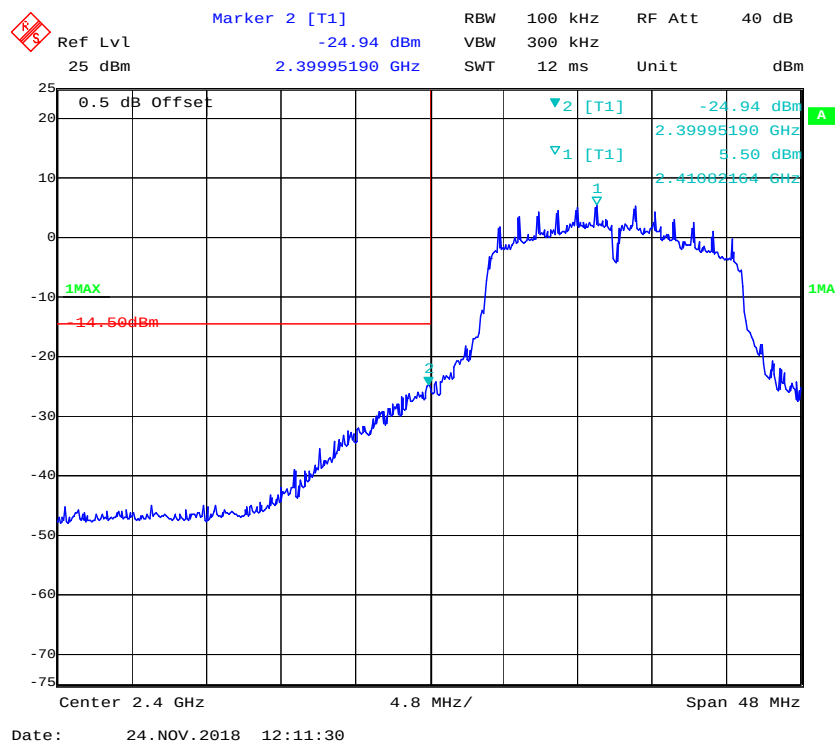
802.11b: Band Edge, Right Side**802.11g: Band Edge, Left Side**

802.11n ht20 Band Edge, Right Side

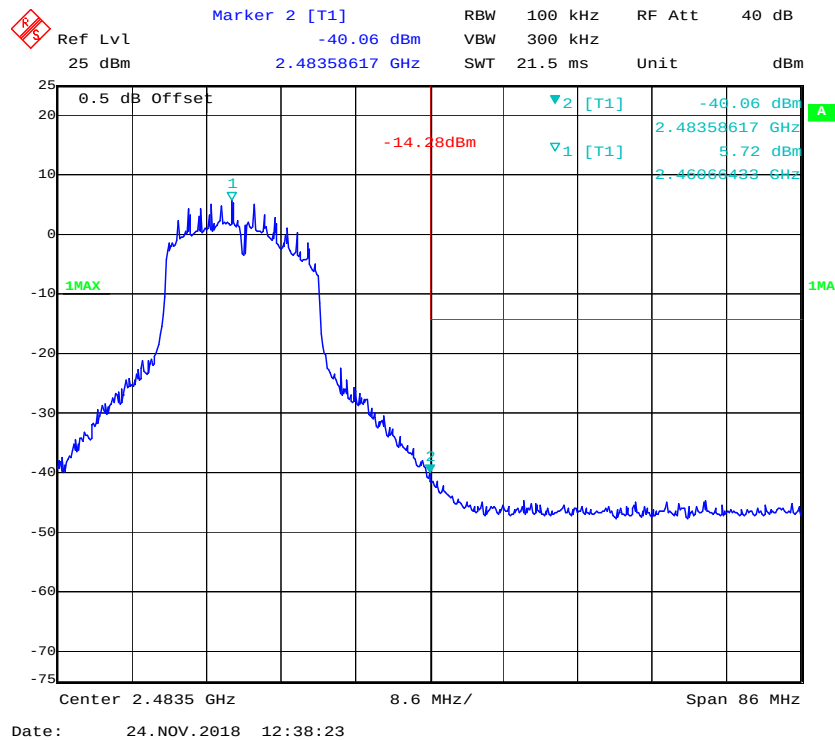


802.11n ht40: Band Edge, Left Side

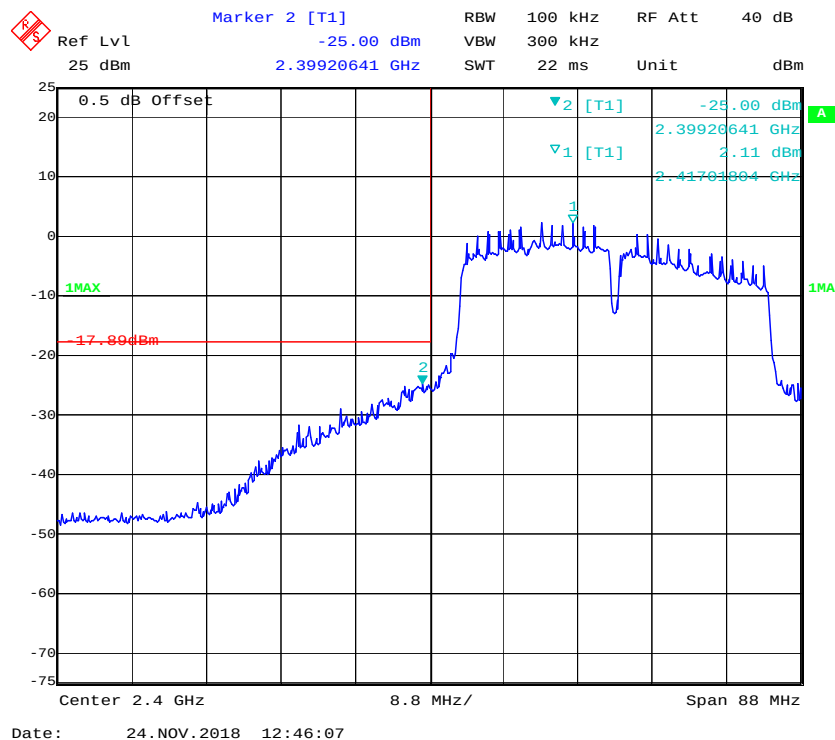


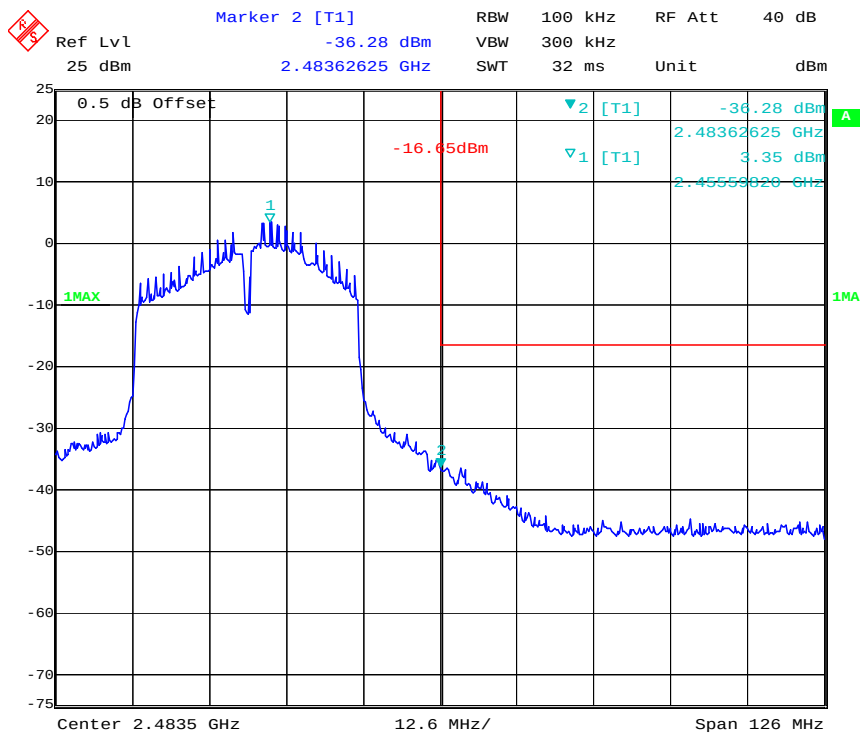
802.11n ht40 Band Edge, Right Side



Date: 24.NOV.2018 12:51:48

Chain 1

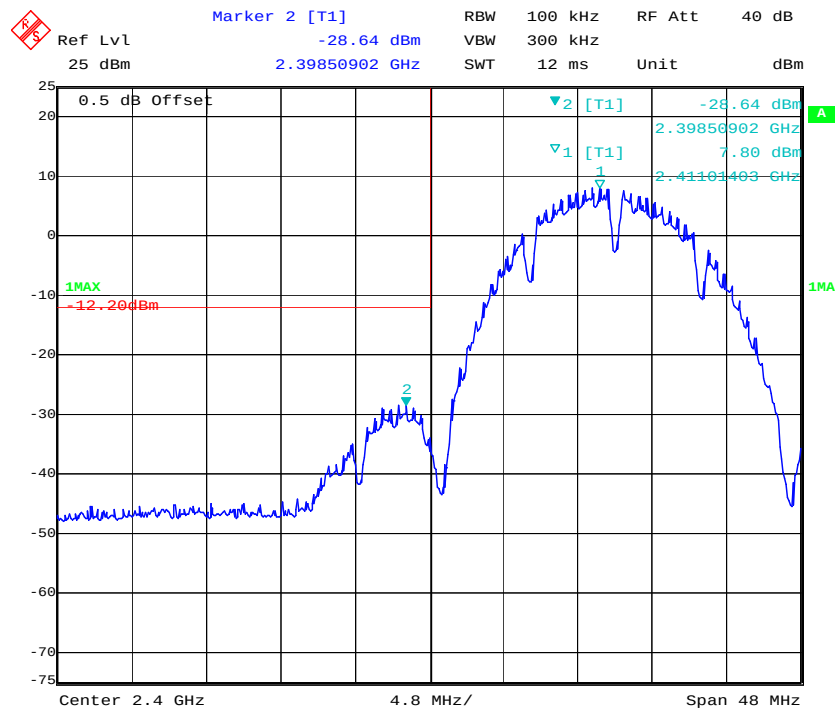
802.11b: Band Edge, Left Side

Date: 24.NOV.2018 12:54:08

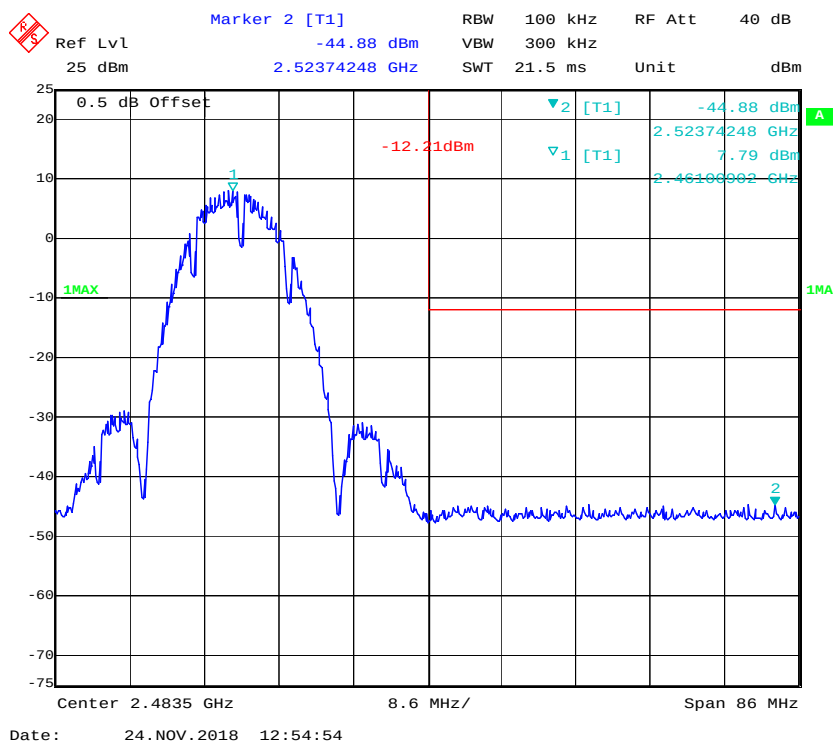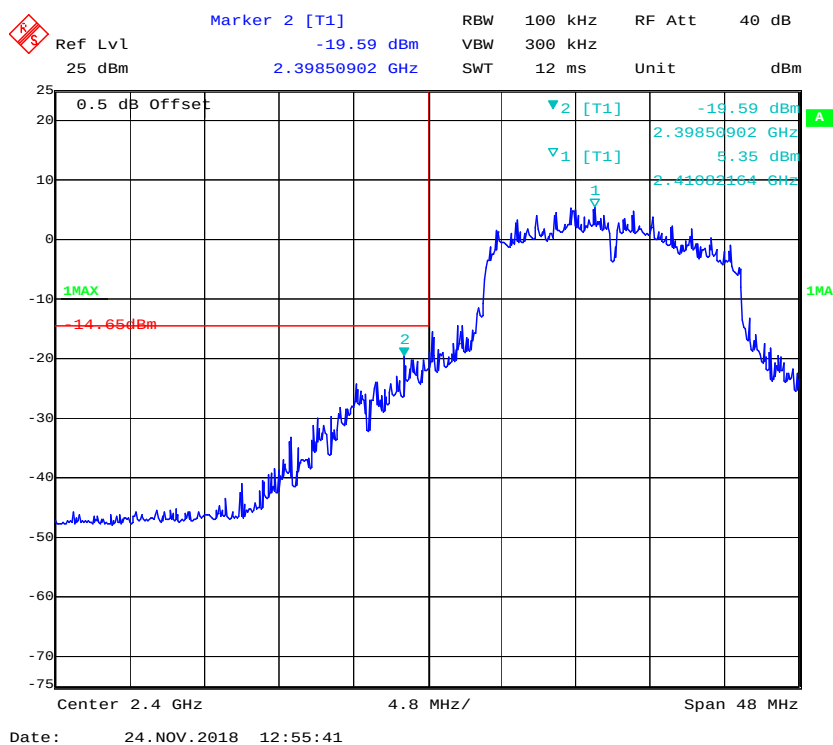
802.11b: Band Edge, Right Side**802.11g: Band Edge, Left Side**

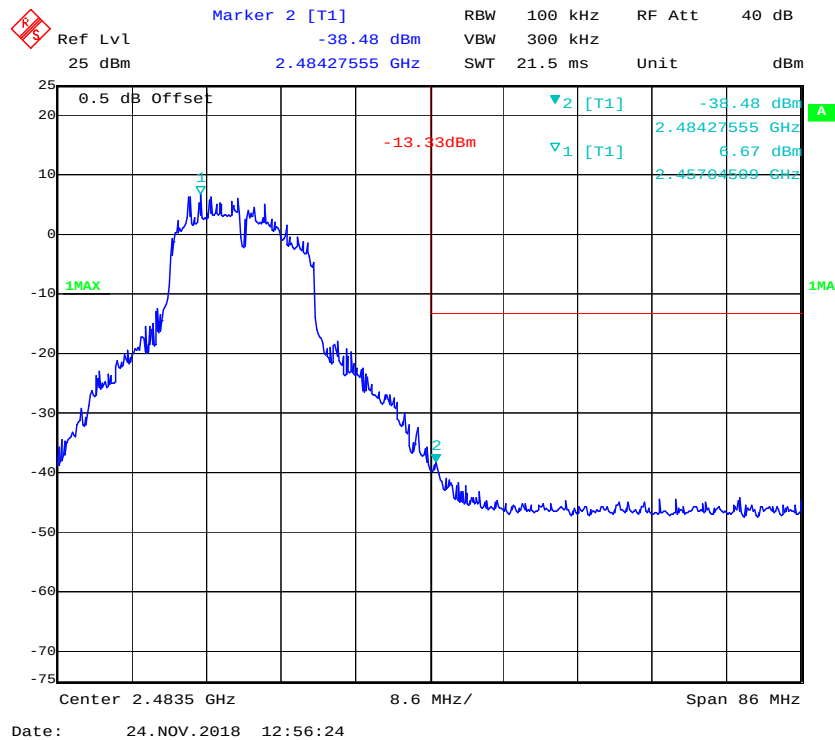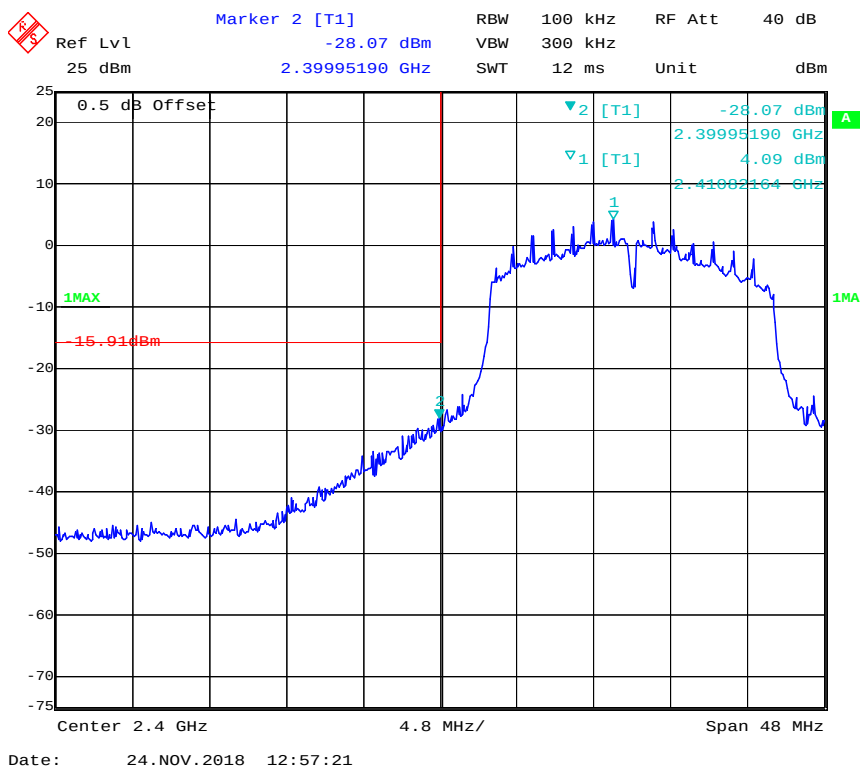802.11g: Band Edge, Right Side**802.11n ht20 Band Edge, Left Side**


802.11n ht20 Band Edge, Right Side

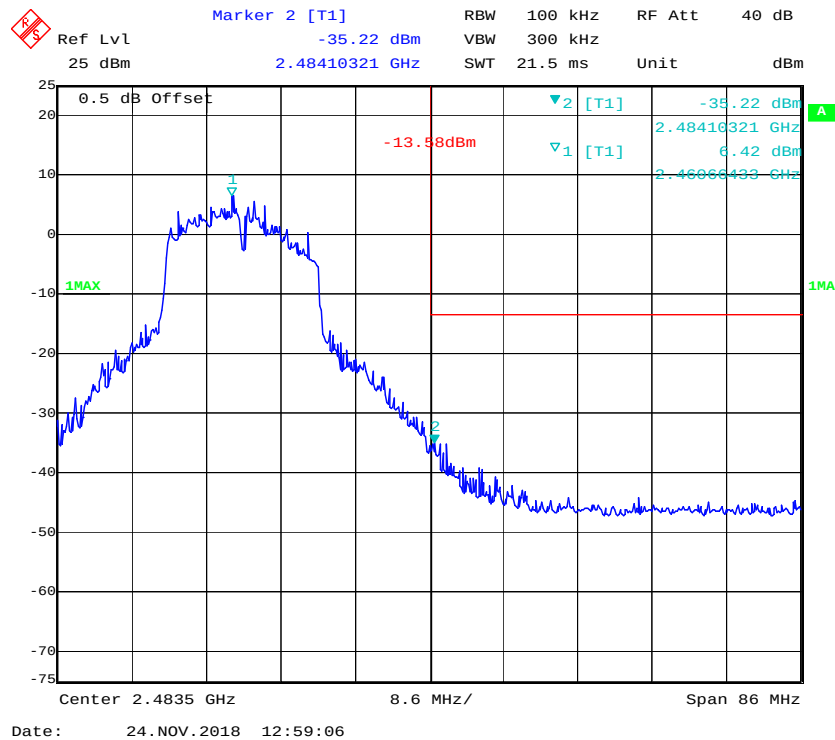

802.11n ht40: Band Edge, Left Side

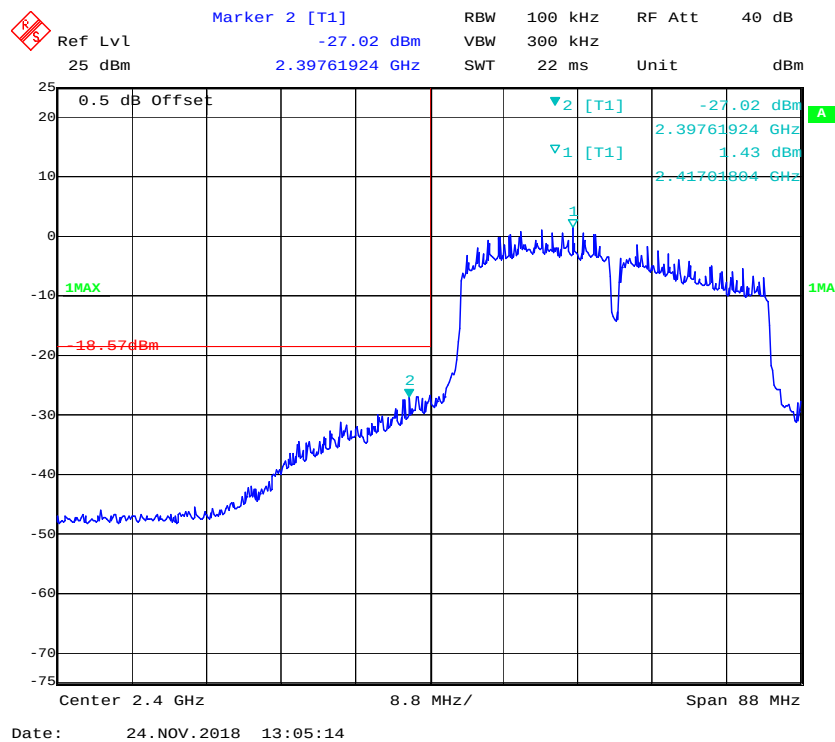

802.11n ht40 Band Edge, Right Side

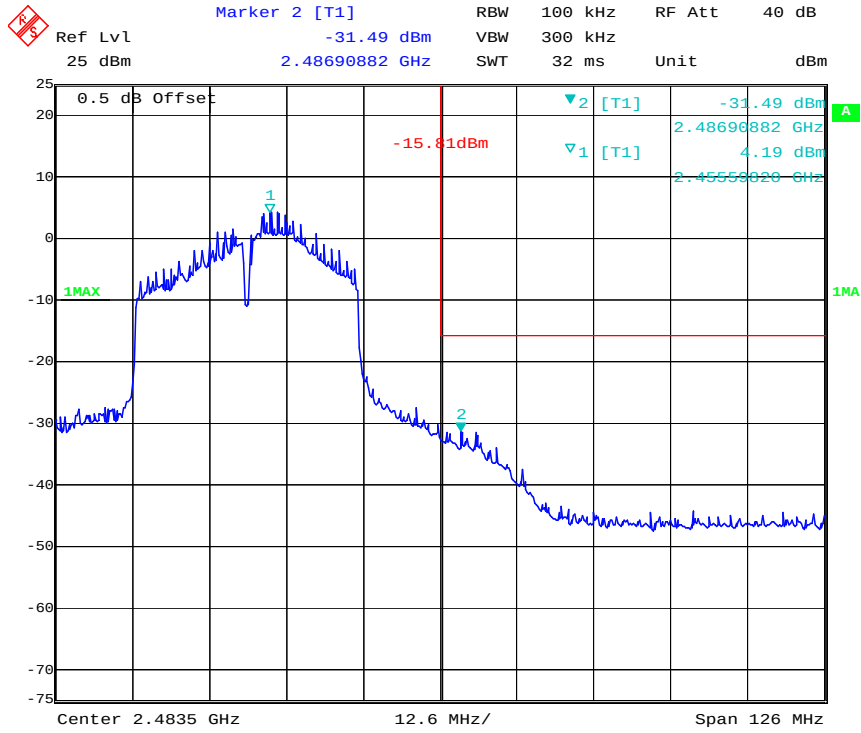

Date: 24.NOV.2018 13:05:56

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW = 3 kHz, VBW = 10 kHz, Set the span to 1.5 times the DTS bandwidth.
4. Use the peak marker function to determine the maximum amplitude level.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2018-08-03	2019-08-03
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.9 °C
Relative Humidity:	43 %
ATM Pressure:	100.5 kPa

* The testing was performed by Tiago Huang on 2018-11-24

Test Result: Compliance

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots

Test mode	Channel	Frequency (MHz)	PSD (dBm/3kHz)			Limit (dBm/3kHz)
			Chain 0	Chain 1	Total	
802.11b	Low	2412	-7.62	-8.37	/	≤8
	Middle	2437	-9.93	-9.34	/	≤8
	High	2462	-7.78	-9.01	/	≤8
802.11g	Low	2412	-10.05	-12.41	/	≤8
	Middle	2437	-11.31	-13.59	/	≤8
	High	2462	-10.07	-11.99	/	≤8
802.11n ht20	Low	2412	-10.40	-12.14	-8.17	≤8
	Middle	2437	-12.11	-13.51	-9.74	≤8
	High	2462	-8.47	-9.83	-6.09	≤8
802.11n ht40	Low	2422	-13.55	-15.57	-11.43	≤8
	Middle	2437	-15.34	-15.68	-12.5	≤8
	High	2452	-13.09	-12.42	-9.73	≤8

Note 1: The maximum antenna gain is 4.0 dBi. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:


$$\text{Array Gain} = 10 \log(N_{\text{ANT}}/N_{\text{SS}}) \text{ dB.}$$



So:

$$\text{Directional gain} = G_{\text{ANT}} + \text{Array Gain} = 4.0\text{dBi} + 10 \cdot \log(2/2) = 4.0\text{dBi}$$


Chain 0

Power Spectral Density, 802.11b Low Channel

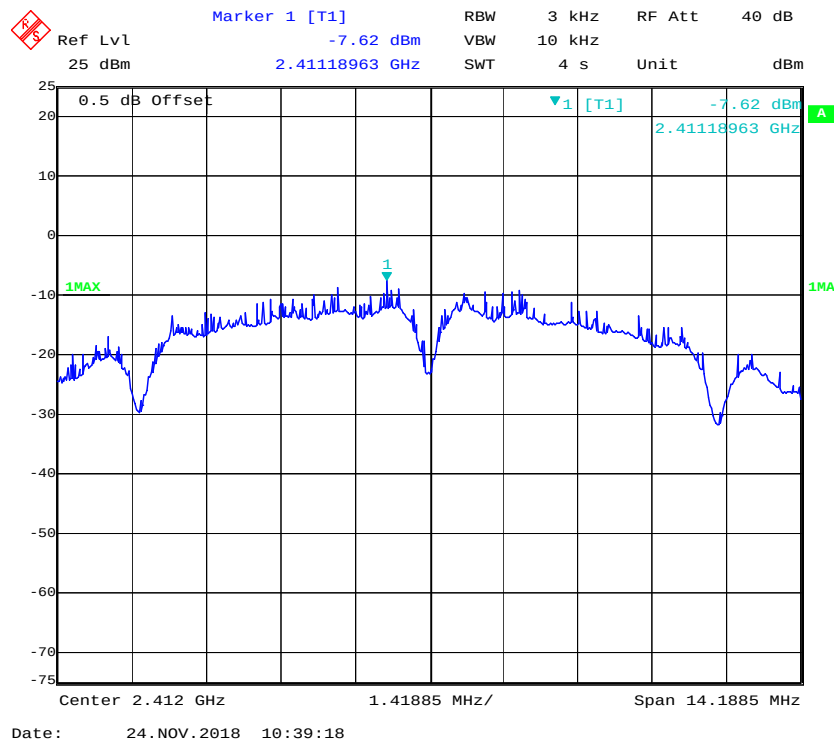


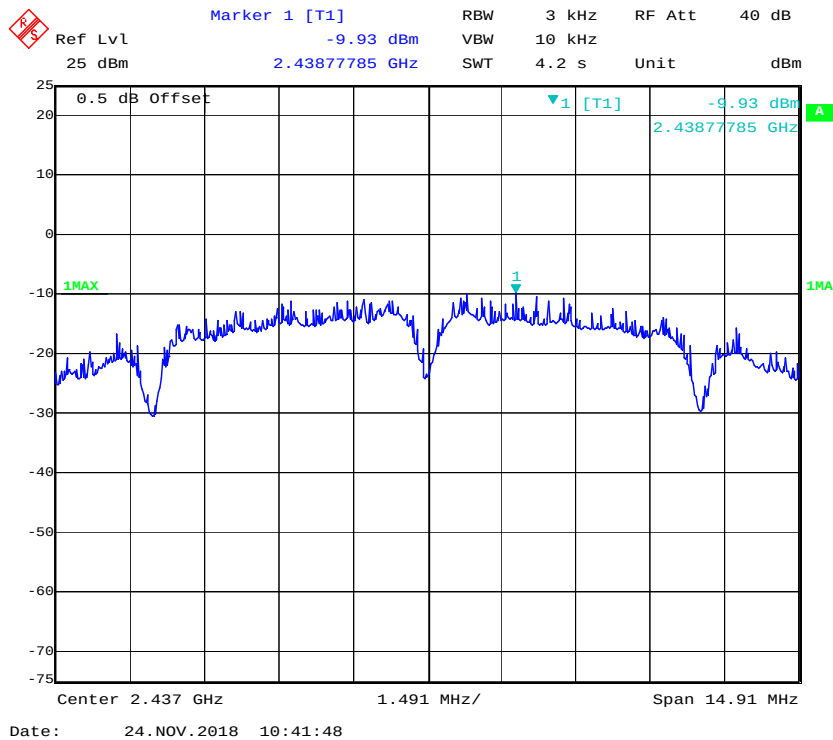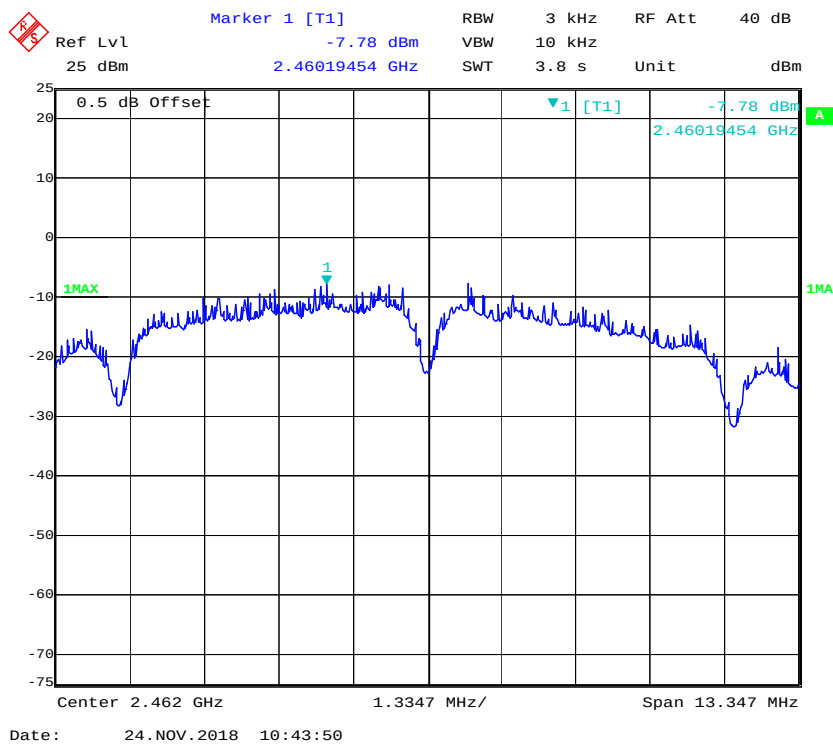Power Spectral Density, 802.11b Middle Channel**Power Spectral Density, 802.11b High Channel**


Power Spectral Density, 802.11g Low Channel

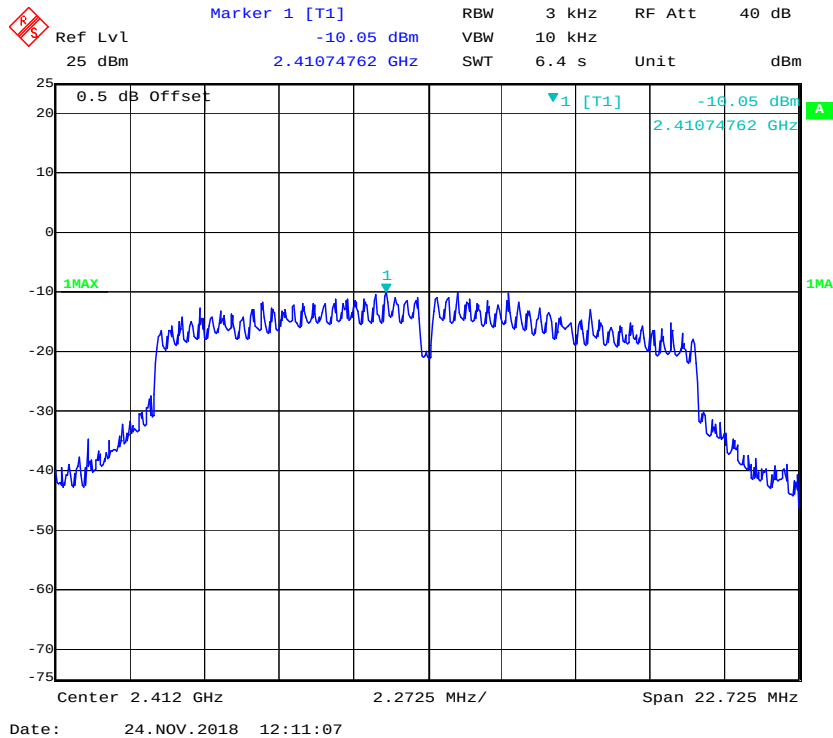


Power Spectral Density, 802.11g Middle Channel

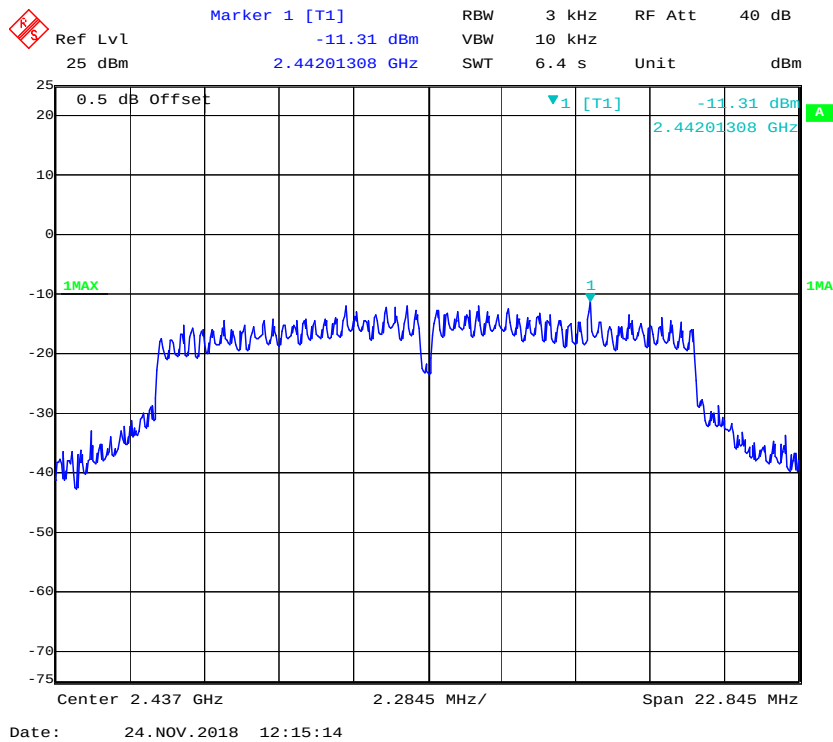


Power Spectral Density, 802.11g High Channel

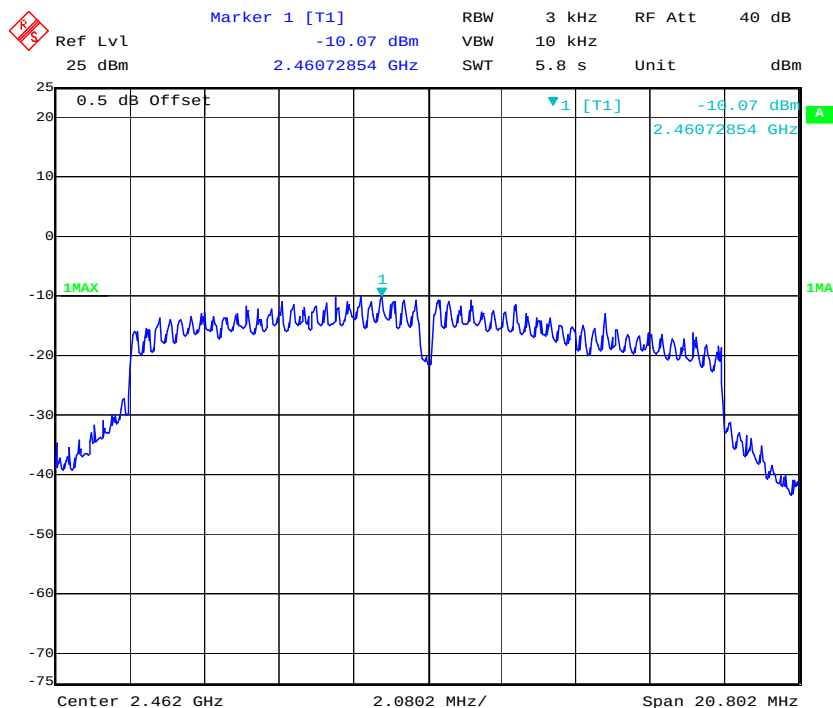


Power Spectral Density, 802.11n ht20 Low Channel

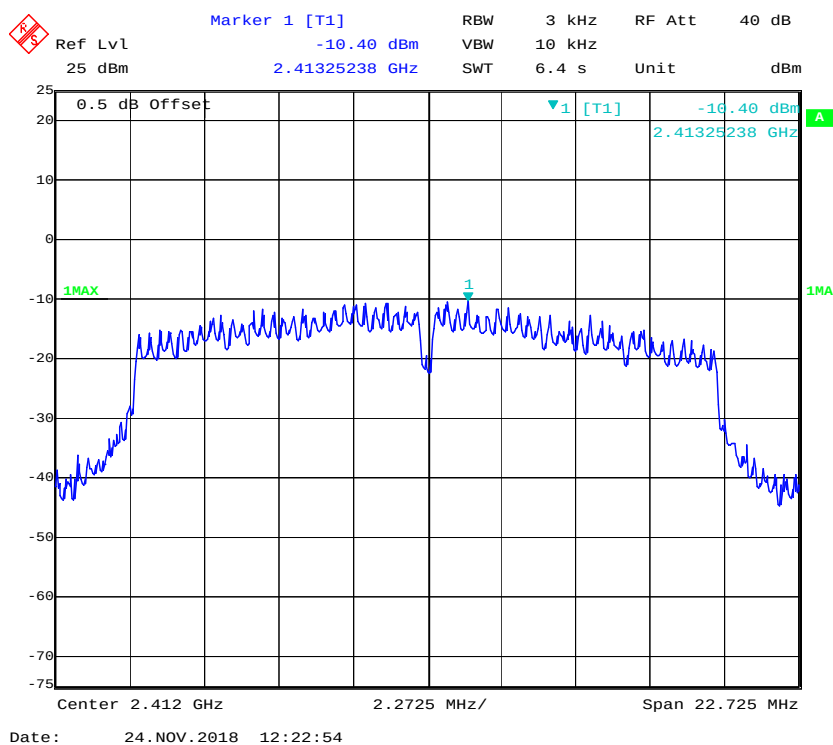


Power Spectral Density, 802.11n ht20 Middle Channel

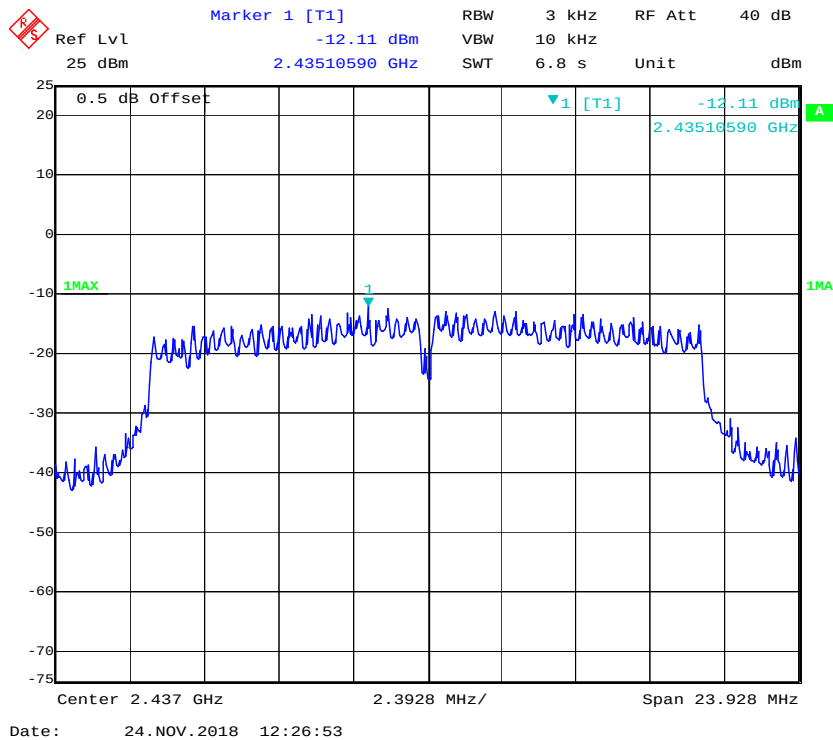

Power Spectral Density, 802.11n ht20 High Channel

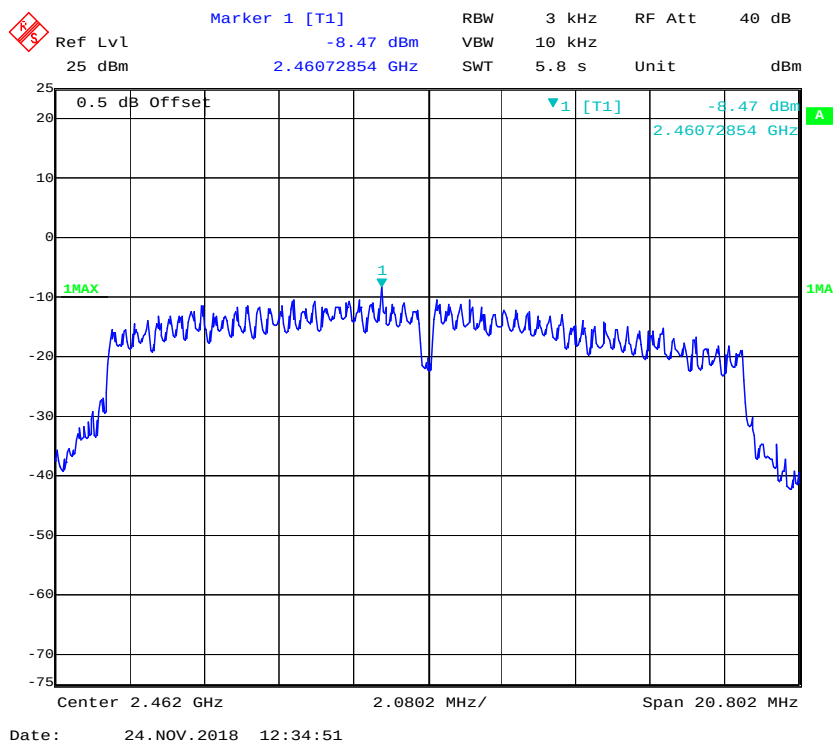


Power Spectral Density, 802.11n ht40 Low Channel


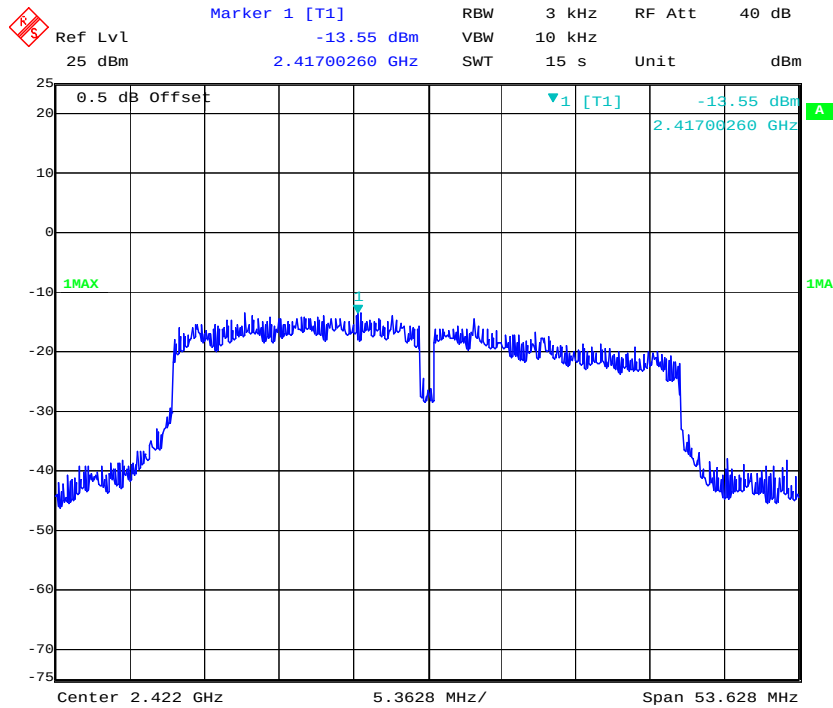


Date: 24.NOV.2018 12:45:39


Power Spectral Density, 802.11n ht40 Middle Channel

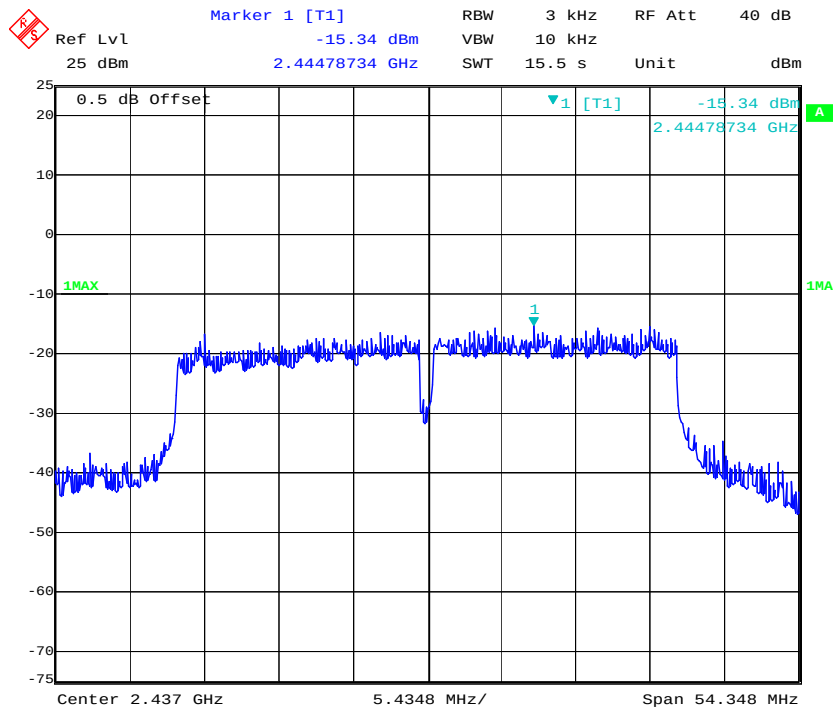

Date: 24.NOV.2018 12:48:42

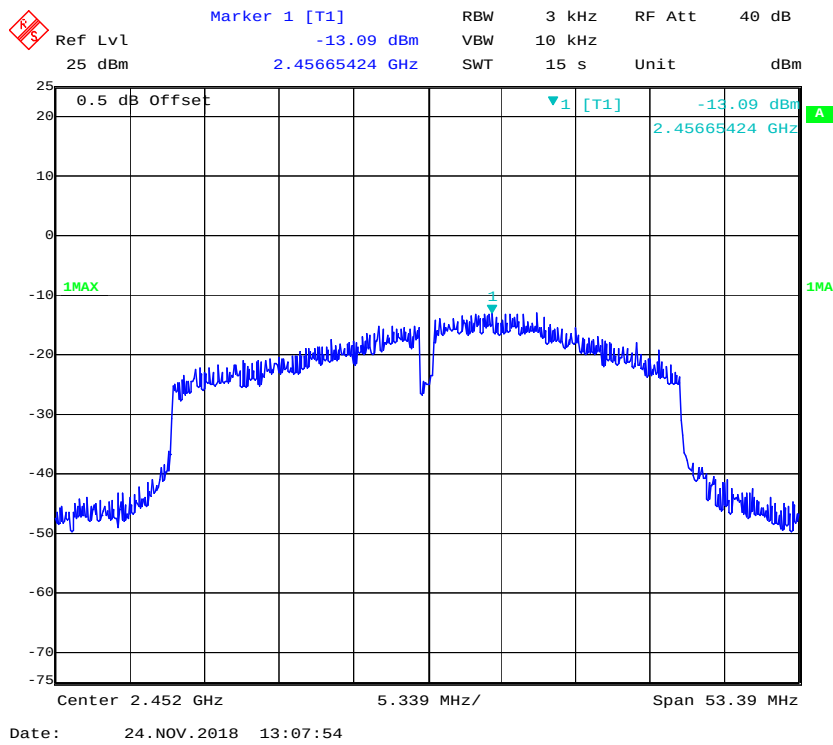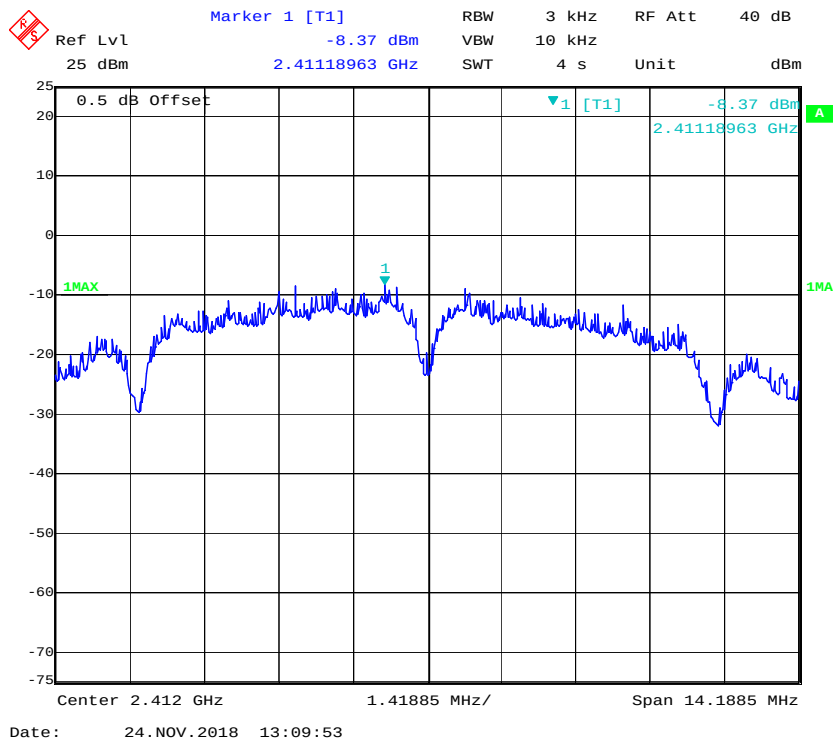
Power Spectral Density, 802.11n ht40 High Channel**Chain 1****Power Spectral Density, 802.11b Low Channel**

Power Spectral Density, 802.11b Middle Channel

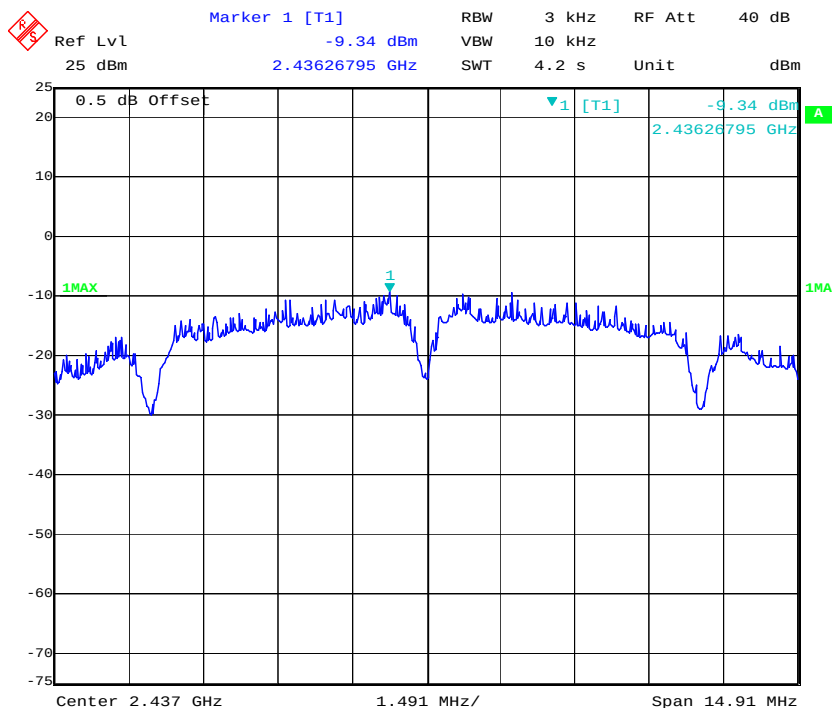


Date: 24.NOV.2018 13:11:08

Power Spectral Density, 802.11b High Channel

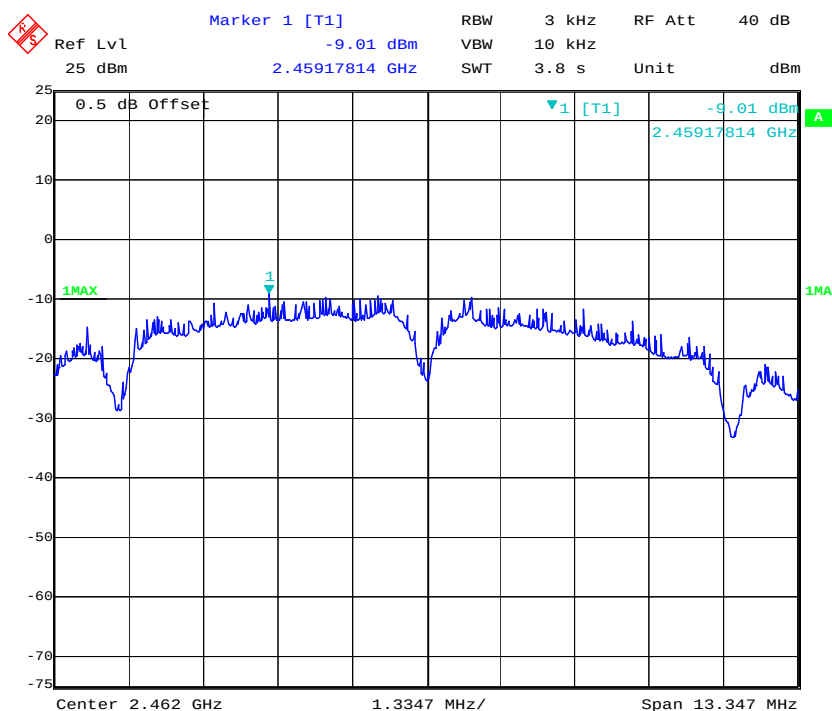


Date: 24.NOV.2018 13:11:56


Power Spectral Density, 802.11g Low Channel

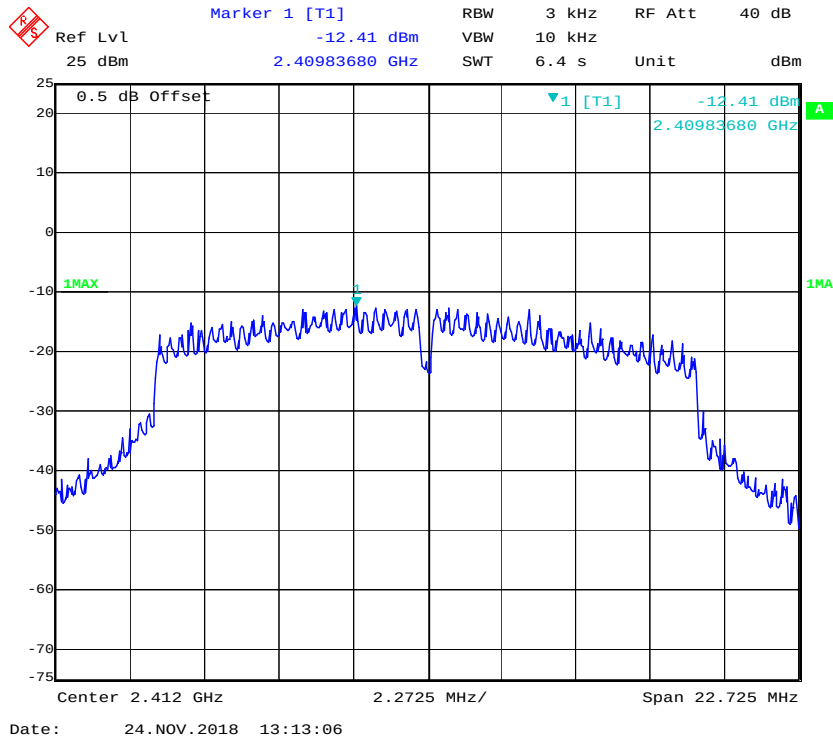


Power Spectral Density, 802.11g Middle Channel


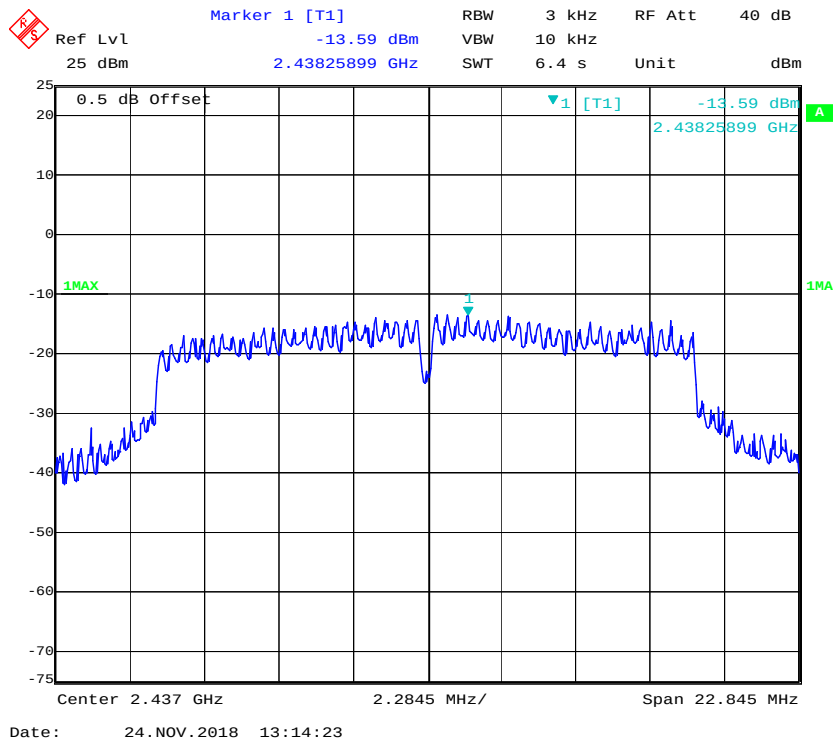


Power Spectral Density, 802.11g High Channel

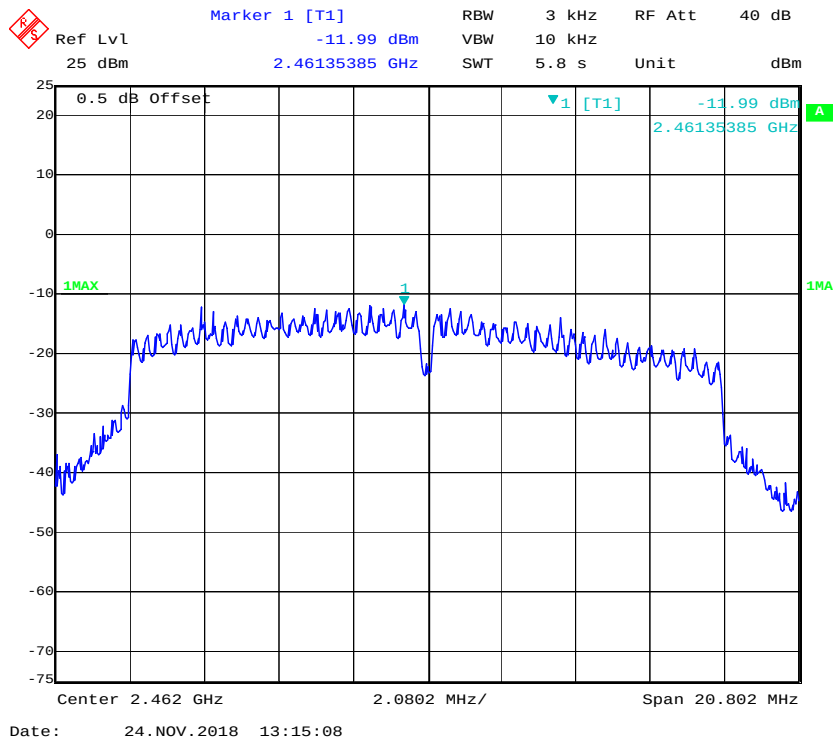


Power Spectral Density, 802.11n ht20 Low Channel

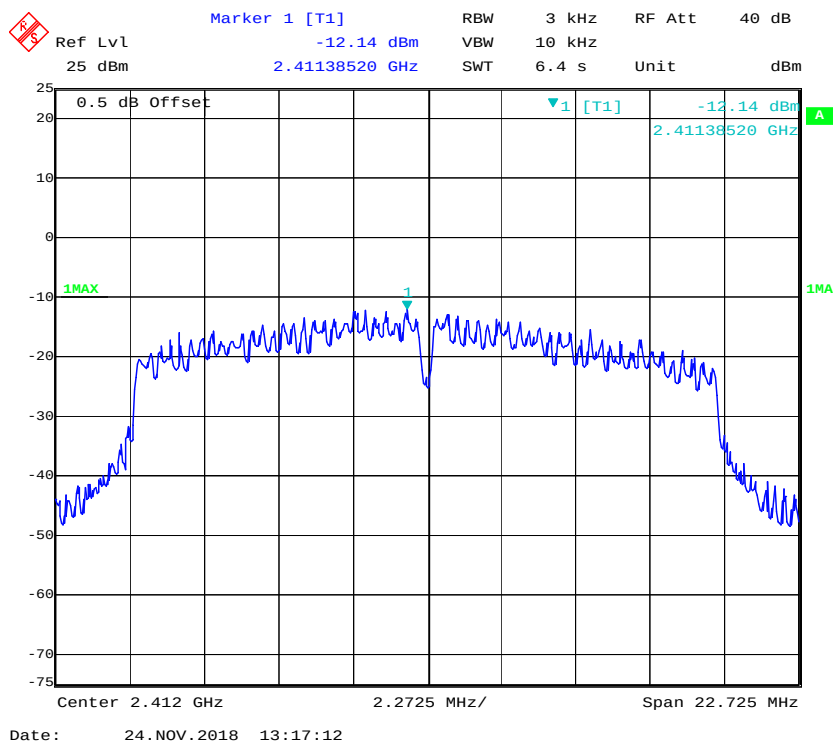

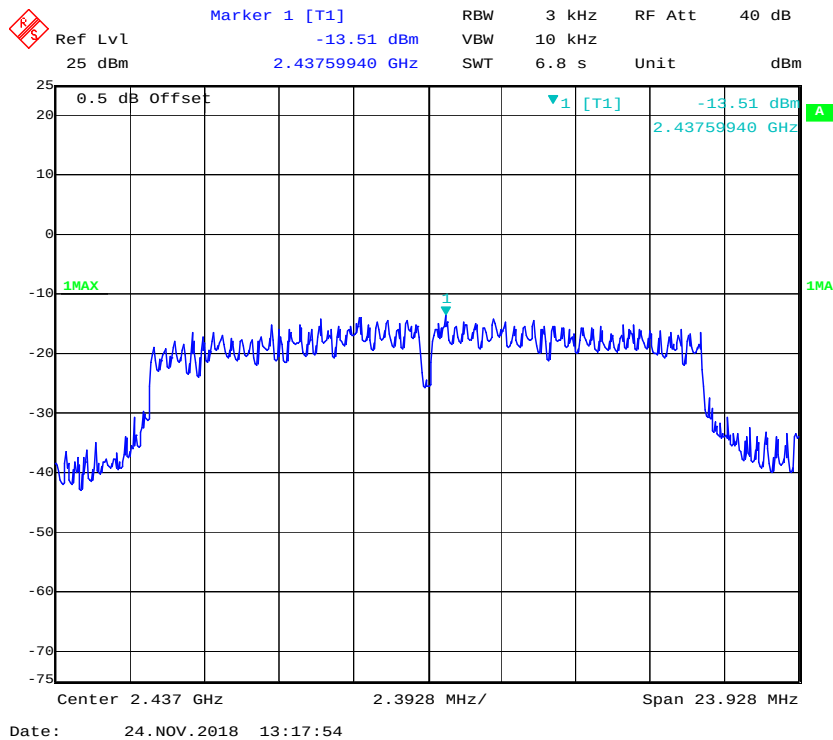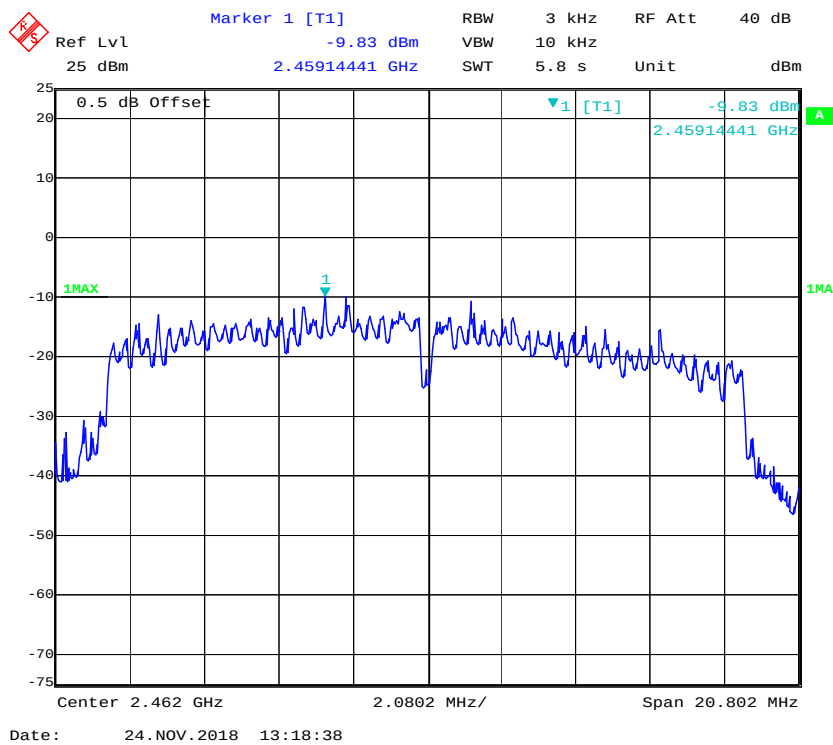
Power Spectral Density, 802.11n ht20 Middle Channel**Power Spectral Density, 802.11n ht20 High Channel**

Power Spectral Density, 802.11n ht40 Low Channel

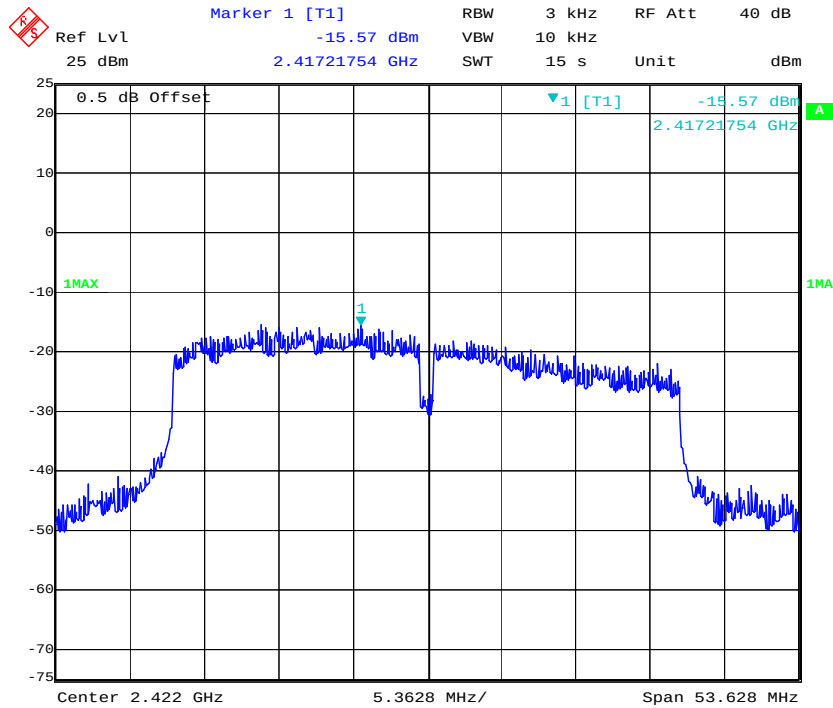


Date: 24.NOV.2018 13:19:41

Power Spectral Density, 802.11n ht40 Middle Channel

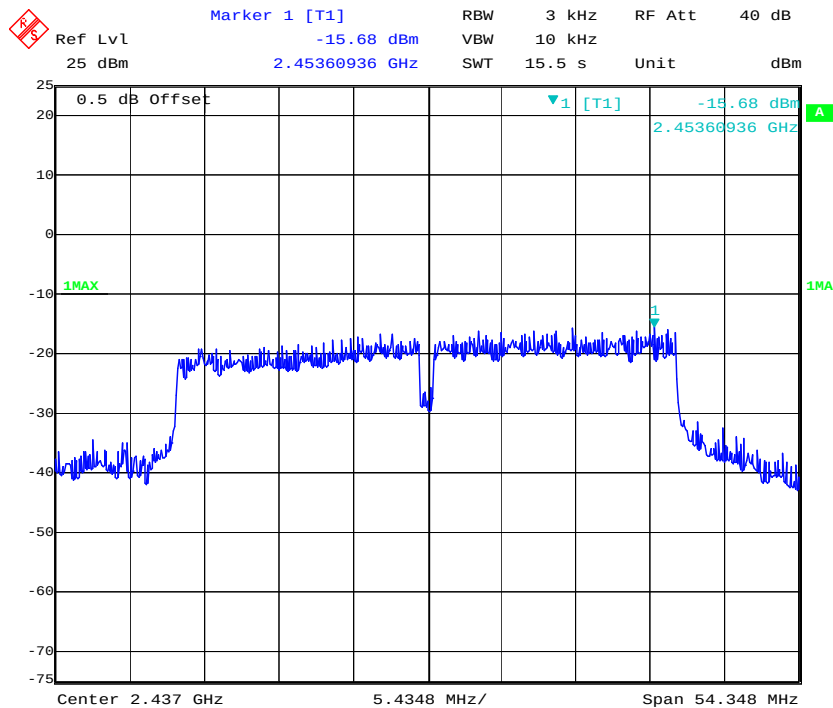

Date: 24.NOV.2018 13:20:22

Power Spectral Density, 802.11n ht40 High Channel

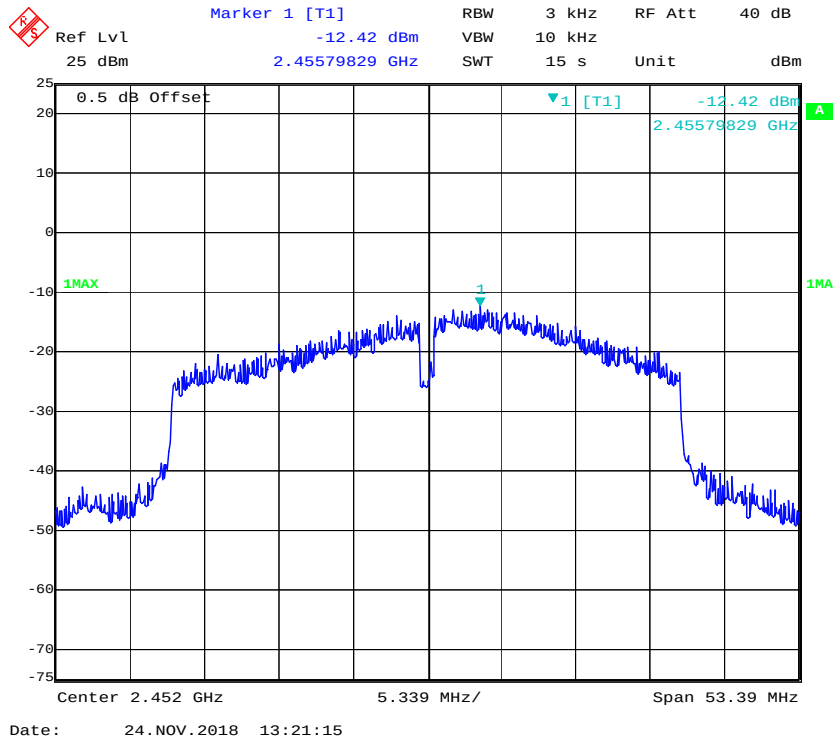

***** END OF REPORT *****