



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 22H, PART 24E
FCC PART 27
MEASUREMENT AND TEST REPORT

For

MFOURTEL MEXICO S.A. DE C.V.

Av. Ejercito Nacional 436 Piso 3 Chapultepec, Morales Miguel Hidalgo D.F 11570, Mexico

FCC ID: CLNM4SPOTCALL1

Report Type: Original Report	Product Type: M4 Spot call 1
Report Number: RDG190527003-00D	
Report Date: 2019-06-22	
Reviewed By:	Jerry Zhang EMC Manager
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
CONFIGURATION OF TEST SETUP	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
§1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	9
APPLICABLE STANDARD	9
FCC §2.1047 - MODULATION CHARACTERISTIC	11
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) & § 27.50 - RF OUTPUT POWER.....	12
APPLICABLE STANDARD	12
TEST PROCEDURE	13
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST DATA	17
FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53- OCCUPIED BANDWIDTH.....	36
APPLICABLE STANDARD	36
TEST PROCEDURE	36
TEST EQUIPMENT LIST AND DETAILS.....	36
TEST DATA	36
FCC §2.1051, §22.917(A) & §24.238(A) & §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS ..	68
APPLICABLE STANDARD	68
TEST PROCEDURE	68
TEST EQUIPMENT LIST AND DETAILS.....	68
TEST DATA	68
FCC §2.1053, §22.917 & §24.238 & §27.53 - SPURIOUS RADIATED EMISSIONS	97
APPLICABLE STANDARD	97
TEST PROCEDURE	97
TEST EQUIPMENT LIST AND DETAILS.....	98
TEST DATA	98
FCC §22.917(A) & §24.238(A) & §27.53 - BAND EDGES.....	104
APPLICABLE STANDARD	104
TEST PROCEDURE	104
TEST EQUIPMENT LIST AND DETAILS.....	104
TEST DATA	104

FCC §2.1055, §22.355 & §24.235 & §27.54 - FREQUENCY STABILITY.....163

 APPLICABLE STANDARD163

 TEST PROCEDURE163

 TEST EQUIPMENT LIST AND DETAILS.....164

 TEST DATA164

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:		M4 Spot call 1
EUT Model:		M4 Spot call 1
Operation modes:		WCDMA(R99 (Voice+Data), HSDPA/HSUPA/HSPA+), FDD-LTE
Operation Frequency:		WCDMA Band 2:1850-1910 MHz(TX), 1920-1990 MHz(RX) WCDMA Band 5:824-849 MHz(TX), 869-894 MHz(RX) LTE Band 2:1850-1910 MHz(TX), 1920-1990 MHz(RX) LTE Band 4:1710-1755 MHz(TX), 2110-2155 MHz(RX) LTE Band 5:824-849 MHz(TX), 869-894 MHz(RX) LTE Band 7:2500-2570 MHz(TX), 2620-2690 MHz(RX) LTE Band 66:1710-1780 MHz(TX), 2110-2180 MHz(RX)
Maximum Output Power: (Conducted)		WCDMA band 2: 21.06 dBm, WCDMA band 5: 21.51 dBm LTE band 2: 21.40 dBm, LTE band 4: 21.41 dBm LTE band 5: 22.18dBm, LTE band 7: 21.22 dBm LTE band 66: 21.91 dBm
Modulation Type:		QPSK, 16QAM
Rated Input Voltage:		12VDC from adapter
Adapter Information	Model:	ES085C-X120100XYF
	Input:	100-240V, 50/60Hz, 0.5A
	Output:	DC12V, 1A
External Dimension:		190mm(L)*179.5mm(W)*43.5mm(H)
Serial Number:		190527003
EUT Received Date:		2019-05-28

Objective

This report is prepared on behalf of **MFOURTEL MEXICO S.A. DE C.V.** in accordance with: Part 2-Subpart J, Part 22-Subpart H, and Part 24-Subpart E Part 27 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Rules for output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, spurious radiated emission, frequency stability and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: CLNM4SPOTCALL1.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services
Part 24 Subpart E - Personal Communication Services
Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA/EIA 603-D-2010.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp.(Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Unwanted Emissions, radiated	30MHz ~ 1GHz: 5.85 dB 1G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D 2010.

This device employs two type of WWAN antenna: inside FPC antenna or external Dipole Antenna for Main Chain, when dipole antenna installed, the system configure to use the dipole antenna by the switcher.


Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
R&S	Universal Radio Communication Tester	CMU200	106 891
R&S	Wideband Radio Communication Tester	CMW500	147473
Unknown	ANTENNA	Unknown	/

Configuration of Test Setup

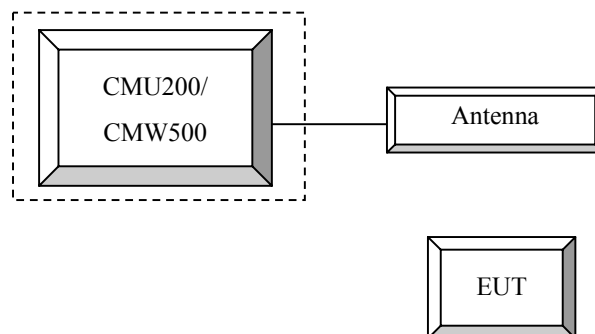

Block Diagram of Test Setup

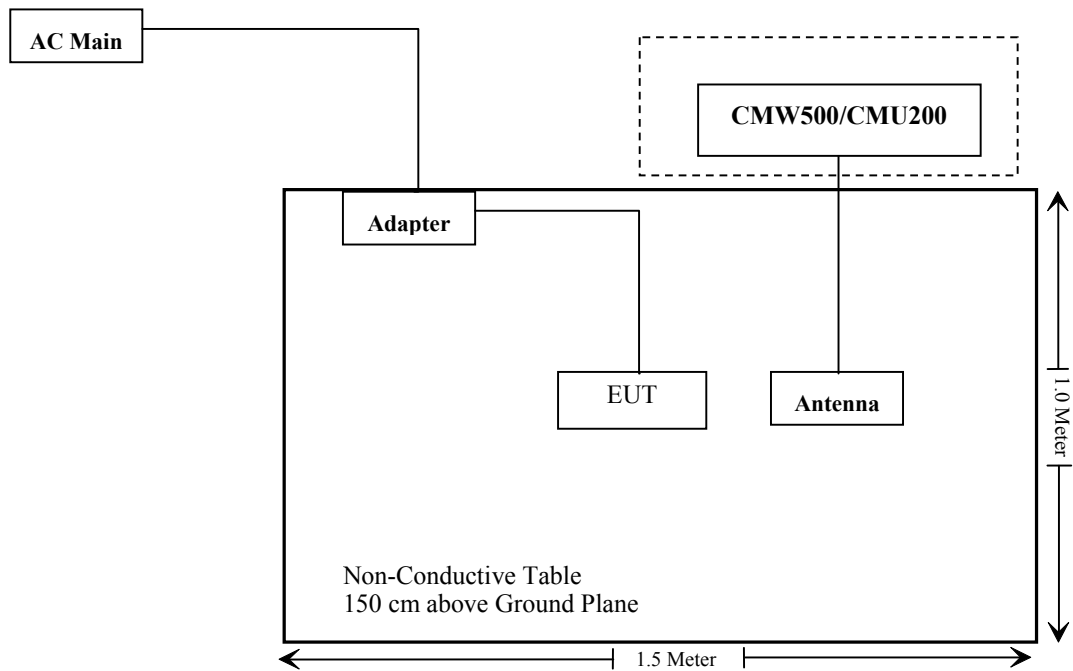

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310, §2.1091	Maximum Permissible Exposure	Compliance
§2.1046; § 22.913 (a); § 24.232 (c); §27.50	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905 § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliance
§ 2.1051, § 22.917 (a); § 24.238 (a); §27.53	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053 § 22.917 (a); § 24.238 (a); §27.53	Field Strength of Spurious Radiation	Compliance
§ 22.917 (a); § 24.238 (a); §27.53	Out of band emission, Band Edge	Compliance
§ 2.1055 § 22.355; § 24.235; §27.54	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

§1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Calculated Data:

Mode	Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
WLAN	2412-2462	3	2.00	29	794.33	20.00	0.32	1.0
WCDMA band 2	1850-1910	3.8	2.40	22	158.49	20.00	0.08	1.0
WCDMA Band 5	824-849	1	1.26	22	158.49	20.00	0.04	0.55
LTE Band 2	1850-1910	3.8	2.40	22	158.49	20.00	0.08	1.0
LTE band 4	1710-1755	4	2.51	22	158.49	20.00	0.08	1.0
LTE Band 5	824-849	1	1.26	23	199.53	20.00	0.05	0.55
LTE Band 7	2500-2570	3	2.00	22	158.49	20.00	0.06	1.0
LTE Band 66	1710-1780	4	2.51	22	158.49	20.00	0.08	1.0

Note: The maximum gain of inside and external antenna was used for calculation.

The WLAN and WWAN can transmit simultaneously:

$$\sum_i \frac{S_i}{S_{Limit,i}}$$

$$=S_{WLAN}/S_{limit-WLAN} + S_{WWAN}/S_{limit-WWAN}$$

$$=0.32/1+0.05/0.55$$

$$=0.41$$

$$< 1.0$$

Result: The device meet FCC MPE at 20 cm distance

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E, Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) & § 27.50 - RF OUTPUT POWER

Applicable Standard

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §24.232 (d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

According to §27.50

(b) (9) Control stations and mobile stations transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands and fixed stations transmitting in the 787-788 MHz and 805-806 MHz bands are limited to **30** watts ERP.

(c) (9) Control and mobile stations in the 698-746 MHz band are limited to **30** watts ERP.

(d), (4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to **1 watt** EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(h),(2) Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

Test Procedure

WCDMA-Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c / β_d	8/15

WCDMA HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subset	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c / β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR(dB)	0	0	0.5	0.5
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs} / \beta_c$	30/15			

WCDMA HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
	MPR(dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs}=\beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27

HSPA+

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.

DC-HSDPA

The following tests were conducted according to the test requirements in Table C.8.1.12 of 3GPP TS 34.121-1

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

LTE (FDD):

The following tests were conducted according to the test requirements in 3GPP TS36.101

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Radiated method:

ANSI/TIA-603-D section 2.2.17

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESR3	102453	2018-06-26	2019-06-26
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2018-09-24	2019-09-24
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2018-09-05	2019-09-05
R&S	Spectrum Analyzer	FSP 38	100478	2019-05-09	2020-05-09
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2018-09-05	2019-09-05
MICRO-COAX	Coaxial Cable	UFA147-1-2362-100100	64639 231029-001	2019-02-24	2020-02-24
R&S	Universal Radio Communication Tester	CMU200	106 891	2018-12-14	2019-12-14
R&S	Wideband Radio Communication Tester	CMW500	147473	2018-08-03	2019-08-03
Agilent	Signal Generator	E8247C	MY43321350	2018-12-10	2019-12-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25.8°C
Relative Humidity:	45 %
ATM Pressure:	100.5 kPa

* The testing was performed by Blake Yang from 2019-06-10 to 2019-06-17.

Conducted Output Power**WCDMA Band II**

Mode	3GPP Sub Test	Low Channel		Middle Channel		High Channel	
		Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)
Rel 99	1	21.06	3.12	21.03	3.12	21.04	3.08
HSDPA	1	20.21	3.64	20.14	3.88	20.18	4.44
	2	20.30	3.61	20.04	3.92	20.23	4.43
	3	20.29	3.57	20.16	3.91	20.13	4.47
	4	20.25	3.58	20.23	3.82	20.19	4.47
HSUPA	1	20.19	4.16	20.13	4.00	20.16	4.08
	2	20.17	4.10	20.21	3.97	20.21	4.07
	3	20.13	4.08	20.20	3.93	20.12	4.02
	4	20.13	4.14	20.06	3.92	20.06	4.17
HSPA+ (16QAM)	5	20.14	4.13	20.16	4.01	20.11	3.99
	1	20.13	4.10	20.19	4.00	20.08	4.15

WCDMA Band V

Mode	3GPP Sub Test	Low Channel		Middle Channel		High Channel	
		Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)
Rel 99	1	21.42	3.12	21.49	3.20	21.51	3.08
HSDPA	1	20.57	4.48	20.58	4.48	20.61	4.40
	2	20.63	4.44	20.57	4.44	20.56	4.35
	3	20.67	4.38	20.50	4.57	20.65	4.46
	4	20.60	4.53	20.65	4.48	20.57	4.41
HSUPA	1	20.64	4.16	20.65	3.88	20.67	4.68
	2	20.62	4.17	20.72	3.82	20.64	4.63
	3	20.73	4.10	20.60	3.80	20.58	4.59
	4	20.56	4.09	20.75	3.82	20.57	4.66
HSPA+ (16QAM)	5	20.55	4.23	20.74	3.81	20.68	4.75
	1	20.56	4.07	20.72	3.96	20.72	4.65

LTE Band 2

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4MHz	QPSK	1#0	20.95	21.22	21.00
		1#3	21.00	21.24	21.01
		1#5	20.89	21.28	21.04
		3#0	21.13	21.21	21.15
		3#3	21.08	21.18	21.14
		6#0	20.05	20.09	20.15
	16QAM	1#0	19.85	20.56	20.82
		1#3	19.88	20.51	20.80
		1#5	19.87	20.63	20.81
		3#0	20.20	20.18	20.08
		3#3	20.19	20.17	20.07
		6#0	19.33	19.40	19.22
3MHz	QPSK	1#0	21.02	21.09	21.01
		1#8	21.05	21.15	20.99
		1#14	21.05	21.12	20.98
		10#0	19.93	20.16	20.06
		10#5	20.05	20.15	20.13
		15#0	19.97	20.18	20.00
	16QAM	1#0	20.14	19.96	20.52
		1#8	20.13	19.95	20.48
		1#14	20.16	19.95	20.50
		10#0	19.31	19.30	19.05
		10#5	19.32	19.30	19.13
		15#0	19.11	19.29	19.24
5MHz	QPSK	1#0	20.91	21.24	21.07
		1#13	20.90	21.22	21.06
		1#24	20.91	21.29	21.06
		10#0	20.02	20.12	20.13
		10#15	20.01	20.12	20.10
		25#0	19.98	20.09	20.08
	16QAM	1#0	19.28	20.32	19.79
		1#13	19.26	20.32	19.78
		1#24	19.26	20.17	19.84
		10#0	19.15	19.04	19.31
		10#15	19.25	19.17	19.29
		25#0	19.23	19.22	19.13

10MHz	QPSK	1#0	20.92	21.02	21.25
		1#25	20.99	21.02	21.13
		1#49	21.04	21.07	21.19
		25#0	20.07	20.09	20.09
		25#25	19.97	20.06	20.07
		50#0	20.10	20.11	20.20
	16QAM	1#0	20.42	20.40	19.63
		1#25	20.41	20.40	19.61
		1#49	20.53	20.48	19.62
		25#0	19.19	19.29	19.35
		25#25	19.19	19.29	19.34
		50#0	19.18	19.28	19.28
15MHz	QPSK	1#0	20.97	21.12	21.14
		1#38	20.94	21.04	21.08
		1#74	21.09	21.12	21.10
		36#0	20.10	20.15	20.16
		36#39	20.21	20.16	20.05
		75#0	20.10	20.15	20.04
	16QAM	1#0	20.43	20.45	20.53
		1#38	20.51	20.43	20.60
		1#74	20.64	20.53	20.55
		36#0	19.17	19.29	19.23
		36#39	19.28	19.27	19.25
		75#0	19.20	19.34	19.30
20MHz	QPSK	1#0	21.14	21.24	21.37
		1#50	21.26	21.13	21.34
		1#99	21.33	21.25	21.40
		50#0	20.03	20.13	20.14
		50#50	20.12	20.27	20.05
		100#0	20.13	20.18	20.12
	16QAM	1#0	20.24	20.25	20.90
		1#50	20.28	20.25	20.88
		1#99	20.43	20.30	20.91
		50#0	19.20	19.31	19.36
		50#50	19.30	19.40	19.24
		100#0	19.23	19.28	19.30

LTE Band 4

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4MHz	QPSK	RB1#0	21.38	21.10	21.20
		RB1#3	21.34	21.15	21.24
		RB1#5	21.32	21.19	21.18
		RB3#0	21.36	21.34	21.08
		RB3#3	21.41	21.36	21.07
		RB6#0	20.23	20.32	20.03
	16QAM	RB1#0	21.03	21.12	20.18
		RB1#3	21.04	21.17	20.18
		RB1#5	21.02	21.10	20.15
		RB3#0	20.45	20.17	20.09
		RB3#3	20.46	20.19	20.07
		RB6#0	19.64	19.31	19.43
3MHz	QPSK	RB1#0	21.32	21.18	21.22
		RB1#8	21.22	21.18	21.21
		RB1#14	21.25	21.18	21.18
		RB6#0	20.29	20.28	20.04
		RB6#9	20.34	20.26	20.04
		RB15#0	20.31	20.21	20.07
	16QAM	RB1#0	20.75	21.18	20.22
		RB1#8	20.70	21.13	20.16
		RB1#14	20.69	21.13	20.15
		RB6#0	19.31	19.32	19.44
		RB6#9	19.25	19.31	19.42
		RB15#0	19.46	19.30	19.23
5MHz	QPSK	RB1#0	21.37	21.38	20.96
		RB1#13	21.32	21.41	20.96
		RB1#24	21.34	21.41	20.89
		RB15#0	20.29	20.27	20.17
		RB15#10	20.43	20.25	20.17
		RB25#0	20.32	20.24	20.13
	16QAM	RB1#0	19.72	20.43	19.70
		RB1#13	19.69	20.42	19.78
		RB1#24	19.72	20.51	19.75
		RB15#0	19.55	19.31	19.21
		RB15#10	19.53	19.14	19.23
		RB25#0	19.46	19.27	19.16

10MHz	QPSK	RB1#0	21.34	21.36	21.16
		RB1#25	21.27	21.25	21.15
		RB1#49	21.36	21.27	21.15
		RB25#0	20.32	20.30	20.14
		RB25#25	20.45	20.20	20.05
		RB50#0	20.45	20.19	20.14
	16QAM	RB1#0	20.57	20.43	19.73
		RB1#25	20.56	20.33	19.78
		RB1#49	20.69	20.38	19.71
		RB25#0	19.44	19.46	19.30
		RB25#25	19.53	19.48	19.34
		RB50#0	19.43	19.37	19.28
15MHz	QPSK	RB1#0	21.32	21.35	21.21
		RB1#38	21.31	21.31	21.18
		RB1#74	21.33	21.33	21.30
		RB36#0	20.45	20.31	20.17
		RB36#39	20.47	20.16	20.12
		RB75#0	20.29	20.27	20.14
	16QAM	RB1#0	20.55	20.40	20.50
		RB1#38	20.63	20.43	20.53
		RB1#74	20.60	20.45	20.52
		RB36#0	19.47	19.40	19.33
		RB36#39	19.54	19.44	19.32
		RB75#0	19.53	19.31	19.28
20MHz	QPSK	RB1#0	20.55	20.61	20.53
		RB1#50	20.60	20.49	20.48
		RB1#99	20.68	20.51	20.58
		RB50#0	19.39	19.49	19.26
		RB50#50	19.50	19.38	19.27
		RB100#0	19.60	19.37	19.39
	16QAM	RB1#0	19.53	19.85	18.82
		RB1#50	19.56	19.84	18.82
		RB1#99	19.58	19.88	18.82
		RB50#0	18.48	18.39	18.45
		RB50#50	18.64	18.50	18.55
		RB100#0	18.54	18.50	18.42

LTE Band 5

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4MHz	QPSK	RB1#0	21.95	21.91	22.11
		RB1#3	21.99	21.95	22.15
		RB1#5	22.01	21.95	22.14
		RB3#0	21.99	22.16	22.11
		RB3#3	21.98	22.10	22.11
		RB6#0	20.76	21.04	20.92
	16QAM	RB1#0	21.07	21.67	20.61
		RB1#3	21.04	21.70	20.67
		RB1#5	21.07	21.70	20.71
		RB3#0	20.79	20.92	21.03
		RB3#3	20.77	20.91	21.07
3MHz	QPSK	RB1#0	21.89	21.88	22.12
		RB1#8	21.92	21.92	22.11
		RB1#14	21.99	21.99	22.18
		RB6#0	20.78	20.94	21.00
		RB6#9	20.83	21.00	20.97
		RB15#0	20.91	20.98	21.00
	16QAM	RB1#0	21.19	21.64	20.67
		RB1#8	21.14	21.76	20.70
		RB1#14	21.19	21.73	20.73
		RB6#0	19.97	19.92	20.19
		RB6#9	19.94	20.04	20.18
5MHz	QPSK	RB1#0	21.81	22.01	21.96
		RB1#13	21.84	22.08	22.02
		RB1#24	21.83	22.11	22.02
		RB15#0	20.87	20.91	20.87
		RB15#10	20.97	20.98	20.99
		RB25#0	20.95	20.96	21.02
	16QAM	RB1#0	20.07	21.09	20.63
		RB1#13	20.26	21.14	20.67
		RB1#24	20.17	21.17	20.67
		RB15#0	20.01	19.87	20.02
		RB15#10	20.03	19.84	20.06
10MHz	QPSK	RB25#0	20.02	19.97	19.94
		RB1#0	21.85	22.06	22.05
		RB1#25	21.89	22.04	22.09
		RB1#49	22.03	22.12	22.09
		RB25#0	20.88	20.95	21.02
	16QAM	RB25#25	21.00	21.05	21.02
		RB50#0	21.03	21.01	21.00
		RB1#0	21.30	21.05	20.49
		RB1#25	21.35	21.14	20.55
		RB1#49	21.40	21.19	20.51
	16QAM	RB25#0	19.93	20.08	20.17
		RB25#25	19.92	20.17	20.14
		RB50#0	20.02	20.09	20.04

LTE Band 7

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5MHz	QPSK	RB1#0	20.37	20.88	19.67
		RB1#13	20.56	21.16	19.79
		RB1#24	20.06	20.66	19.19
		RB15#0	20.01	20.31	19.87
		RB15#10	19.96	20.24	19.70
		RB25#0	19.94	20.24	19.72
	16QAM	RB1#0	20.09	19.92	19.38
		RB1#13	20.06	19.96	19.54
		RB1#24	20.11	20.04	19.00
		RB15#0	18.92	19.40	19.65
		RB15#10	18.91	19.24	19.55
		RB25#0	19.08	19.25	19.63
10MHz	QPSK	RB1#0	20.27	20.90	19.96
		RB1#25	20.30	21.00	19.92
		RB1#49	20.54	20.96	19.66
		RB25#0	19.87	20.25	20.02
		RB25#25	19.89	20.26	19.89
		RB50#0	19.97	20.20	19.95
	16QAM	RB1#0	20.26	20.56	19.73
		RB1#25	20.24	20.69	19.71
		RB1#49	20.23	20.73	19.51
		RB25#0	19.01	19.37	19.67
		RB25#25	19.00	19.47	19.76
		RB50#0	18.98	19.41	19.59
15MHz	QPSK	RB1#0	20.35	21.04	20.19
		RB1#38	20.26	20.95	20.00
		RB1#74	20.56	20.65	19.50
		RB36#0	19.98	20.16	20.17
		RB36#39	19.87	20.34	19.84
		RB75#0	19.86	20.23	19.99
	16QAM	RB1#0	20.29	20.63	20.23
		RB1#38	20.25	20.86	19.98
		RB1#74	20.27	20.78	19.60
		RB36#0	19.07	19.34	19.55
		RB36#39	19.10	19.53	19.67
		RB75#0	19.01	19.39	19.55
20MHz	QPSK	RB1#0	20.45	21.00	20.29
		RB1#50	20.32	20.97	20.00
		RB1#99	21.22	21.13	19.91
		RB50#0	19.82	20.28	20.21
		RB50#50	19.93	20.38	20.10
		RB100#0	19.85	20.38	20.14
	16QAM	RB1#0	19.74	20.68	20.62
		RB1#50	19.72	20.91	20.24
		RB1#99	20.06	21.10	20.16
		RB50#0	19.13	19.39	19.47
		RB50#50	19.16	19.62	19.64
		RB100#0	19.12	19.36	19.55

LTE Band 66

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4MHz	QPSK	RB1#0	21.02	20.47	20.26
		RB1#3	21.06	20.42	20.28
		RB1#5	21.05	20.45	20.27
		RB3#0	20.99	20.73	20.41
		RB3#3	21.03	20.71	20.45
		RB6#0	19.88	19.66	19.37
	16QAM	RB1#0	20.12	20.23	19.16
		RB1#3	20.12	20.27	19.23
		RB1#5	20.09	20.26	19.21
		RB3#0	19.87	19.63	19.41
		RB3#3	19.86	19.63	19.37
3MHz	QPSK	RB1#0	20.92	20.48	20.27
		RB1#8	20.84	20.47	20.30
		RB1#14	20.84	20.43	20.35
		RB6#0	19.96	19.66	19.35
		RB6#9	19.76	19.64	19.33
		RB15#0	19.94	19.47	19.26
	16QAM	RB1#0	20.13	20.24	19.21
		RB1#8	20.18	20.26	19.14
		RB1#14	20.13	20.29	19.21
		RB6#0	19.18	18.63	18.59
		RB6#9	19.16	18.67	18.60
5MHz	QPSK	RB1#0	20.87	20.68	20.30
		RB1#13	20.82	20.66	20.31
		RB1#24	20.84	20.60	20.31
		RB15#0	19.91	19.55	19.29
		RB15#10	20.03	19.54	19.27
		RB25#0	19.82	19.52	19.33
	16QAM	RB1#0	19.22	19.73	19.02
		RB1#13	19.20	19.70	19.04
		RB1#24	19.19	19.65	19.05
		RB15#0	19.02	18.51	18.40
		RB15#10	19.03	18.51	18.42
10MHz	QPSK	RB25#0	19.06	18.62	18.29
		RB1#0	20.83	20.55	20.41
		RB1#25	20.80	20.50	20.41
		RB1#49	20.83	20.60	20.41
		RB25#0	19.98	19.49	19.34
		RB25#25	20.00	19.58	19.35
	16QAM	RB50#0	20.03	19.49	19.36
		RB1#0	20.21	20.19	18.92
		RB1#25	20.16	20.18	18.90
		RB1#49	20.14	20.22	18.90
		RB25#0	18.98	18.70	18.58
		RB25#25	19.02	18.66	18.54
		RB50#0	19.09	18.70	18.45

15MHz	QPSK	RB1#0	20.96	20.63	20.36
		RB1#38	20.87	20.51	20.33
		RB1#74	20.85	20.61	20.36
		RB36#0	19.97	19.59	19.28
		RB36#39	19.90	19.56	19.22
		RB75#0	19.92	19.56	19.34
	16QAM	RB1#0	20.20	19.91	19.79
		RB1#38	20.15	19.88	19.77
		RB1#74	20.12	19.94	19.77
		RB36#0	19.05	18.72	18.42
		RB36#39	19.13	18.69	18.39
		RB75#0	19.07	18.71	18.41
20MHz	QPSK	RB1#0	21.97	21.94	21.38
		RB1#50	21.93	21.88	21.26
		RB1#99	21.92	21.88	21.34
		RB50#0	21.89	21.54	21.31
		RB50#50	21.78	21.55	21.39
		RB100#0	21.87	21.65	21.31
	16QAM	RB1#0	21.71	21.15	21.84
		RB1#50	21.58	21.08	21.69
		RB1#99	21.63	21.09	21.73
		RB50#0	20.99	20.75	20.54
		RB50#50	20.93	20.77	20.56
		RB100#0	20.94	20.66	20.45

PAR, Band 2

Test Modulation		Channel Bandwidth	Low Channel PAR (dB)	Middle Channel PAR (dB)	High Channel PAR (dB)	Limit (dB)
QPSK	1 RB	20 MHz	4.32	4.04	3.28	13
	100 RB		5.28	5.36	5.32	13
16QAM	1 RB	20 MHz	5.28	5.36	4.24	13
	100 RB		6.24	6.28	6.12	13

PAR, Band 4

Test Modulation		Channel Bandwidth	Low Channel PAR (dB)	Middle Channel PAR (dB)	High Channel PAR (dB)	Limit (dB)
QPSK	1 RB	20 MHz	4.20	3.48	4.44	13
	100 RB		5.32	5.12	5.40	13
16QAM	1 RB	20 MHz	5.52	4.36	5.40	13
	100 RB		6.12	6.08	6.32	13

PAR, Band 5

Test Modulation		Channel Bandwidth	Low Channel PAR (dB)	Middle Channel PAR (dB)	High Channel PAR (dB)	Limit (dB)
QPSK	1 RB	10 MHz	3.44	4.60	3.56	13
	50 RB		5.48	5.16	5.20	13
16QAM	1 RB	10 MHz	4.44	6.04	4.60	13
	50 RB		6.40	6.20	6.16	13

PAR, Band 66

Test Modulation		Channel Bandwidth	Low Channel PAR (dB)	Middle Channel PAR (dB)	High Channel PAR (dB)	Limit (dB)
QPSK	1 RB	20 MHz	3.88	4.00	2.64	13
	100 RB		5.28	5.36	4.92	13
16QAM	1 RB	20 MHz	4.76	5.16	3.20	13
	100 RB		6.20	6.28	5.76	13

Note: peak-to-average ratio (PAR) <13 dB.

ERP & EIRP

External Antenna:

WCDMA Band V Middle Channel

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
836.60	H	95.41	20.49	0.00	0.97	19.52	38.45	18.93
836.60	V	91.10	19.31	0.00	0.97	18.34	38.45	20.11

WCDMA Band II Middle Channel

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1880.00	H	85.54	10.76	11.14	1.56	20.34	33.00	12.66
1880.00	V	81.68	6.71	11.14	1.56	16.29	33.00	16.71

LTE Band 2

Frequency (MHz)	BW (MHz)	Modulation	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
					Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1880.00	1.40	QPSK	H	87.02	12.24	11.14	1.56	21.82	33.00	11.18
1880.00			V	88.39	13.42	11.14	1.56	23.00	33.00	10.00
1880.00	3.00		H	82.69	7.91	11.14	1.56	17.49	33.00	15.51
1880.00			V	87.38	12.41	11.14	1.56	21.99	33.00	11.01
1880.00	5.00		H	82.54	7.76	11.14	1.56	17.34	33.00	15.66
1880.00			V	86.78	11.81	11.14	1.56	21.39	33.00	11.61
1880.00	10.00		H	82.44	7.66	11.14	1.56	17.24	33.00	15.76
1880.00			V	86.54	11.57	11.14	1.56	21.15	33.00	11.85
1880.00	15.00		H	82.37	7.59	11.14	1.56	17.17	33.00	15.83
1880.00			V	86.76	11.79	11.14	1.56	21.37	33.00	11.63
1880.00	20.00		H	82.56	7.78	11.14	1.56	17.36	33.00	15.64
1880.00			V	86.86	11.89	11.14	1.56	21.47	33.00	11.53
1880.00	1.40	16QAM	H	86.87	12.09	11.14	1.56	21.67	33.00	11.33
1880.00			V	88.25	13.28	11.14	1.56	22.86	33.00	10.14
1880.00	3.00		H	82.57	7.79	11.14	1.56	17.37	33.00	15.63
1880.00			V	86.17	11.20	11.14	1.56	20.78	33.00	12.22
1880.00	5.00		H	82.41	7.63	11.14	1.56	17.21	33.00	15.79
1880.00			V	85.75	10.78	11.14	1.56	20.36	33.00	12.64
1880.00	10.00		H	82.00	7.22	11.14	1.56	16.80	33.00	16.20
1880.00			V	85.67	10.70	11.14	1.56	20.28	33.00	12.72
1880.00	15.00		H	82.37	7.59	11.14	1.56	17.17	33.00	15.83
1880.00			V	86.45	11.48	11.14	1.56	21.06	33.00	11.94
1880.00	20.00		H	82.46	7.68	11.14	1.56	17.26	33.00	15.74
1880.00			V	86.63	11.66	11.14	1.56	21.24	33.00	11.76

LTE Band 4

Frequency (MHz)	BW (MHz)	Modulation	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
					Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1732.50	1.40	QPSK	H	83.02	7.81	10.70	1.52	16.99	30.00	13.01
1732.50			V	89.63	14.12	10.70	1.52	23.30	30.00	6.70
1732.50	3.00		H	82.87	7.66	10.70	1.52	16.84	30.00	13.16
1732.50			V	89.54	14.03	10.70	1.52	23.21	30.00	6.79
1732.50	5.00		H	82.54	7.33	10.70	1.52	16.51	30.00	13.49
1732.50			V	89.14	13.63	10.70	1.52	22.81	30.00	7.19
1732.50	10.00		H	82.10	6.89	10.70	1.52	16.07	30.00	13.93
1732.50			V	88.70	13.19	10.70	1.52	22.37	30.00	7.63
1732.50	15.00		H	83.45	8.24	10.70	1.52	17.42	30.00	12.58
1732.50			V	89.21	13.70	10.70	1.52	22.88	30.00	7.12
1732.50	20.00		H	83.51	8.30	10.70	1.52	17.48	30.00	12.52
1732.50			V	89.90	14.39	10.70	1.52	23.57	30.00	6.43
1732.50	1.40	16QAM	H	83.00	7.79	10.70	1.52	16.97	30.00	13.03
1732.50			V	89.45	13.94	10.70	1.52	23.12	30.00	6.88
1732.50	3.00		H	82.78	7.57	10.70	1.52	16.75	30.00	13.25
1732.50			V	89.41	13.90	10.70	1.52	23.08	30.00	6.92
1732.50	5.00		H	82.24	7.03	10.70	1.52	16.21	30.00	13.79
1732.50			V	88.97	13.46	10.70	1.52	22.64	30.00	7.36
1732.50	10.00		H	82.01	6.80	10.70	1.52	15.98	30.00	14.02
1732.50			V	88.64	13.13	10.70	1.52	22.31	30.00	7.69
1732.50	15.00		H	83.21	8.00	10.70	1.52	17.18	30.00	12.82
1732.50			V	89.00	13.49	10.70	1.52	22.67	30.00	7.33
1732.50	20.00		H	83.45	8.24	10.70	1.52	17.42	30.00	12.58
1732.50			V	89.78	14.27	10.70	1.52	23.45	30.00	6.55

LTE Band 5

Frequency (MHz)	BW (MHz)	Modulation	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
					Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
836.50	1.40	QPSK	H	92.08	20.29	0.00	0.97	15.24	38.45	23.21
836.50			V	90.54	15.61	0.00	0.97	19.67	38.45	18.78
836.50	3.00		H	92.25	20.46	0.00	0.97	15.3	38.45	23.15
836.50			V	91.24	16.31	0.00	0.97	19.49	38.45	18.96
836.50	5.00		H	92.43	20.64	0.00	0.97	15.34	38.45	23.11
836.50			V	91.2	16.27	0.00	0.97	19.32	38.45	19.13
836.50	10.00		H	91.75	19.96	0.00	0.97	14.64	38.45	23.81
836.50			V	90.98	16.05	0.00	0.97	18.99	38.45	19.46
836.50	1.40	16QAM	H	91.56	19.77	0.00	0.97	15.08	38.45	23.37
836.50			V	91.25	16.32	0.00	0.97	19.39	38.45	19.06
836.50	3.00		H	92.15	20.36	0.00	0.97	15.1	38.45	23.35
836.50			V	91.00	16.07	0.00	0.97	18.8	38.45	19.65
836.50	5.00		H	92.34	20.55	0.00	0.97	15.35	38.45	23.1
836.50			V	90.24	15.31	0.00	0.97	19.58	38.45	18.87
836.50	10.00		H	91.64	19.85	0.00	0.97	14.34	38.45	24.11
836.50			V	92.08	20.29	0.00	0.97	18.88	38.45	19.57

LTE Band 7

Frequency (MHz)	BW (MHz)	Modulation	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
					Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
2535.00	5.00	QPSK	H	77.69	4.60	12.21	1.79	15.02	33.00	17.98
2535.00			V	85.11	11.73	12.21	1.79	22.15	33.00	10.85
2535.00	10.00		H	77.93	4.84	12.21	1.79	15.26	33.00	17.74
2535.00			V	83.06	9.68	12.21	1.79	20.10	33.00	12.90
2535.00	15.00		H	79.16	6.07	12.21	1.79	16.49	33.00	16.51
2535.00			V	84.19	10.81	12.21	1.79	21.23	33.00	11.77
2535.00	20.00		H	77.51	4.42	12.21	1.79	14.84	33.00	18.16
2535.00			V	84.58	11.20	12.21	1.79	21.62	33.00	11.38
2535.00	5.00	16QAM	H	77.21	4.12	12.21	1.79	14.54	33.00	18.46
2535.00			V	85.00	11.62	12.21	1.79	22.04	33.00	10.96
2535.00	10.00		H	77.87	4.78	12.21	1.79	15.20	33.00	17.80
2535.00			V	82.99	9.61	12.21	1.79	20.03	33.00	12.97
2535.00	15.00		H	79.01	5.92	12.21	1.79	16.34	33.00	16.66
2535.00			V	84.00	10.62	12.21	1.79	21.04	33.00	11.96
2535.00	20.00		H	77.20	4.11	12.21	1.79	14.53	33.00	18.47
2535.00			V	83.88	10.50	12.21	1.79	20.92	33.00	12.08

LTE Band 66

Frequency (MHz)	BW (MHz)	Modulation	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
					Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1745.00	1.40	QPSK	H	79.91	4.74	10.74	1.52	13.96	30.00	16.04
1745.00			V	89.24	13.78	10.74	1.52	23	30.00	7
1745.00	3.00		H	80.17	5	10.74	1.52	14.22	30.00	15.78
1745.00			V	87.97	12.51	10.74	1.52	21.73	30.00	8.27
1745.00	5.00		H	78.62	3.45	10.74	1.52	12.67	30.00	17.33
1745.00			V	86.71	11.25	10.74	1.52	20.47	30.00	9.53
1745.00	10.00		H	78.51	3.34	10.74	1.52	12.56	30.00	17.44
1745.00			V	86.21	10.75	10.74	1.52	19.97	30.00	10.03
1745.00	15.00		H	80.87	5.7	10.74	1.52	14.92	30.00	15.08
1745.00			V	87.28	11.82	10.74	1.52	21.04	30.00	8.96
1745.00	20.00		H	80.8	5.63	10.74	1.52	14.85	30.00	15.15
1745.00			V	87.12	11.66	10.74	1.52	20.88	30.00	9.12
1745.00	1.40	16QAM	H	79.87	4.7	10.74	1.52	13.92	30.00	16.08
1745.00			V	89.2	13.74	10.74	1.52	22.96	30.00	7.04
1745.00	3.00		H	80.1	4.93	10.74	1.52	14.15	30.00	15.85
1745.00			V	87.68	12.22	10.74	1.52	21.44	30.00	8.56
1745.00	5.00		H	78.23	3.06	10.74	1.52	12.28	30.00	17.72
1745.00			V	86.68	11.22	10.74	1.52	20.44	30.00	9.56
1745.00	10.00		H	77.24	2.07	10.74	1.52	11.29	30.00	18.71
1745.00			V	85.57	10.11	10.74	1.52	19.33	30.00	10.67
1745.00	15.00		H	78.25	3.08	10.74	1.52	12.3	30.00	17.7
1745.00			V	86.57	11.11	10.74	1.52	20.33	30.00	9.67
1745.00	20.00		H	80.54	5.37	10.74	1.52	14.59	30.00	15.41
1745.00			V	86.78	11.32	10.74	1.52	20.54	30.00	9.46

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

Inside Antenna:

WCDMA Band V Middle Channel

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
836.60	H	97.01	22.09	0.00	0.97	21.12	38.45	17.33
836.60	V	85.33	13.54	0.00	0.97	12.57	38.45	25.88

WCDMA Band II Middle Channel

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1880.00	H	83.33	8.55	11.14	1.56	18.13	33.00	14.87
1880.00	V	75.52	0.55	11.14	1.56	10.13	33.00	22.87

LTE Band 2

Frequency (MHz)	BW (MHz)	Modulation	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
					Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1880.00	1.40	QPSK	H	83.50	8.72	11.14	1.56	18.30	33.00	14.70
1880.00			V	74.00	-0.97	11.14	1.56	8.61	33.00	24.39
1880.00	3.00		H	82.50	7.72	11.14	1.56	17.30	33.00	15.70
1880.00			V	73.24	-1.73	11.14	1.56	7.85	33.00	25.15
1880.00	5.00		H	82.01	7.23	11.14	1.56	16.81	33.00	16.19
1880.00			V	72.94	-2.03	11.14	1.56	7.55	33.00	25.45
1880.00	10.00		H	82.40	7.62	11.14	1.56	17.20	33.00	15.80
1880.00			V	73.54	-1.43	11.14	1.56	8.15	33.00	24.85
1880.00	15.00		H	83.41	8.63	11.14	1.56	18.21	33.00	14.79
1880.00			V	73.87	-1.10	11.14	1.56	8.48	33.00	24.52
1880.00	20.00		H	83.34	8.56	11.14	1.56	18.14	33.00	14.86
1880.00			V	73.24	-1.73	11.14	1.56	7.85	33.00	25.15
1880.00	1.40	16QAM	H	84.10	9.32	11.14	1.56	18.90	33.00	14.10
1880.00			V	74.74	-0.23	11.14	1.56	9.35	33.00	23.65
1880.00	3.00		H	83.54	8.76	11.14	1.56	18.34	33.00	14.66
1880.00			V	73.44	-1.53	11.14	1.56	8.05	33.00	24.95
1880.00	5.00		H	82.51	7.73	11.14	1.56	17.31	33.00	15.69
1880.00			V	73.21	-1.76	11.14	1.56	7.82	33.00	25.18
1880.00	10.00		H	82.97	8.19	11.14	1.56	17.77	33.00	15.23
1880.00			V	73.87	-1.10	11.14	1.56	8.48	33.00	24.52
1880.00	15.00		H	83.80	9.02	11.14	1.56	18.60	33.00	14.40
1880.00			V	74.00	-0.97	11.14	1.56	8.61	33.00	24.39
1880.00	20.00		H	83.78	9.00	11.14	1.56	18.58	33.00	14.42
1880.00			V	73.76	-1.21	11.14	1.56	8.37	33.00	24.63

LTE Band 4

Frequency (MHz)	BW (MHz)	Modulation	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
					Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1732.50	1.40	QPSK	H	83.21	8.00	10.70	1.52	17.18	30.00	12.82
1732.50			V	75.54	0.03	10.70	1.52	9.21	30.00	20.79
1732.50	3.00		H	82.57	7.36	10.70	1.52	16.54	30.00	13.46
1732.50			V	74.57	-0.94	10.70	1.52	8.24	30.00	21.76
1732.50	5.00		H	83.64	8.43	10.70	1.52	17.61	30.00	12.39
1732.50			V	74.60	-0.91	10.70	1.52	8.27	30.00	21.73
1732.50	10.00		H	82.54	7.33	10.70	1.52	16.51	30.00	13.49
1732.50			V	74.40	-1.11	10.70	1.52	8.07	30.00	21.93
1732.50	15.00		H	82.64	7.43	10.70	1.52	16.61	30.00	13.39
1732.50			V	74.81	-0.70	10.70	1.52	8.48	30.00	21.52
1732.50	20.00		H	83.06	7.85	10.70	1.52	17.03	30.00	12.97
1732.50			V	74.58	-0.93	10.70	1.52	8.25	30.00	21.75
1732.50	1.40	16QAM	H	84.54	9.33	10.70	1.52	18.51	30.00	11.49
1732.50			V	75.34	-0.17	10.70	1.52	9.01	30.00	20.99
1732.50	3.00		H	83.67	8.46	10.70	1.52	17.64	30.00	12.36
1732.50			V	74.64	-0.87	10.70	1.52	8.31	30.00	21.69
1732.50	5.00		H	83.34	8.13	10.70	1.52	17.31	30.00	12.69
1732.50			V	74.54	-0.97	10.70	1.52	8.21	30.00	21.79
1732.50	10.00		H	83.14	7.93	10.70	1.52	17.11	30.00	12.89
1732.50			V	74.37	-1.14	10.70	1.52	8.04	30.00	21.96
1732.50	15.00		H	84.21	9.00	10.70	1.52	18.18	30.00	11.82
1732.50			V	75.45	-0.06	10.70	1.52	9.12	30.00	20.88
1732.50	20.00		H	84.50	9.29	10.70	1.52	18.47	30.00	11.53
1732.50			V	75.87	0.36	10.70	1.52	9.54	30.00	20.46

LTE Band 5

Frequency (MHz)	BW (MHz)	Modulation	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)	
					Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)				
836.50	1.40	QPSK	H	95.00	20.07	0.00	0.97	19.10	38.45	19.35	
836.50			V	86.00	14.21	0.00	0.97	13.24	38.45	25.21	
836.50	3.00		H	94.87	19.94	0.00	0.97	18.97	38.45	19.48	
836.50			V	85.54	13.75	0.00	0.97	12.78	38.45	25.67	
836.50	5.00		H	93.87	18.94	0.00	0.97	17.97	38.45	20.48	
836.50			V	85.00	13.21	0.00	0.97	12.24	38.45	26.21	
836.50	10.00		H	93.03	18.10	0.00	0.97	17.13	38.45	21.32	
836.50			V	82.95	11.16	0.00	0.97	10.19	38.45	28.26	
836.50	1.40		16QAM	H	94.87	19.94	0.00	0.97	18.97	38.45	19.48
836.50				V	85.87	14.08	0.00	0.97	13.11	38.45	25.34
836.50	3.00	H		94.47	19.54	0.00	0.97	18.57	38.45	19.88	
836.50		V		85.14	13.35	0.00	0.97	12.38	38.45	26.07	
836.50	5.00	H		93.47	18.54	0.00	0.97	17.57	38.45	20.88	
836.50		V		84.47	12.68	0.00	0.97	11.71	38.45	26.74	
836.50	10.00	H		92.87	17.94	0.00	0.97	16.97	38.45	21.48	
836.50		V		82.87	11.08	0.00	0.97	10.11	38.45	28.34	

LTE Band 7

Frequency (MHz)	BW (MHz)	Modulation	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
					Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
2535.00	5.00	QPSK	H	83.75	10.66	12.21	1.79	21.08	33.00	11.92
2535.00			V	74.22	0.84	12.21	1.79	11.26	33.00	21.74
2535.00	10.00		H	83.24	10.15	12.21	1.79	20.57	33.00	12.43
2535.00			V	74.24	0.86	12.21	1.79	11.28	33.00	21.72
2535.00	15.00		H	83.21	10.12	12.21	1.79	20.54	33.00	12.46
2535.00			V	74.21	0.83	12.21	1.79	11.25	33.00	21.75
2535.00	20.00		H	83.55	10.46	12.21	1.79	20.88	33.00	12.12
2535.00			V	74.20	0.82	12.21	1.79	11.24	33.00	21.76
2535.00	5.00	16QAM	H	84.40	11.31	12.21	1.79	21.73	33.00	11.27
2535.00			V	74.14	0.76	12.21	1.79	11.18	33.00	21.82
2535.00	10.00		H	84.10	11.01	12.21	1.79	21.43	33.00	11.57
2535.00			V	74.00	0.62	12.21	1.79	11.04	33.00	21.96
2535.00	15.00		H	84.12	11.03	12.21	1.79	21.45	33.00	11.55
2535.00			V	74.21	0.83	12.21	1.79	11.25	33.00	21.75
2535.00	20.00		H	84.45	11.36	12.21	1.79	21.78	33.00	11.22
2535.00			V	74.54	1.16	12.21	1.79	11.58	33.00	21.42

LTE Band 66

Frequency (MHz)	BW (MHz)	Modulation	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
					Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1745.00	1.40	QPSK	H	83.87	8.70	10.74	1.52	17.92	30.00	12.08
1745.00			V	75.55	0.09	10.74	1.52	9.31	30.00	20.69
1745.00	3.00		H	83.54	8.37	10.74	1.52	17.59	30.00	12.41
1745.00			V	75.42	-0.04	10.74	1.52	9.18	30.00	20.82
1745.00	5.00		H	82.87	7.70	10.74	1.52	16.92	30.00	13.08
1745.00			V	74.24	-1.22	10.74	1.52	8.00	30.00	22.00
1745.00	10.00		H	82.97	7.80	10.74	1.52	17.02	30.00	12.98
1745.00			V	74.78	-0.68	10.74	1.52	8.54	30.00	21.46
1745.00	15.00		H	83.57	8.40	10.74	1.52	17.62	30.00	12.38
1745.00			V	74.57	-0.89	10.74	1.52	8.33	30.00	21.67
1745.00	20.00		H	83.91	8.74	10.74	1.52	17.96	30.00	12.04
1745.00			V	74.98	-0.48	10.74	1.52	8.74	30.00	21.26
1745.00	1.40	16QAM	H	84.54	9.37	10.74	1.52	18.59	30.00	11.41
1745.00			V	75.89	0.42	10.74	1.52	9.64	30.00	20.36
1745.00	3.00		H	83.78	8.61	10.74	1.52	17.83	30.00	12.17
1745.00			V	75.48	0.02	10.74	1.52	9.24	30.00	20.76
1745.00	5.00		H	83.27	8.10	10.74	1.52	17.32	30.00	12.68
1745.00			V	74.54	-0.92	10.74	1.52	8.30	30.00	21.70
1745.00	10.00		H	83.14	7.97	10.74	1.52	17.19	30.00	12.81
1745.00			V	74.21	-1.25	10.74	1.52	7.97	30.00	22.03
1745.00	15.00		H	84.23	9.06	10.74	1.52	18.28	30.00	11.72
1745.00			V	74.24	-1.22	10.74	1.52	8.00	30.00	22.00
1745.00	20.00		H	84.40	9.23	10.74	1.52	18.45	30.00	11.55
1745.00			V	74.54	-0.92	10.74	1.52	8.30	30.00	21.70

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level


FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53- OCCUPIED BANDWIDTH**Applicable Standard**

FCC §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The 26 dB & 99% bandwidth was recorded.

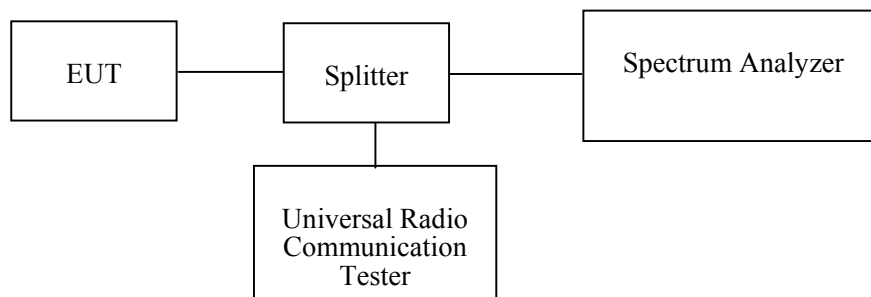**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2018-12-10	2019-12-10
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41010012	Each time	/
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	/
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24.9 °C
Relative Humidity:	47 %
ATM Pressure:	100.6 kPa

The testing was performed by Blake Yang on 2019-06-16.

Test Mode: Transmitting


Test Result: Compliant. Please refer to the following table and plots.

Band	Test Channel	Mode	99% Occupied Bandwidth (MHz)	26 dB Occupied Bandwidth (MHz)
WCDMA Band II	M	Rel 99	4.160	4.700
		HSDPA	4.160	4.720
		HSUPA	4.160	4.720
WCDMA Band V		Rel 99	4.140	4.700
		HSDPA	4.160	4.720
		HSUPA	4.140	4.720

Band	Bandwidth	Modulation	99% occupied bandwidth (MHz)	26 dB bandwidth (MHz)
LTE Band 2	1.4 MHz	QPSK	1.112	1.317
		16QAM	1.106	1.431
	3 MHz	QPSK	2.705	3.018
		16QAM	2.705	3.042
	5 MHz	QPSK	4.569	5.391
		16QAM	4.549	5.311
	10 MHz	QPSK	8.978	9.820
		16QAM	8.978	9.900
LTE Band 4	1.4 MHz	QPSK	1.112	1.371
		16QAM	1.124	1.341
	3 MHz	QPSK	2.705	3.066
		16QAM	2.693	3.102
	5 MHz	QPSK	4.569	5.291
		16QAM	4.549	5.371
	10 MHz	QPSK	9.018	9.820
		16QAM	8.978	9.820
LTE Band 5	1.4 MHz	QPSK	1.112	1.323
		16QAM	1.124	1.311
	3 MHz	QPSK	2.705	3.078
		16QAM	2.705	3.054
	5 MHz	QPSK	4.569	5.411
		16QAM	4.549	5.371
	10 MHz	QPSK	9.018	9.860
		16QAM	8.938	9.900


Band	Bandwidth	Modulation	99% occupied bandwidth (MHz)	26 dB bandwidth (MHz)
LTE Band 7	5 MHz	QPSK	4.549	5.351
		16QAM	4.549	5.431
	10 MHz	QPSK	8.978	9.860
		16QAM	8.978	9.739
	15 MHz	QPSK	13.587	15.631
		16QAM	13.587	15.090
	20 MHz	QPSK	17.956	19.800
		16QAM	18.116	20.120
LTE Band 66	1.4 MHz	QPSK	1.112	1.359
		16QAM	1.118	1.323
	3 MHz	QPSK	2.705	3.042
		16QAM	2.693	3.078
	5 MHz	QPSK	4.569	5.311
		16QAM	4.569	5.371
	10 MHz	QPSK	8.978	9.780
		16QAM	8.978	9.900
	15 MHz	QPSK	13.587	15.331
		16QAM	13.527	15.090
	20 MHz	QPSK	17.956	19.800
		16QAM	17.956	20.120

WCDMA Band II, Rel 99

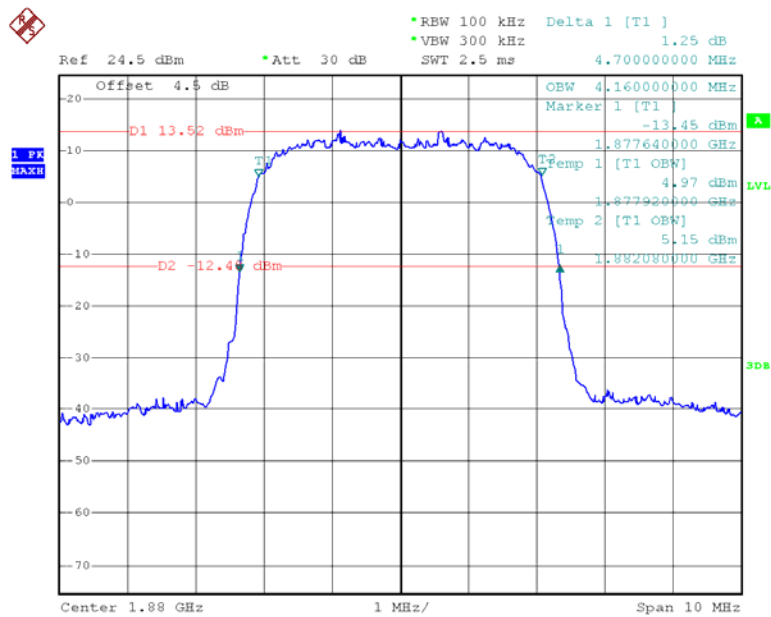


Date: 16.JUN.2019 17:58:46

WCDMA Band II, HSDPA

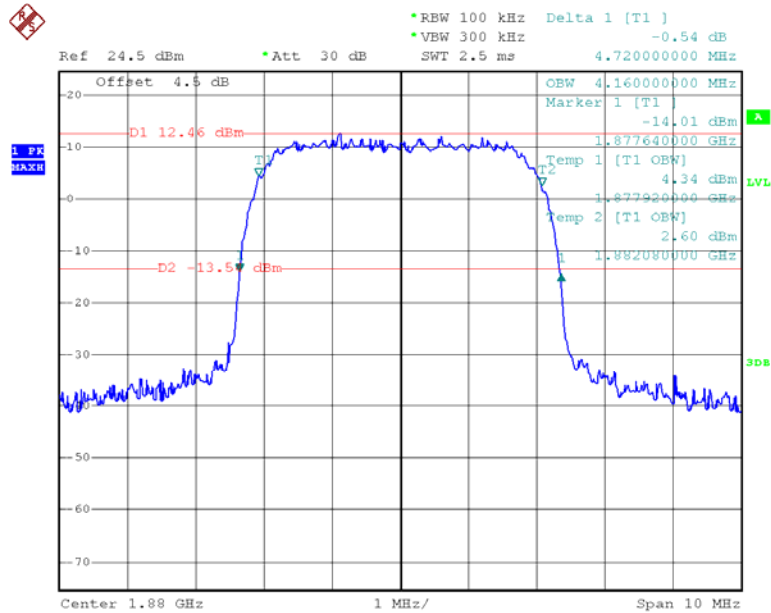


Date: 16.JUN.2019 17:59:58

WCDMA Band II, HSUPA

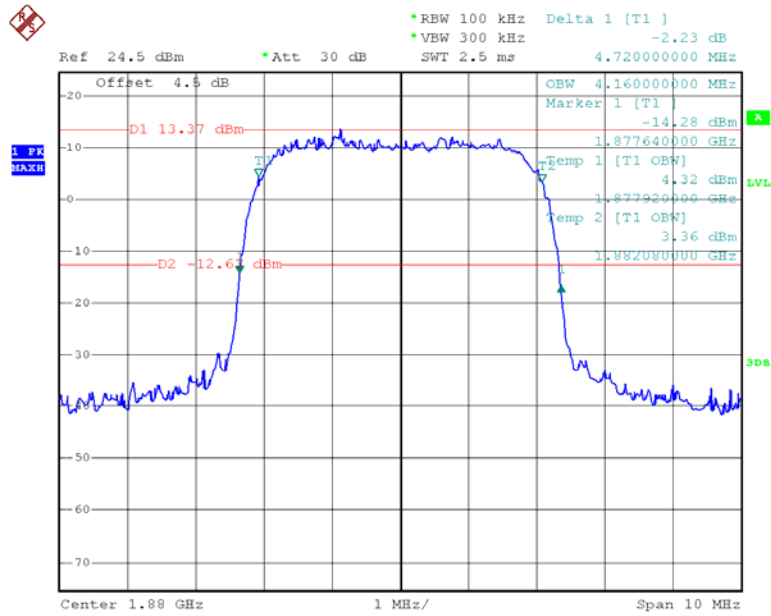


Date: 16.JUN.2019 18:01:37

WCDMA Band V, Rel 99

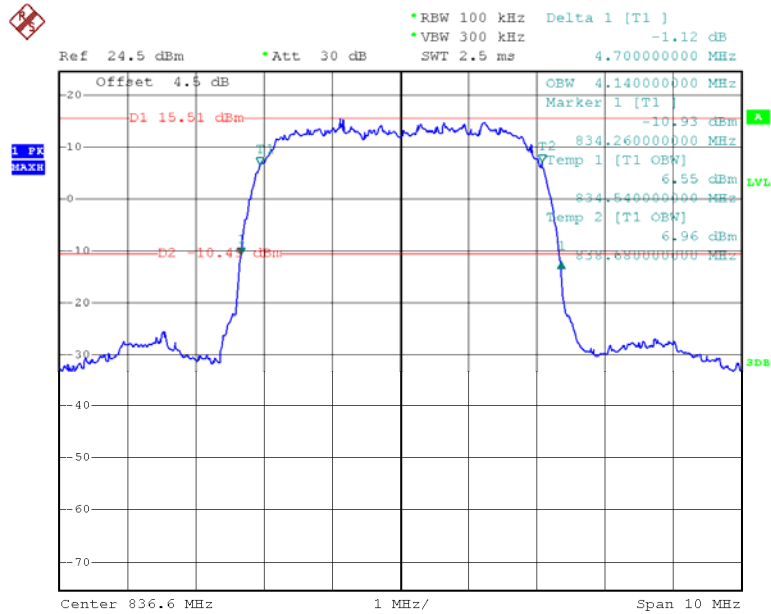


Date: 16.JUN.2019 18:22:31

WCDMA Band V, HSDPA

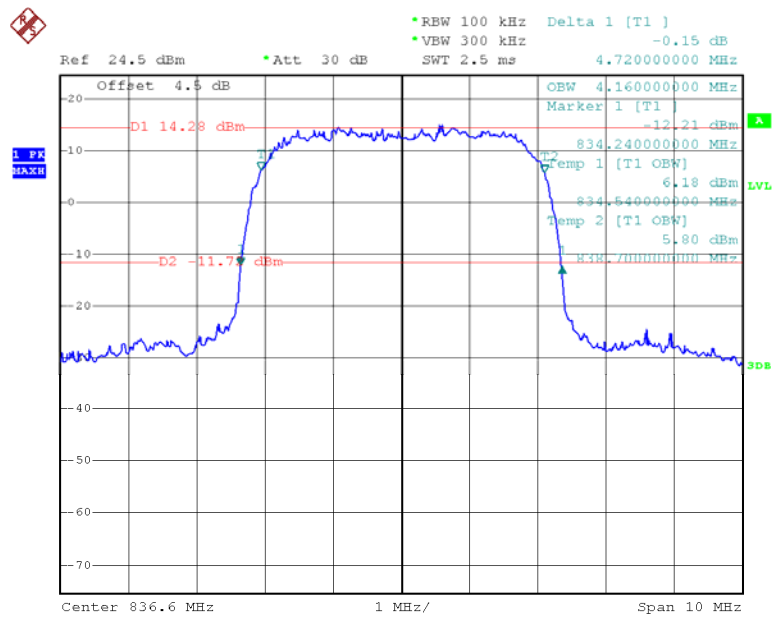


Date: 16.JUN.2019 18:23:56

WCDMA Band V, HSUPA

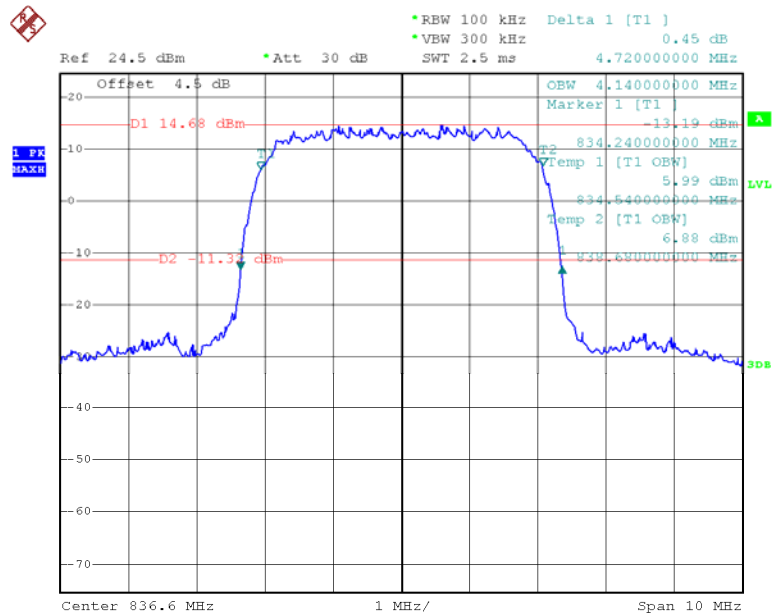


Date: 16.JUN.2019 18:25:01


Band 2 1.4 MHz_Middle_QPSK_RB6#0

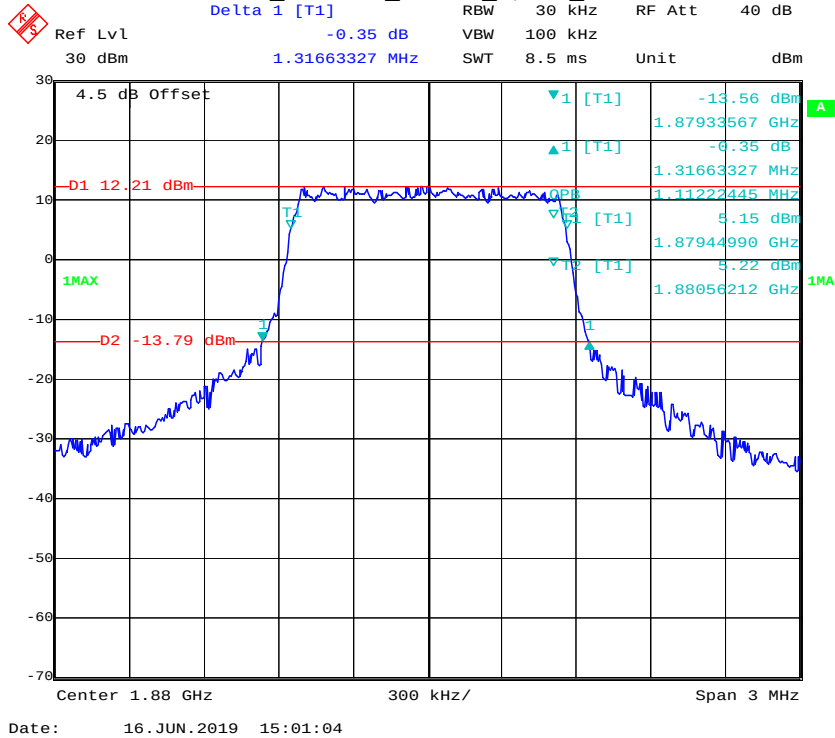


Band 2 1.4 MHz_Middle_16QAM_RB6#0


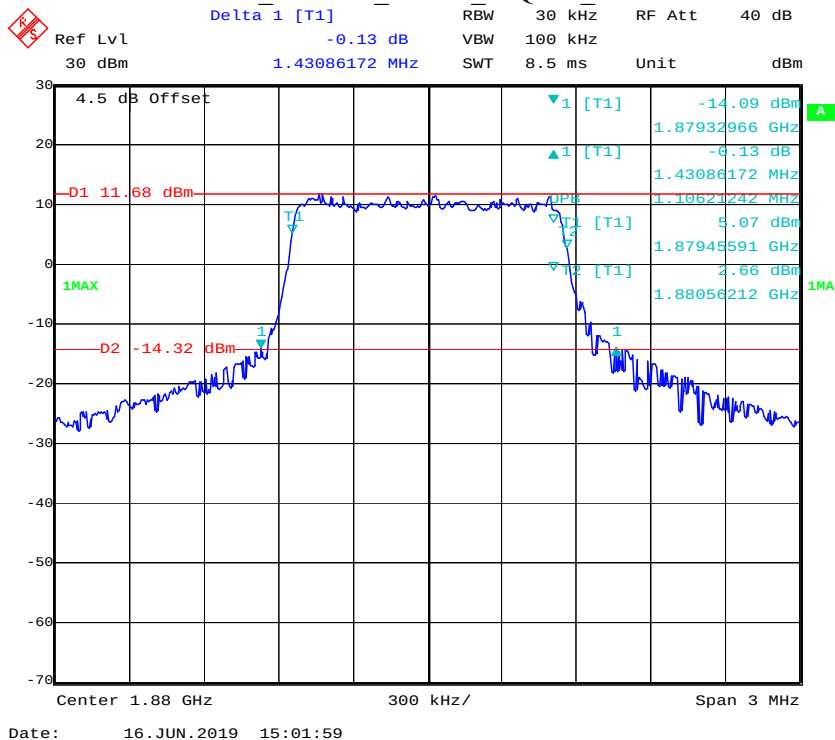


Band 2_5 MHz_Middle_QPSK_RB25#0

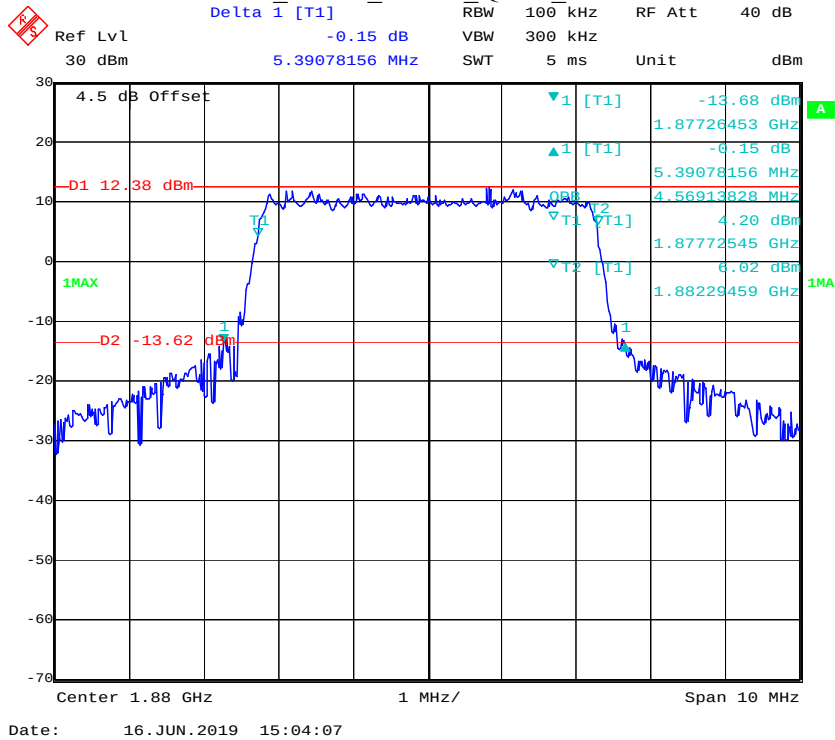


Band 2_5 MHz_Middle_16QAM_RB25#0

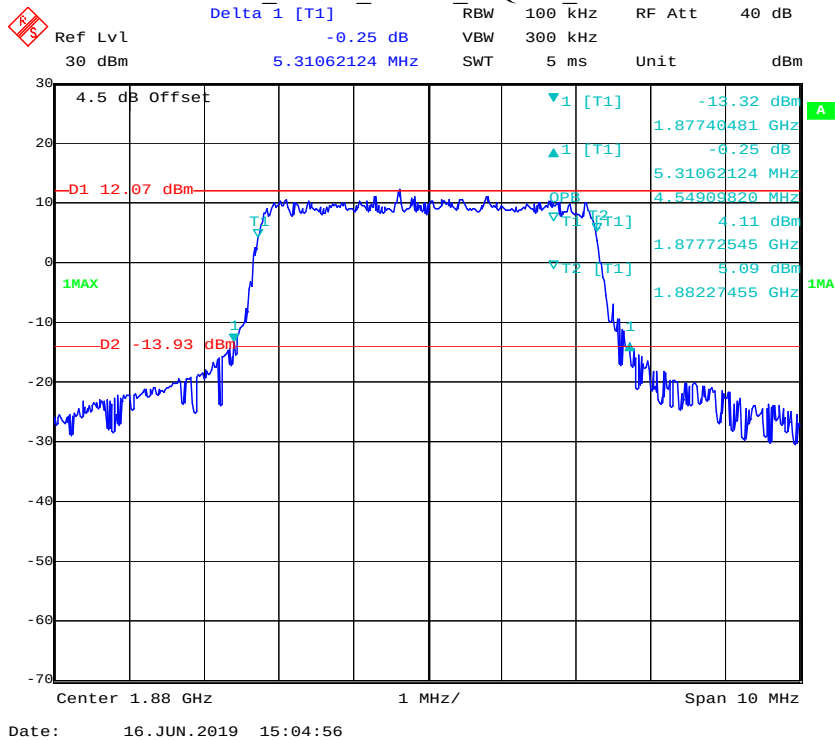


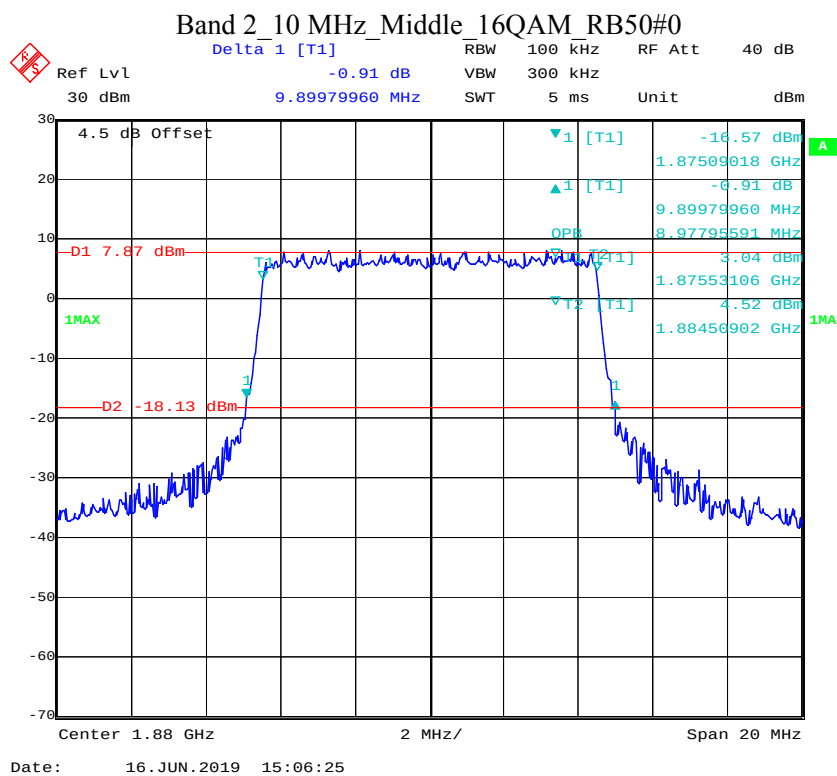
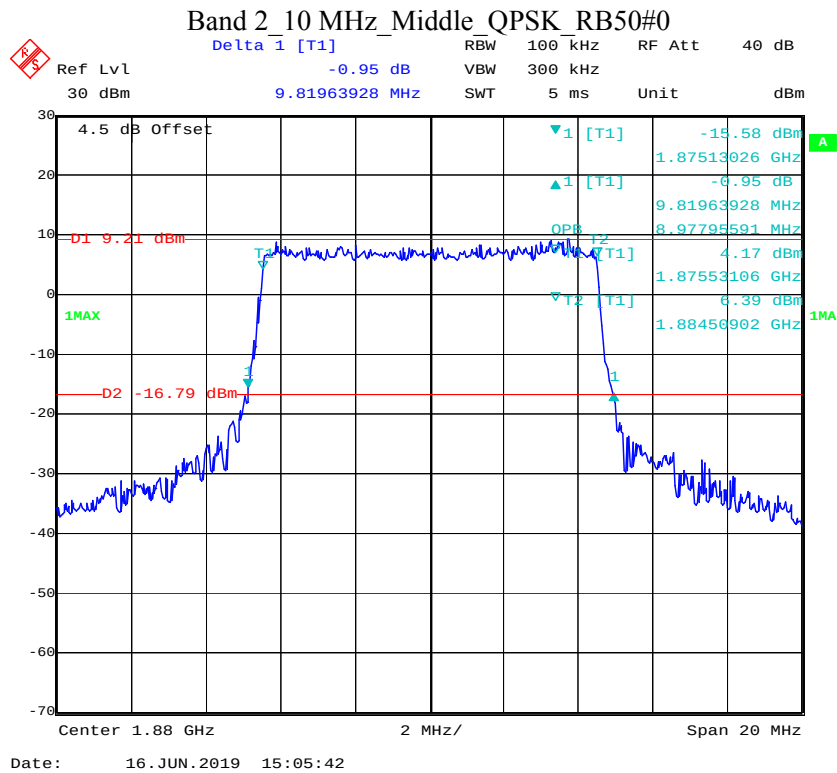


Band 2_15 MHz_Middle_QPSK_RB75#0

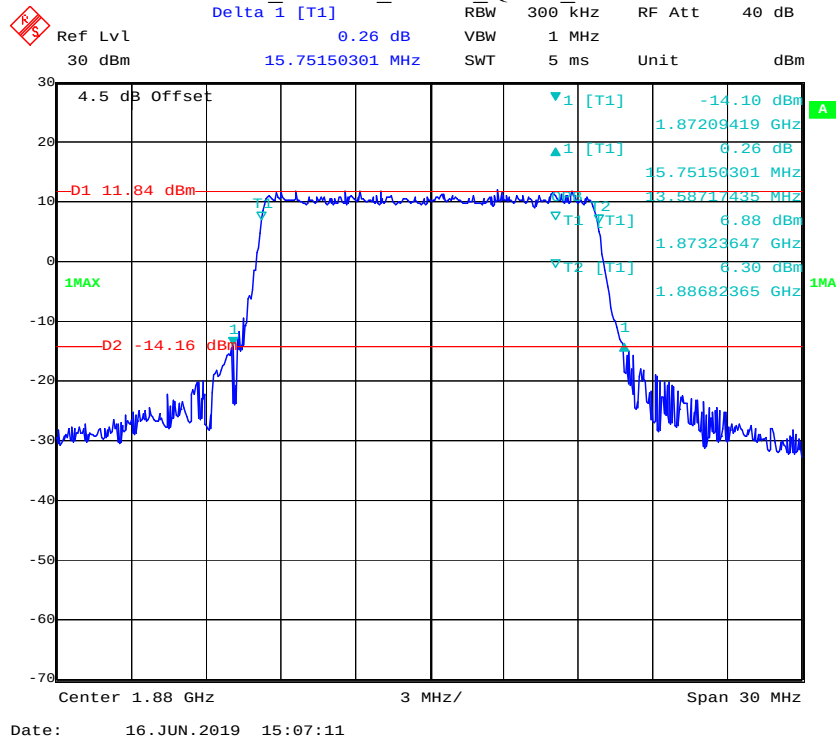


Band 2_15 MHz_Middle_16QAM_RB75#0

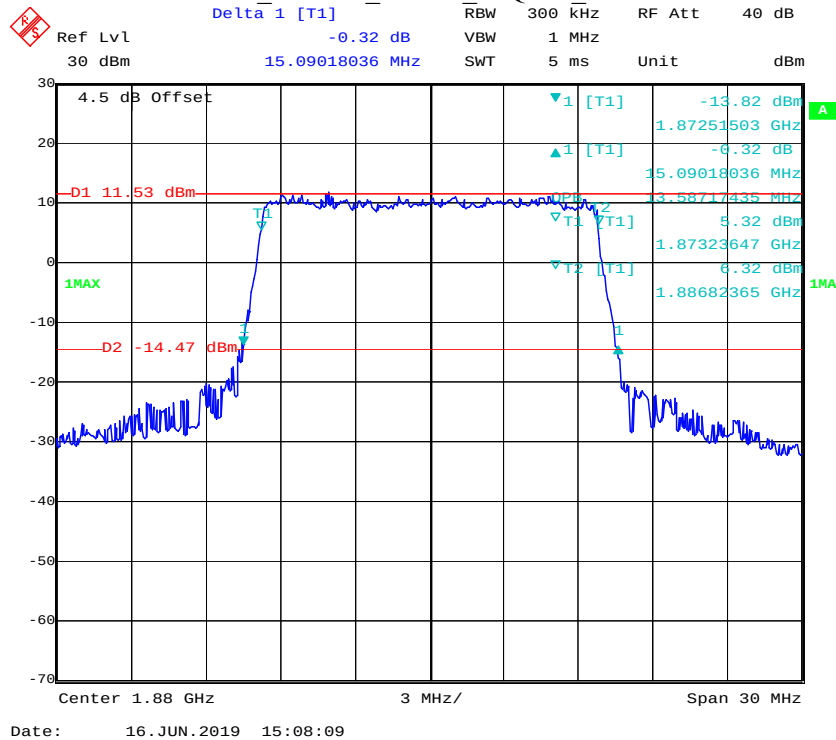


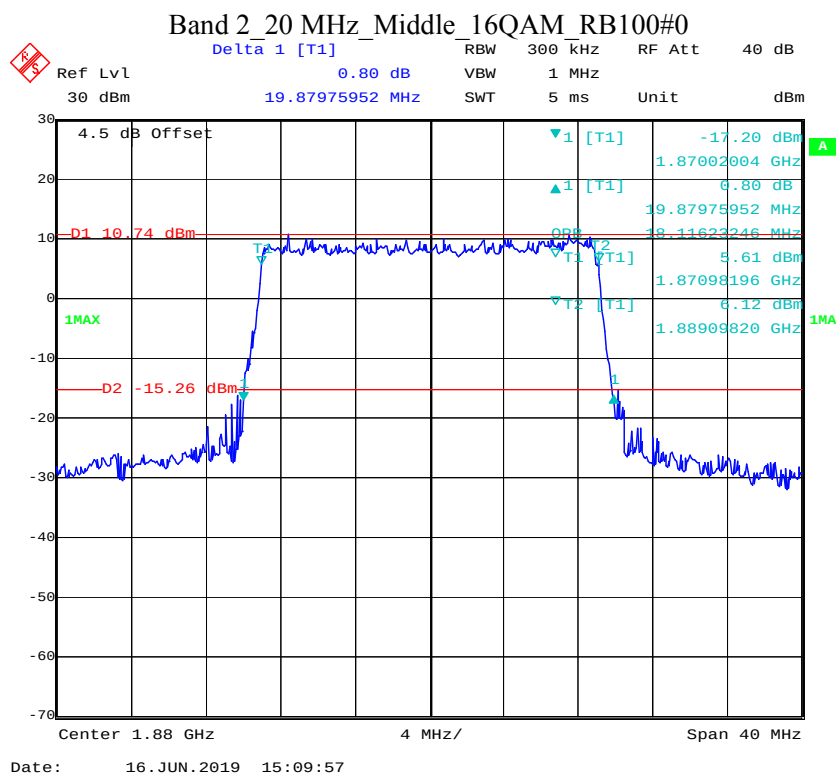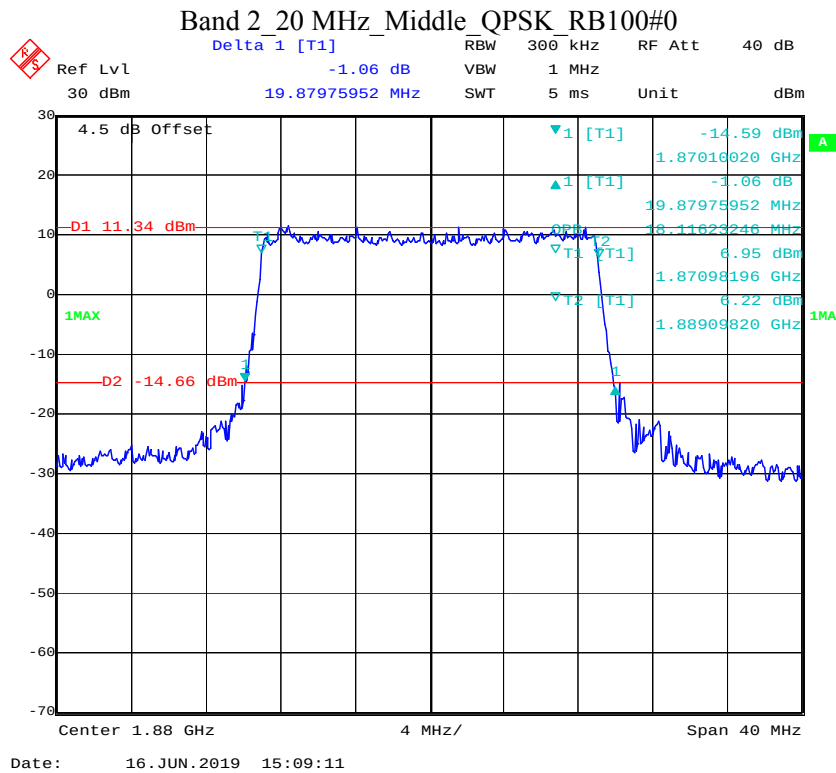


Band 4_1.4 MHz_Middle_QPSK_RB6#0

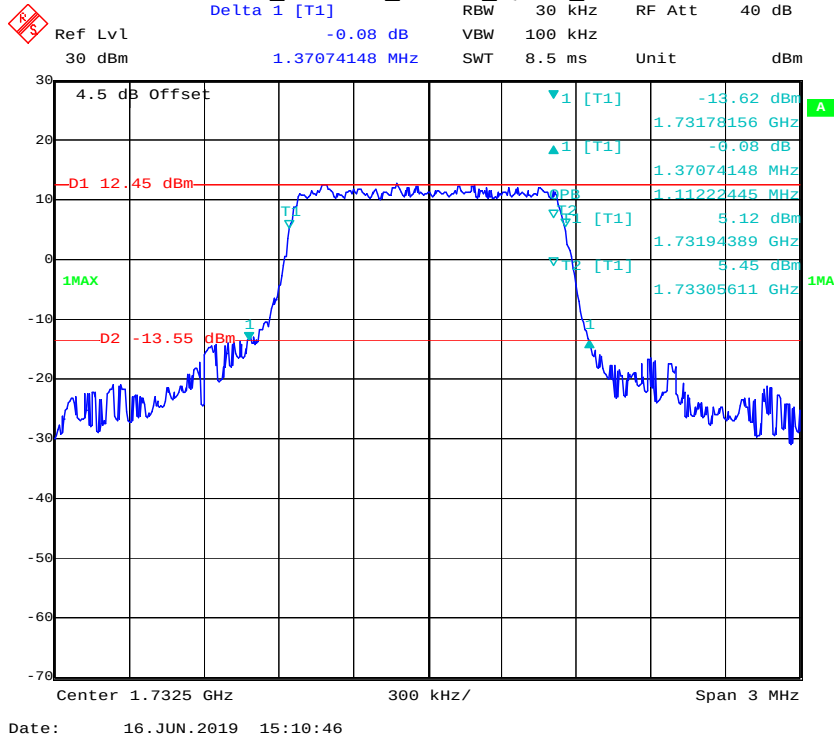


Band 4_1.4 MHz_Middle_16QAM_RB6#0

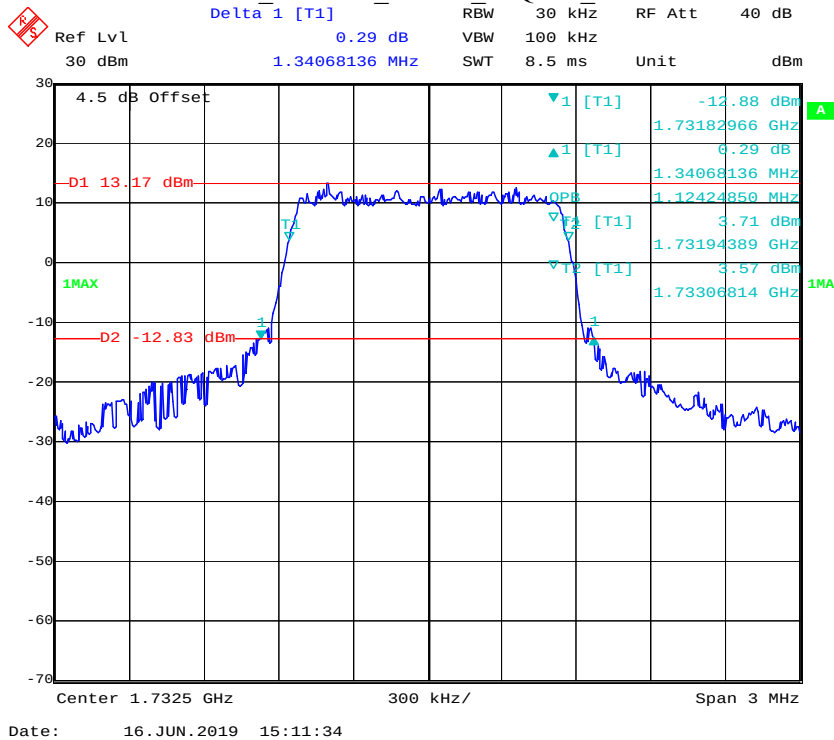


Band 4_3 MHz_Middle_QPSK_RB15#0

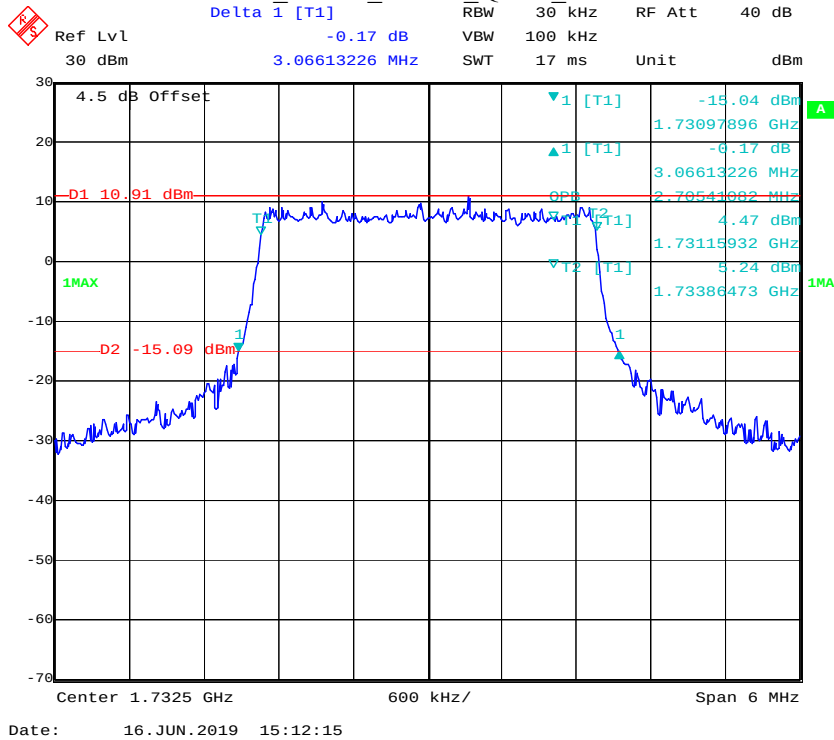


Band 4_3 MHz_Middle_16QAM_RB15#0

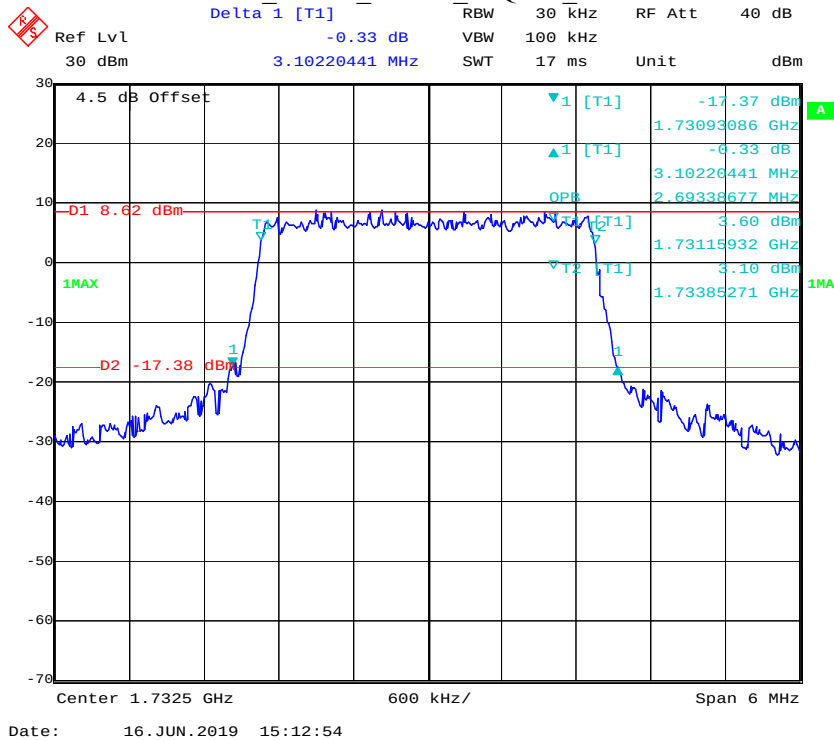


Band 4_5 MHz_Middle_QPSK_RB25#0

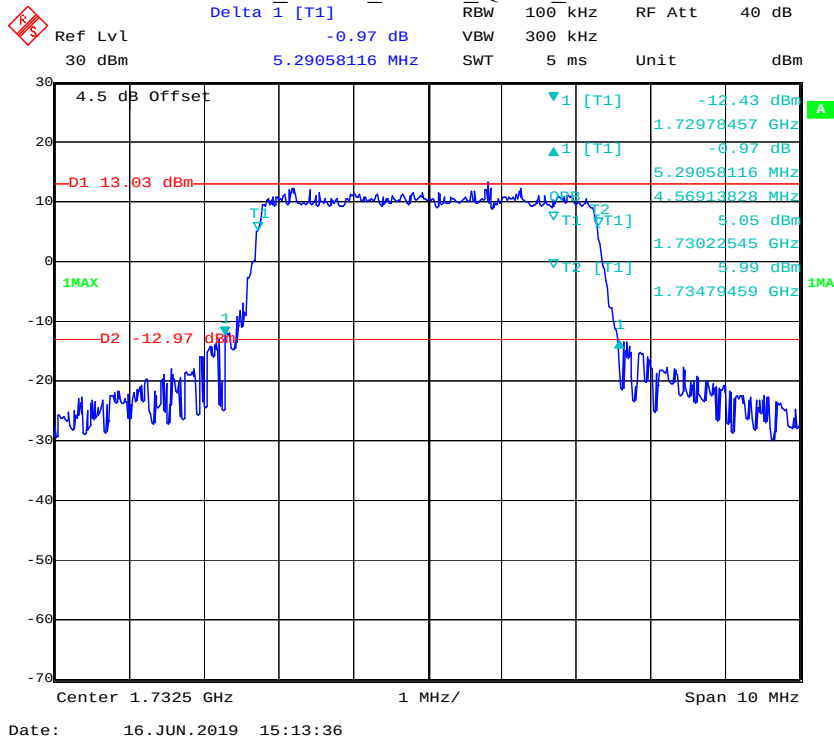


Band 4_5 MHz_Middle_16QAM_RB25#0

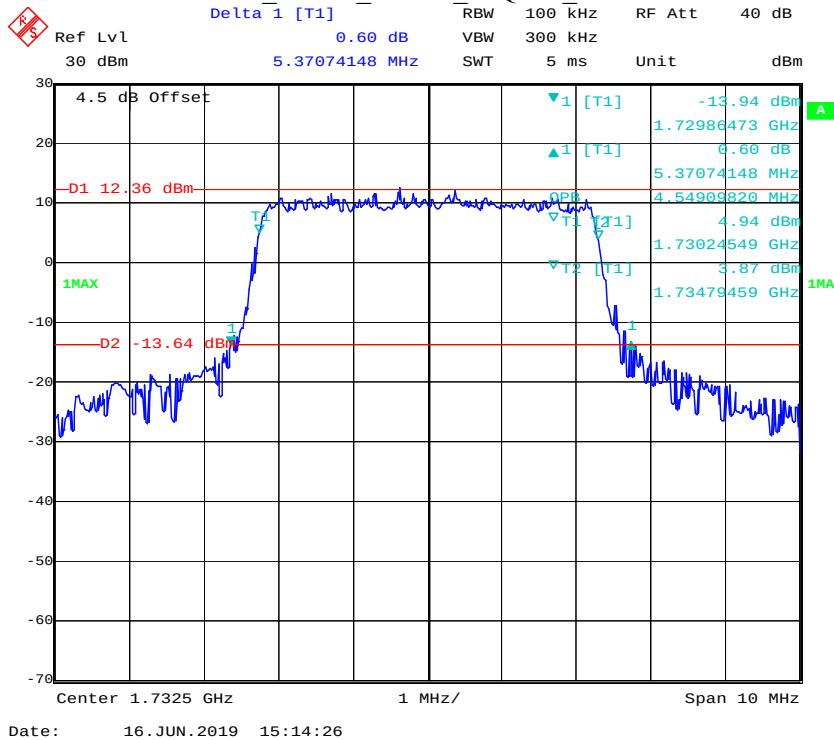


Band 4_10 MHz_Middle_QPSK_RB50#0

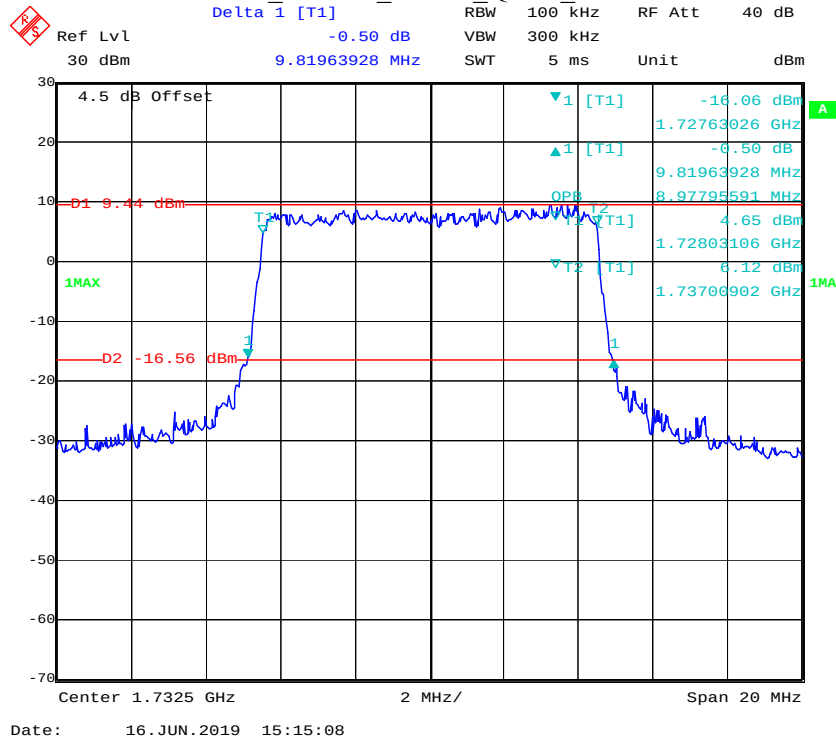


Band 4_10 MHz_Middle_16QAM_RB50#0

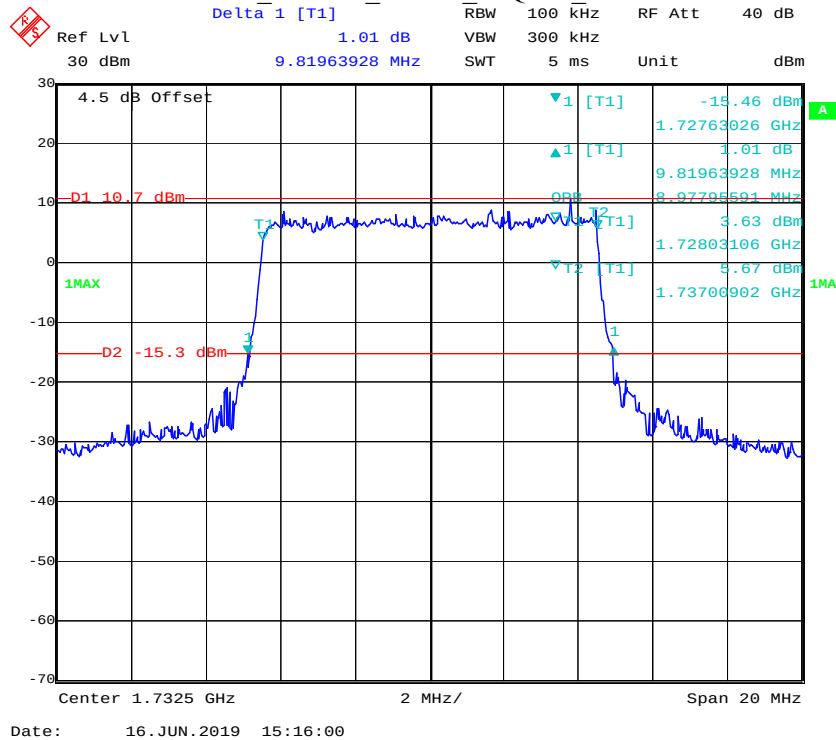


Band 4_20 MHz_Middle_QPSK_RB100#0

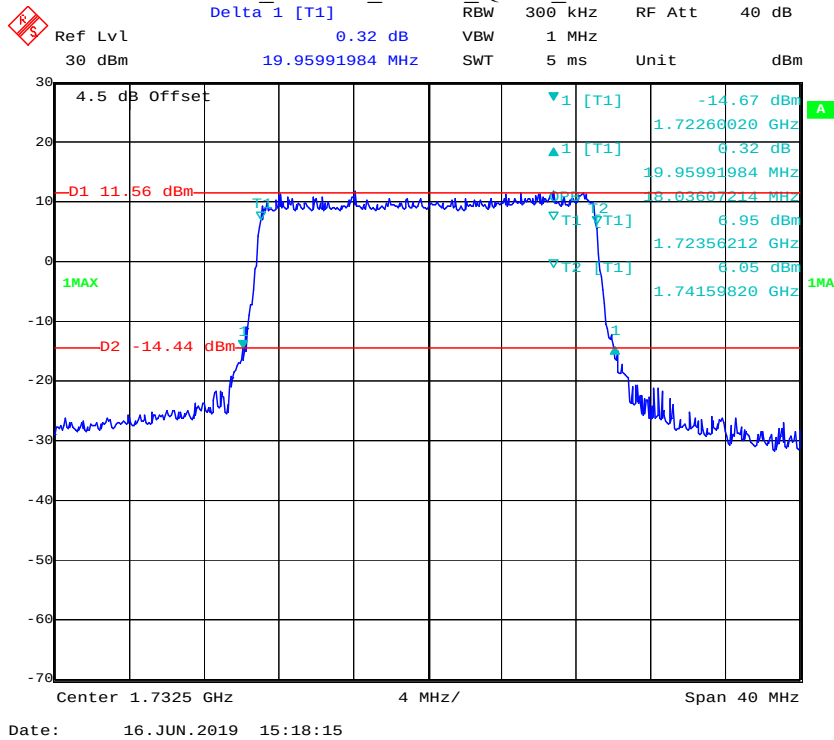


Band 4_20 MHz_Middle_16QAM_RB100#0

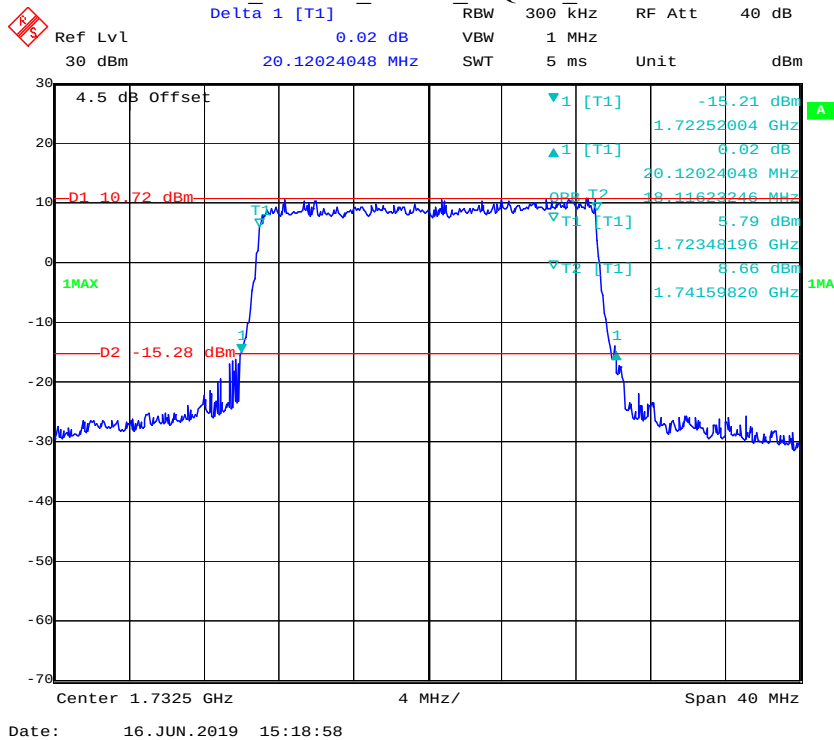


Band 5_1.4 MHz_Middle_QPSK_RB6#0

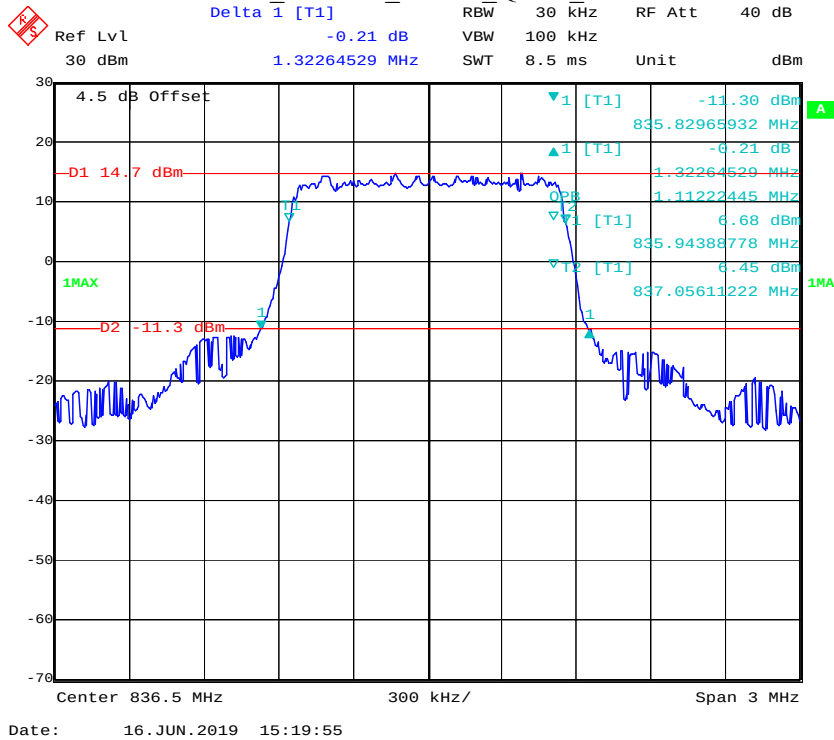


Band 5_1.4 MHz_Middle_16QAM_RB6#0

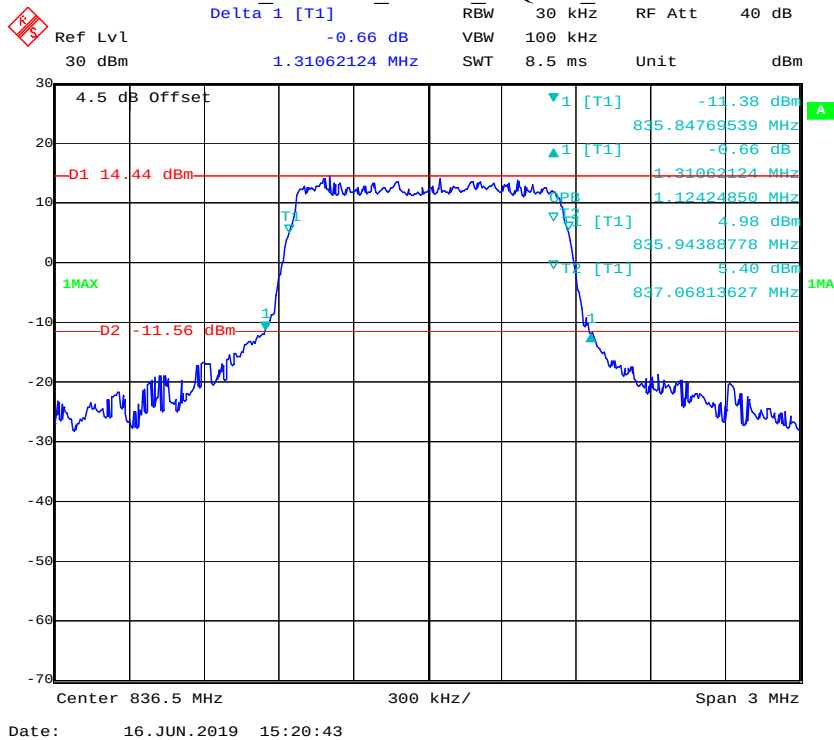


Band 5_3 MHz_Middle_QPSK_RB15#0

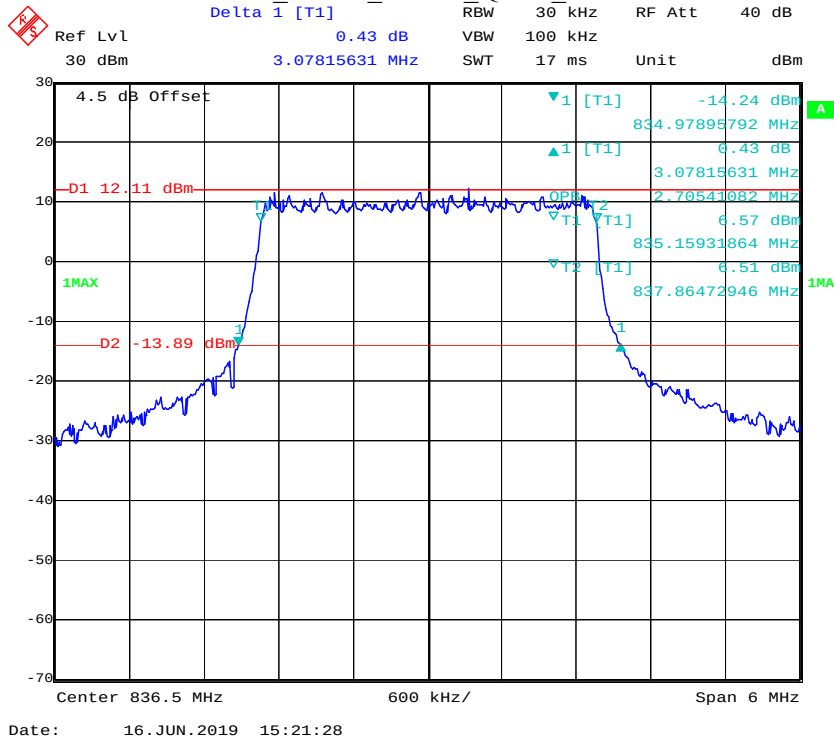


Band 5_3 MHz_Middle_16QAM_RB15#0

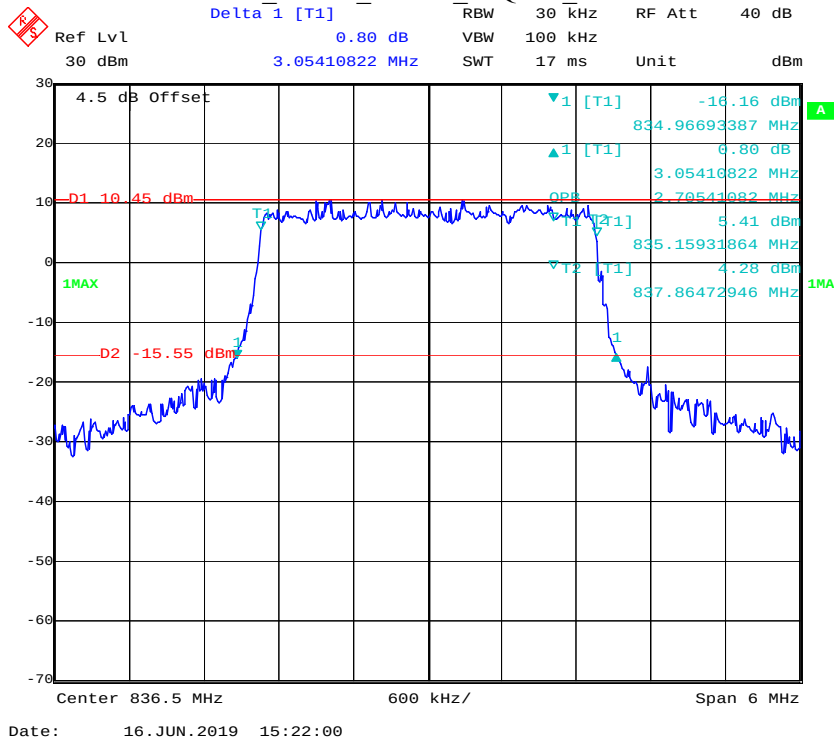


Band 5_5 MHz_Middle_QPSK_RB25#0

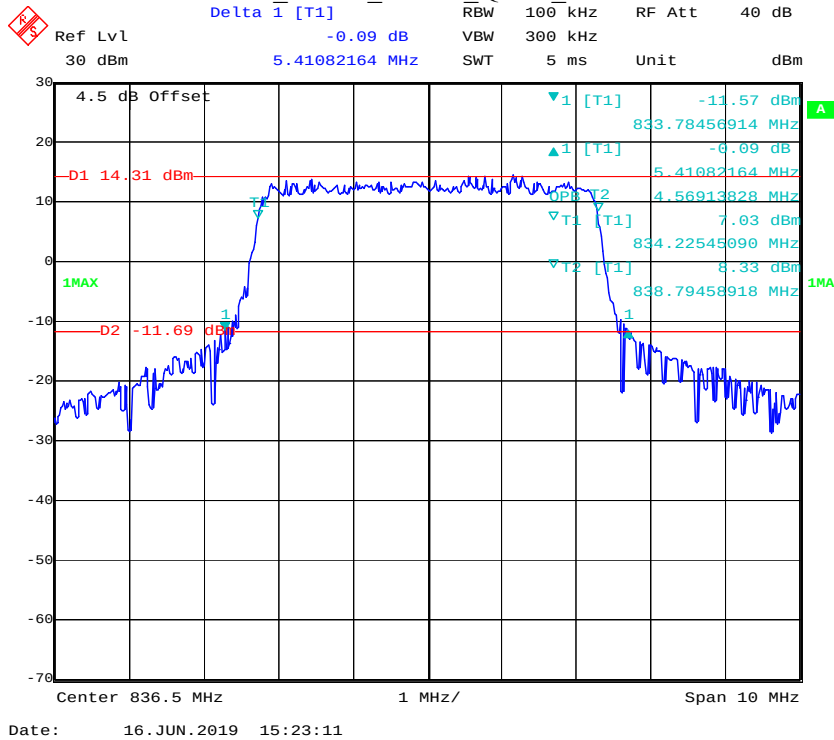


Band 5_5 MHz_Middle_16QAM_RB25#0

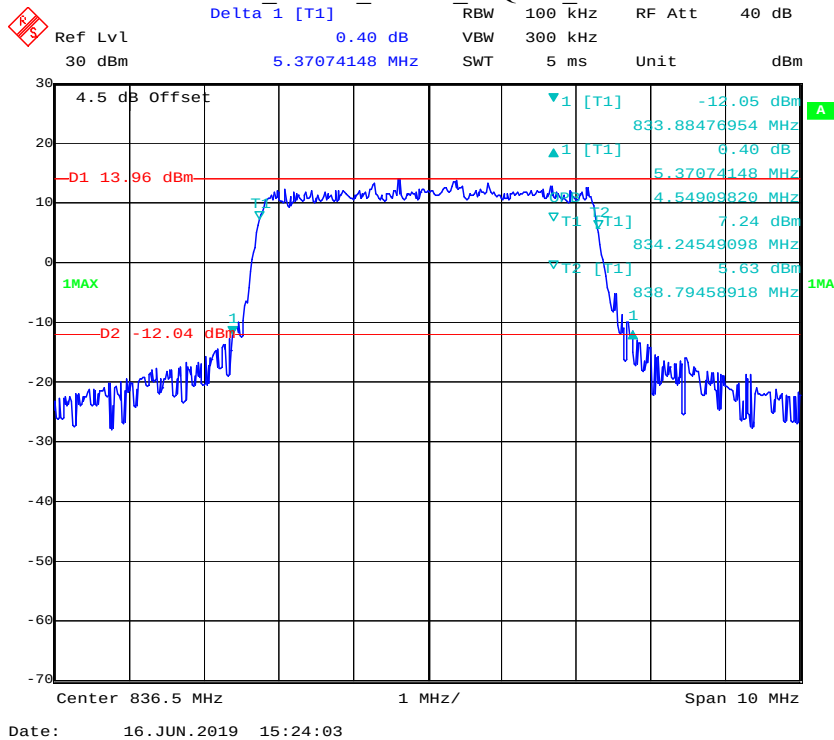


Band 5_10 MHz_Middle_QPSK_RB50#0

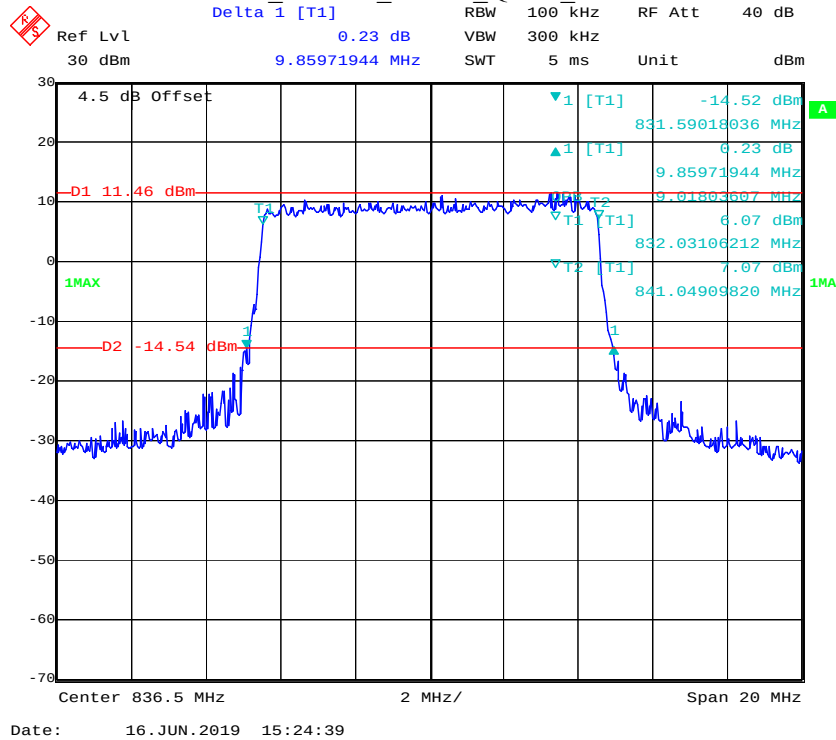


Band 5_10 MHz_Middle_16QAM_RB50#0

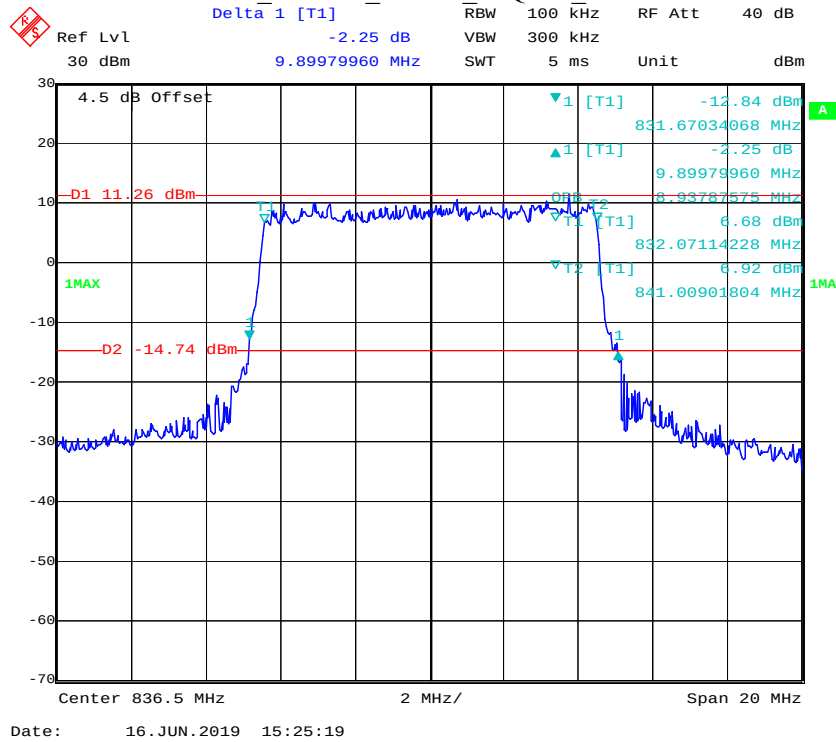


Band 7_5 MHz_Middle_QPSK_RB25#0

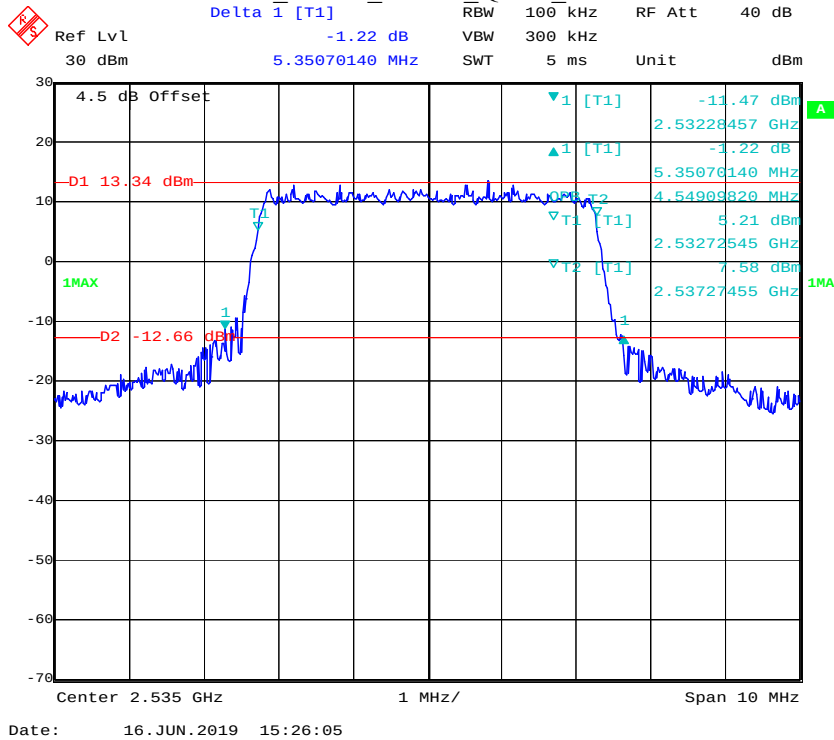


Band 7_5 MHz_Middle_16QAM_RB25#0

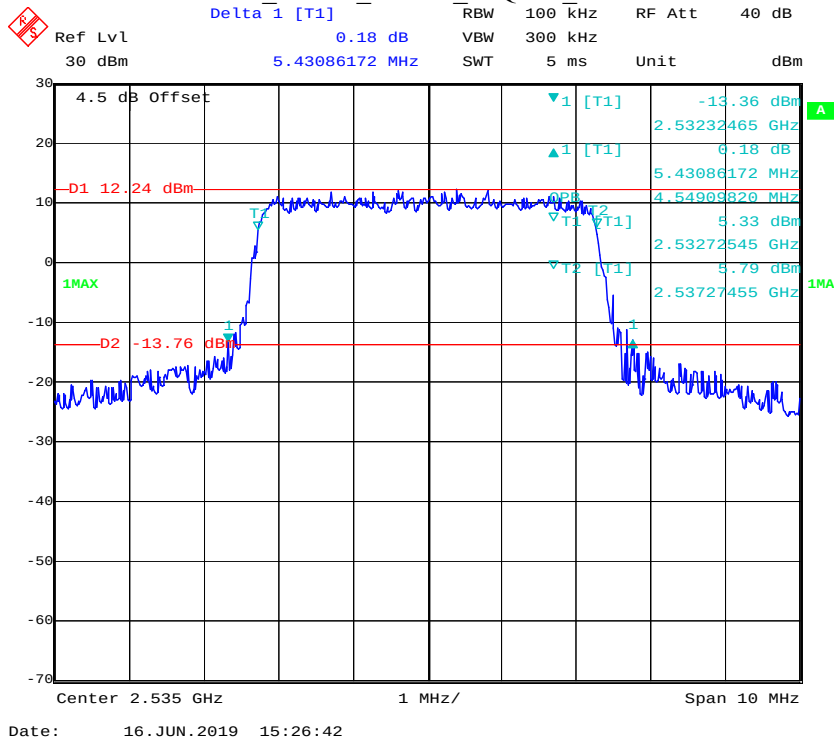


Band 7_10 MHz_Middle_QPSK_RB50#0

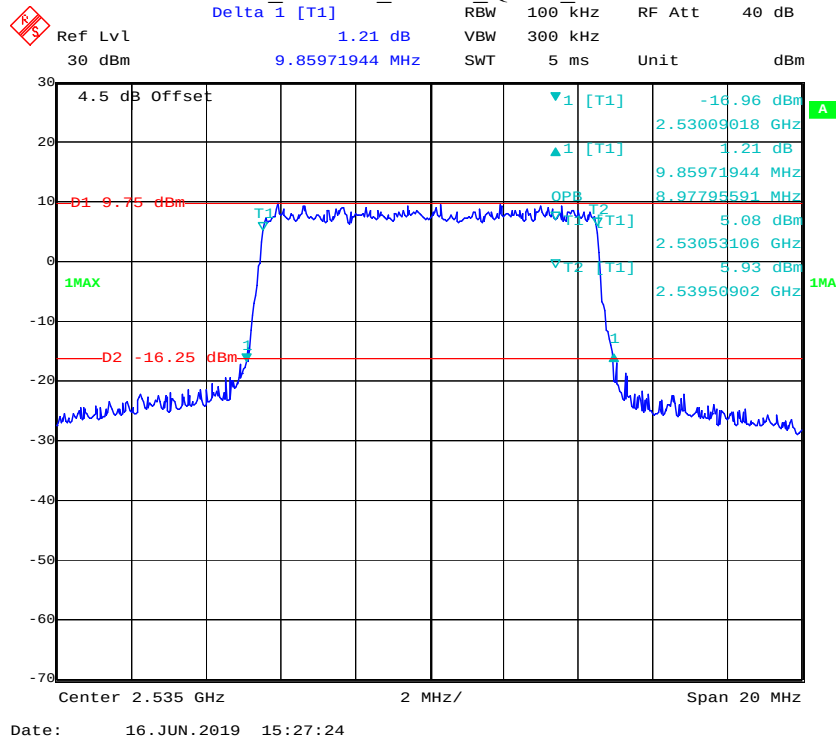


Band 7_10 MHz_Middle_16QAM_RB50#0

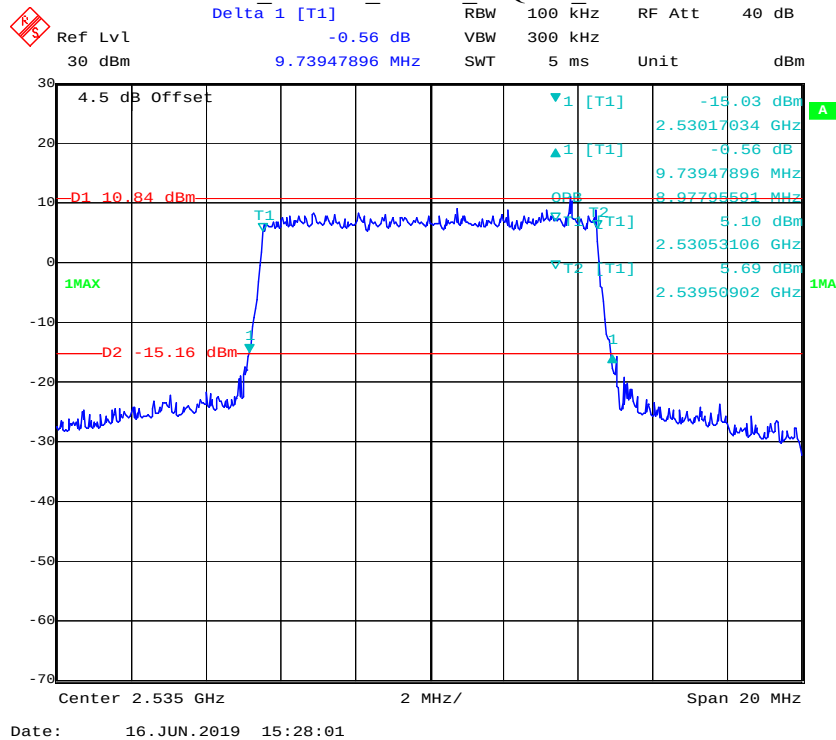


Band 7_15 MHz_Middle_QPSK_RB75#0

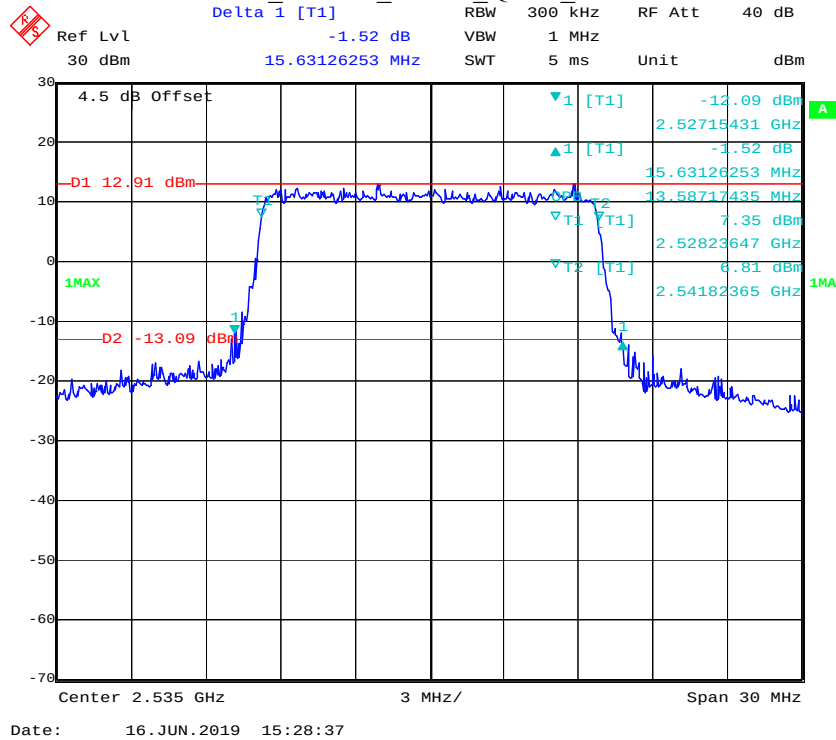


Band 7_15 MHz_Middle_16QAM_RB75#0

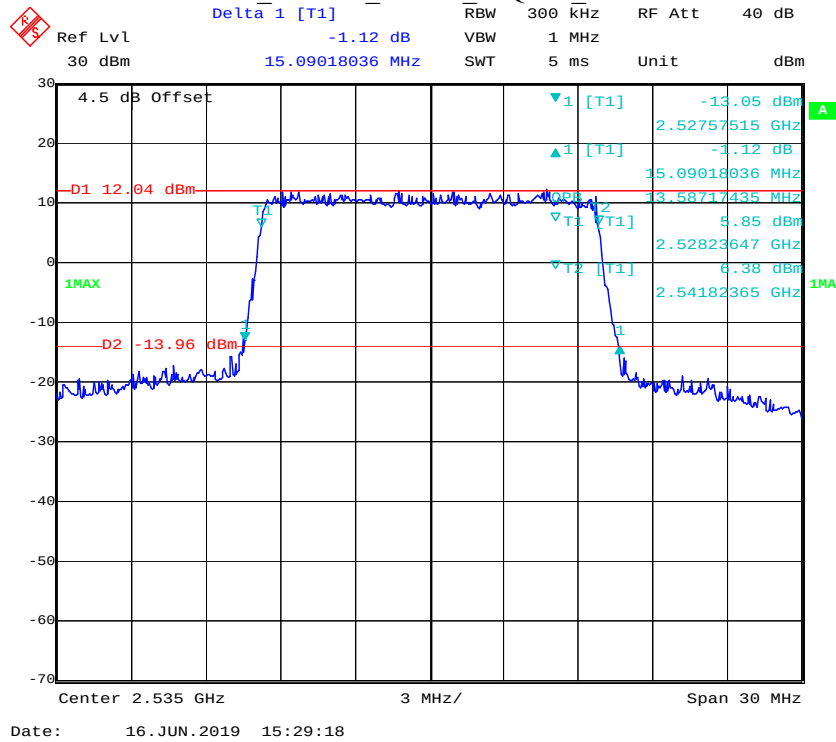


Band 7_20 MHz_Middle_QPSK_RB100#0

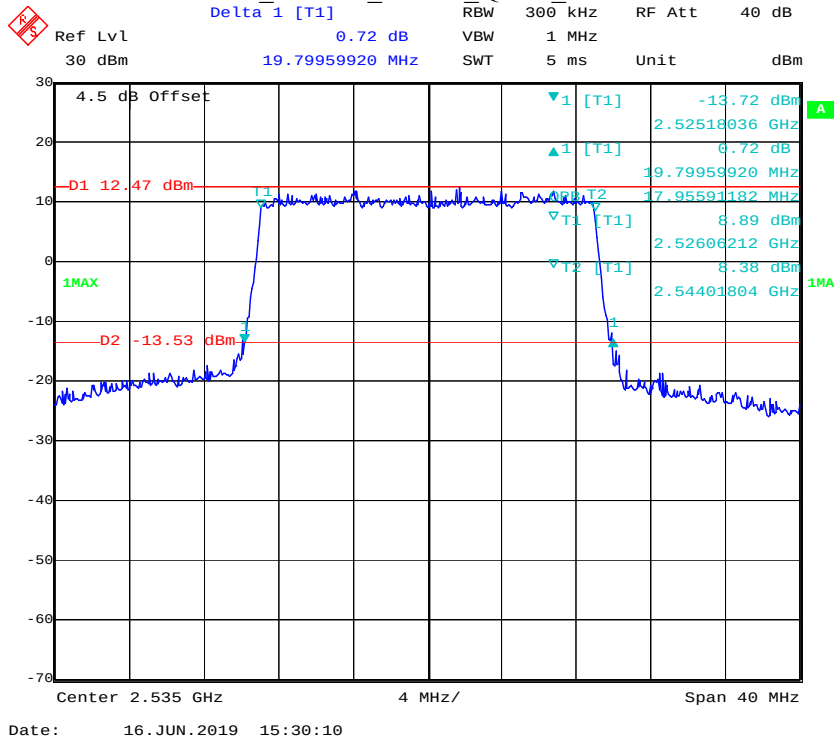


Band 7_20 MHz_Middle_16QAM_RB100#0

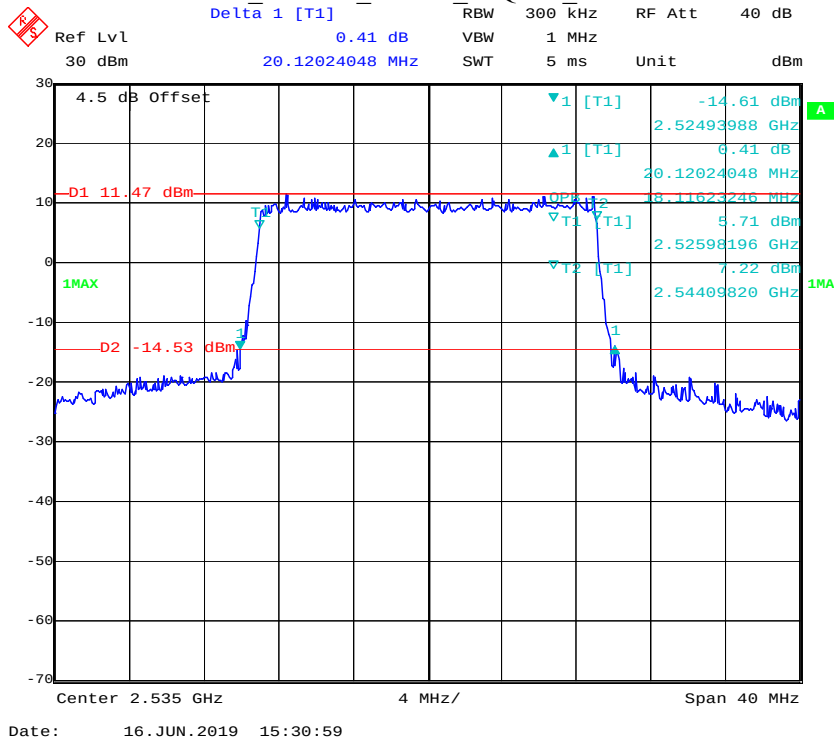


Band 66_1.4 MHz_Middle_QPSK_RB6#0

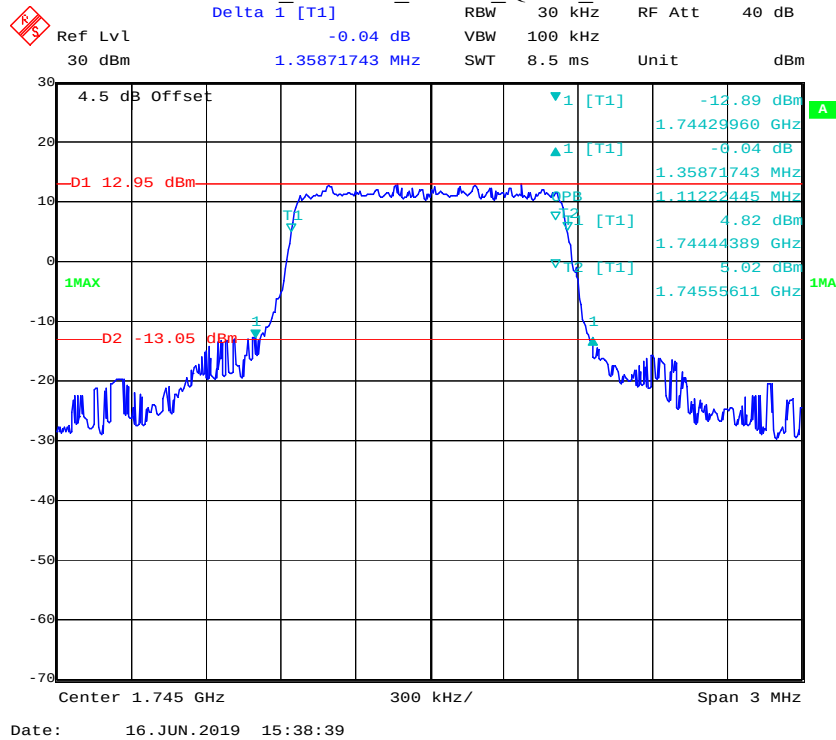


Band 66_1.4 MHz_Middle_16QAM_RB6#0

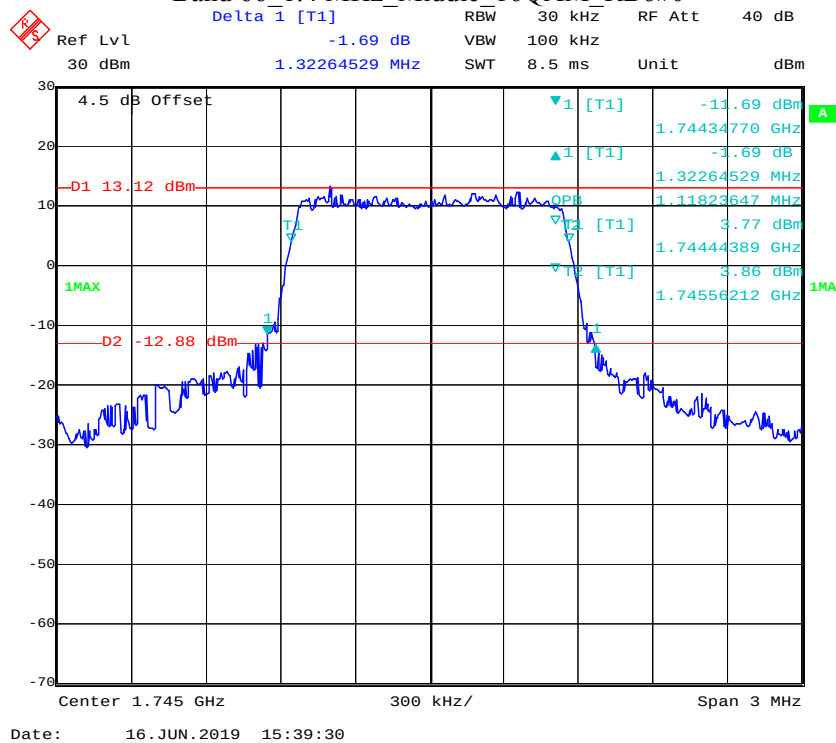


Band 66_3 MHz_Middle_QPSK_RB15#0

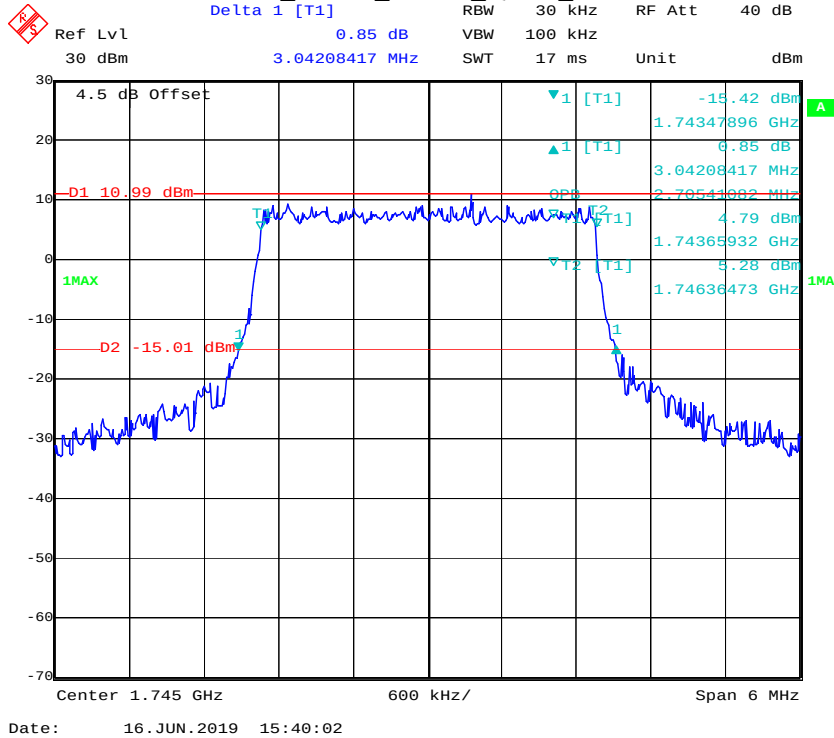


Band 66_3 MHz_Middle_16QAM_RB15#0

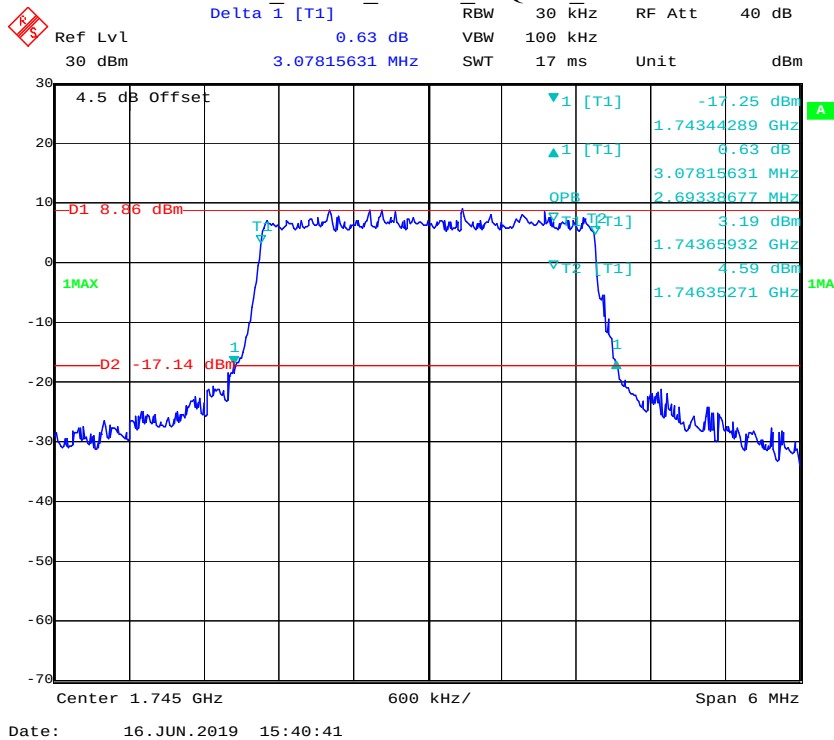


Band 66_5 MHz_Middle_QPSK_RB25#0

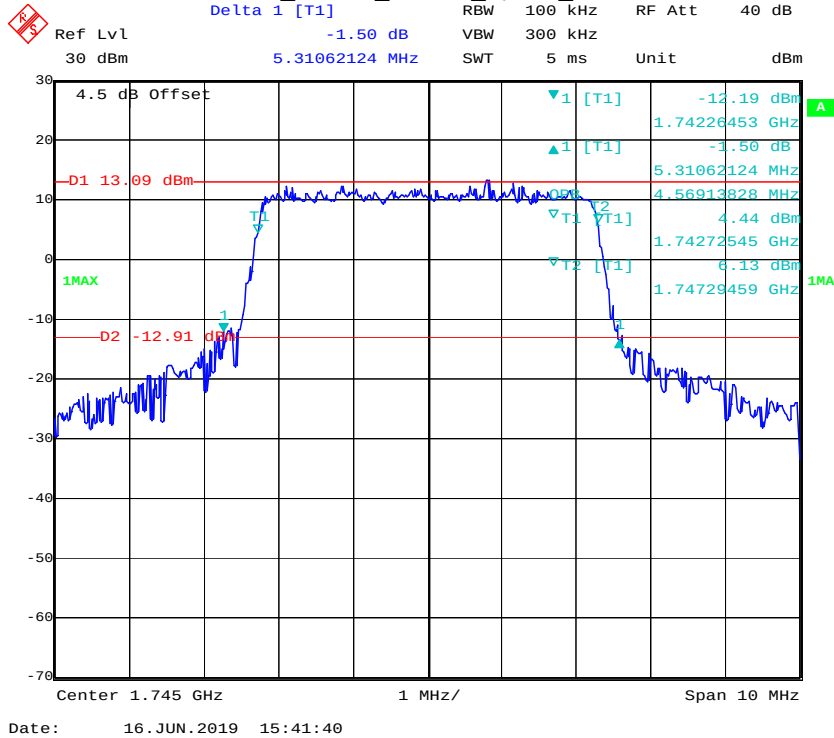


Band 66_5 MHz_Middle_16QAM_RB25#0

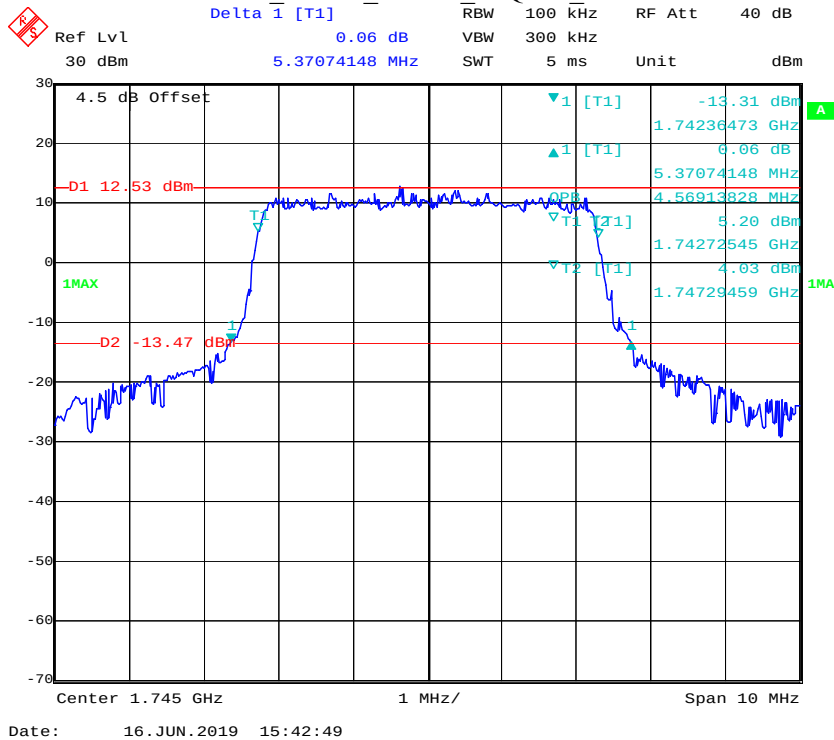


Band 66_10 MHz_Middle_QPSK_RB50#0

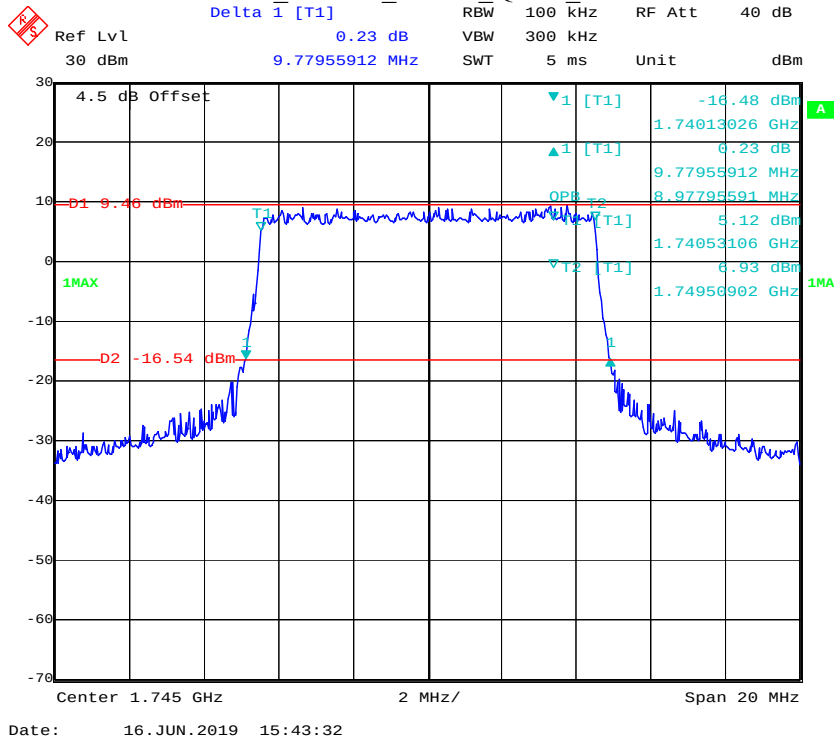


Band 66_10 MHz_Middle_16QAM_RB50#0

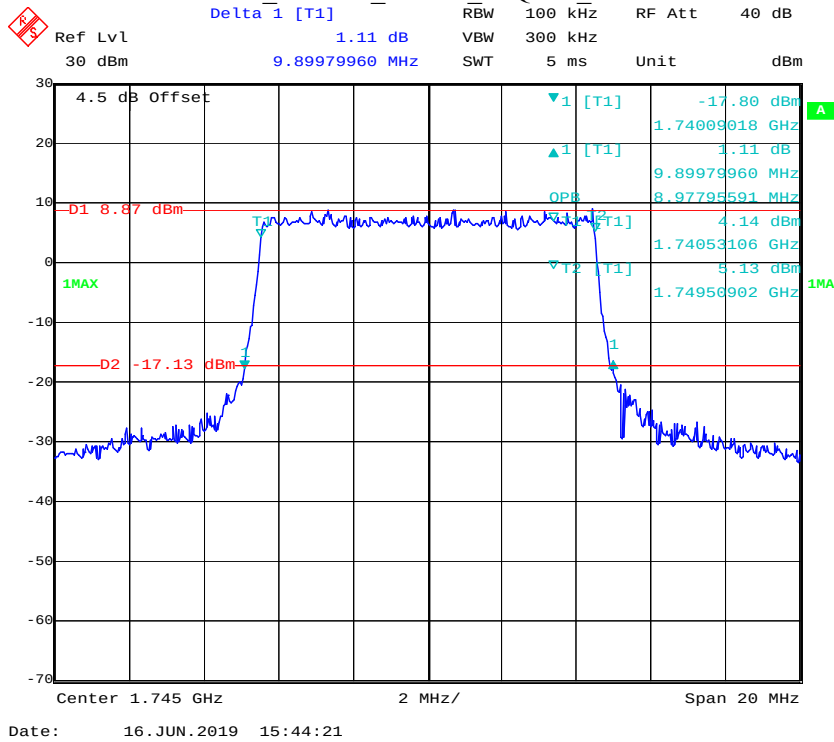


Band 66_15 MHz_Middle_QPSK_RB75#0

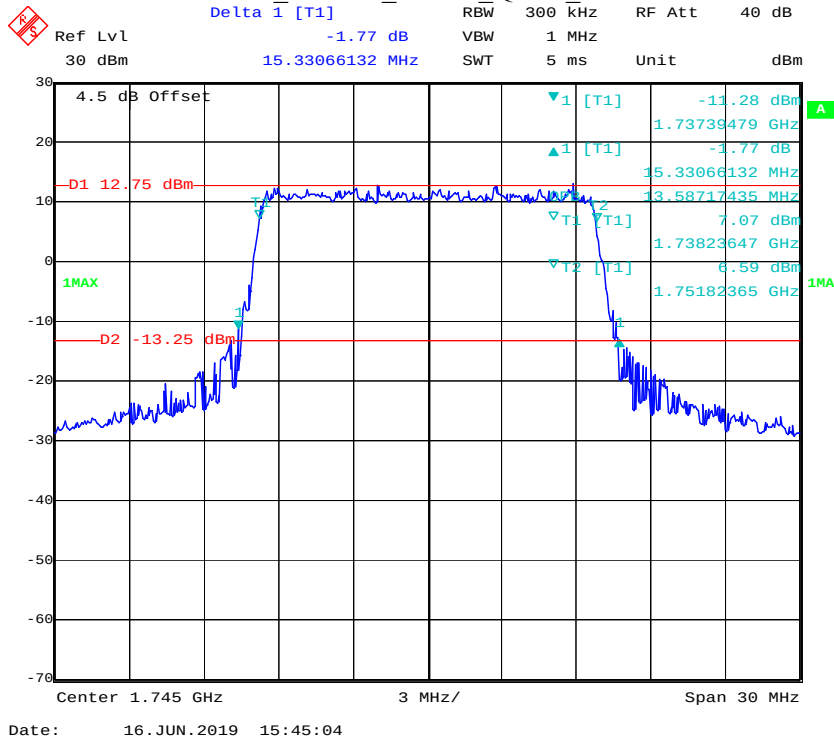


Band 66_15 MHz_Middle_16QAM_RB75#0

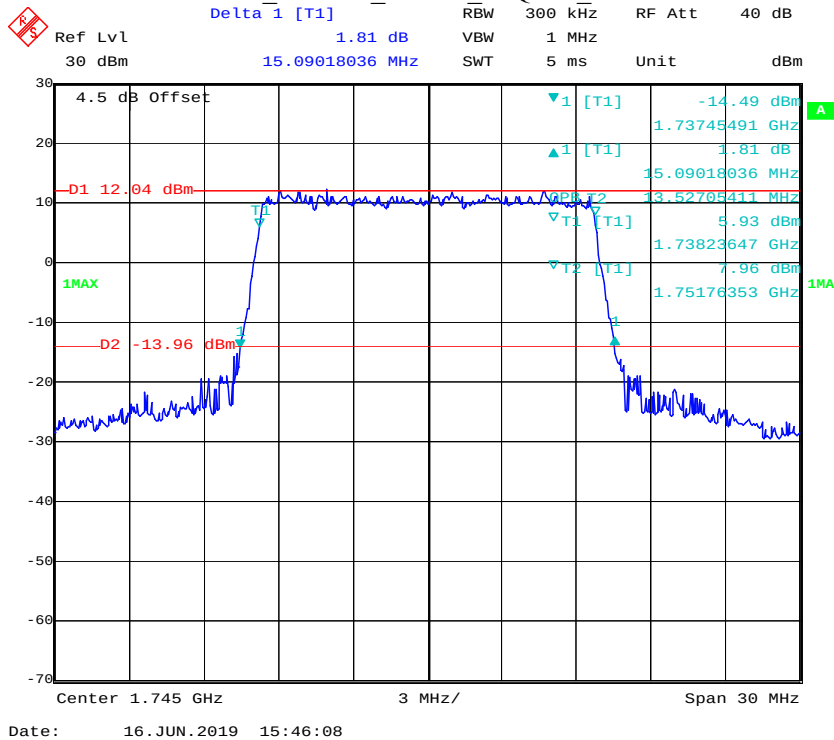

Band 66_20 MHz_Middle_QPSK_RB100#0

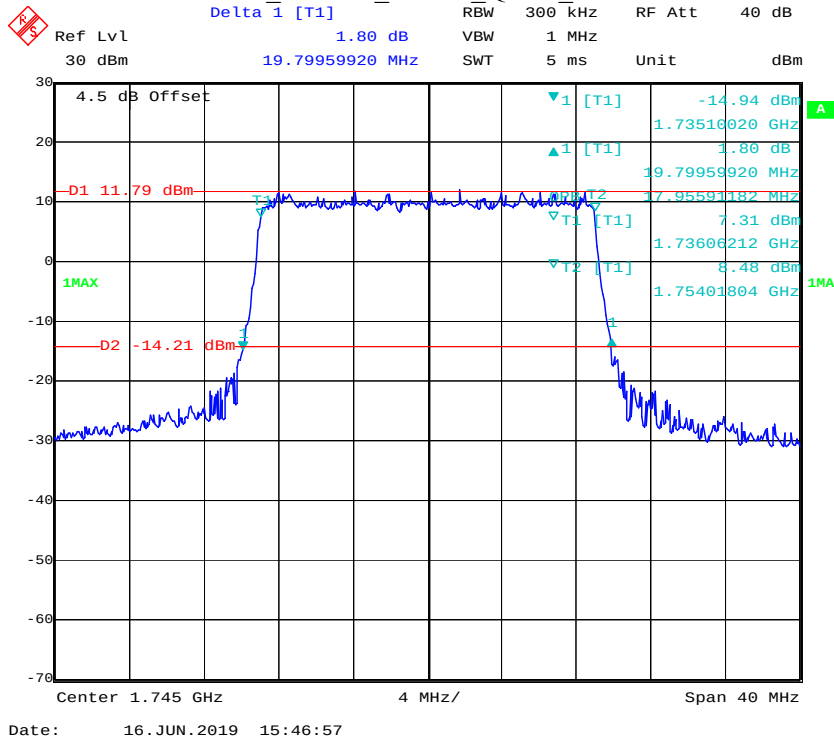

Band 66_20 MHz_Middle_16QAM_RB100#0

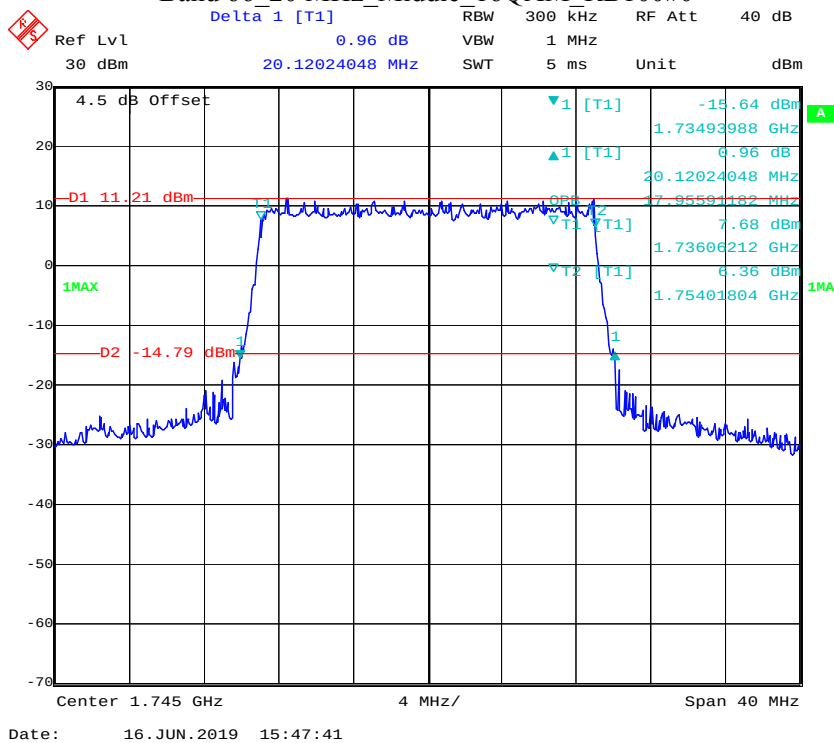

FCC §2.1051, §22.917(a) & §24.238(a) & §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standard

FCC §2.1051, §22.917(a) , §24.238(a) and §27.53.

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

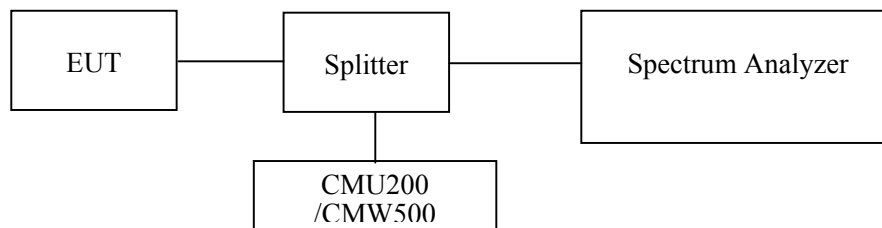

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2018-12-10	2019-12-10
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41010012	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each time	N/A

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	24.9°C
Relative Humidity:	46 %
ATM Pressure:	100.2 kPa

The testing was performed by Blake Yang on 2019-06-17.

Test Mode: Transmitting


Test Result: Compliance(Middle Channel was the worst), Please refer to the following plots.

WCDMA Band II, Rel99

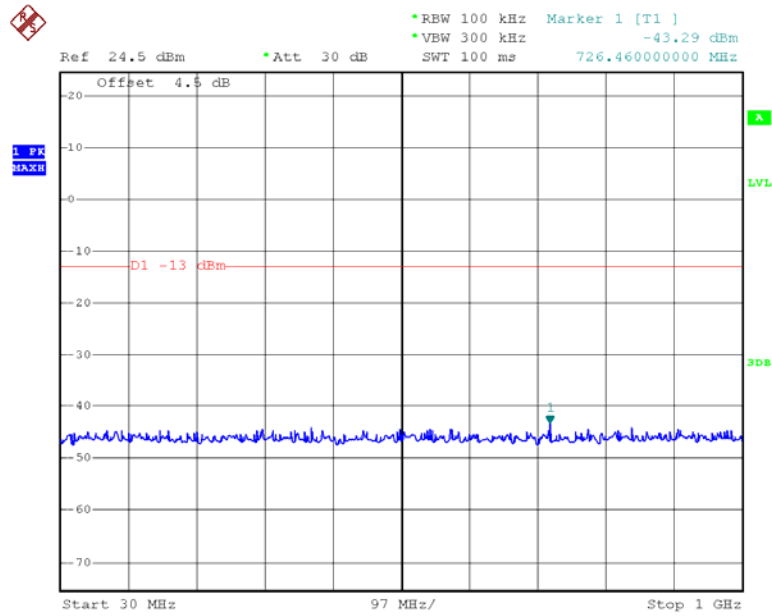


Date: 16.JUN.2019 17:56:35

Fundamental

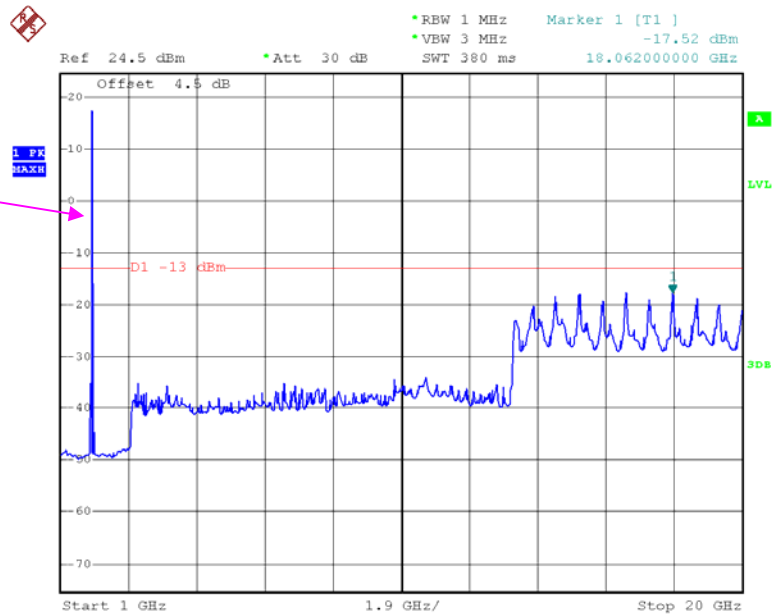


Date: 16.JUN.2019 17:55:58


WCDMA Band V, Rel99

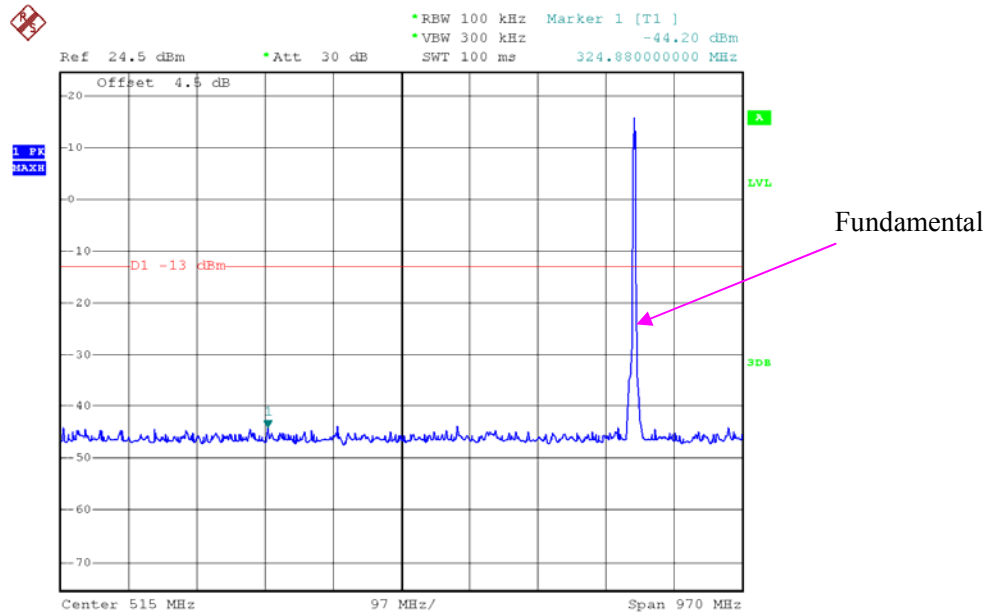


Date: 16.JUN.2019 18:31:12


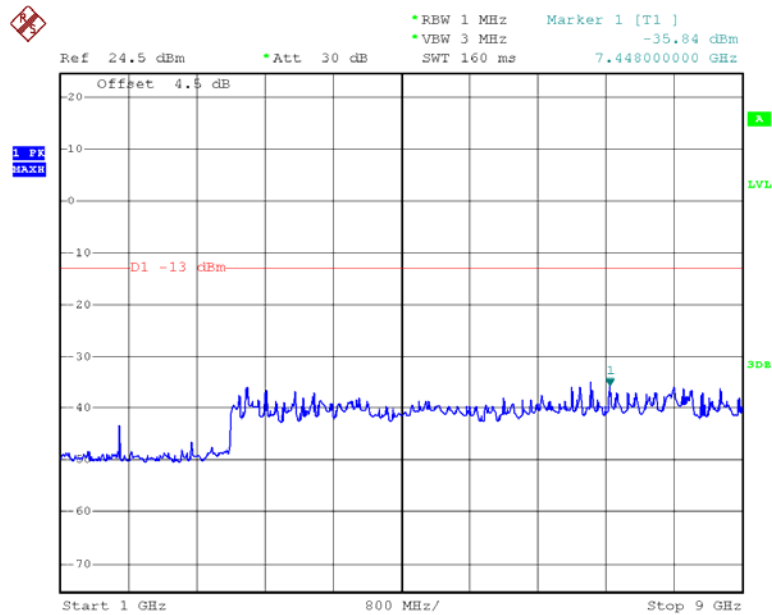




Date: 16.JUN.2019 18:31:38


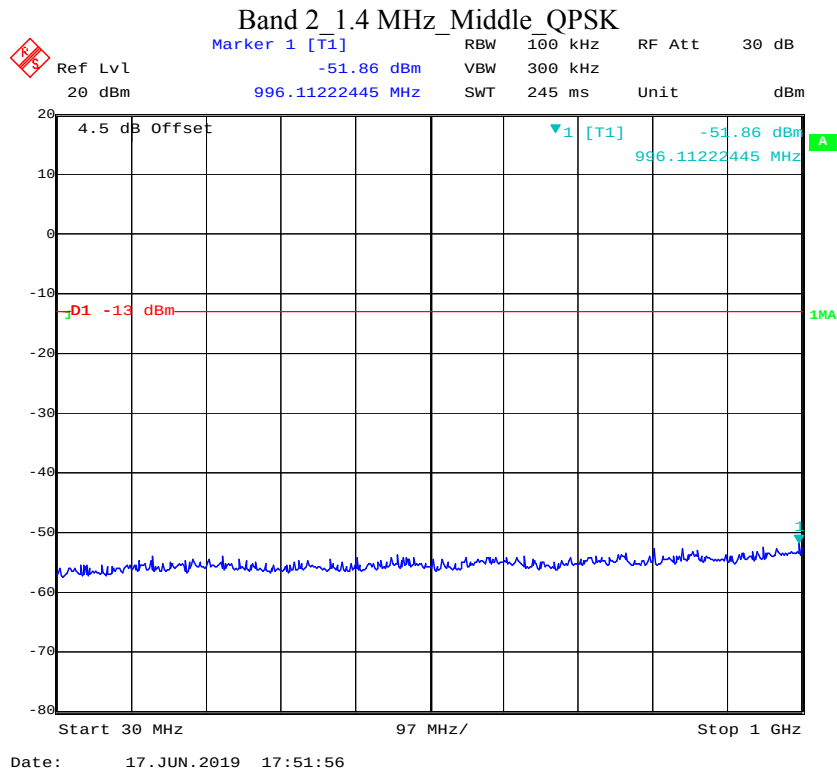




Fundamental


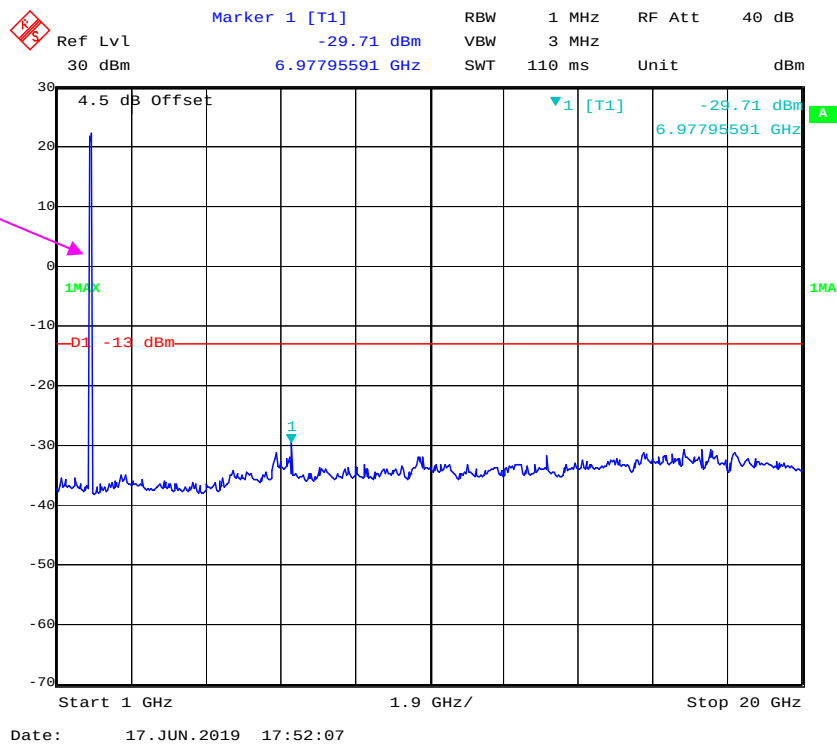


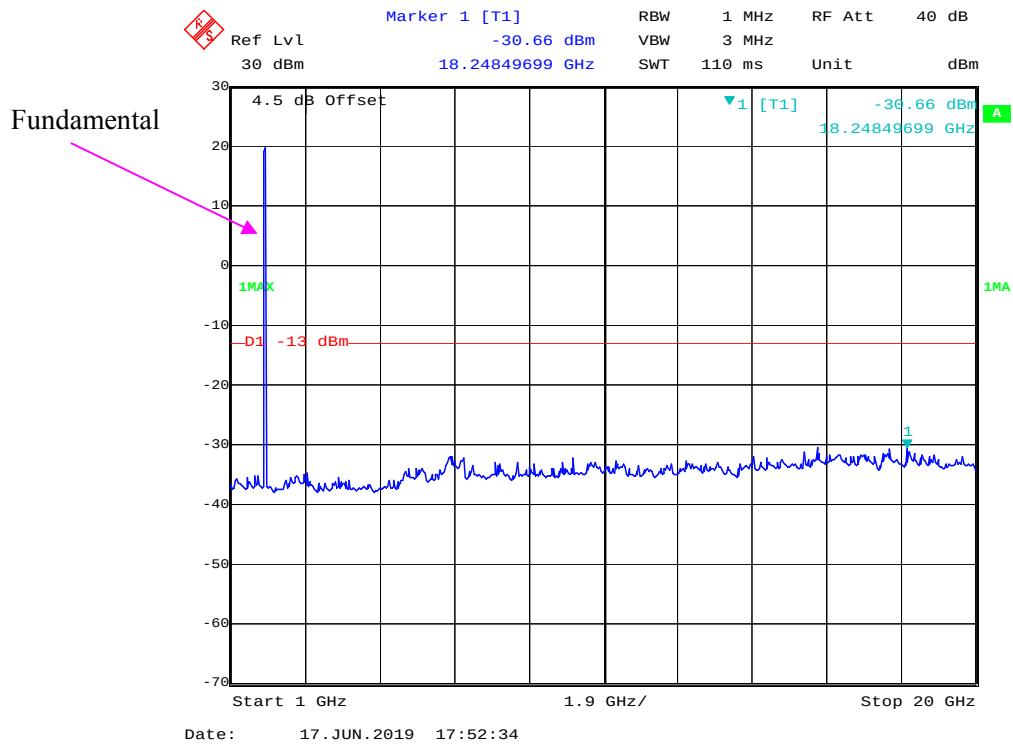
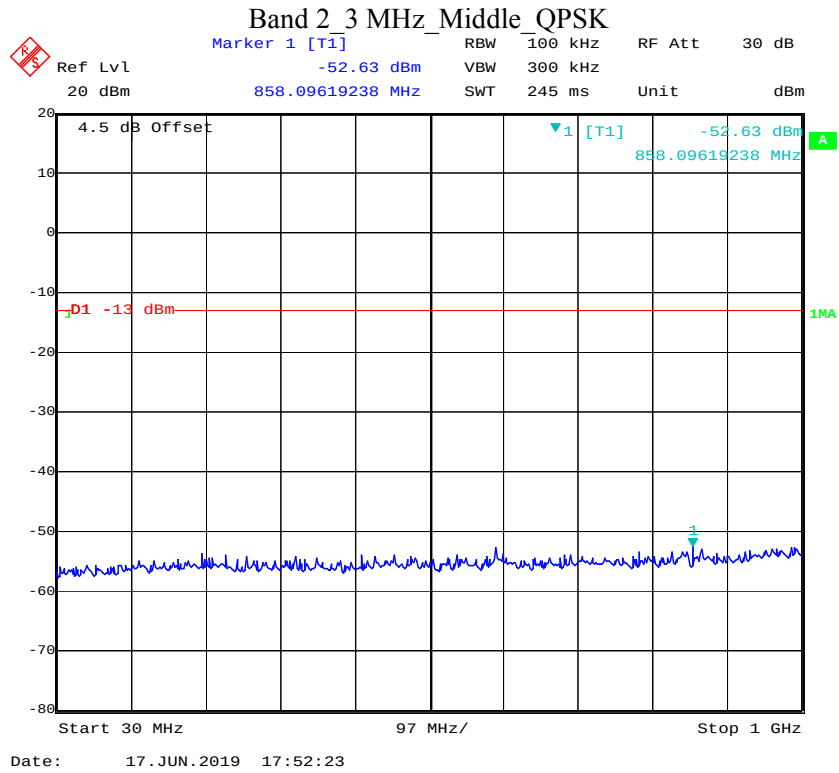


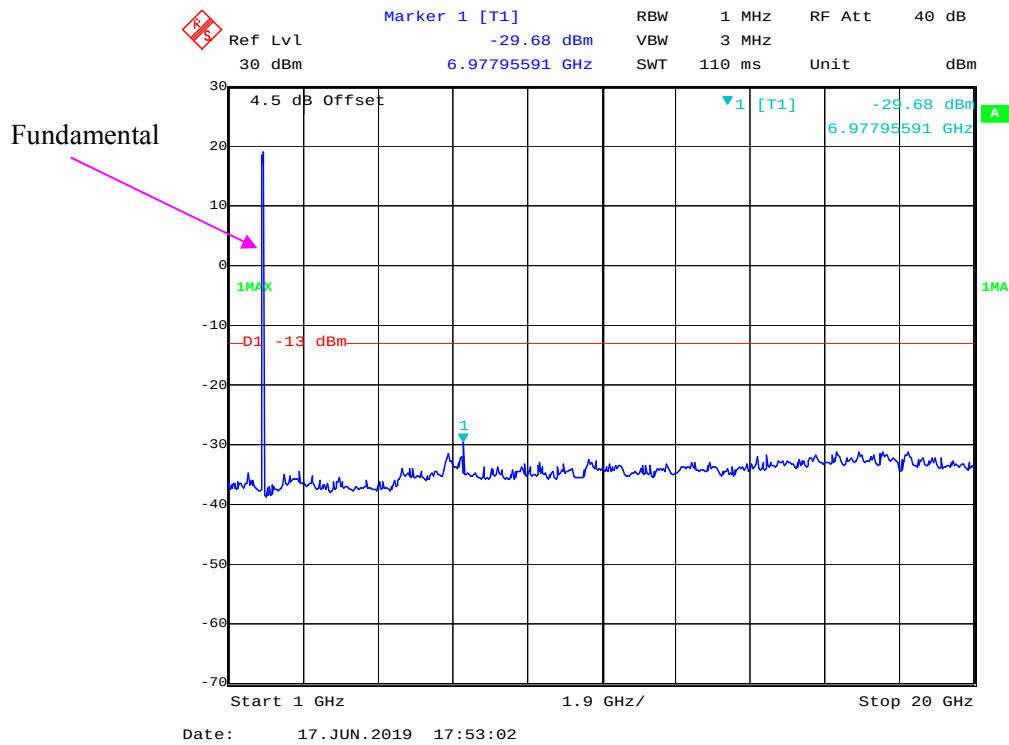
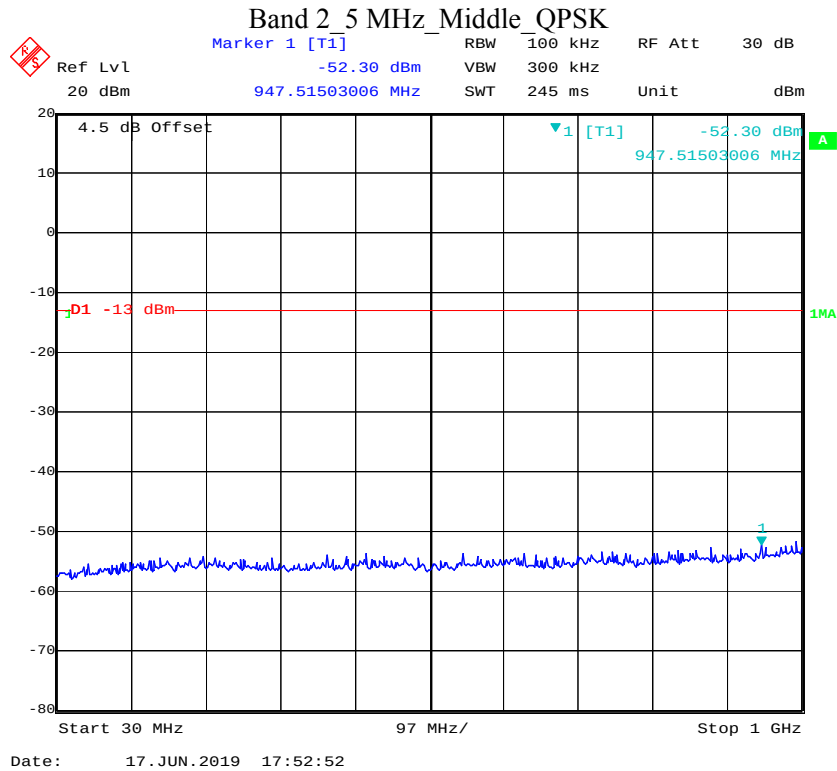


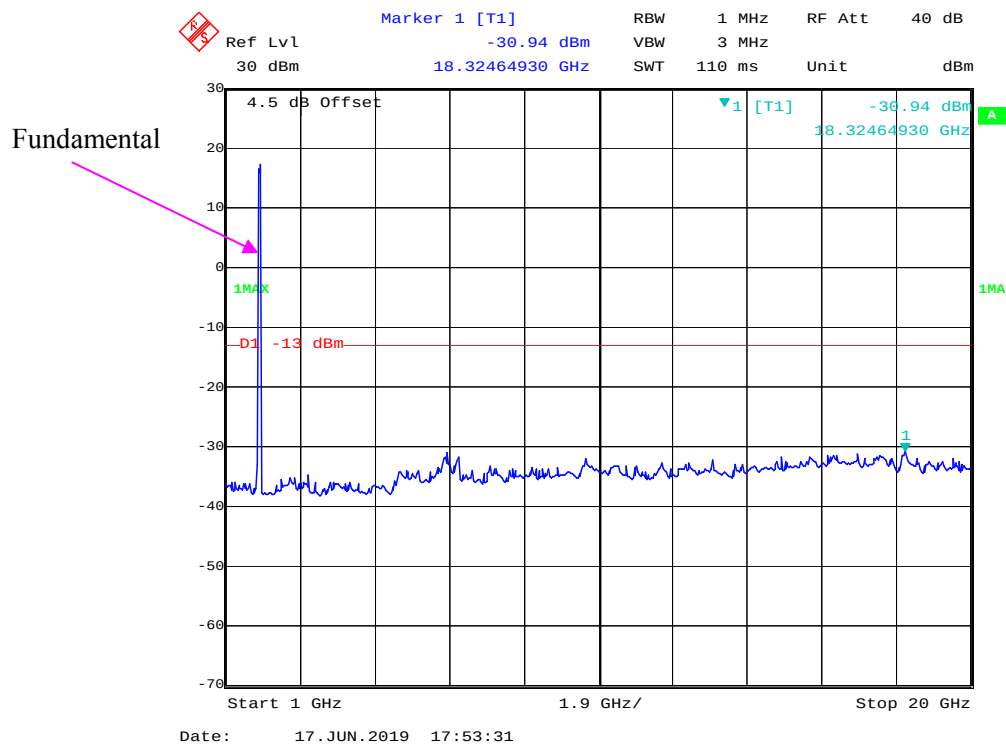
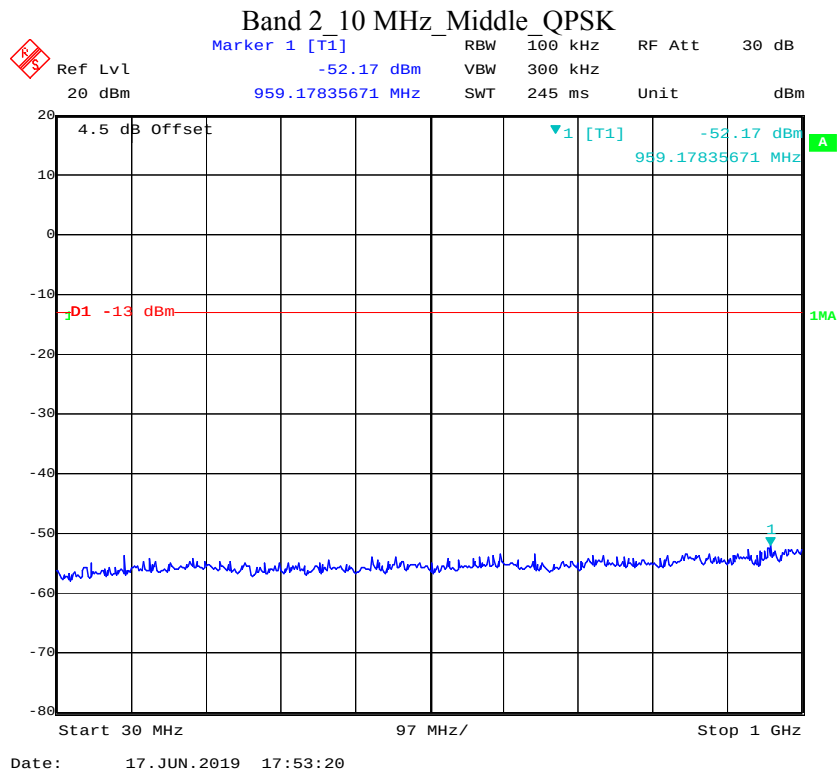


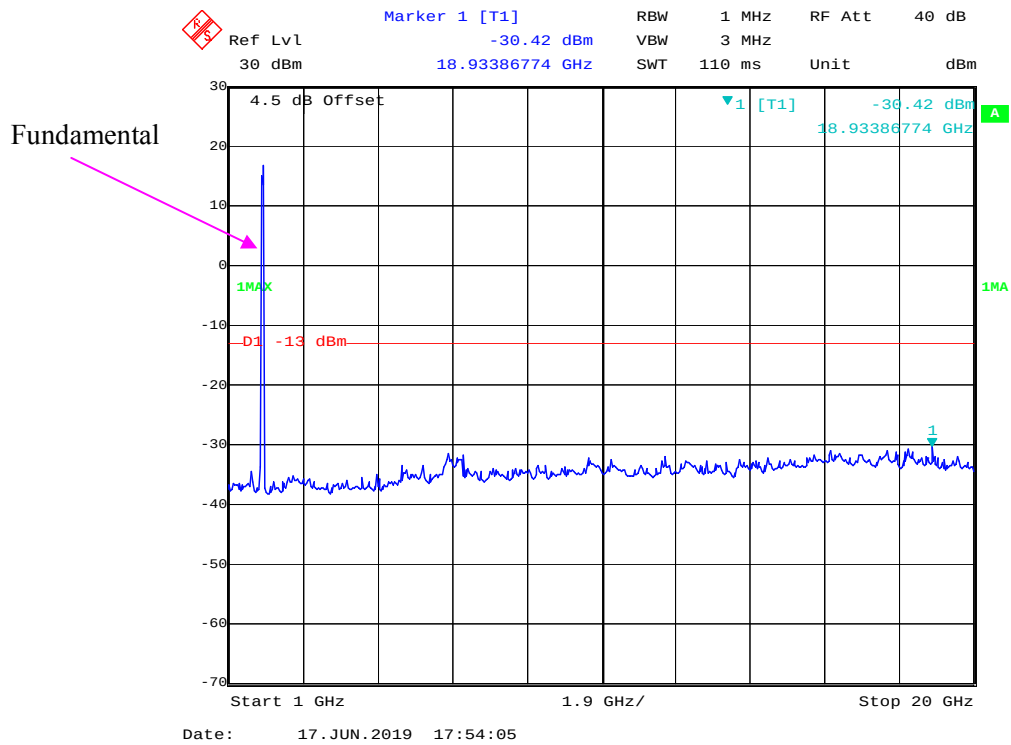
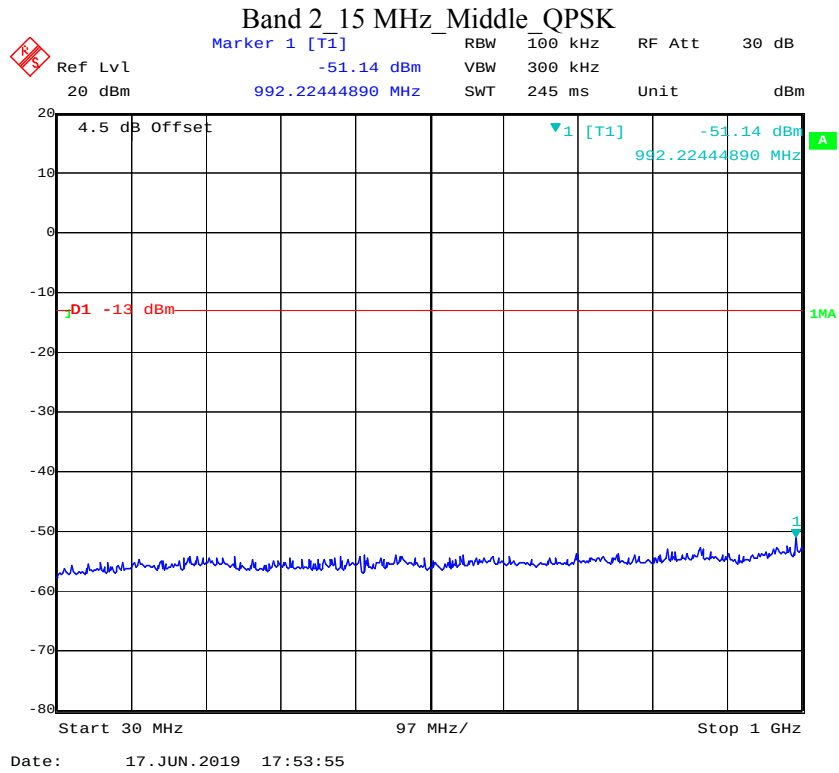


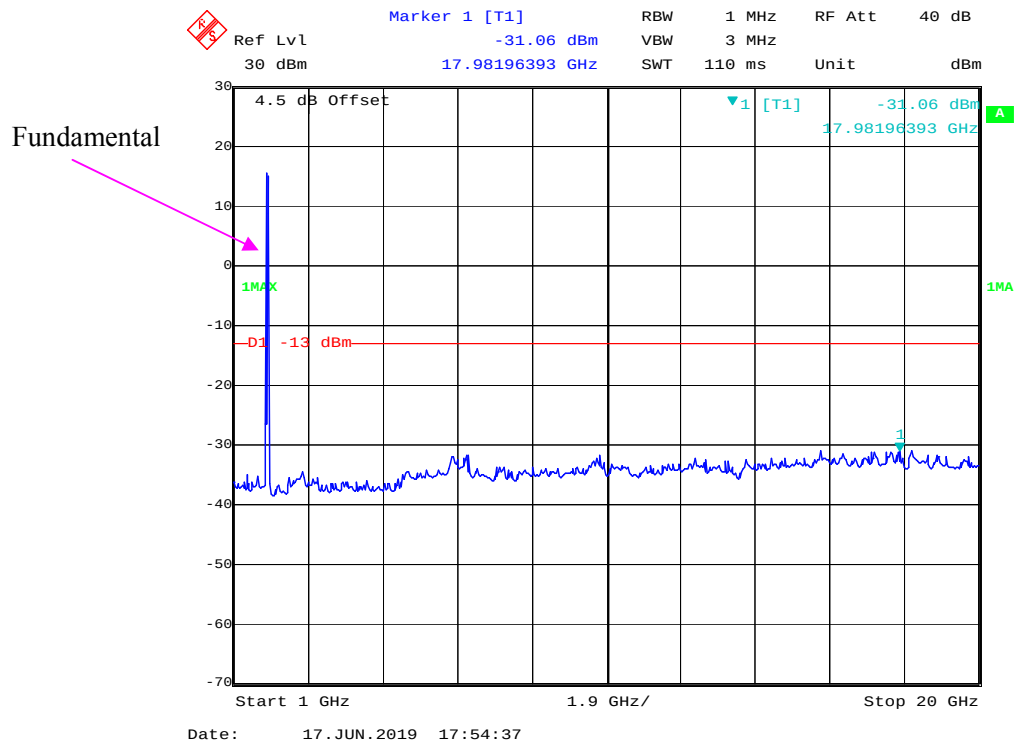
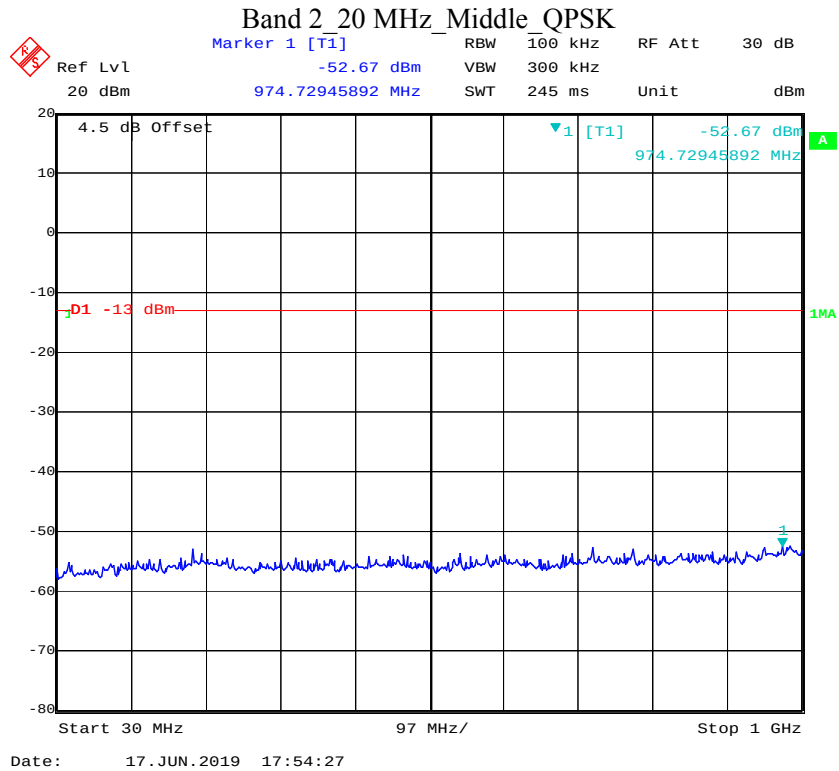


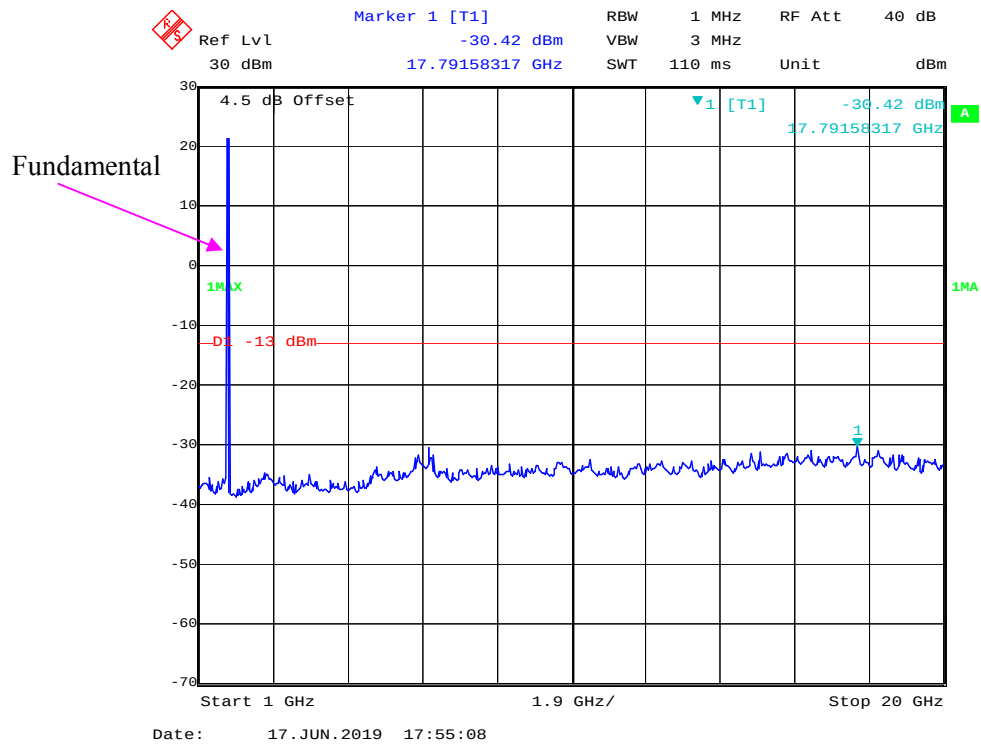
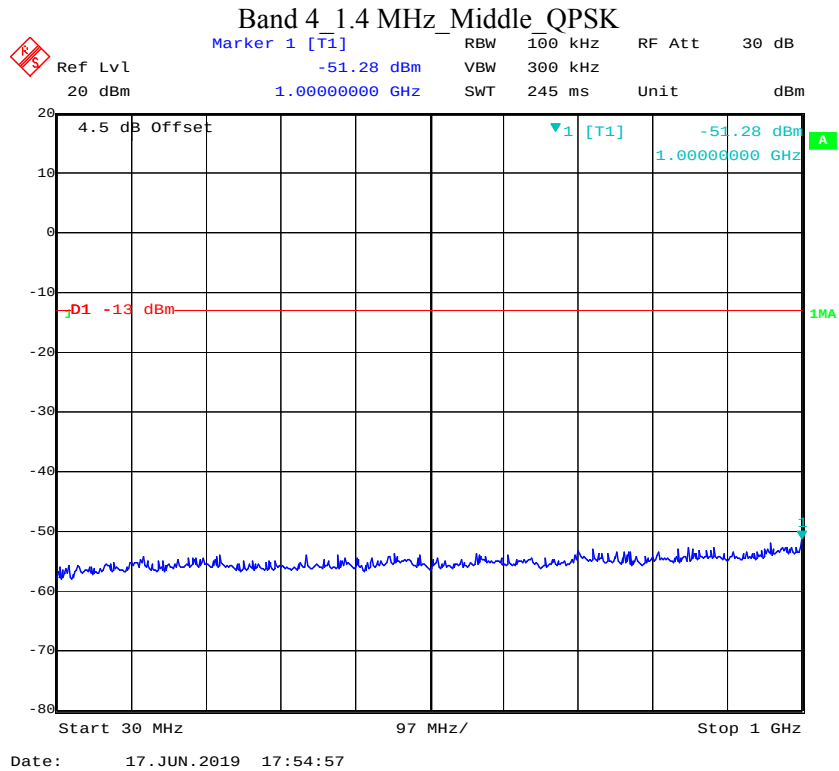


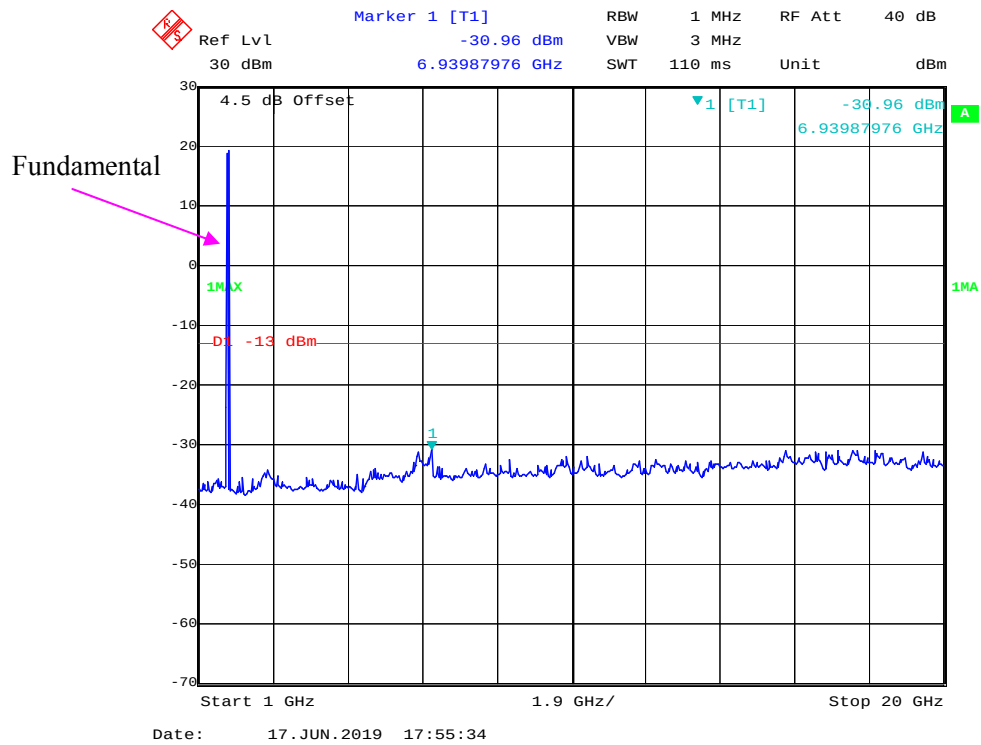
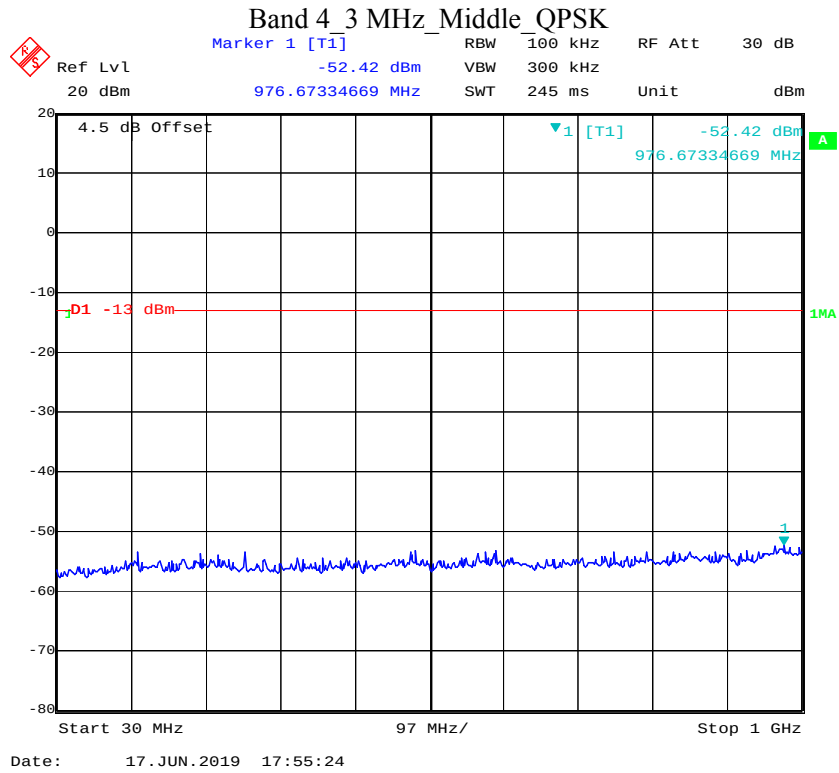


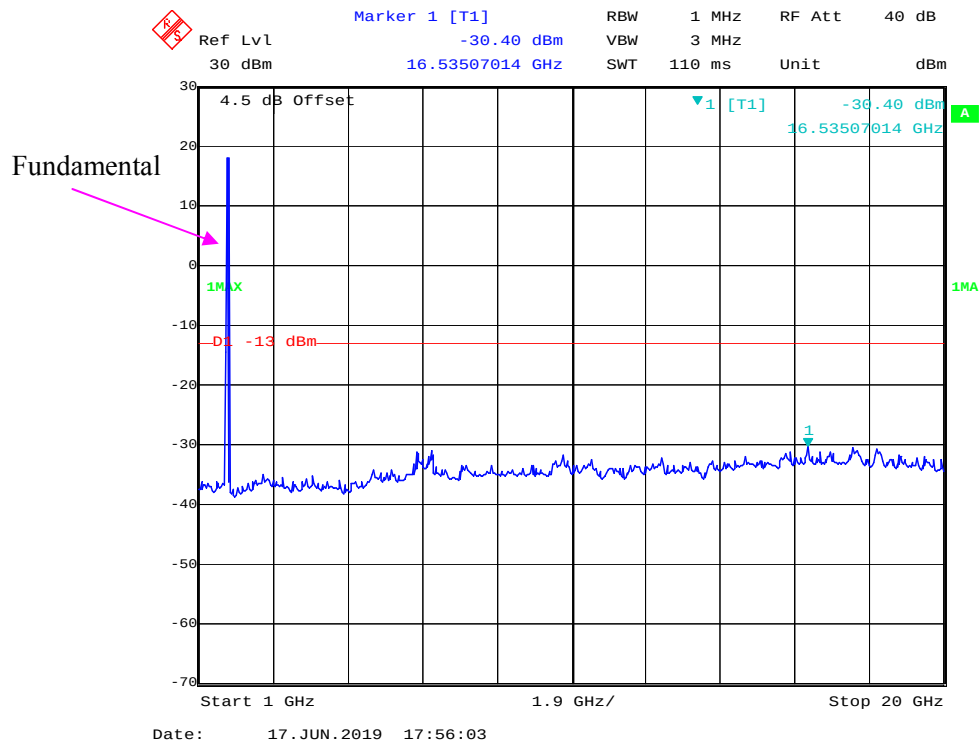
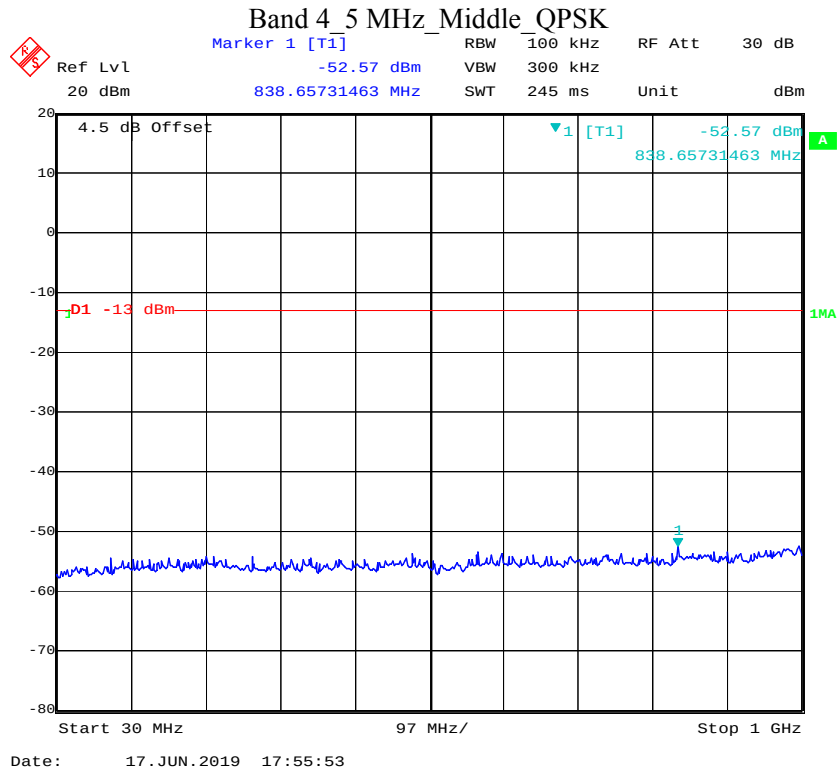


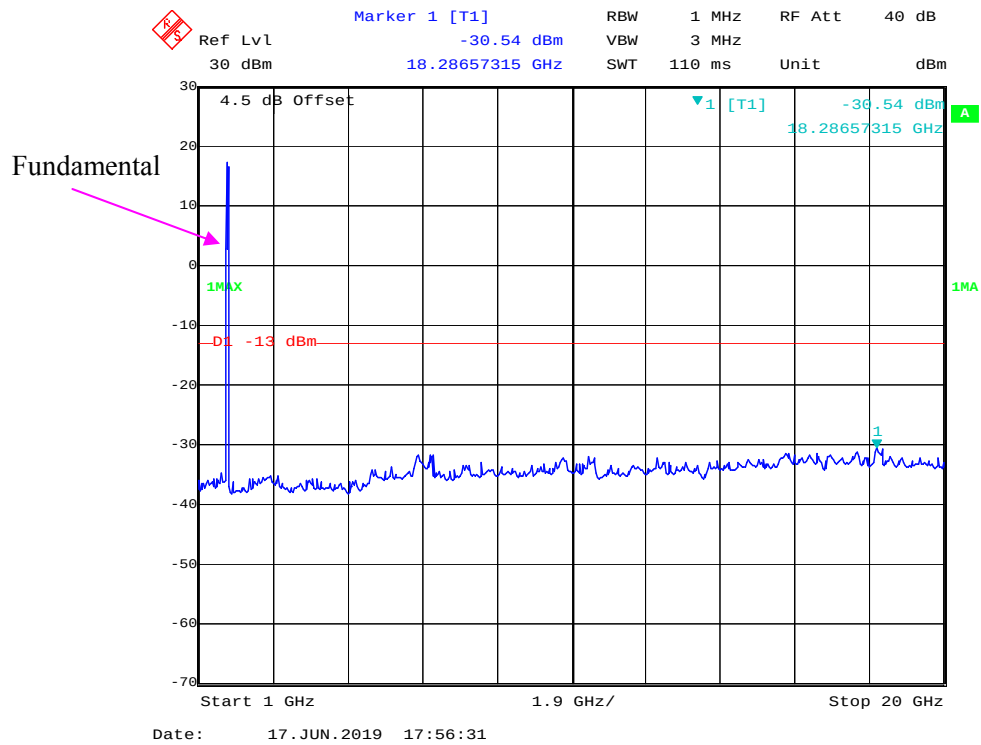
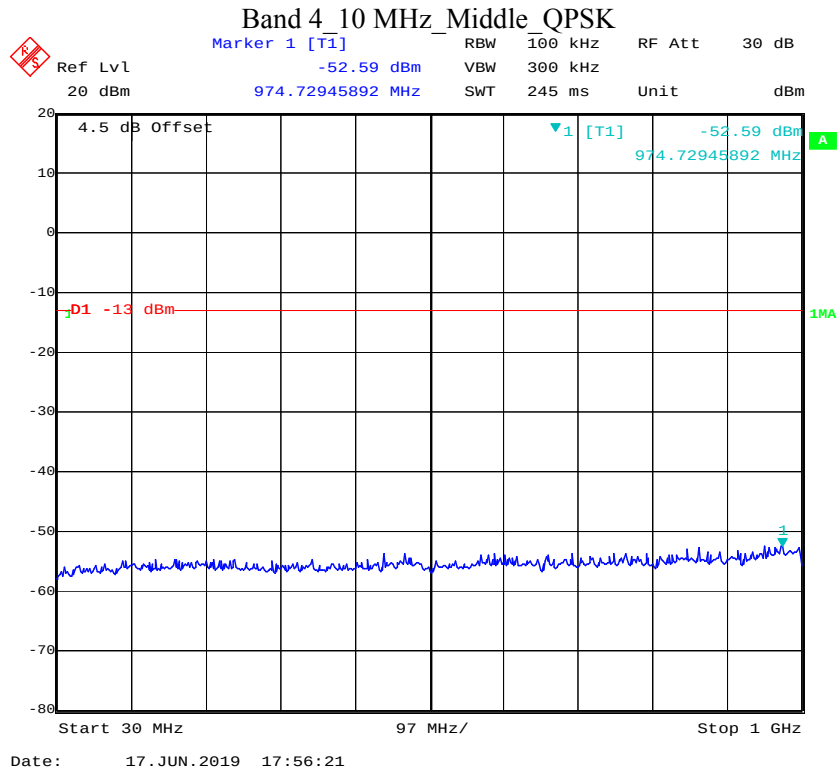


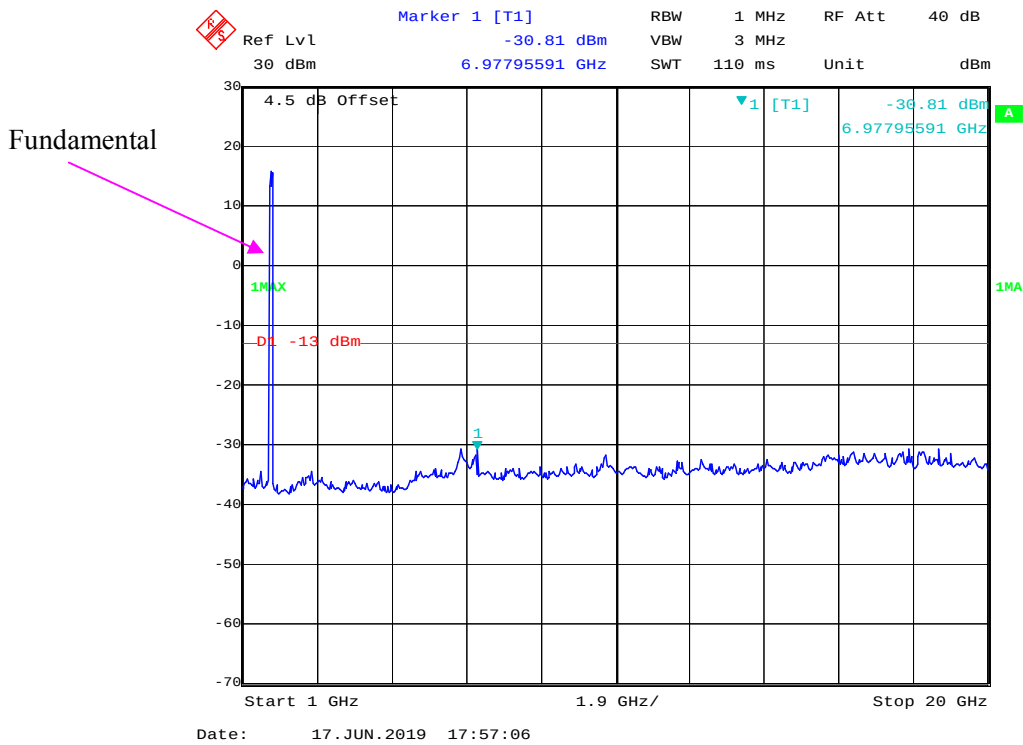
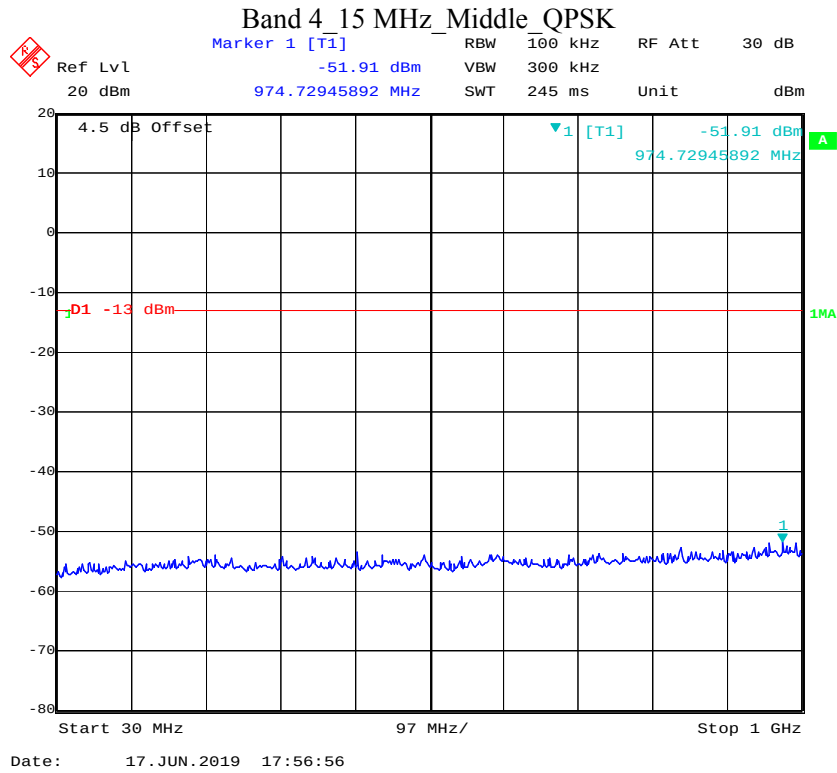


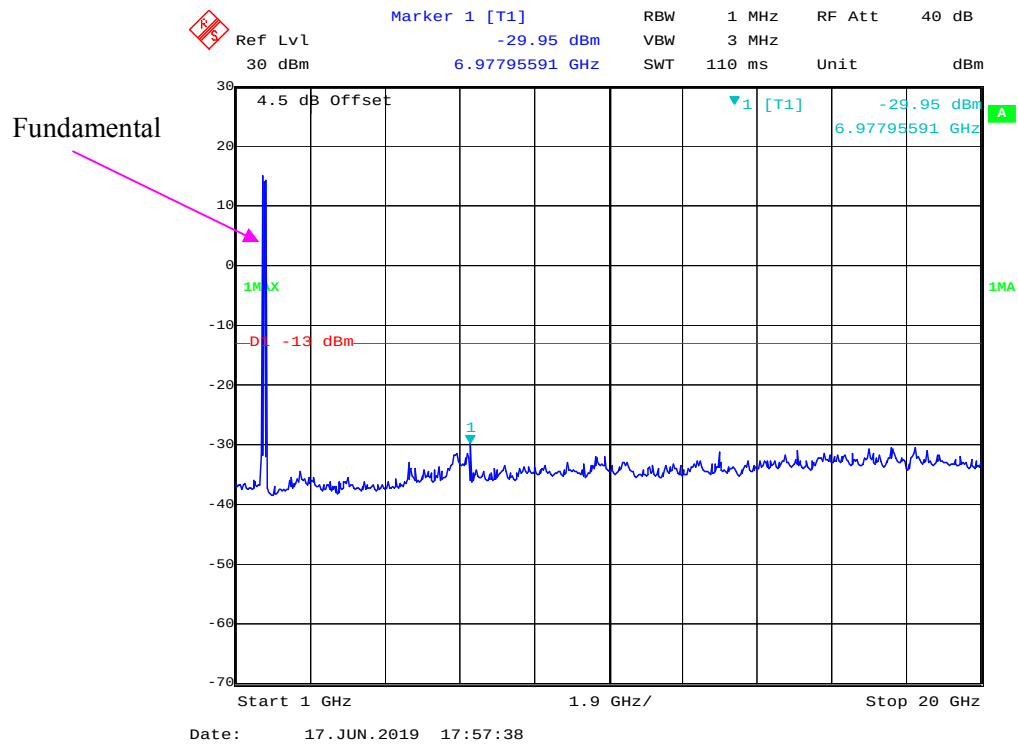
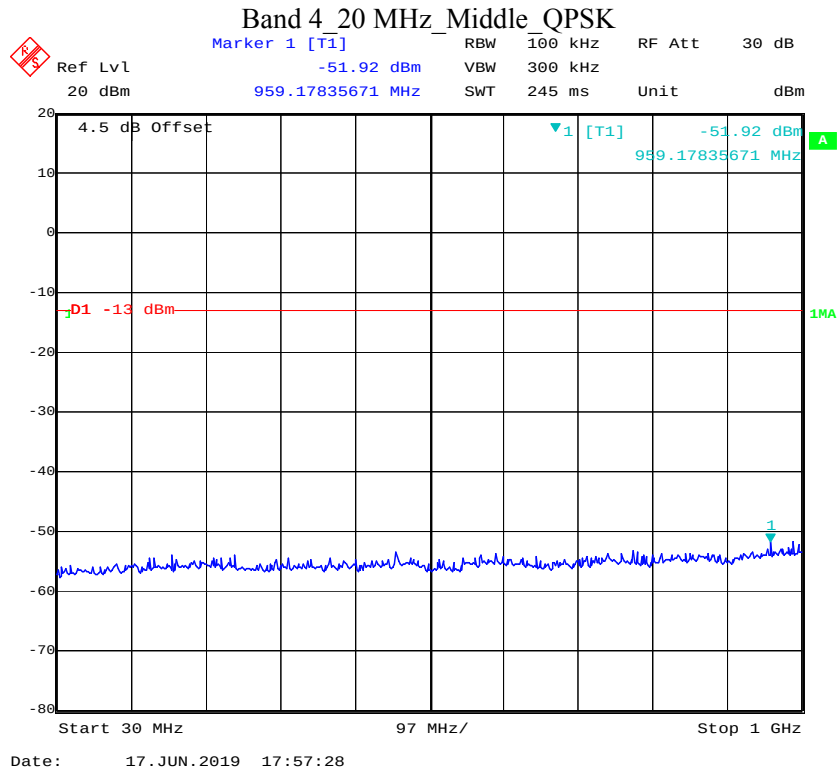


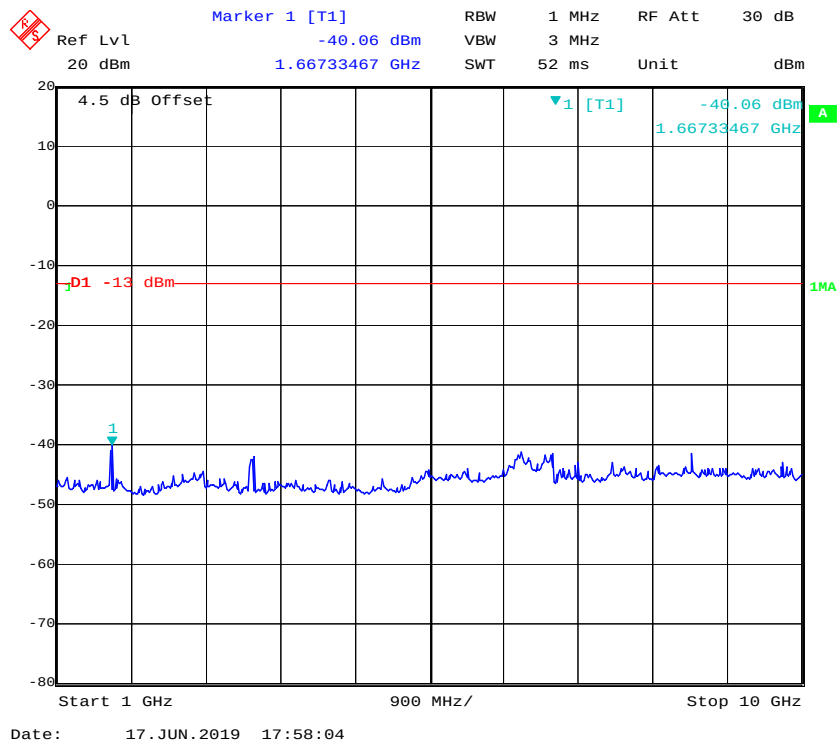
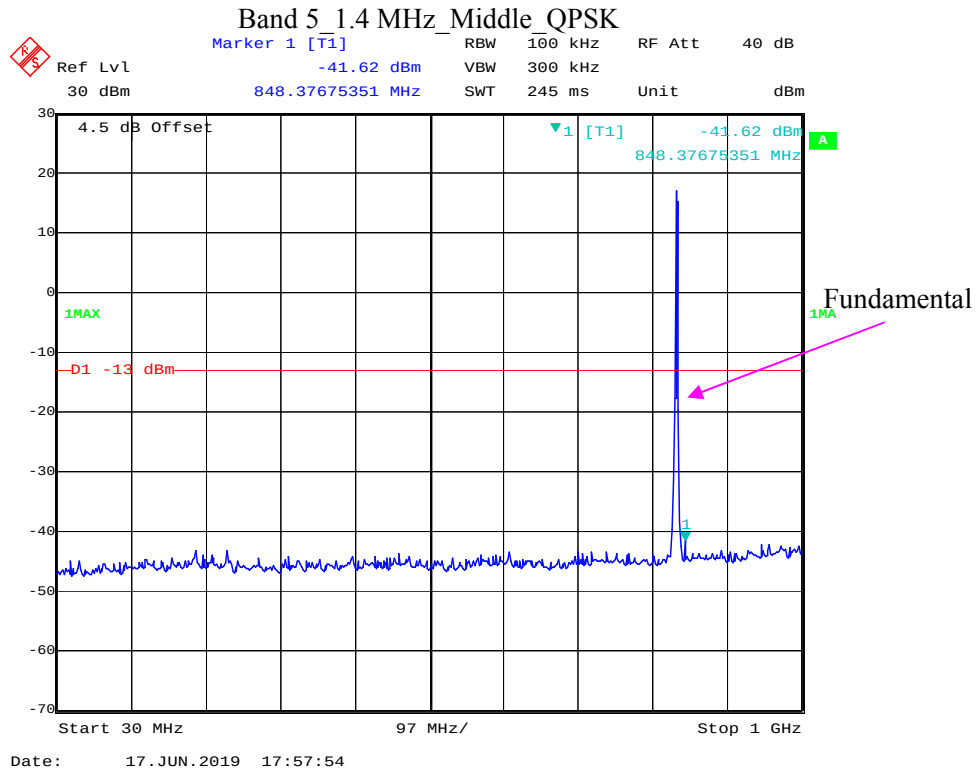


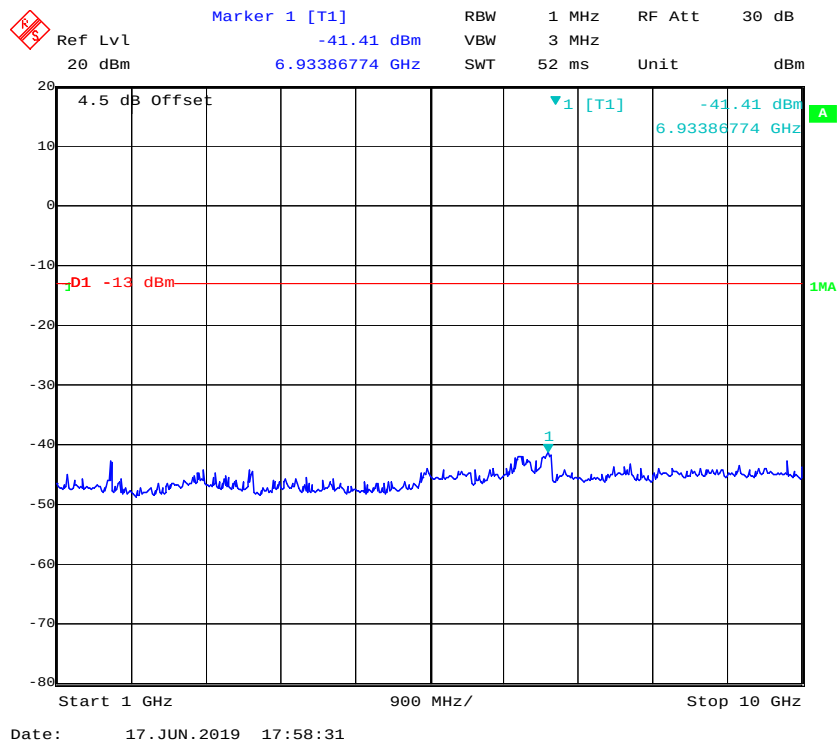
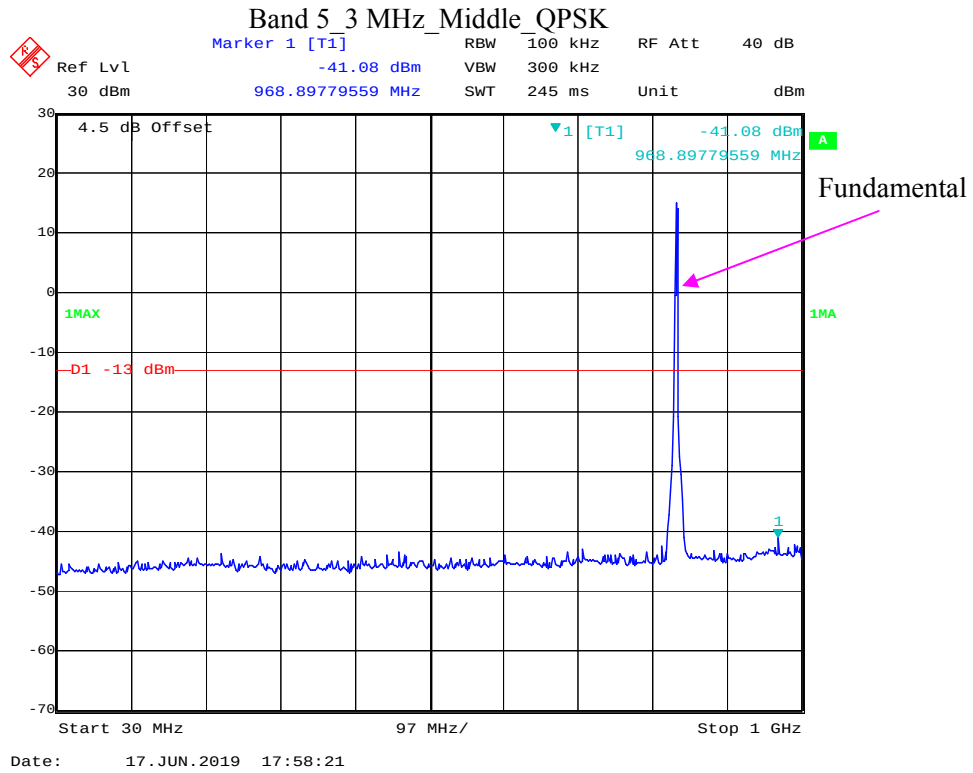


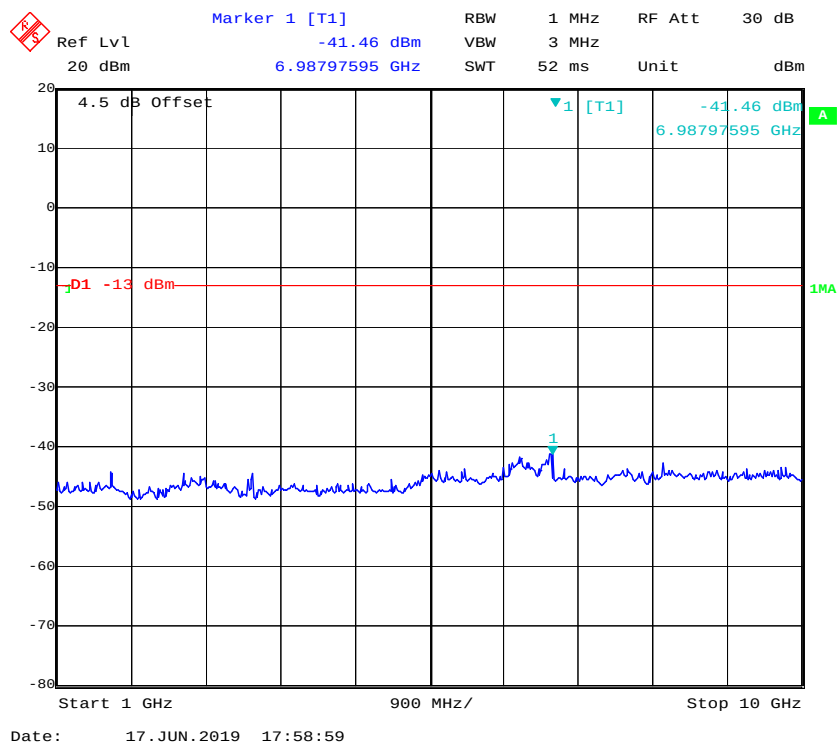
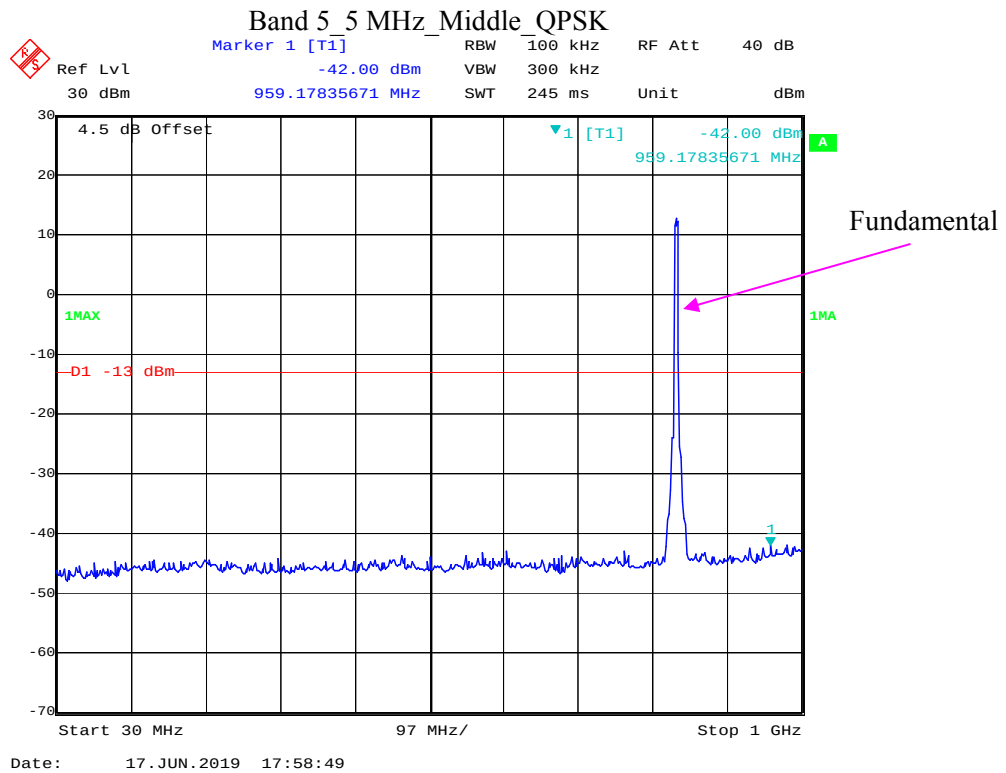


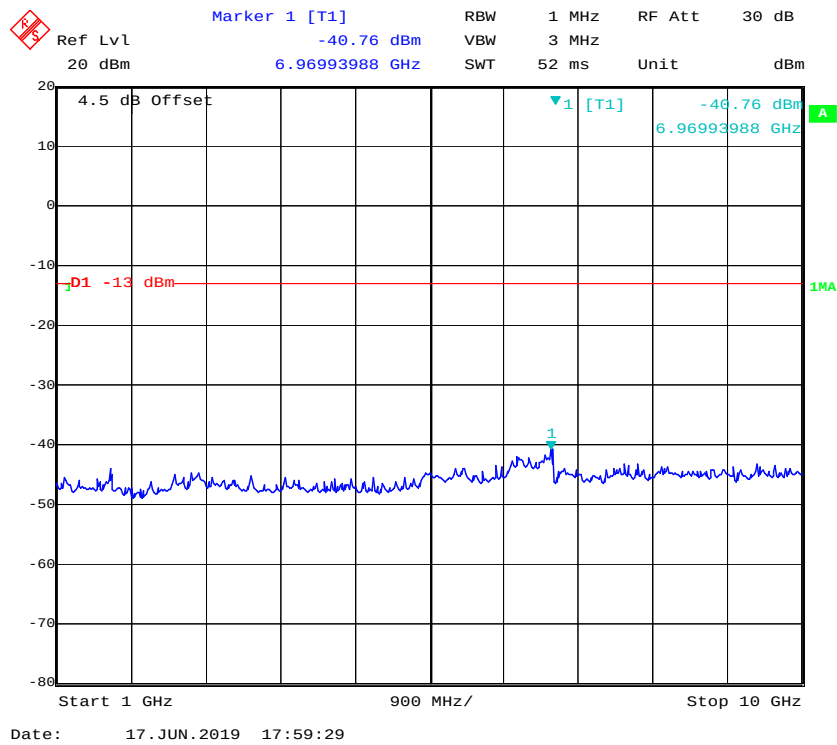
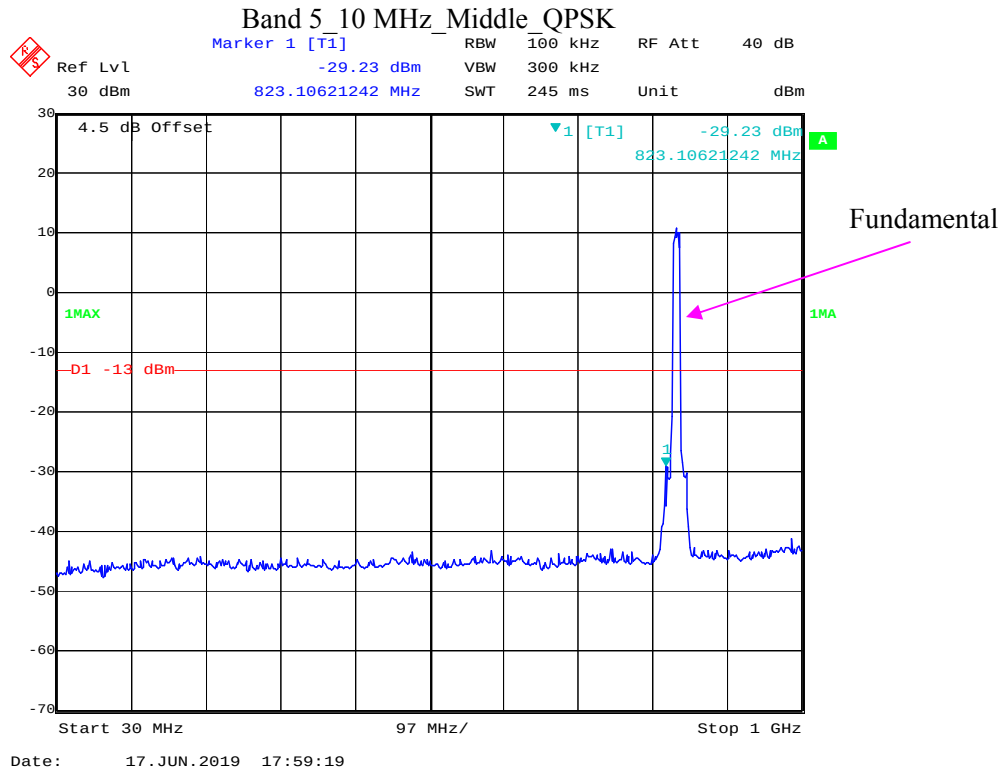


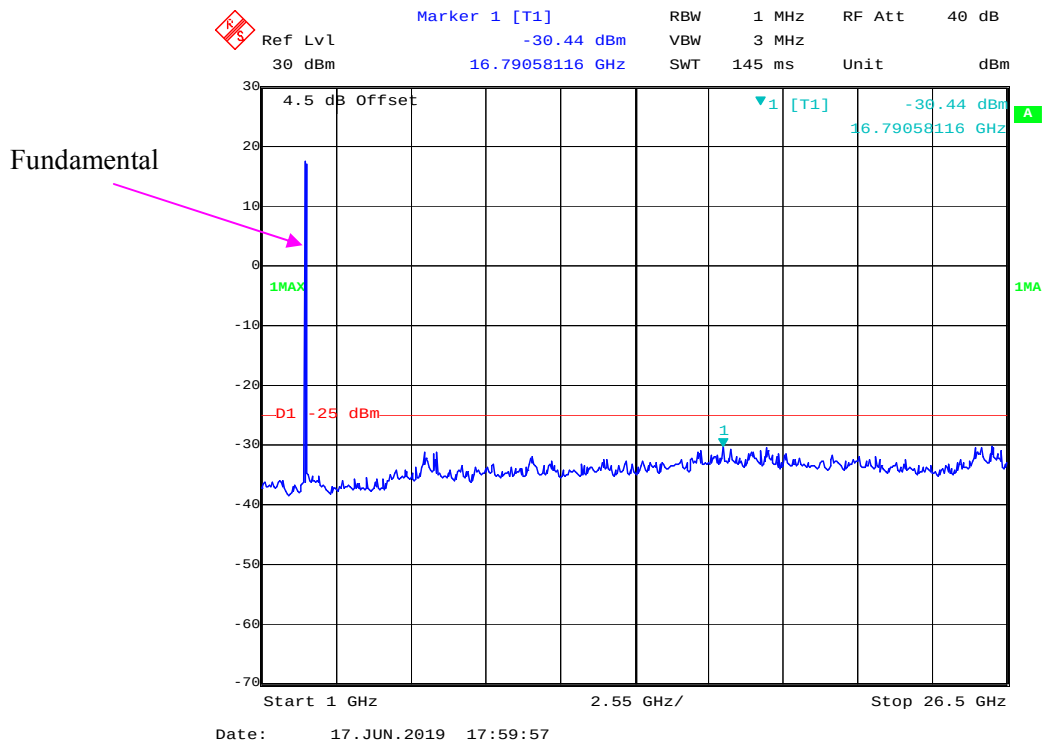
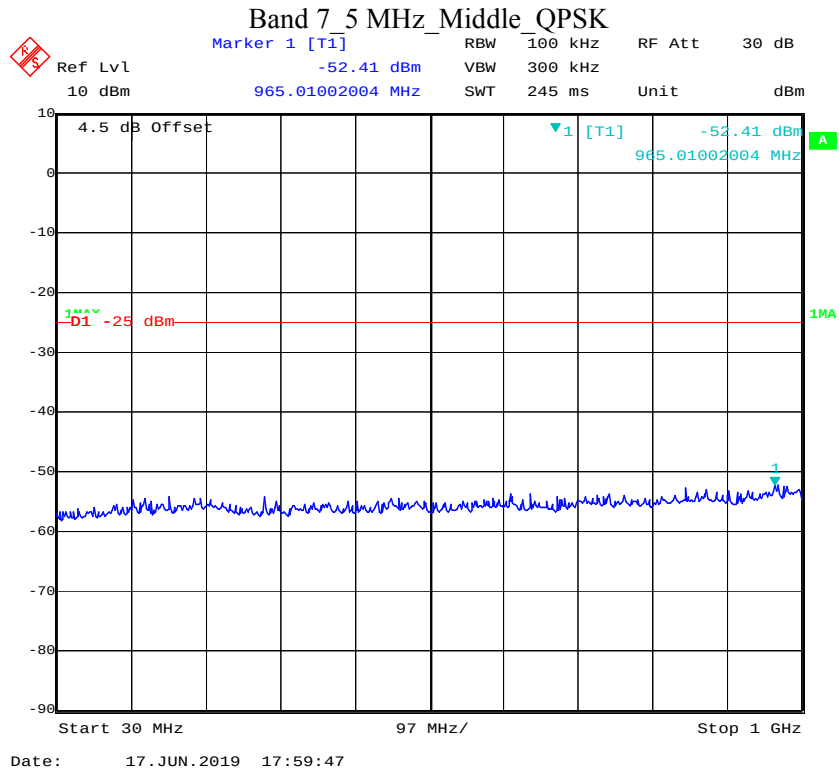


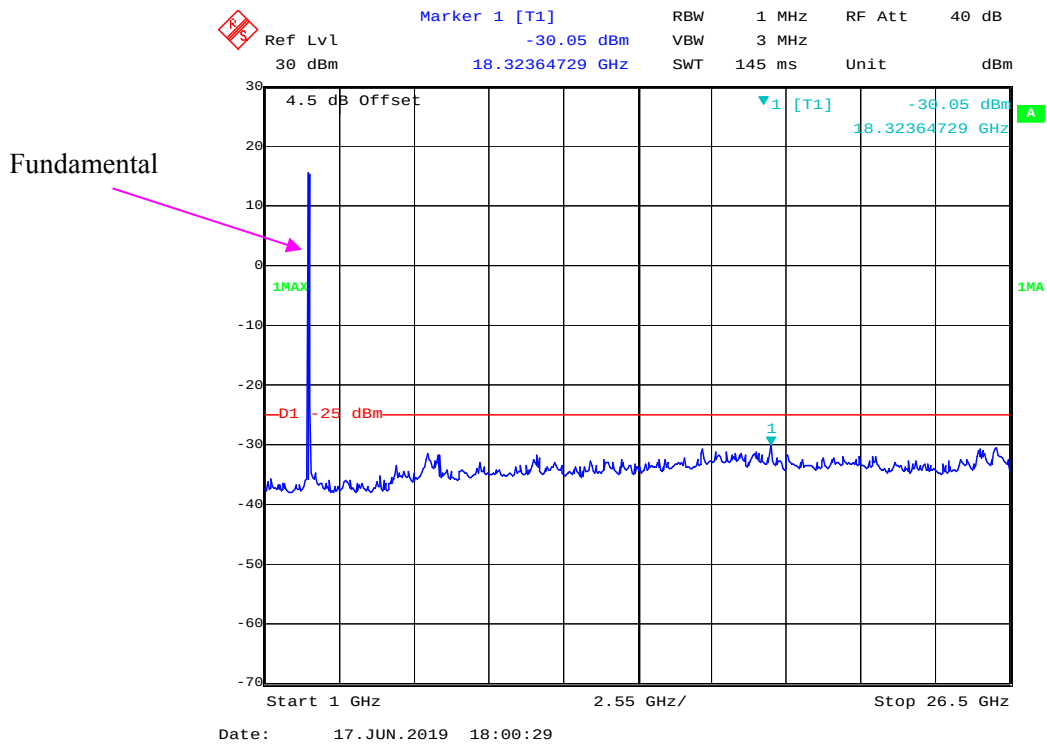
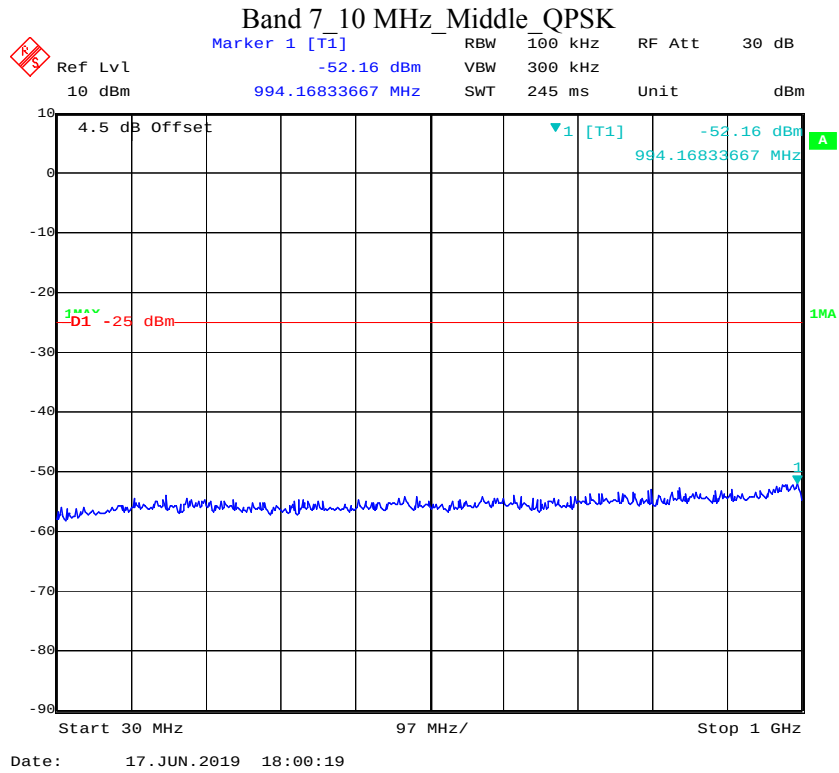


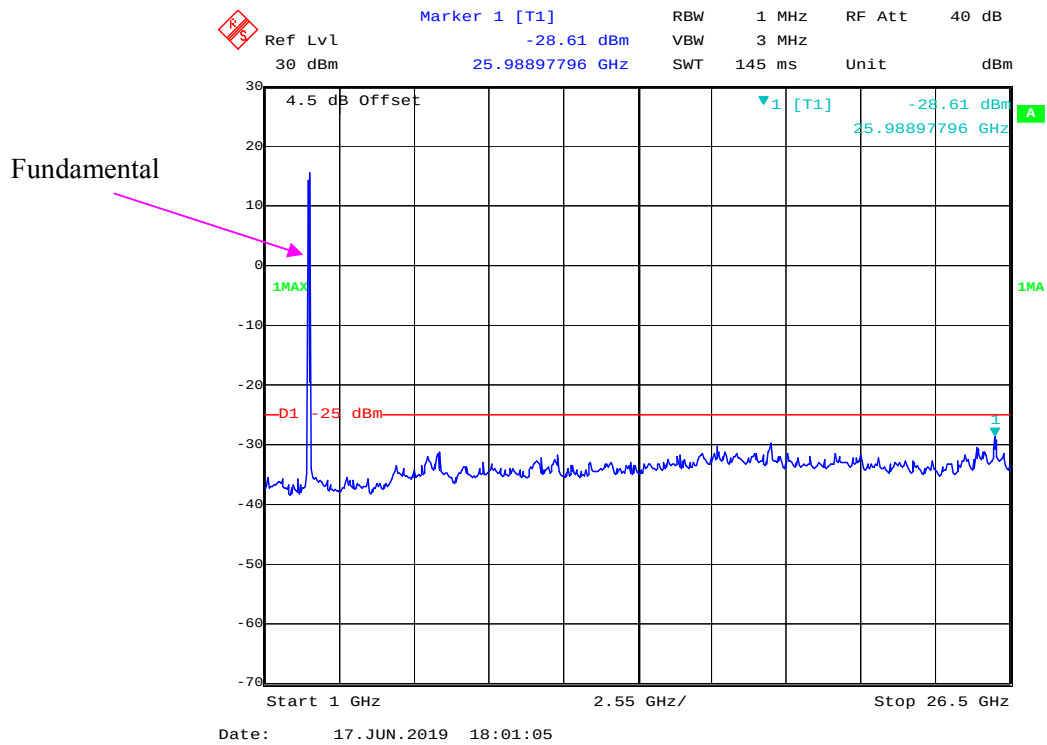
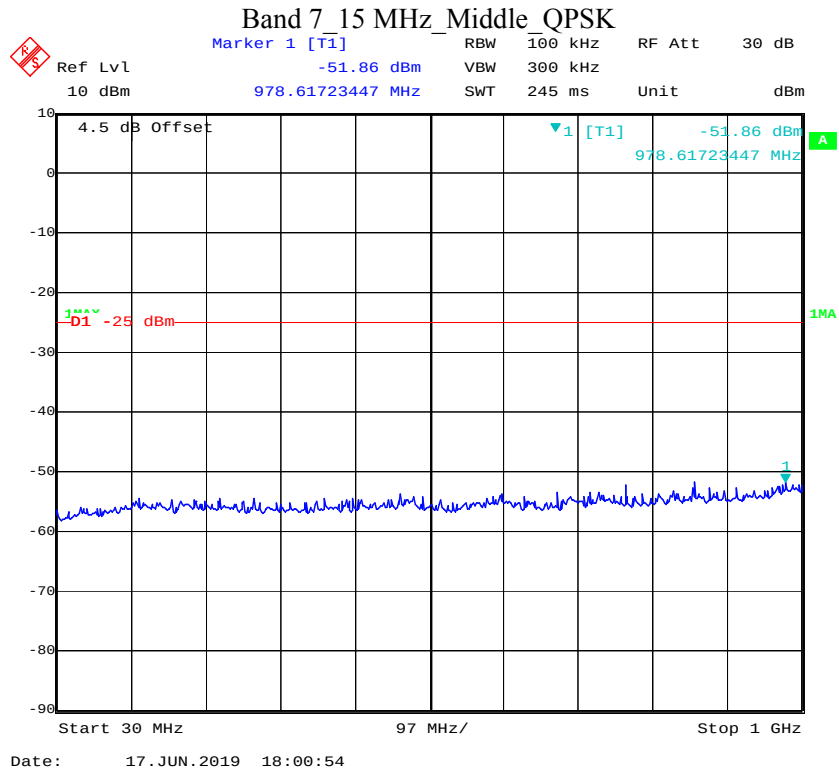


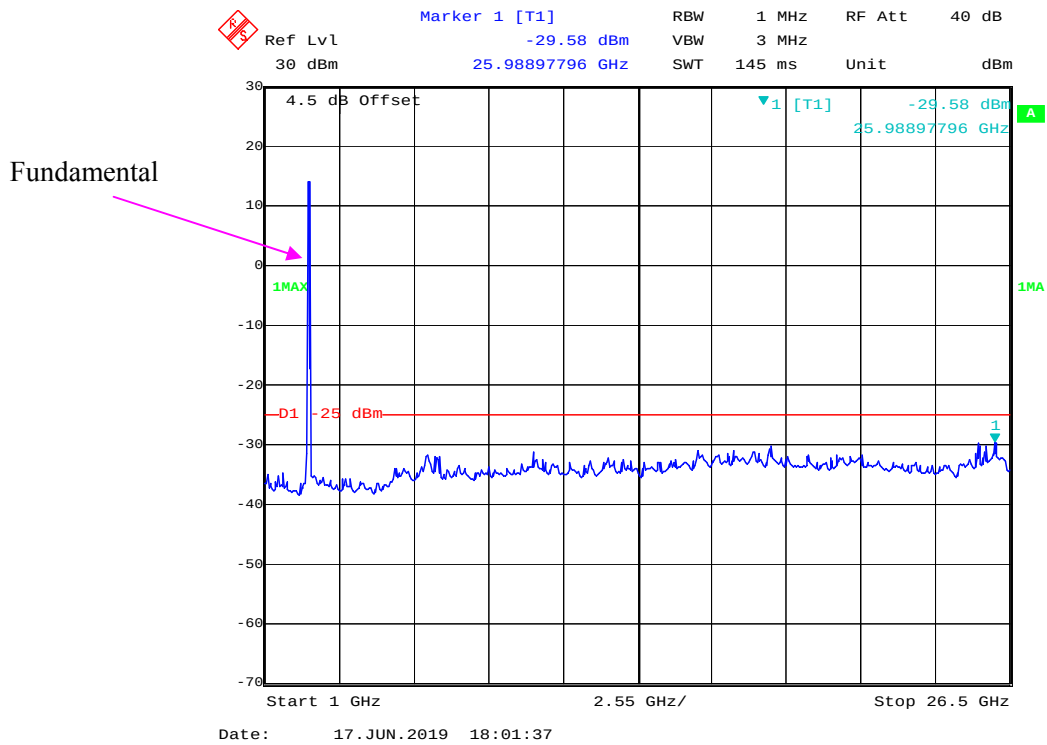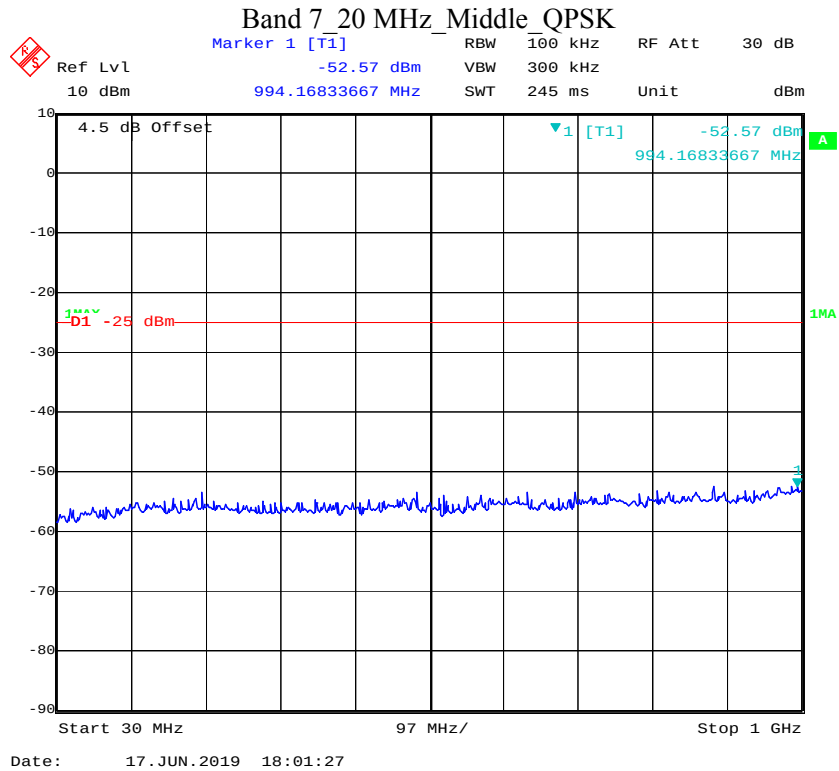


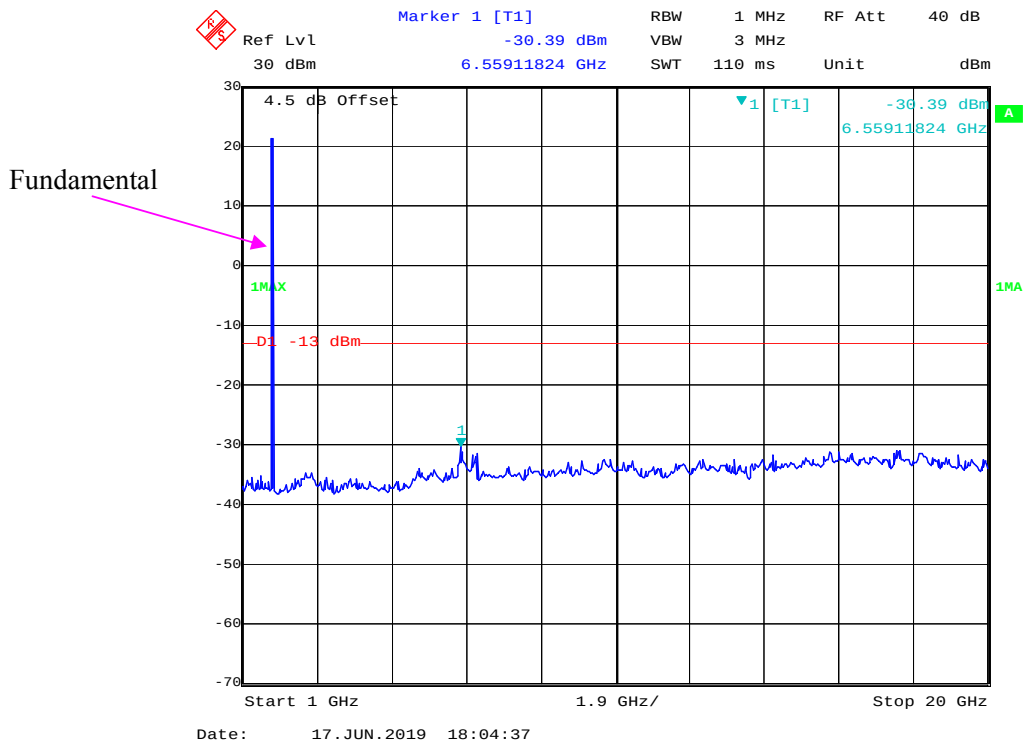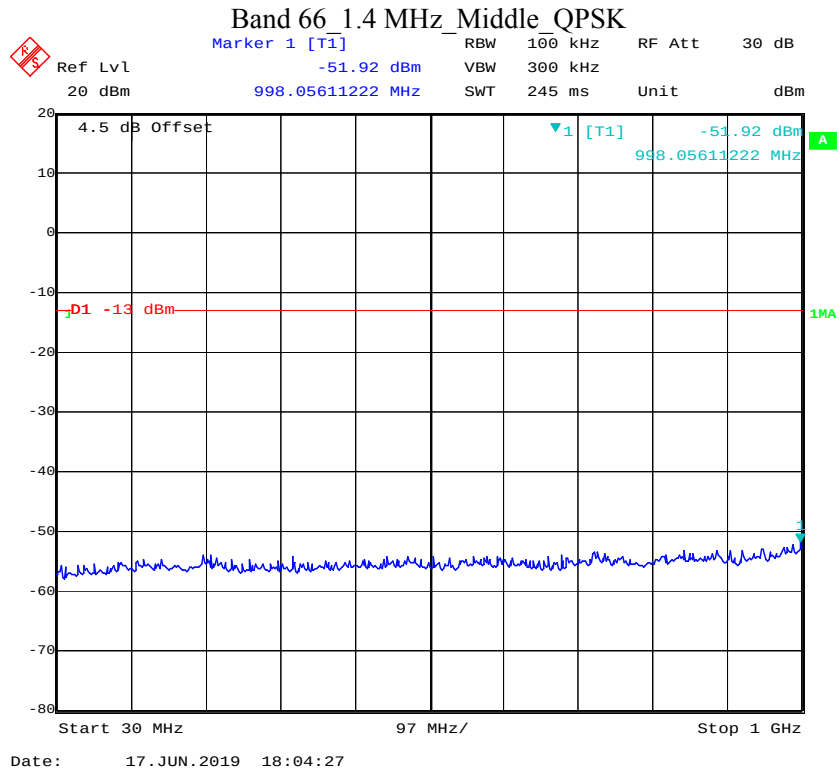

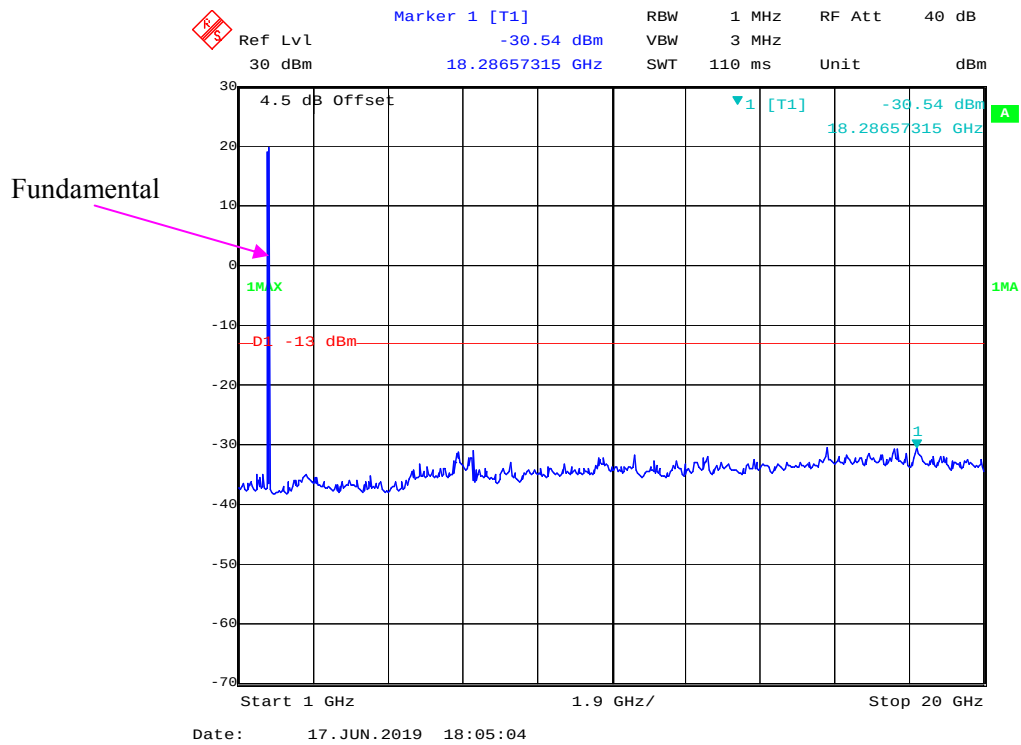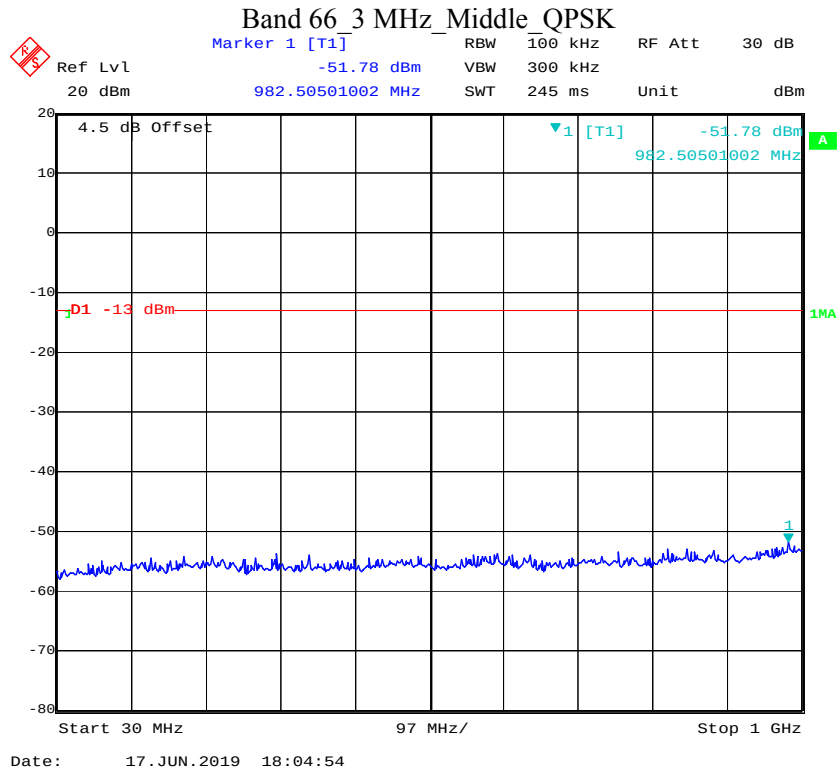


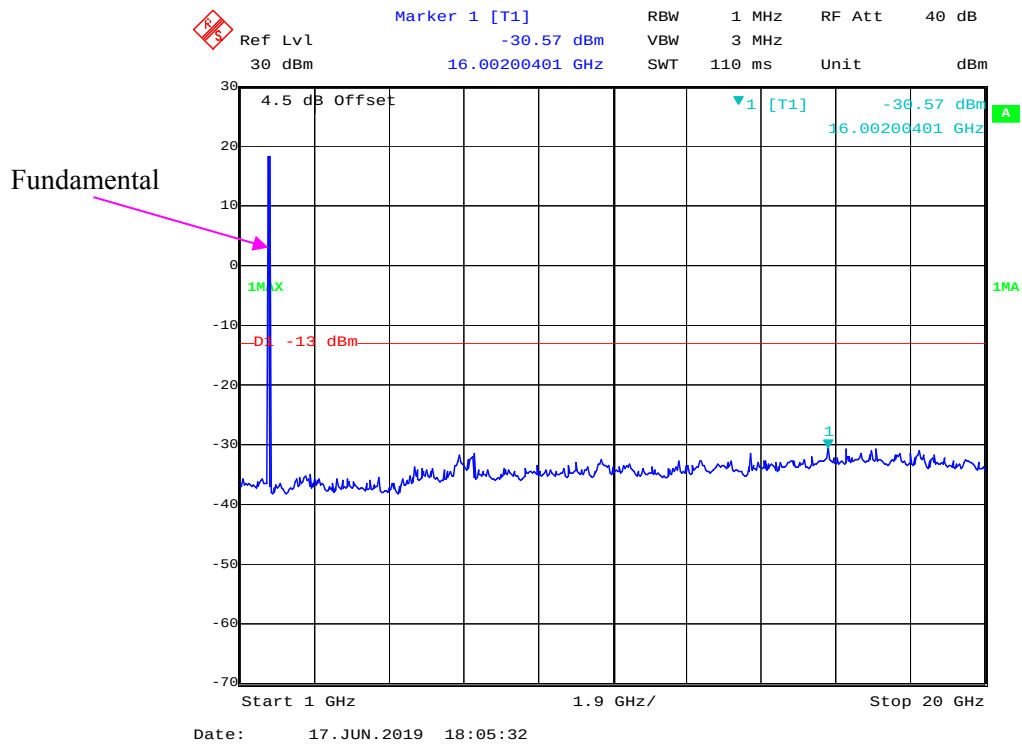
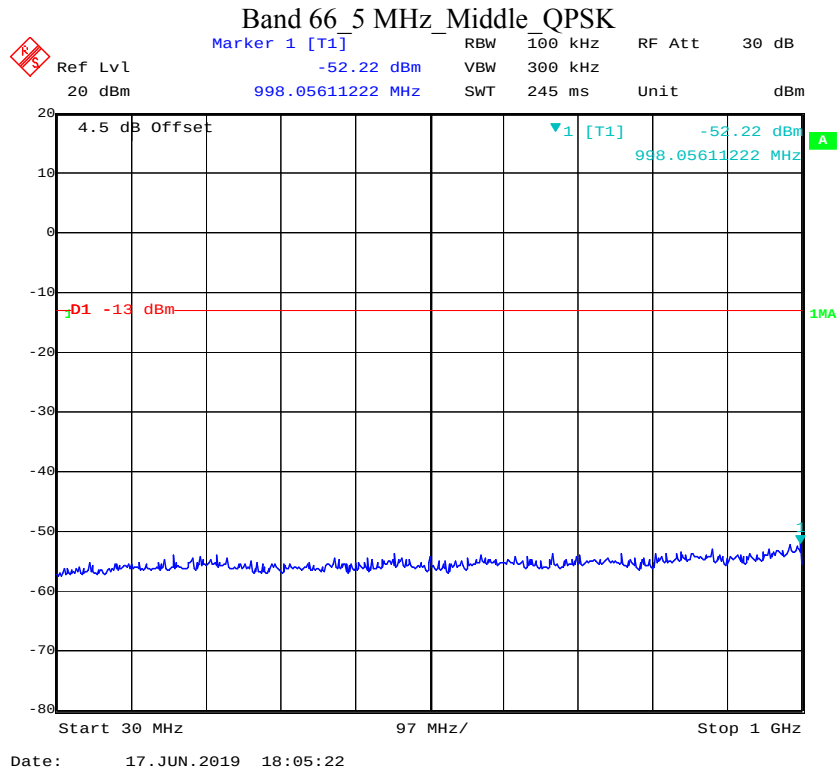


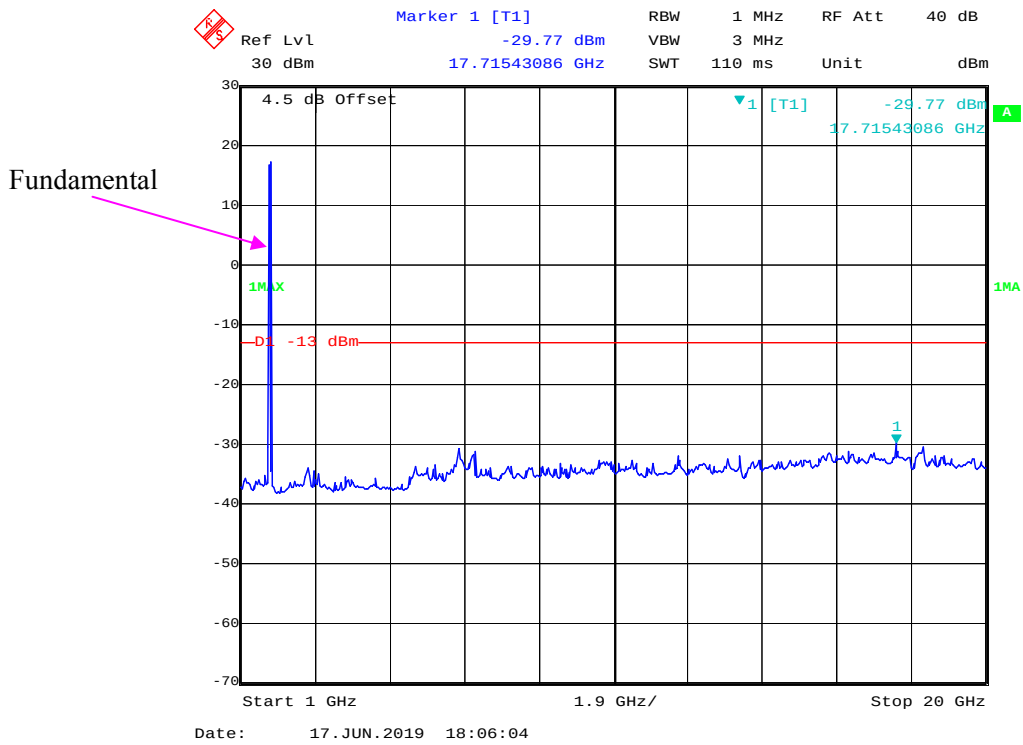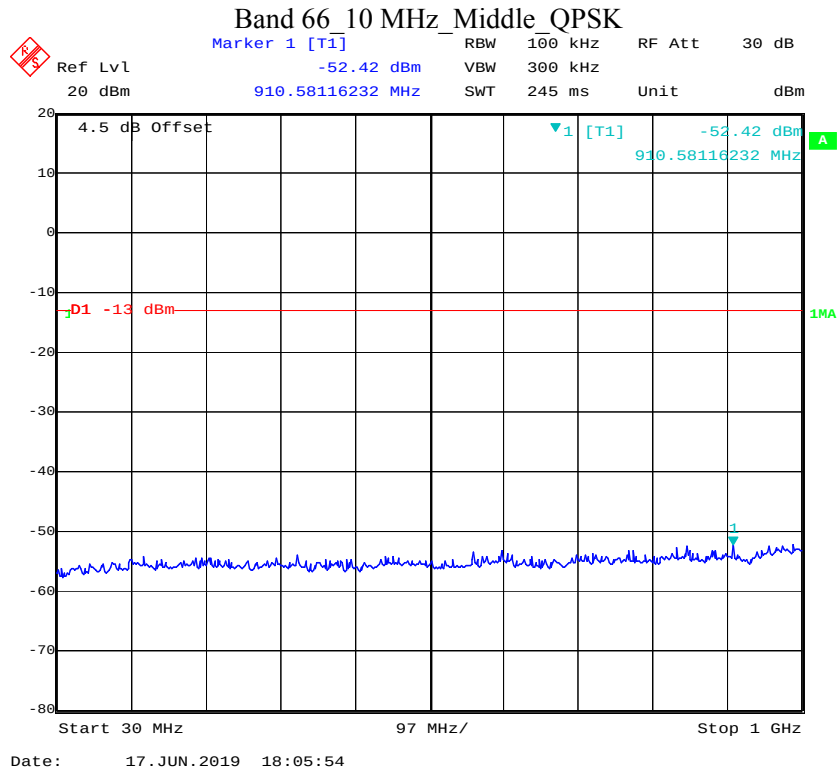

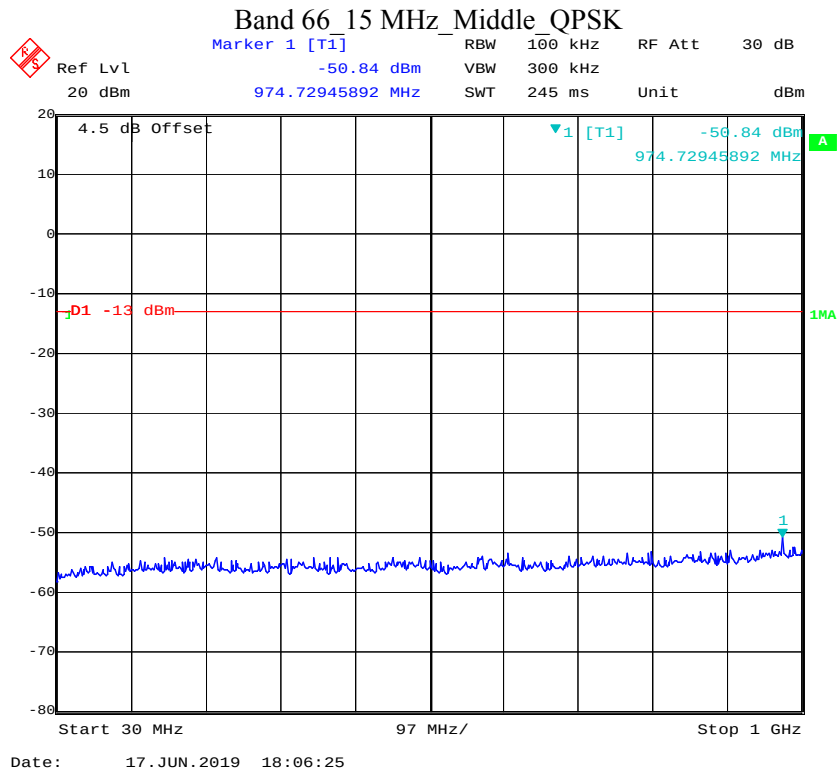

Fundamental

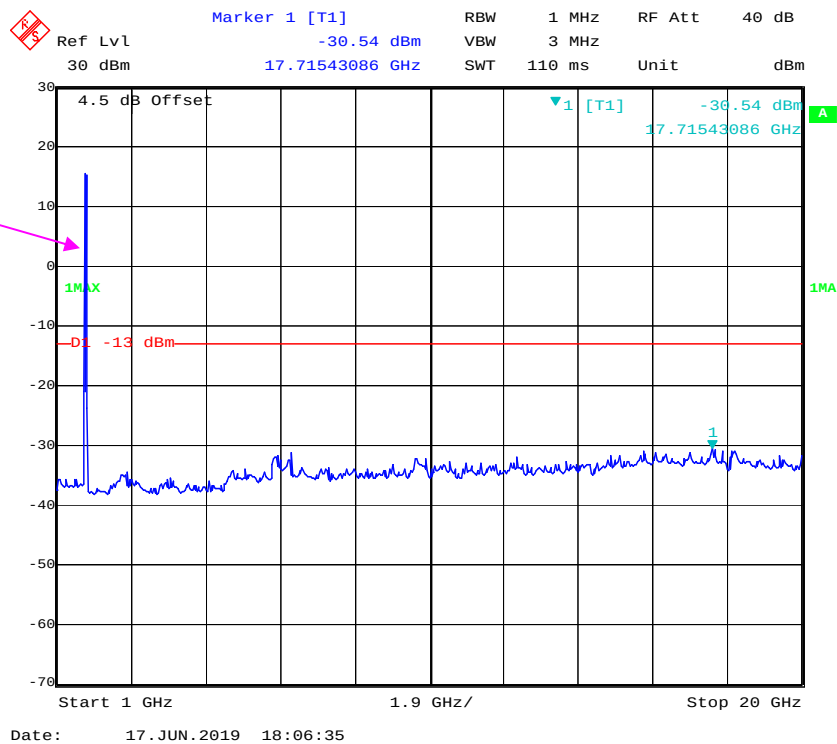

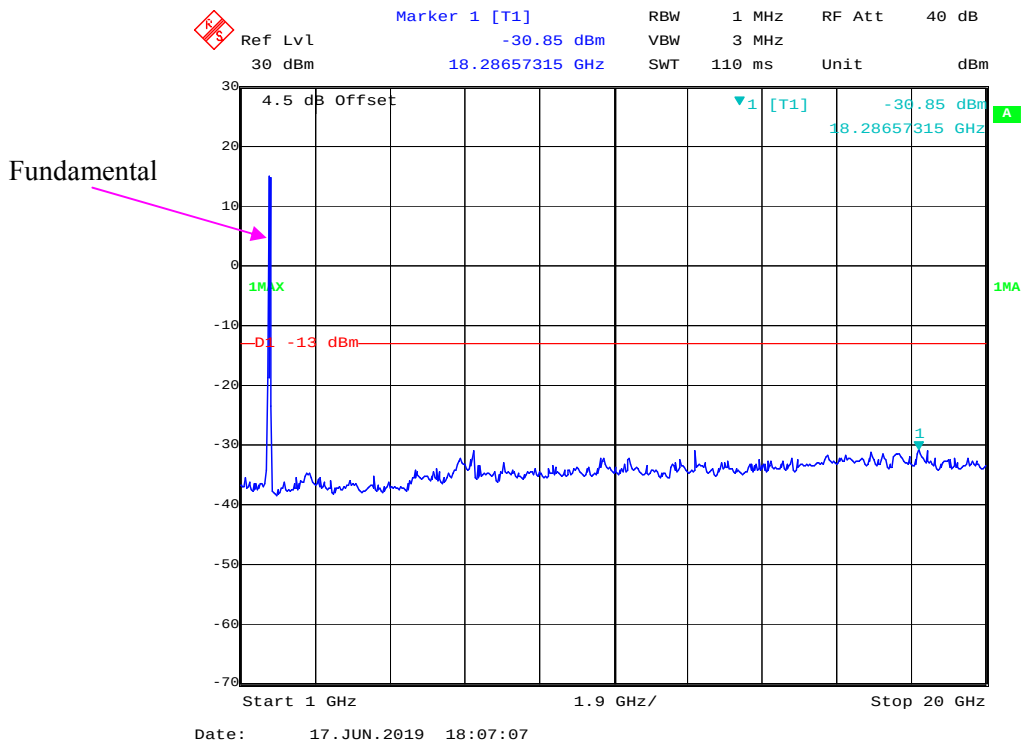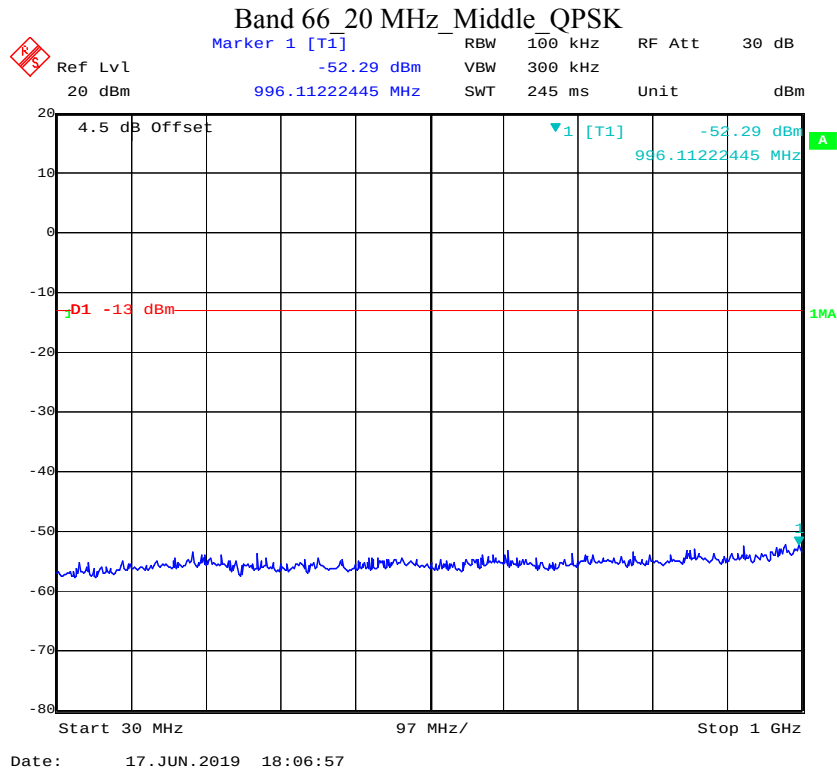

FCC §2.1053, §22.917 & §24.238 & §27.53 - SPURIOUS RADIATED EMISSIONS

Applicable Standard

FCC § 2.1053, §22.917, § 24.238 and § 27.53.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TXpwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \text{Log}_{10} (\text{power out in Watts})$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESR3	102453	2018-06-26	2019-06-26
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2019-05-06	2020-05-06
HP	Amplifier	8447D	2727A05902	2018-09-05	2019-09-05
R&S	Spectrum Analyzer	FSP 38	100478	2019-05-09	2020-05-09
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2018-09-05	2019-09-05
MICRO-COAX	Coaxial Cable	UFA147-1-2362-100100	64639 231029-001	2019-02-24	2020-02-24
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2018-09-05	2019-09-05
Sinoscite	Band-stop filter	BSF1710-1785MN-0383-003	0383003	2018-06-16	2019-06-16
Sinoscite	Band-stop filter	BSF824-862MS-1438-001	1438001	2018-06-16	2019-06-16
Sinoscite	Band-stop filter	BSF1850-1910MS-0935V2	0935V2	2018-06-16	2019-06-16
Agilent	Signal Generator	E8247C	MY43321350	2018-12-10	2019-12-10
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2016-11-18	2019-11-18

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	21.1 °C
Relative Humidity:	31 %
ATM Pressure:	99.7 kPa

* The testing was performed by Vern Shen on 2019-06-05.

EUT Operation Mode: Transmitting

External Antenna:**30 MHz-10 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band V R99,Frequency:836.600 MHz								
1673.200	H	49.00	-55.38	10.5	1.27	-46.1	-13.0	33.1
1673.200	V	47.45	-56.86	10.5	1.27	-47.6	-13.0	34.6
2509.800	H	59.74	-43.03	12.2	1.25	-32.1	-13.0	19.1
2509.800	V	50.69	-53.47	12.2	1.25	-42.5	-13.0	29.5
3346.400	H	49.83	-51.36	12.3	1.58	-40.7	-13.0	27.7
3346.400	V	50.68	-49.44	12.3	1.58	-38.8	-13.0	25.8
394.300	H	47.92	-57.11	0.0	0.6	-57.7	-13.0	44.7
57.400	V	53.00	-52.83	-11.5	0.22	-64.6	-13.0	51.6

30 MHz-20 GHz:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band II R99,Frequency: 1880.000 MHz								
3760.000	H	57.20	-43.01	12.3	1.53	-32.3	-13.0	19.3
3760.000	V	54.74	-45.17	12.3	1.53	-34.5	-13.0	21.5
5640.000	H	50.13	-45.17	13.0	1.28	-33.5	-13.0	20.5
5640.000	V	46.05	-49.56	13.0	1.28	-37.8	-13.0	24.8
582.400	H	56.80	-45.7	0.0	0.75	-46.5	-13.0	33.5
63.000	V	50.44	-58.84	-8.7	0.23	-67.8	-13.0	54.8

LTE Band 2 (30MHz-20GHz):

EYE Data 1 (COMPL 10GHz):								
Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, Frequency: 1880.000 MHz								
3760.00	H	59.01	-41.20	12.25	1.53	-30.48	-13.00	17.48
3760.00	V	58.44	-41.47	12.25	1.53	-30.75	-13.00	17.75
5640.00	H	55.73	-39.57	13.00	1.28	-27.85	-13.00	14.85
5640.00	V	52.91	-42.70	13.00	1.28	-30.98	-13.00	17.98
390.10	H	46.30	-58.89	0.00	0.60	-59.49	-13.00	46.49
307.20	V	39.48	-70.37	0.00	0.53	-70.90	-13.00	57.90

LTE Band 4 (30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK,Frequency:1732.500 MHz								
3465.00	H	59.40	-41.57	12.21	1.60	-30.96	-13.00	17.96
3465.00	V	63.45	-36.11	12.21	1.60	-25.50	-13.00	12.50
5197.50	H	43.00	-53.08	12.92	1.36	-41.52	-13.00	28.52
5197.50	V	43.31	-52.74	12.92	1.36	-41.18	-13.00	28.18
391.50	H	50.70	-54.44	0.00	0.60	-55.04	-13.00	42.04
394.30	V	39.54	-68.73	0.00	0.60	-69.33	-13.00	56.33

LTE Band 5 (30MHz-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, Frequency: 836.500 MHz								
1673.00	H	62.84	-41.54	10.52	1.27	-32.29	-13.00	19.29
1673.00	V	57.42	-46.89	10.52	1.27	-37.64	-13.00	24.64
2509.50	H	63.81	-38.96	12.20	1.24	-28.00	-13.00	15.00
2509.50	V	53.71	-50.45	12.20	1.24	-39.49	-13.00	26.49
3346.00	H	59.30	-41.89	12.26	1.58	-31.21	-13.00	18.21
3346.00	V	54.67	-45.45	12.26	1.58	-34.77	-13.00	21.77
394.80	H	50.10	-54.91	0.00	0.61	-55.52	-13.00	42.52
391.00	V	45.70	-62.63	0.00	0.60	-63.23	-13.00	50.23

LTE Band 7 (30MHz-26.5GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, Frequency: 2535.000 MHz								
5070.00	H	40.87	-55.44	12.97	1.41	-43.88	-25.00	18.88
5070.00	V	42.00	-54.08	12.97	1.41	-42.52	-25.00	17.52
7605.00	H	37.30	-54.08	12.84	1.40	-42.64	-25.00	17.64
7605.00	V	38.07	-53.98	12.84	1.40	-42.54	-25.00	17.54
394.30	H	49.07	-55.96	0.00	0.60	-56.56	-25.00	31.56
79.80	V	44.84	-73.02	-0.10	0.38	-73.50	-25.00	48.50

LTE Band 66 (30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK,Frequency:1745.000 MHz								
3490.00	H	61.80	-39.12	12.20	1.61	-28.53	-13.00	15.53
3490.00	V	62.10	-37.35	12.20	1.61	-26.76	-13.00	13.76
5235.00	H	47.50	-48.52	12.91	1.35	-36.96	-13.00	23.96
5235.00	V	47.97	-48.08	12.91	1.35	-36.52	-13.00	23.52
6980.00	H	40.33	-51.50	13.43	1.82	-39.89	-13.00	26.89
6980.00	V	42.79	-49.23	13.43	1.82	-37.62	-13.00	24.62
392.90	H	47.01	-58.07	0.00	0.60	-58.67	-13.00	45.67
390.10	V	43.98	-64.37	0.00	0.60	-64.97	-13.00	51.97

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit - Absolute Level

Inside Antenna:**30 MHz-10 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band V R99,Frequency:836.600 MHz								
1673.200	H	57.81	-46.57	10.5	1.27	-37.3	-13.0	24.3
1673.200	V	56.60	-47.71	10.5	1.27	-38.5	-13.0	25.5
2509.800	H	53.82	-48.95	12.2	1.25	-38.0	-13.0	25.0
2509.800	V	51.08	-53.08	12.2	1.25	-42.1	-13.0	29.1
3346.400	H	56.14	-45.05	12.3	1.58	-34.4	-13.0	21.4
3346.400	V	55.70	-44.42	12.3	1.58	-33.7	-13.0	20.7
394.500	H	47.35	-57.67	0.0	0.61	-58.3	-13.0	45.3
63.000	V	50.20	-59.08	-8.7	0.23	-68.0	-13.0	55.0

30 MHz-20 GHz:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band II R99,Frequency: 1880.000 MHz								
3760.000	H	64.55	-35.66	12.3	1.53	-24.9	-13.0	11.9
3760.000	V	61.23	-38.68	12.3	1.53	-28.0	-13.0	15.0
5640.000	H	57.15	-38.15	13.0	1.28	-26.4	-13.0	13.4
5640.000	V	52.22	-43.39	13.0	1.28	-31.7	-13.0	18.7
581.000	H	47.40	-55.13	0.0	0.75	-55.9	-13.0	42.9
56.000	V	50.31	-54.68	-12.1	0.22	-67.0	-13.0	54.0

LTE Band 2 (30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK,Frequency:1880.000 MHz								
3760.00	H	71.79	-28.42	12.25	1.53	-17.70	-13.00	4.70
3760.00	V	72.28	-27.63	12.25	1.53	-16.91	-13.00	3.91
5640.00	H	63.92	-31.38	13.00	1.28	-19.66	-13.00	6.66
5640.00	V	60.24	-35.37	13.00	1.28	-23.65	-13.00	10.65
578.20	H	46.37	-56.22	0.00	0.75	-56.97	-13.00	43.97
392.90	V	43.09	-65.21	0.00	0.60	-65.81	-13.00	52.81

LTE Band 4 (30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK,Frequency:1732.500 MHz								
3465.00	H	62.41	-38.56	12.21	1.60	-27.95	-13.00	14.95
3465.00	V	62.80	-36.76	12.21	1.60	-26.15	-13.00	13.15
5197.50	H	55.78	-40.30	12.92	1.36	-28.74	-13.00	15.74
5197.50	V	52.87	-43.18	12.92	1.36	-31.62	-13.00	18.62
390.10	H	49.04	-56.15	0.00	0.60	-56.75	-13.00	43.75
392.90	V	43.00	-65.30	0.00	0.60	-65.90	-13.00	52.90

LTE Band 5 (30MHz-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, Frequency: 836.500 MHz								
1673.00	H	70.19	-34.19	10.52	1.27	-24.94	-13.00	11.94
1673.00	V	65.80	-38.51	10.52	1.27	-29.26	-13.00	16.26
2509.50	H	67.80	-34.97	12.20	1.24	-24.01	-13.00	11.01
2509.50	V	58.87	-45.29	12.20	1.24	-34.33	-13.00	21.33
3346.00	H	62.30	-38.89	12.26	1.58	-28.21	-13.00	15.21
3346.00	V	61.80	-38.32	12.26	1.58	-27.64	-13.00	14.64
573.78	H	47.87	-54.81	0.00	0.75	-55.56	-13.00	42.56
392.40	V	45.40	-62.91	0.00	0.60	-63.51	-13.00	50.51

LTE Band 7 (30MHz-26.5GHz):

EFL Band 7 (56.0MHz-26.5GHz):								
Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, Frequency: 2535.000 MHz								
5070.00	H	40.50	-55.81	12.97	1.41	-44.25	-25.00	19.25
5070.00	V	42.50	-53.58	12.97	1.41	-42.02	-25.00	17.02
7605.00	H	38.70	-52.68	12.84	1.40	-41.24	-25.00	16.24
7605.00	V	38.70	-53.35	12.84	1.40	-41.91	-25.00	16.91
390.10	H	48.44	-56.75	0.00	0.60	-57.35	-25.00	32.35
79.80	V	45.85	-72.01	-0.10	0.38	-72.49	-25.00	47.49

LTE Band 66 (30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, Frequency: 1745.000 MHz								
3490.00	H	66.70	-34.22	12.20	1.61	-23.63	-13.00	10.63
3490.00	V	67.58	-31.87	12.20	1.61	-21.28	-13.00	8.28
5235.00	H	60.37	-35.65	12.91	1.35	-24.09	-13.00	11.09
5235.00	V	58.10	-37.95	12.91	1.35	-26.39	-13.00	13.39
6980.00	H	47.80	-44.03	13.43	1.82	-32.42	-13.00	19.42
6980.00	V	48.40	-43.62	13.43	1.82	-32.01	-13.00	19.01
391.50	H	46.65	-58.49	0.00	0.60	-59.09	-13.00	46.09
387.30	V	41.20	-67.20	0.00	0.60	-67.80	-13.00	54.80

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit - Absolute Level

FCC §22.917(a) & §24.238(a) & §27.53 - BAND EDGES


Applicable Standard

FCC § 2.1053, §22.917, § 24.238 and § 27.53.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

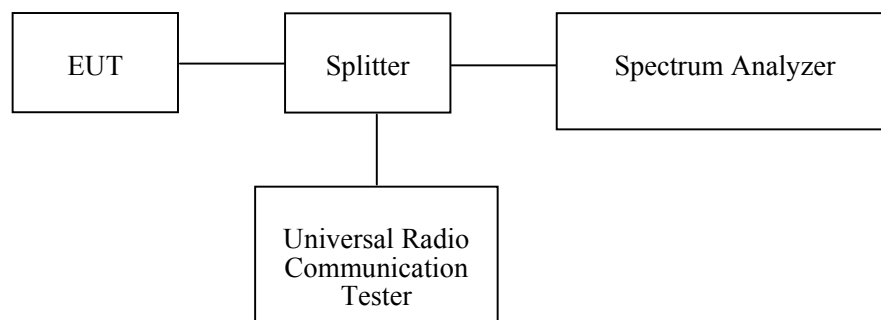

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2018-12-10	2019-12-10
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41010012	Each time	/
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	/
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	24.9~25.9 °C
Relative Humidity:	47~53 %
ATM Pressure:	100.6~100.5 kPa

The testing was performed by Blake Yang from 2019-06-10 to 2019-06-16.

Test Mode: Transmitting


Test Result: Compliant. Please refer to the following plots.

WCDMA Band II Rel 99, Left Band Edge

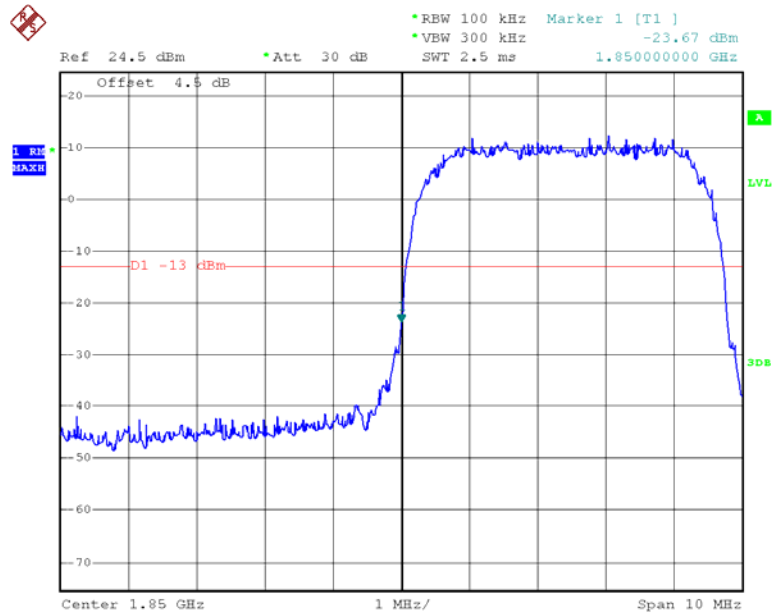


Date: 16.JUN.2019 18:05:47

WCDMA Band II Rel 99, Right Band Edge

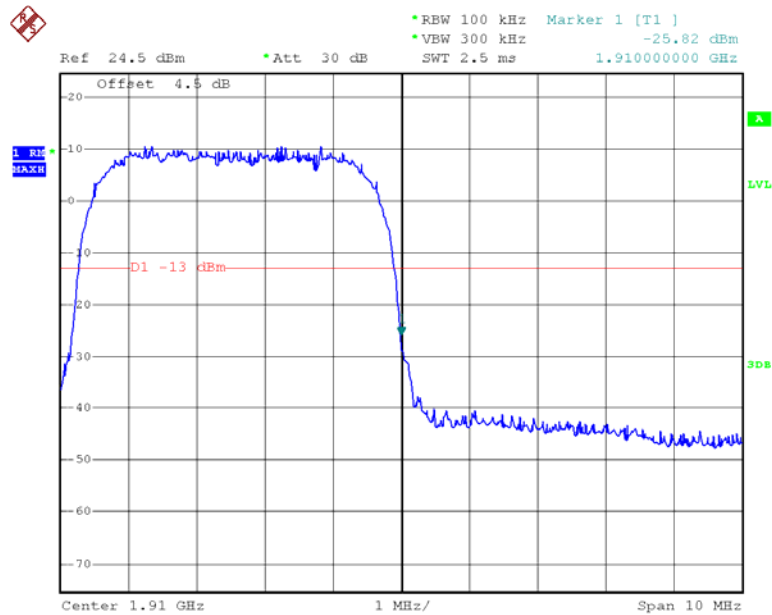


Date: 16.JUN.2019 18:06:09

WCDMA Band II HSDPA, Left Band Edge

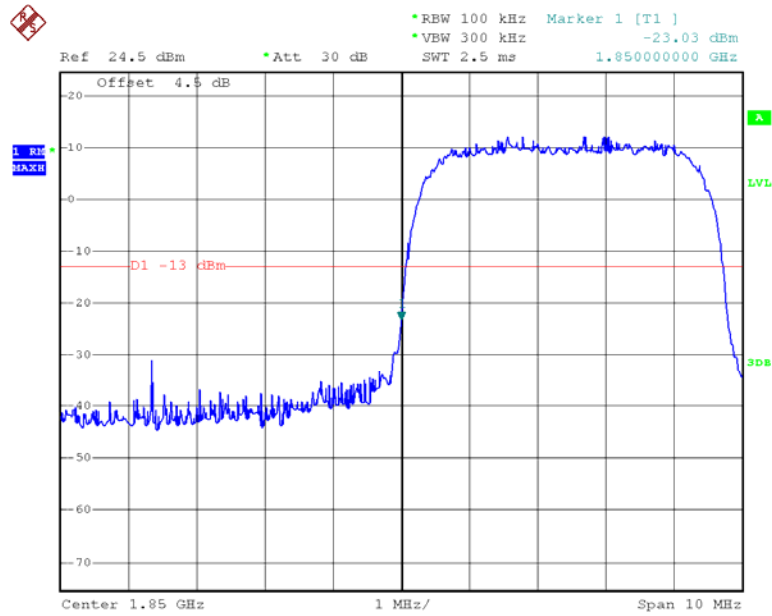


Date: 16.JUN.2019 18:04:58

WCDMA Band II HSDPA, Right Band Edge

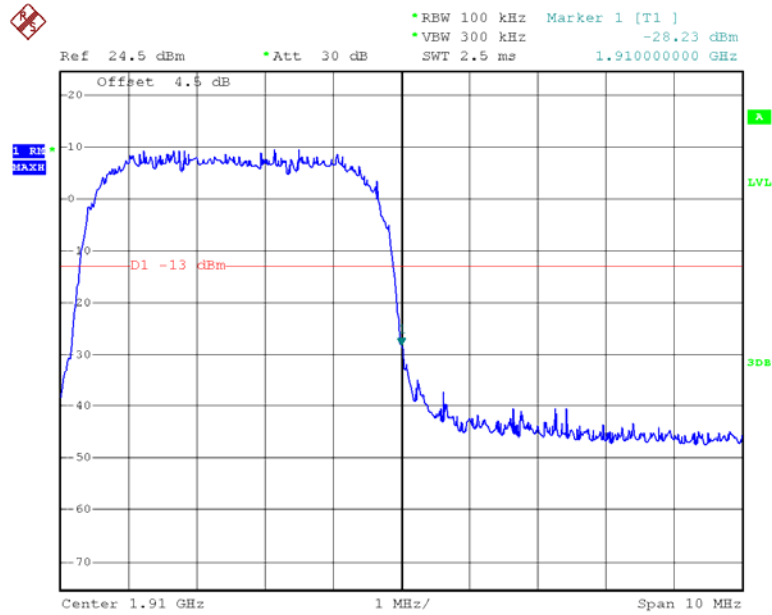


Date: 16.JUN.2019 18:04:32

WCDMA Band II HSUPA, Left Band Edge

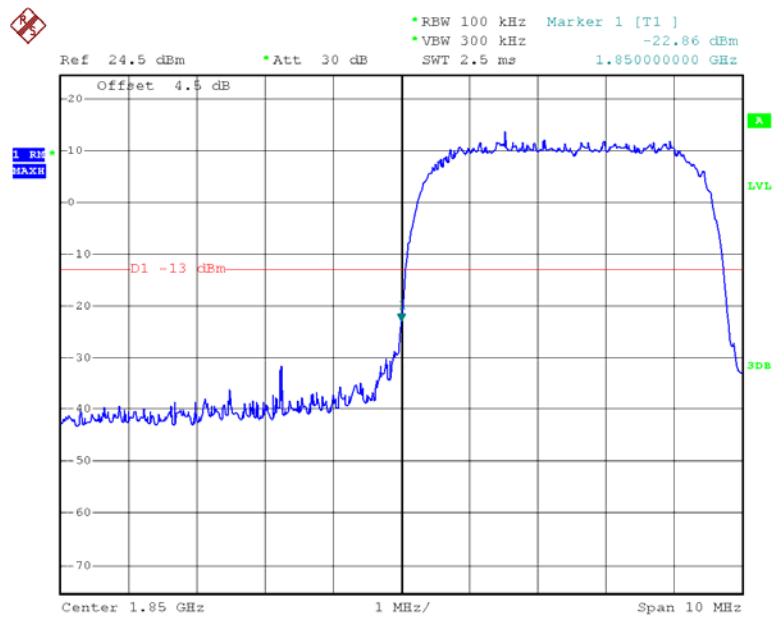


Date: 16.JUN.2019 18:03:30

WCDMA Band II HSUPA, Right Band Edge

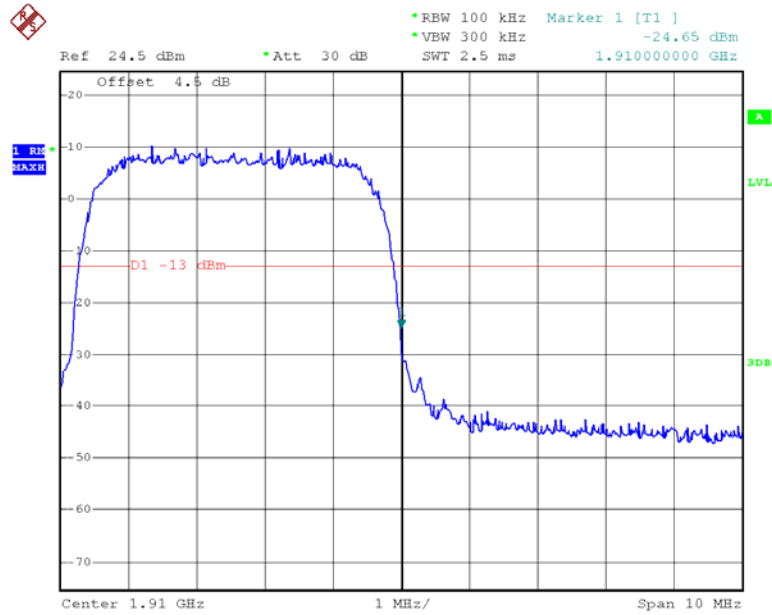


Date: 16.JUN.2019 18:04:03

WCDMA Band V Rel 99, Left Band Edge

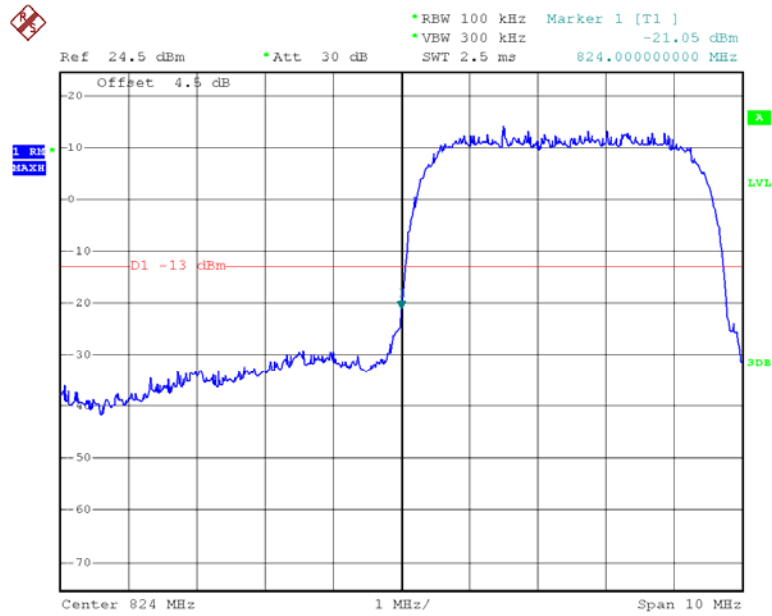


Date: 16.JUN.2019 18:29:29

WCDMA Band V Rel 99, Right Band Edge

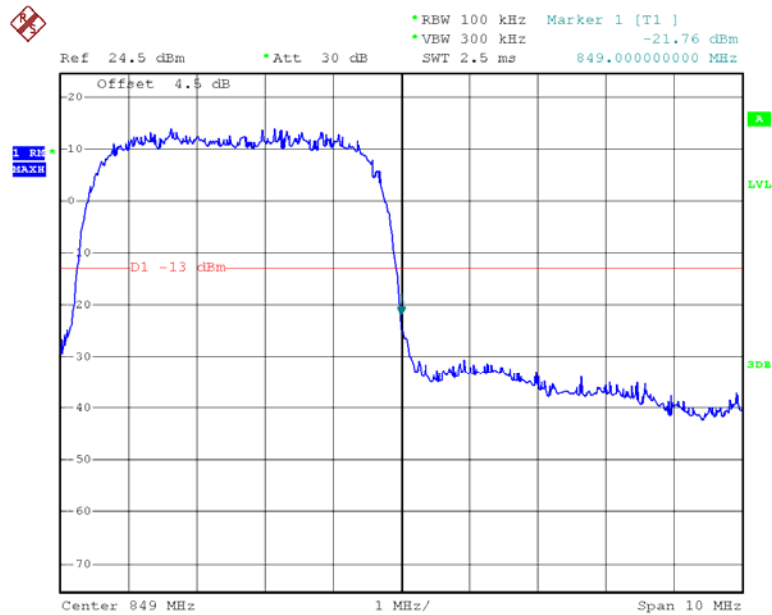


Date: 16.JUN.2019 18:29:51

WCDMA Band V HSDPA, Left Band Edge

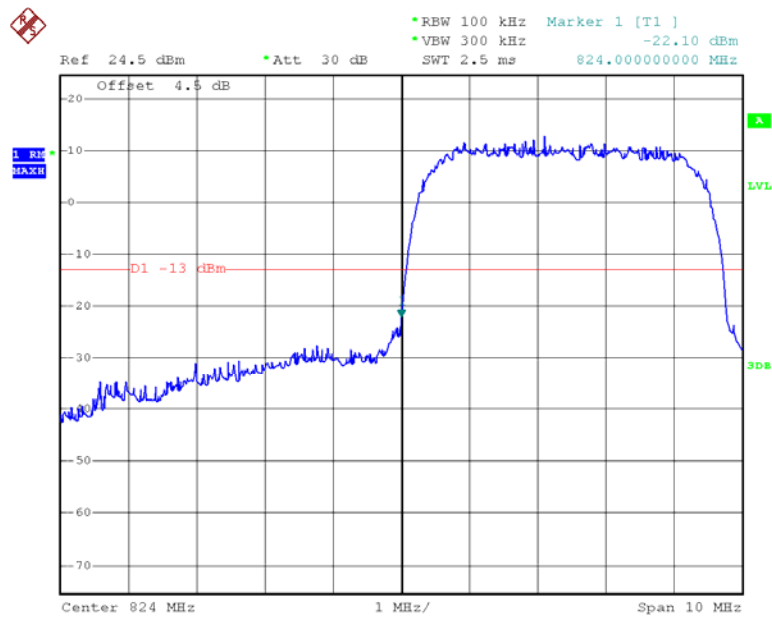


Date: 16.JUN.2019 18:28:00

WCDMA Band V HSDPA, Right Band Edge

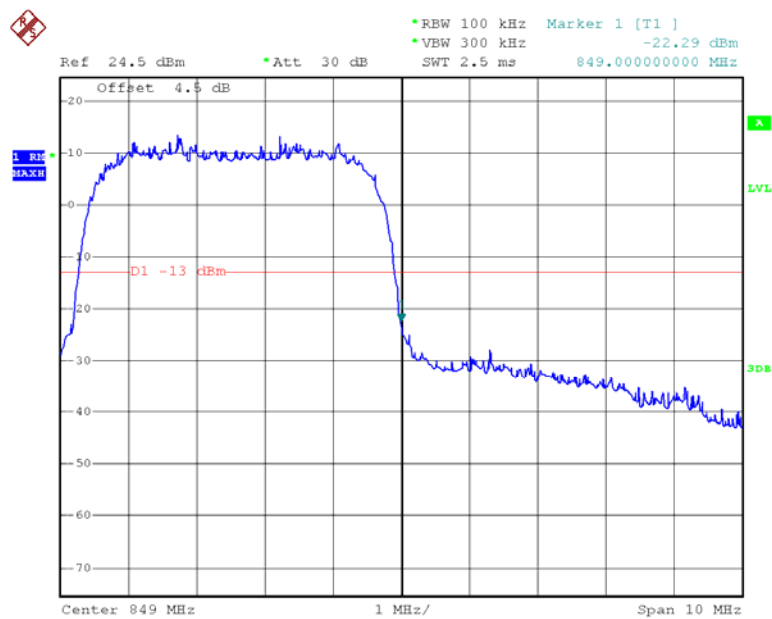


Date: 16.JUN.2019 18:27:23

WCDMA Band V HSUPA, Left Band Edge


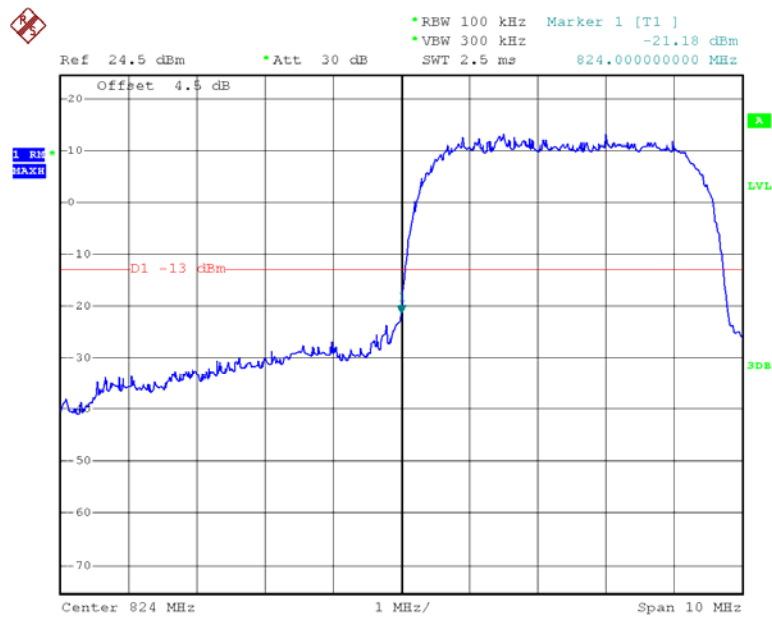




Date: 16.JUN.2019 18:26:30



WCDMA Band V HSUPA, Right Band Edge


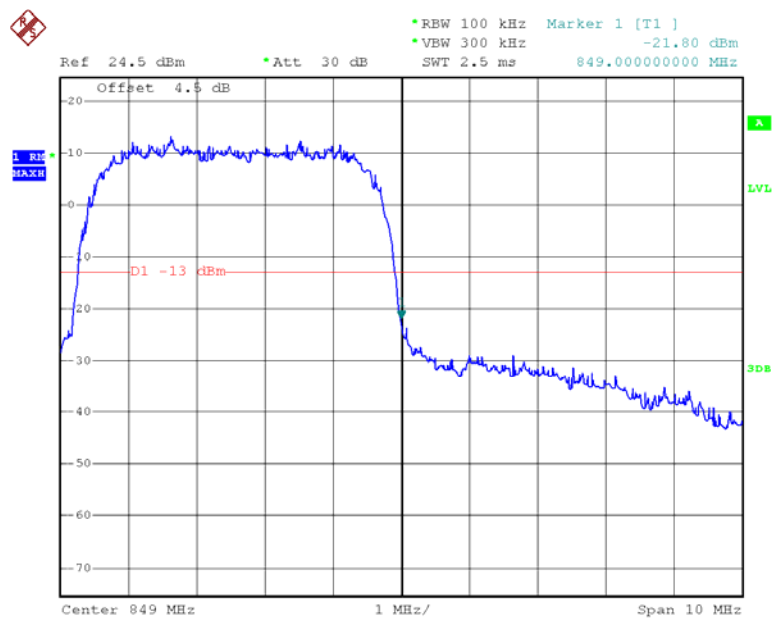




Date: 16.JUN.2019 18:26:58

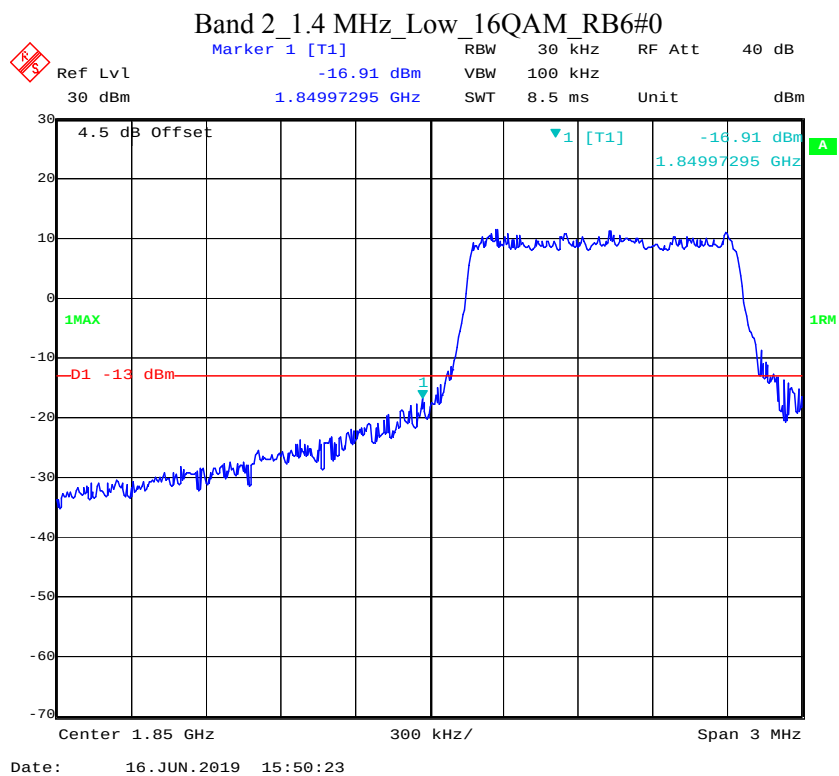
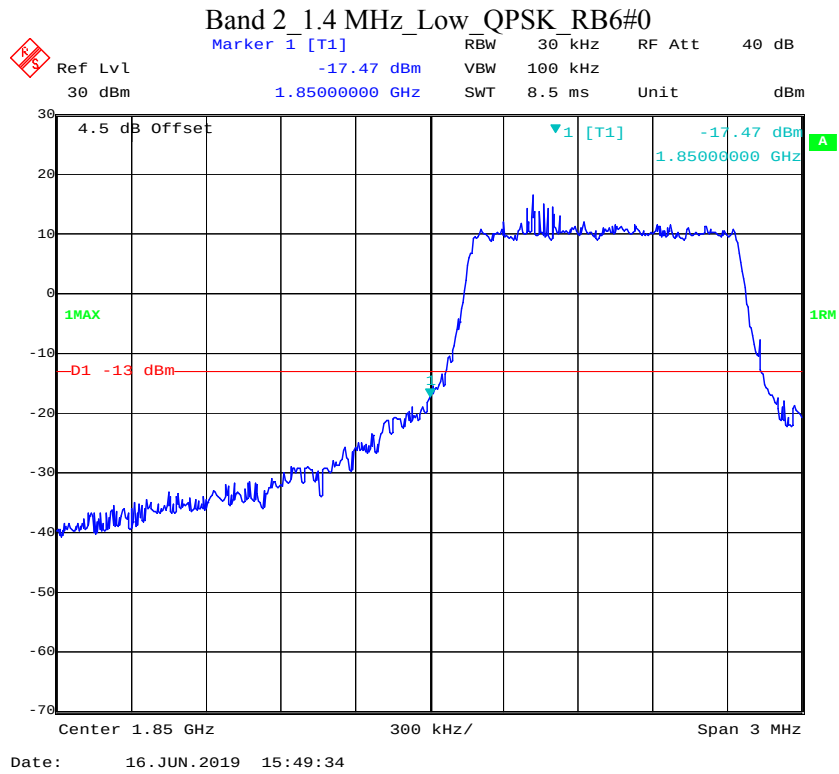


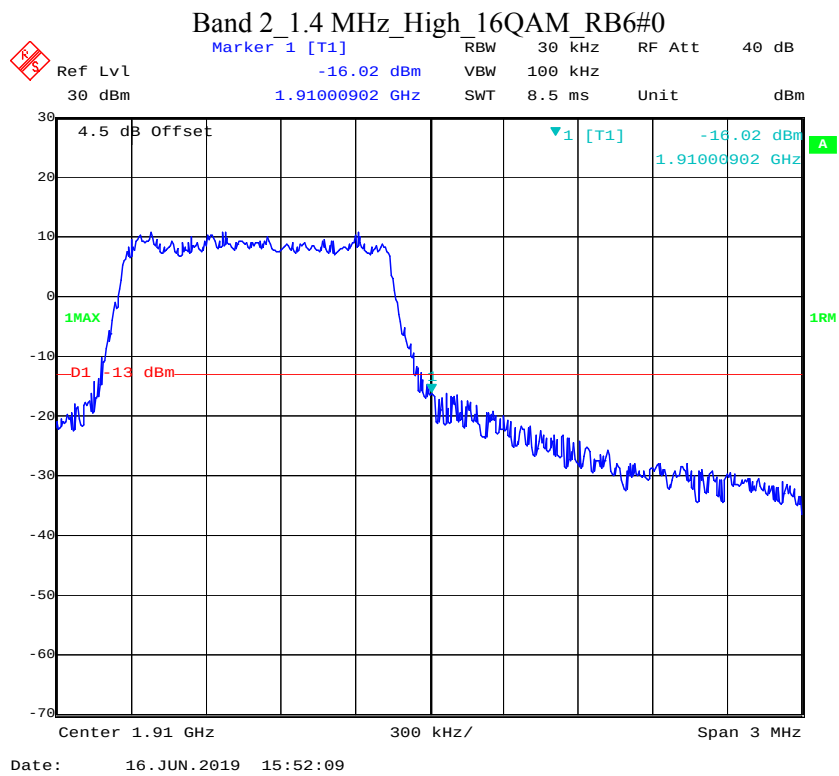
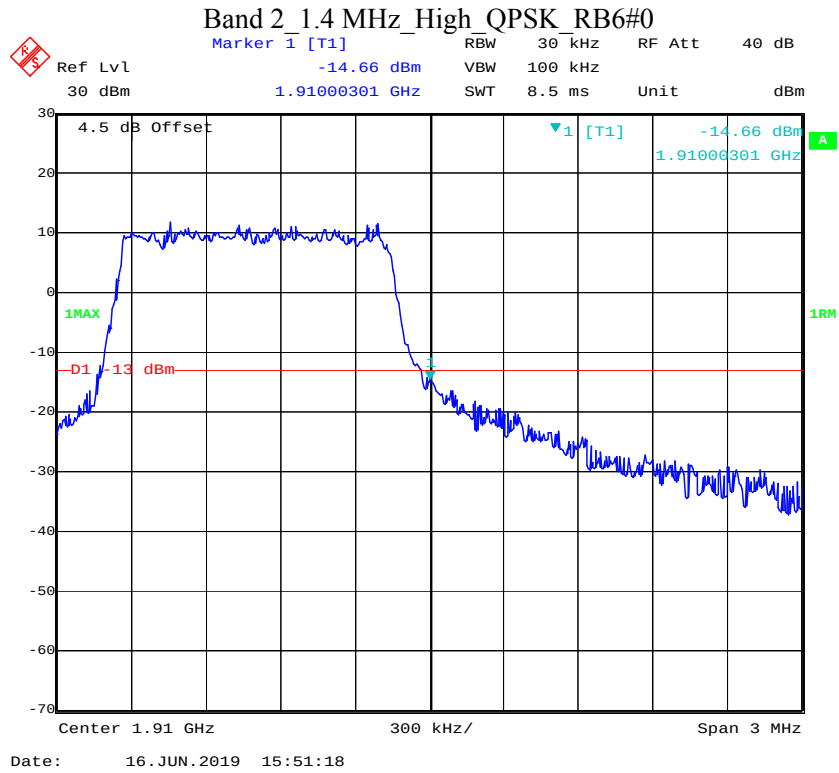


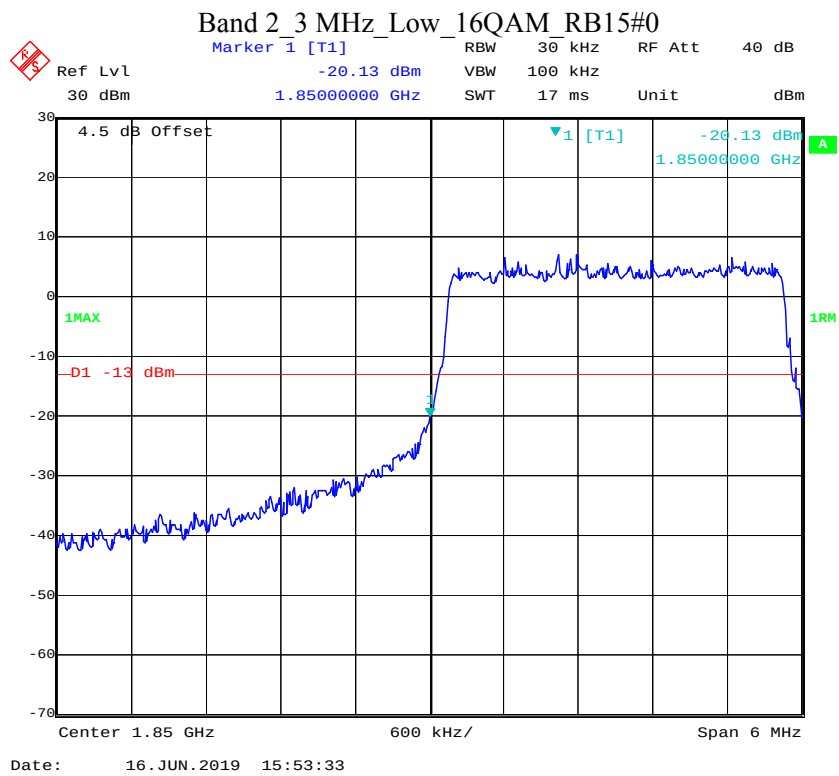
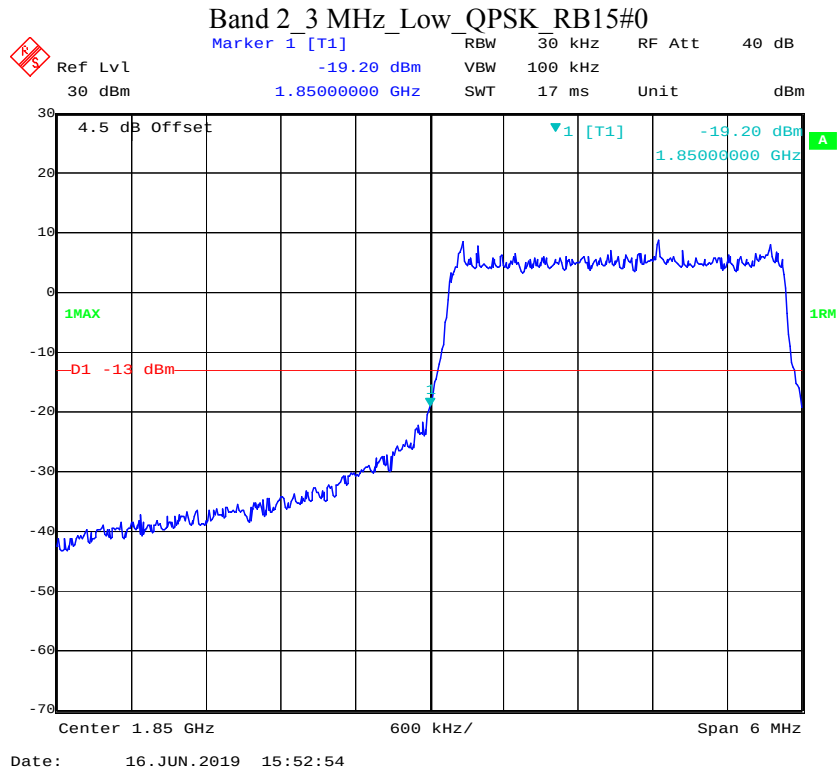


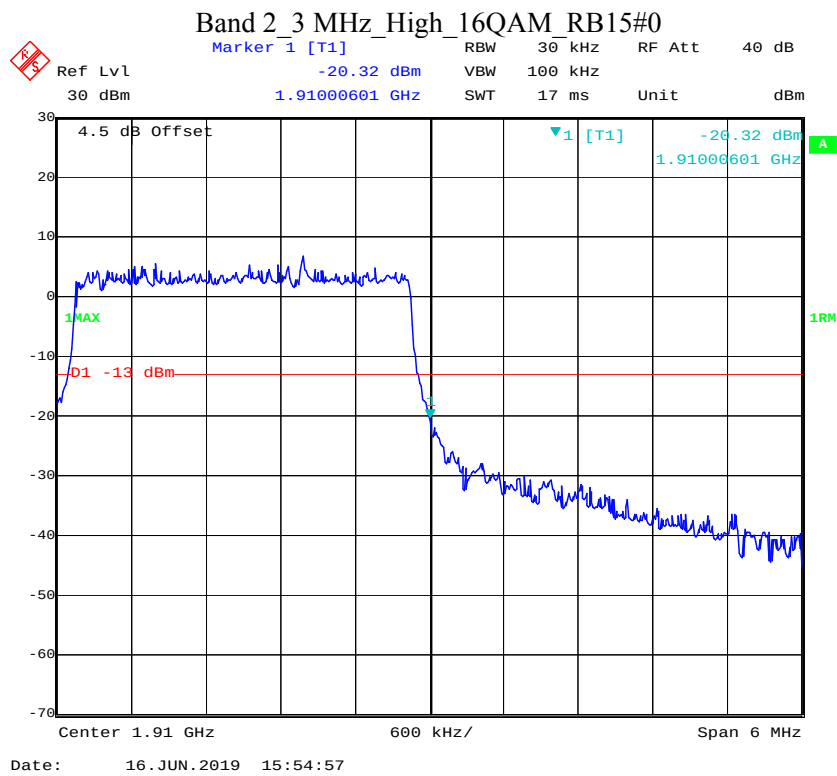
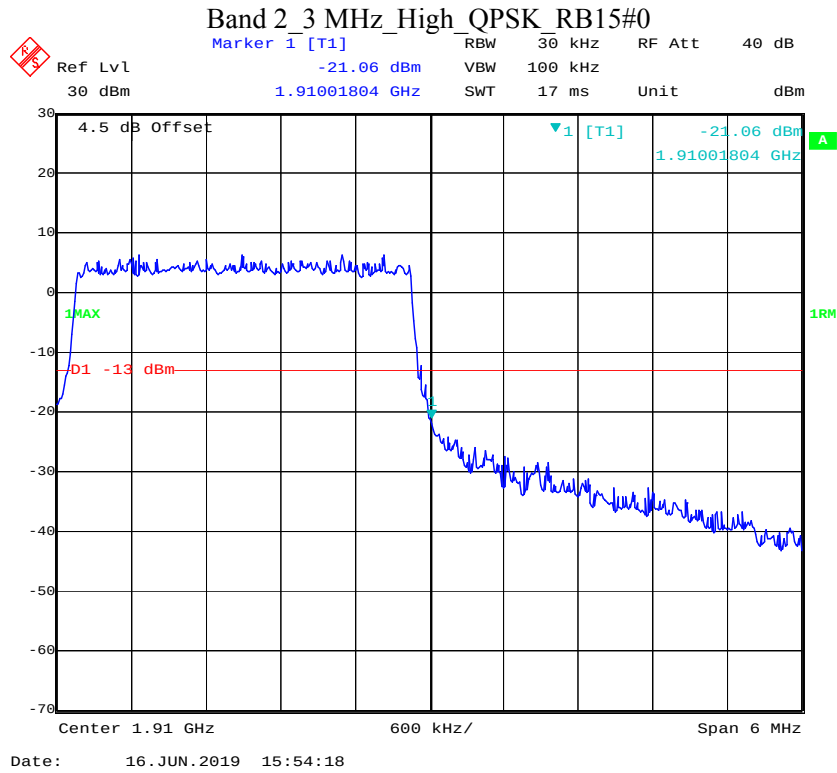


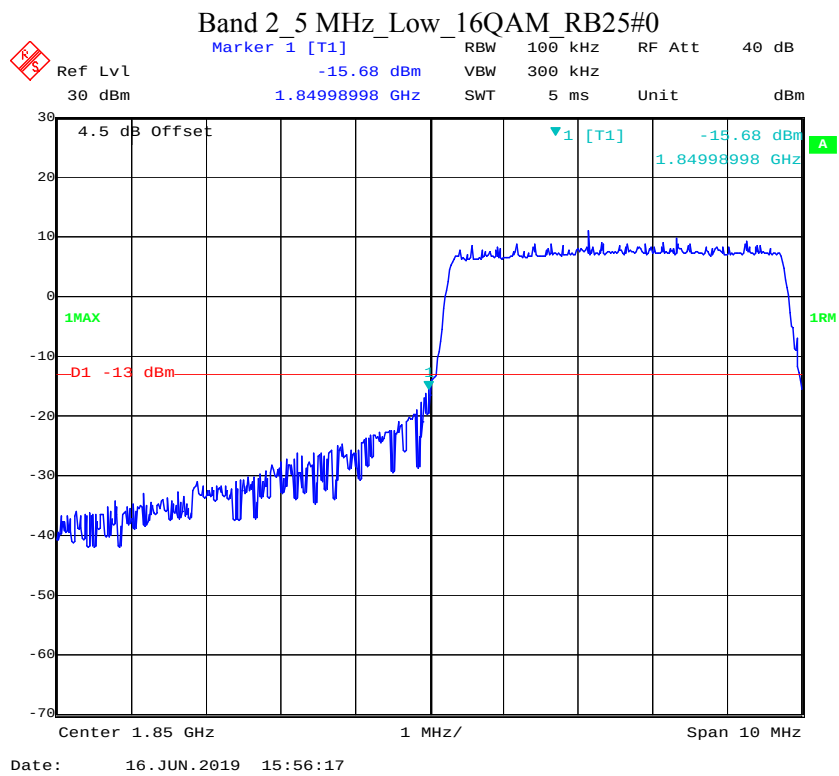
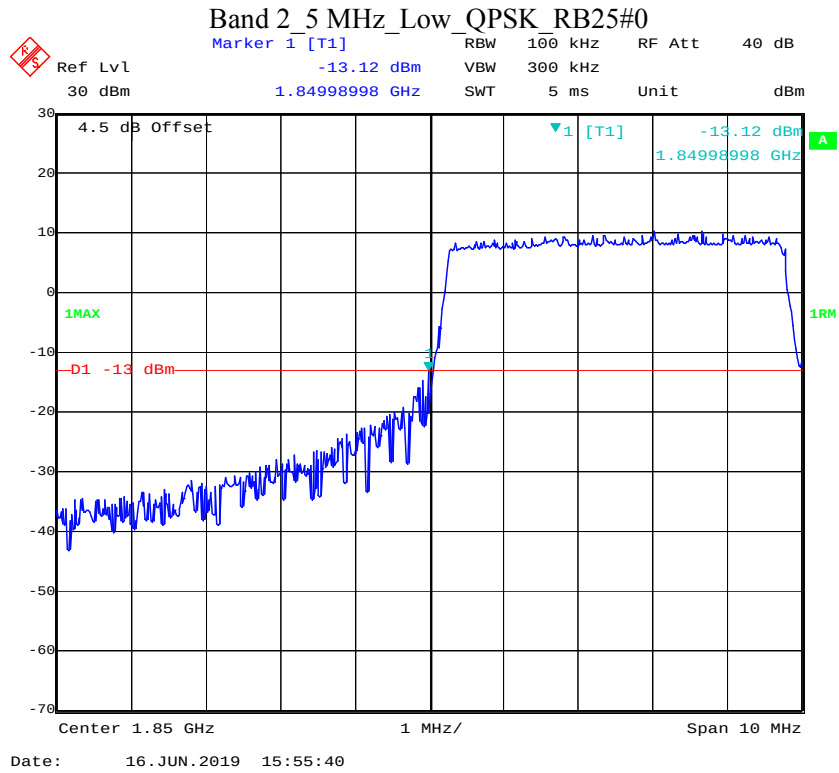


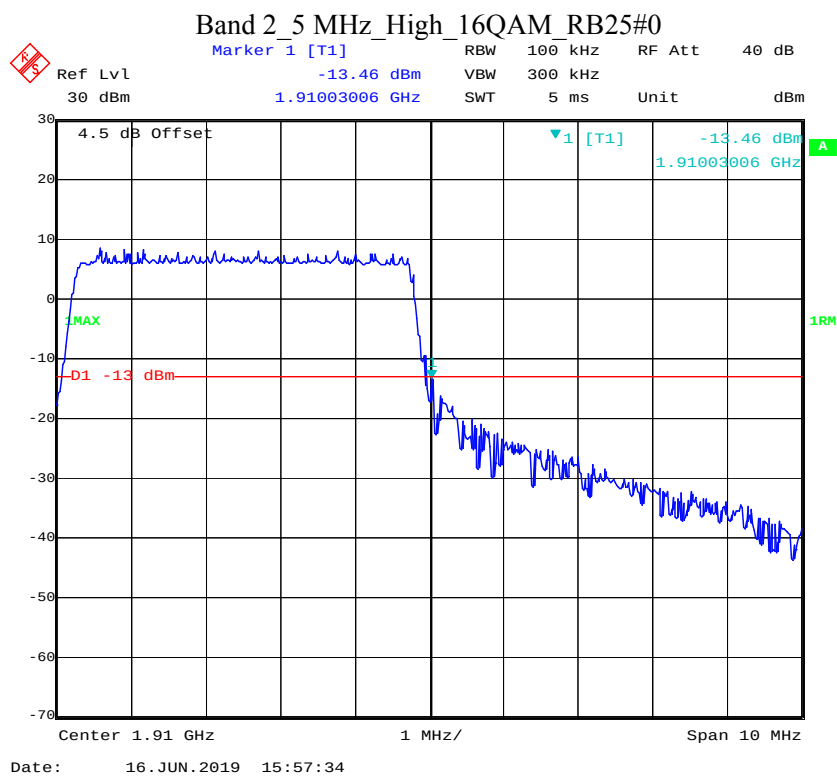
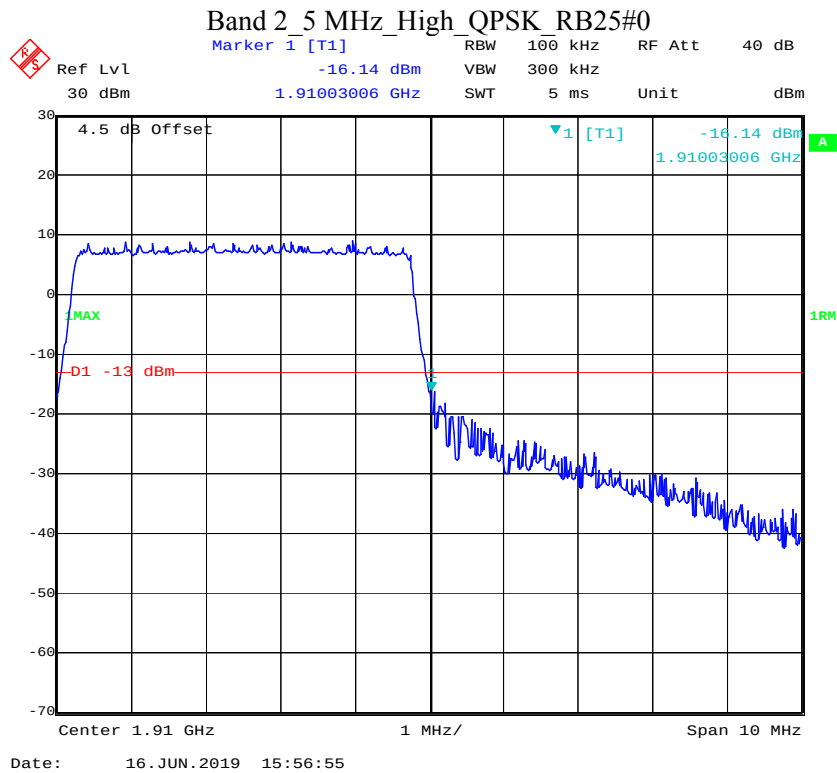


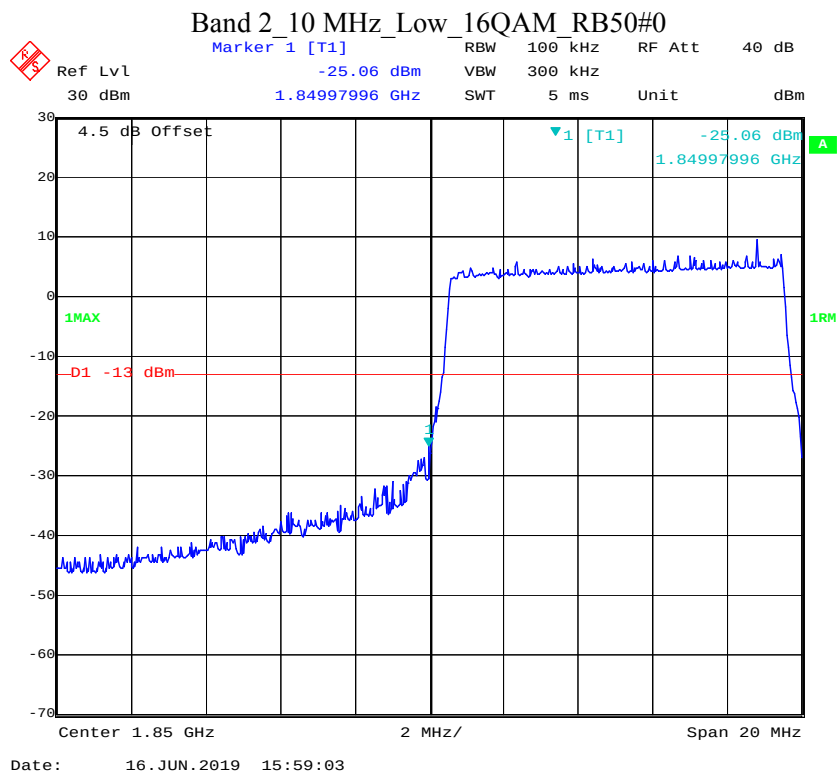
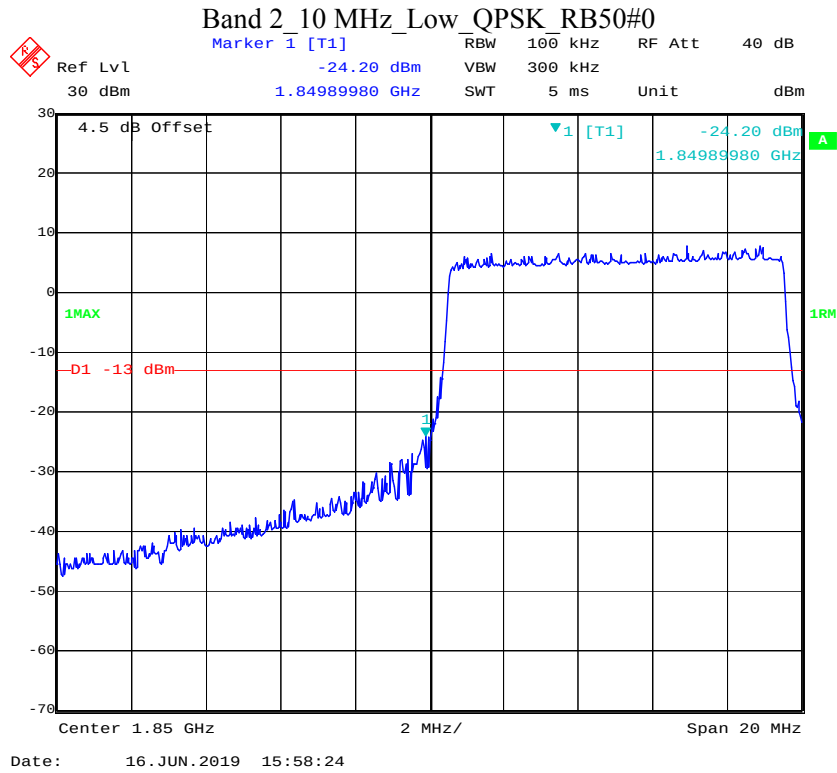


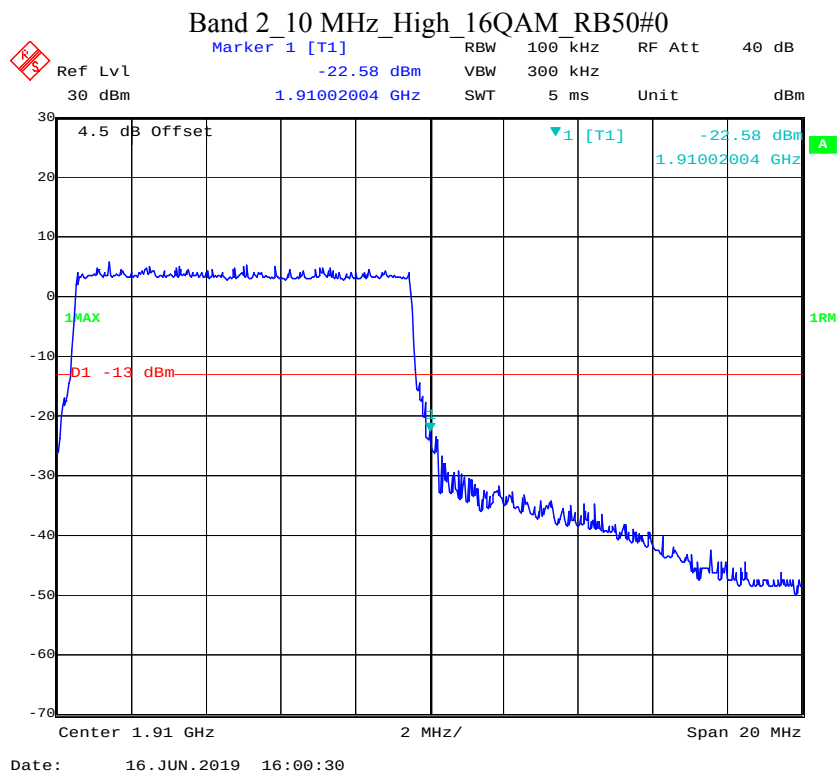
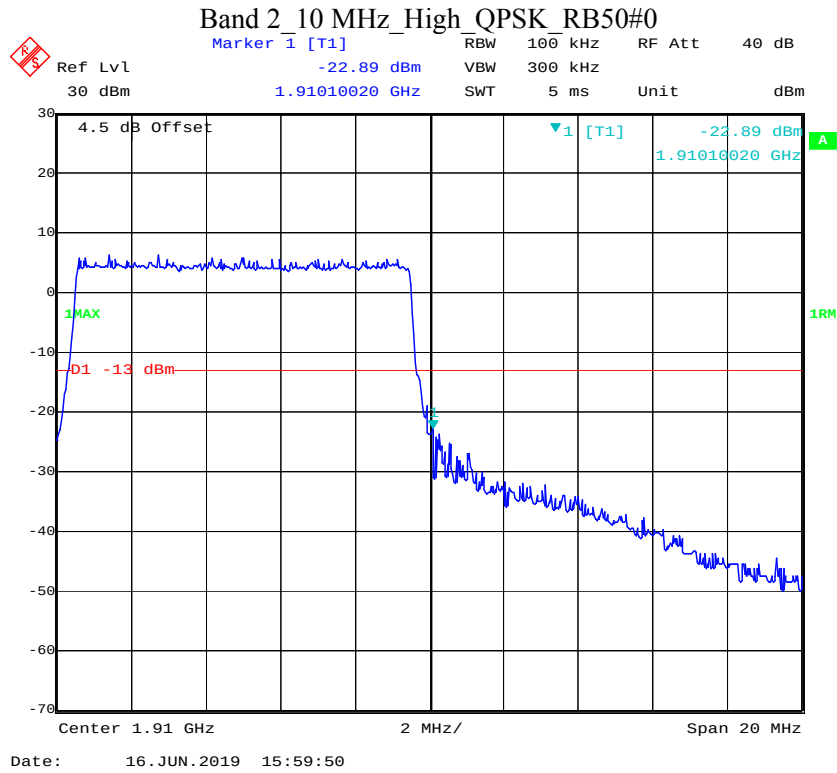


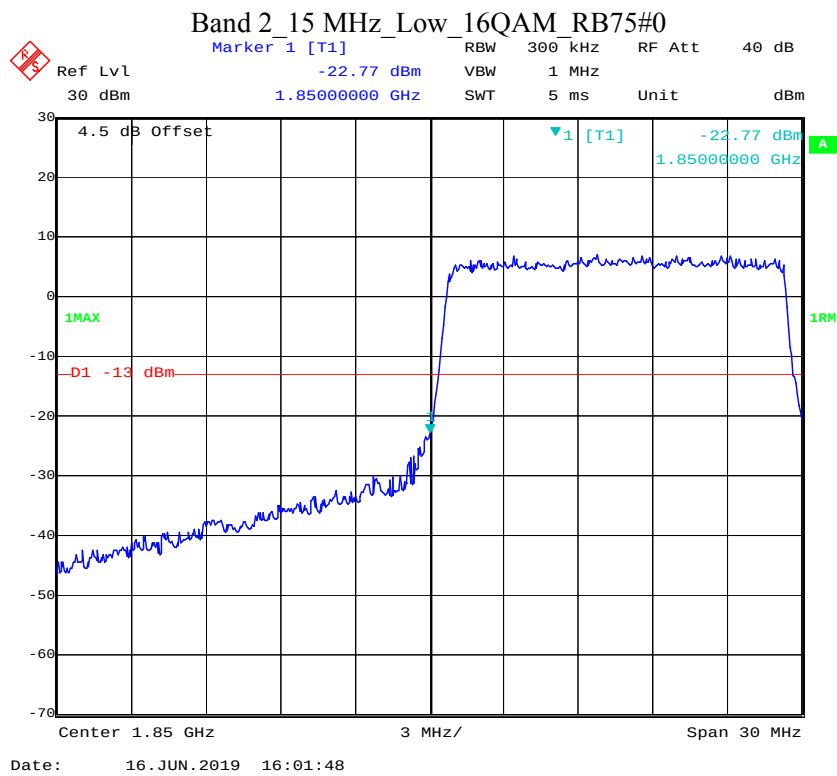
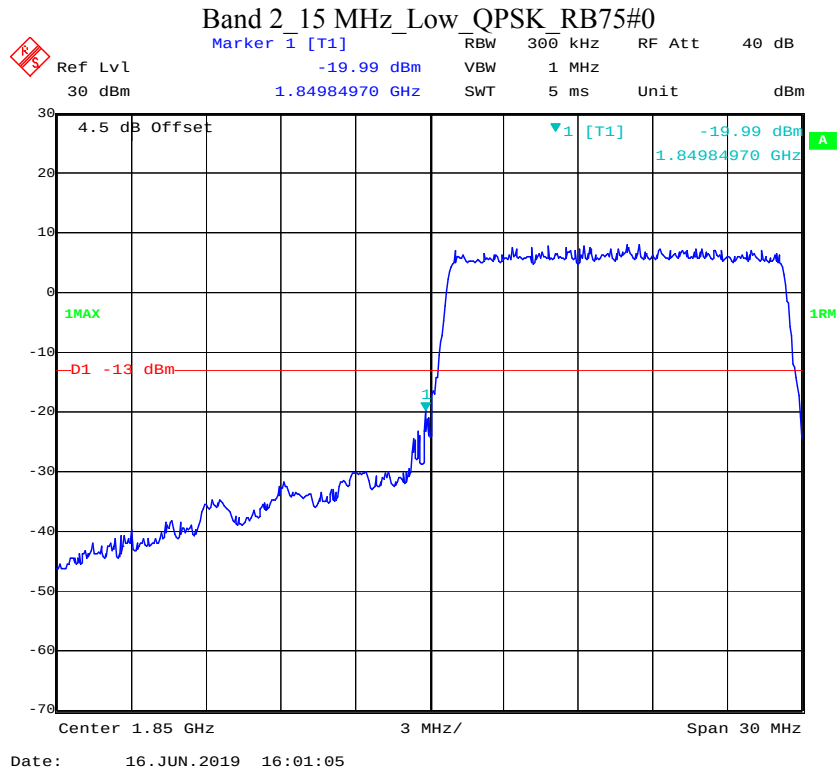


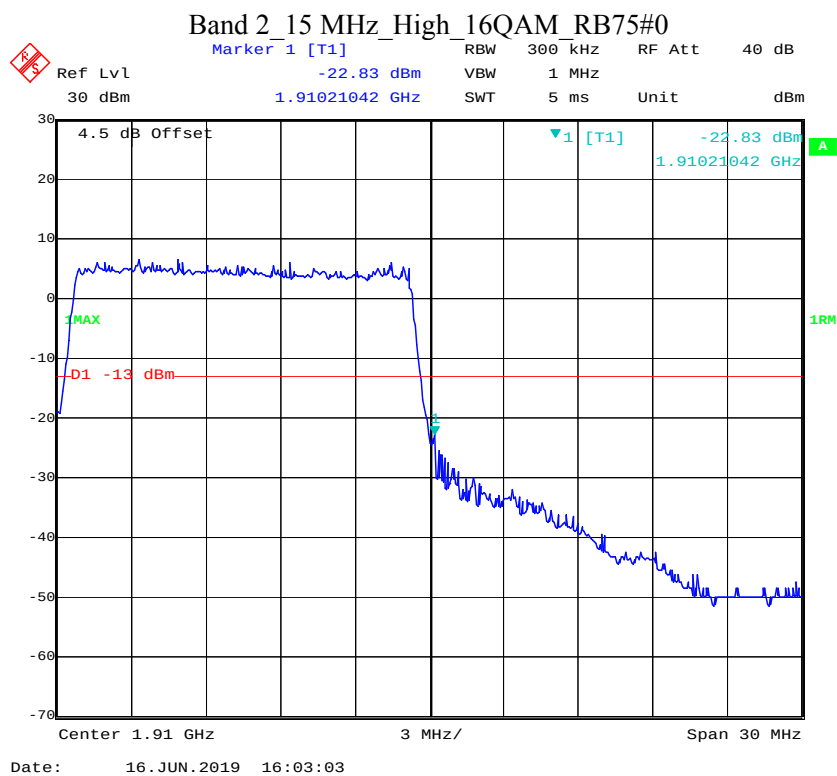
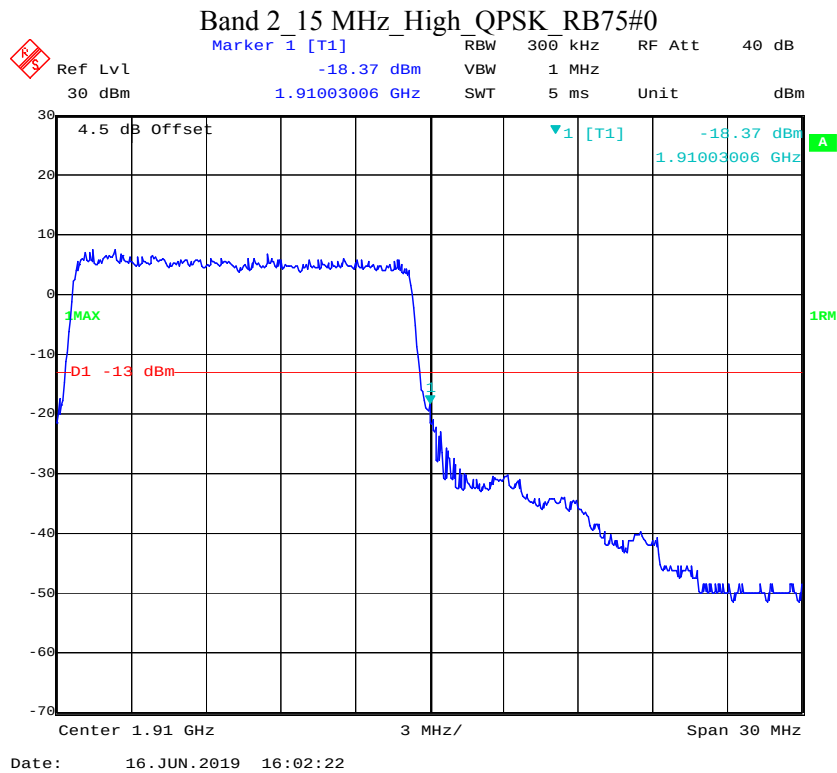


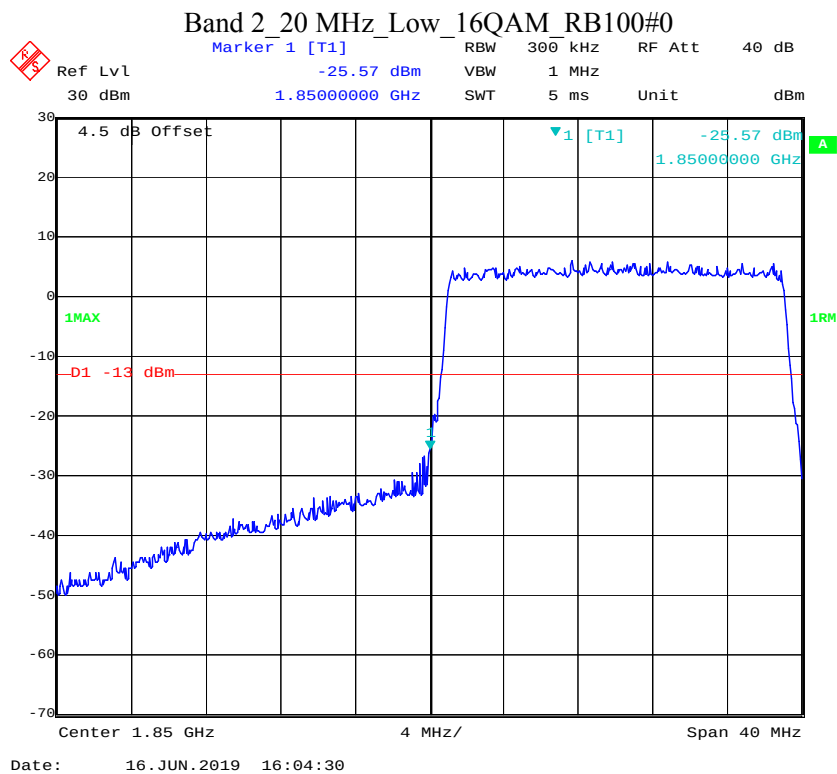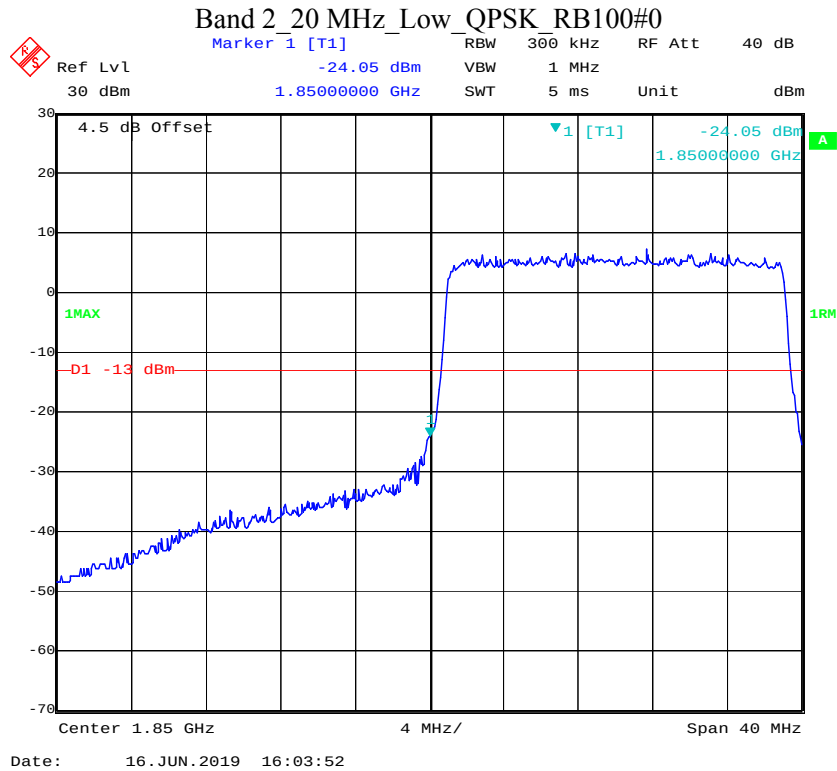


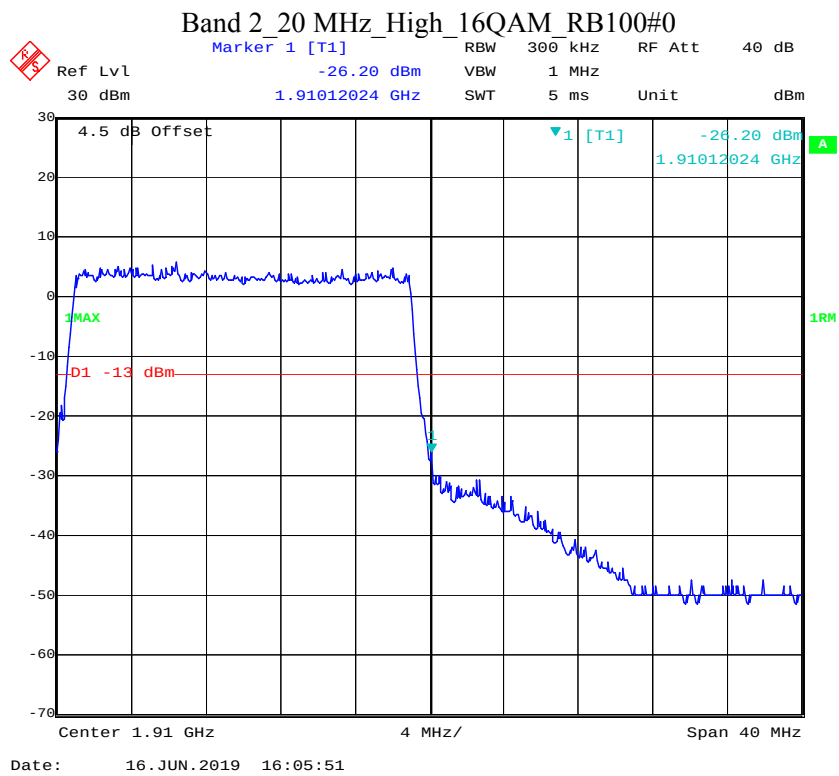
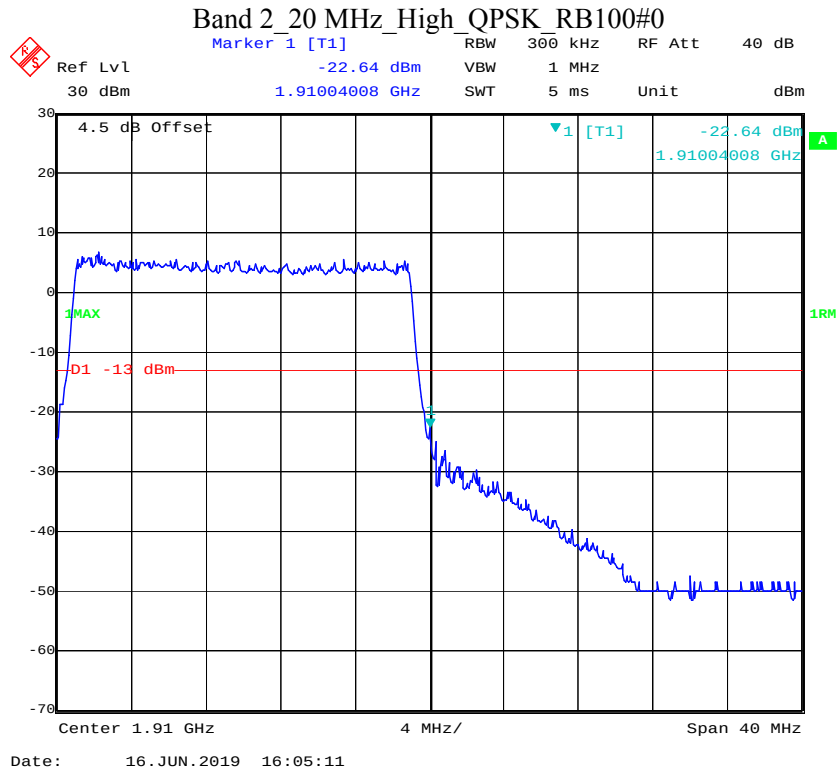


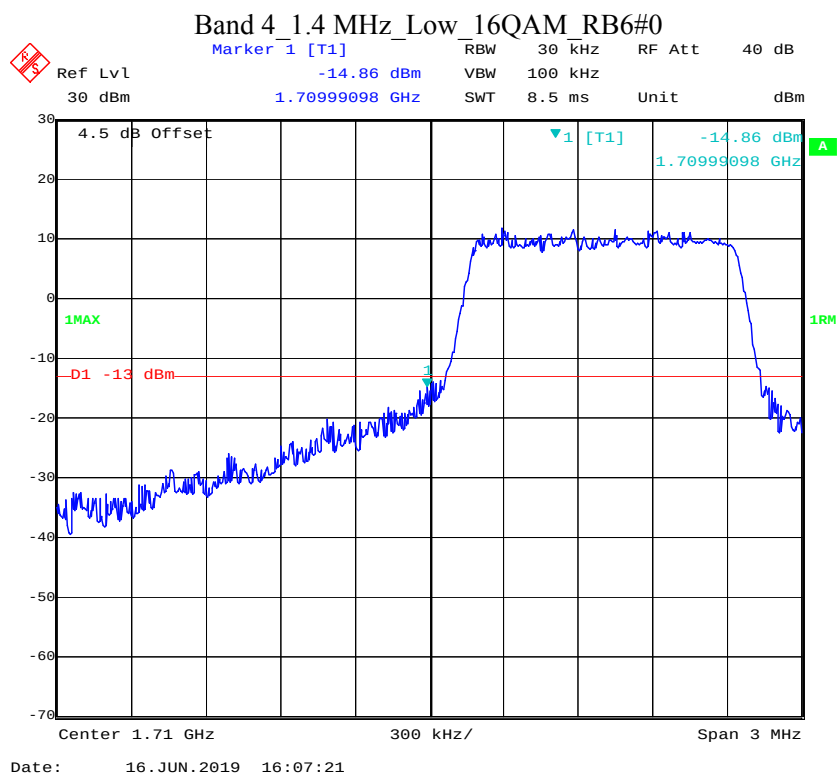
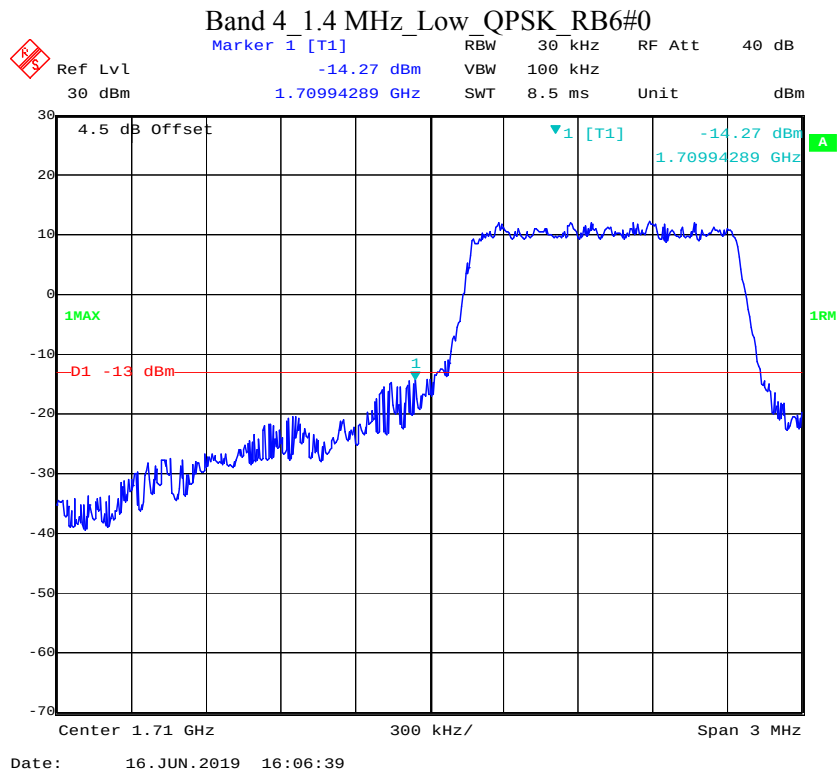


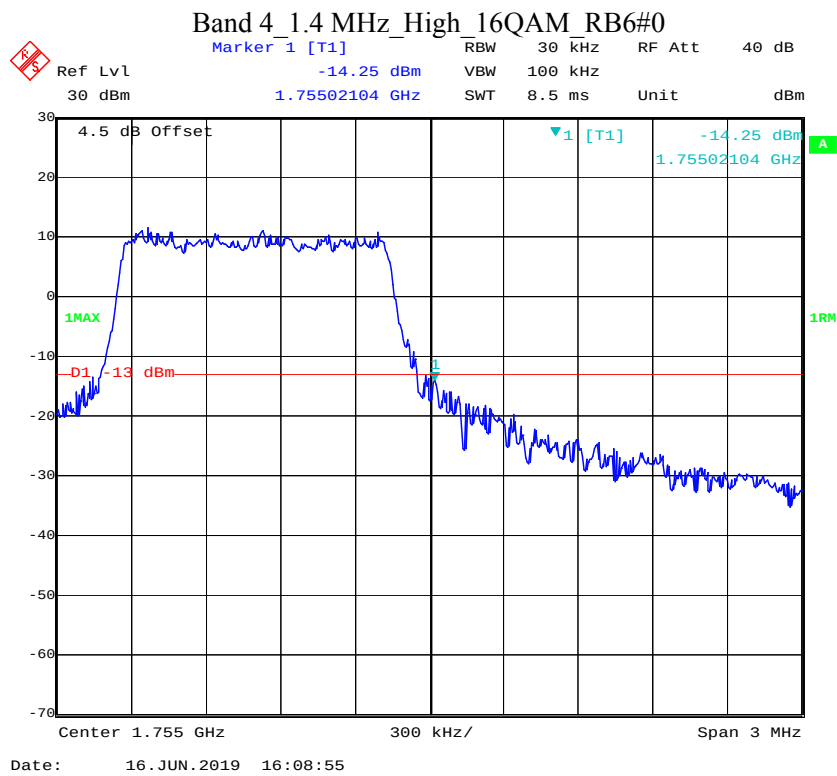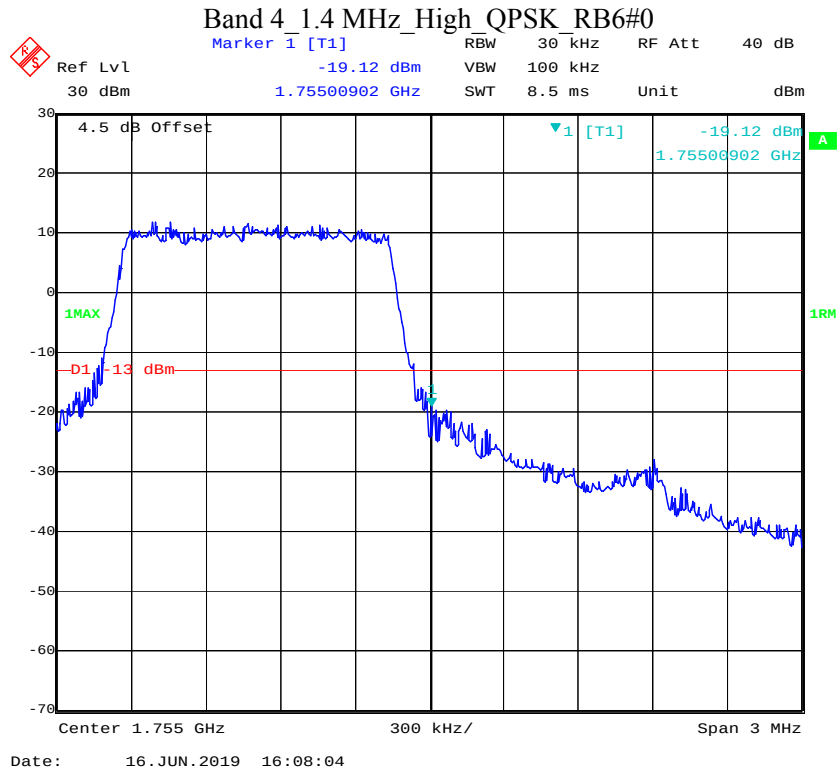

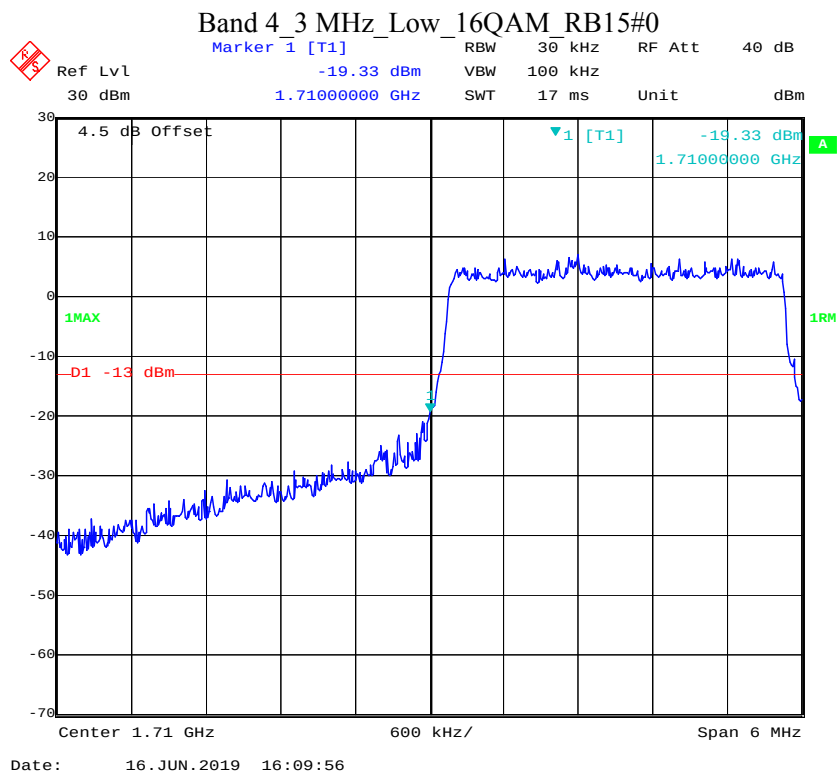
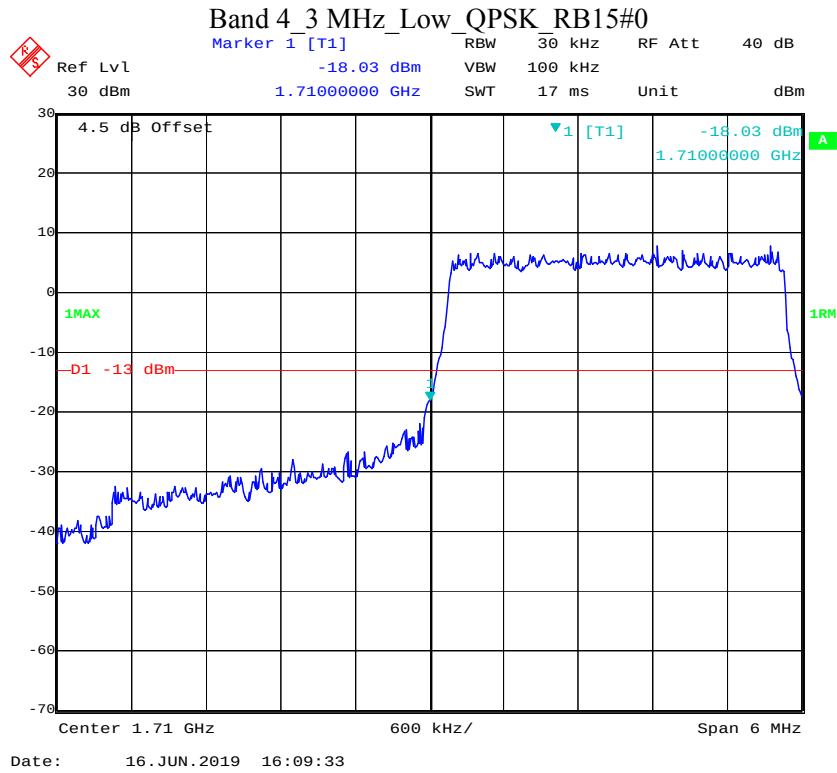



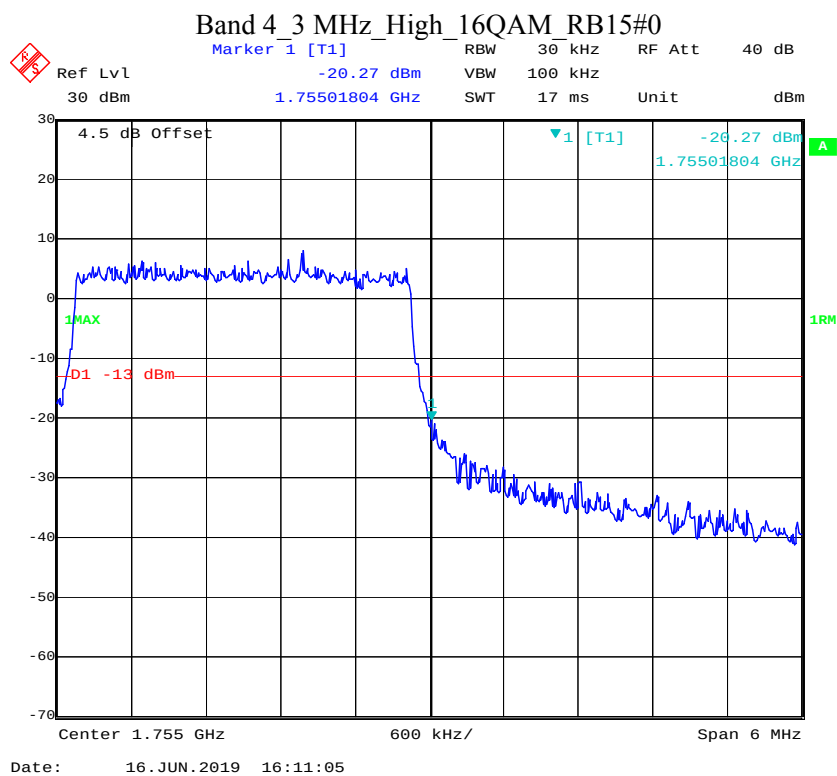


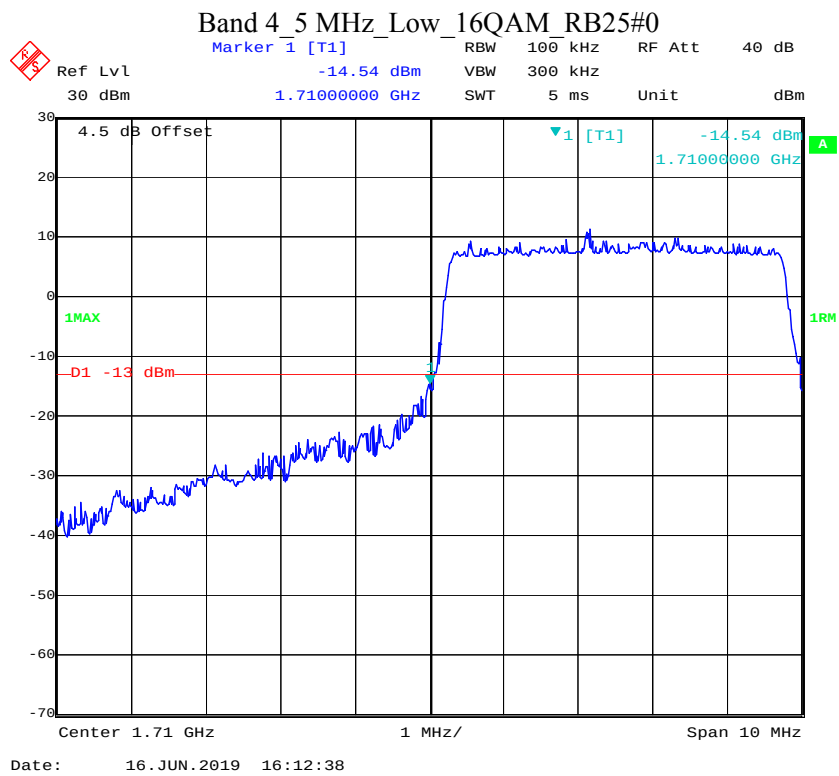
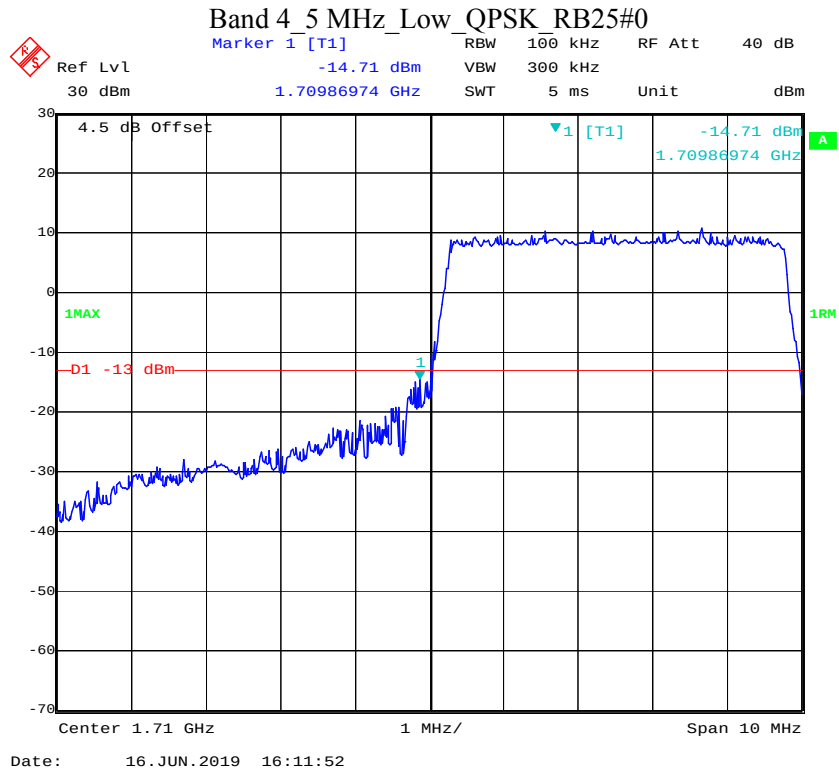


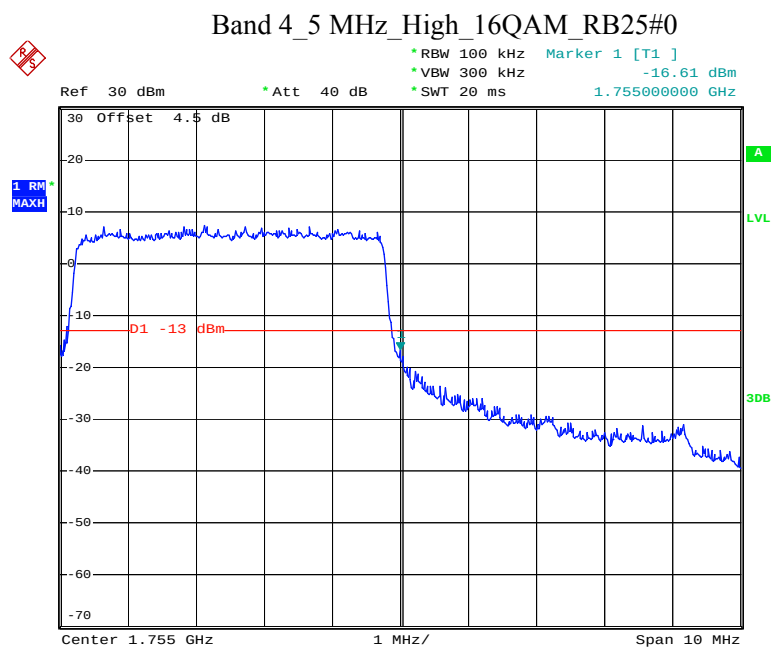
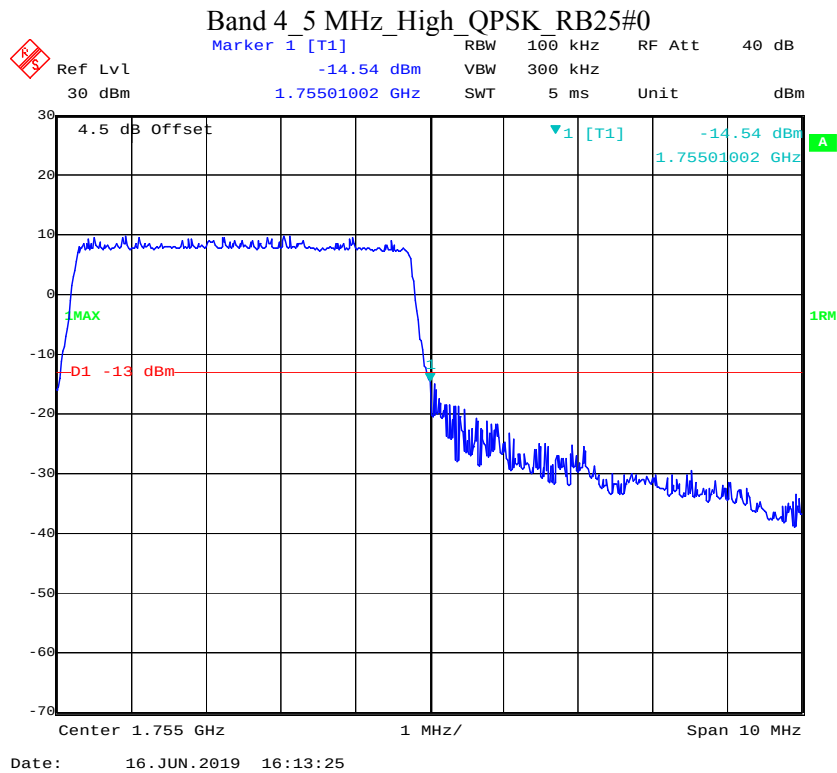




Date: 17.JUN.2019 23:44:13

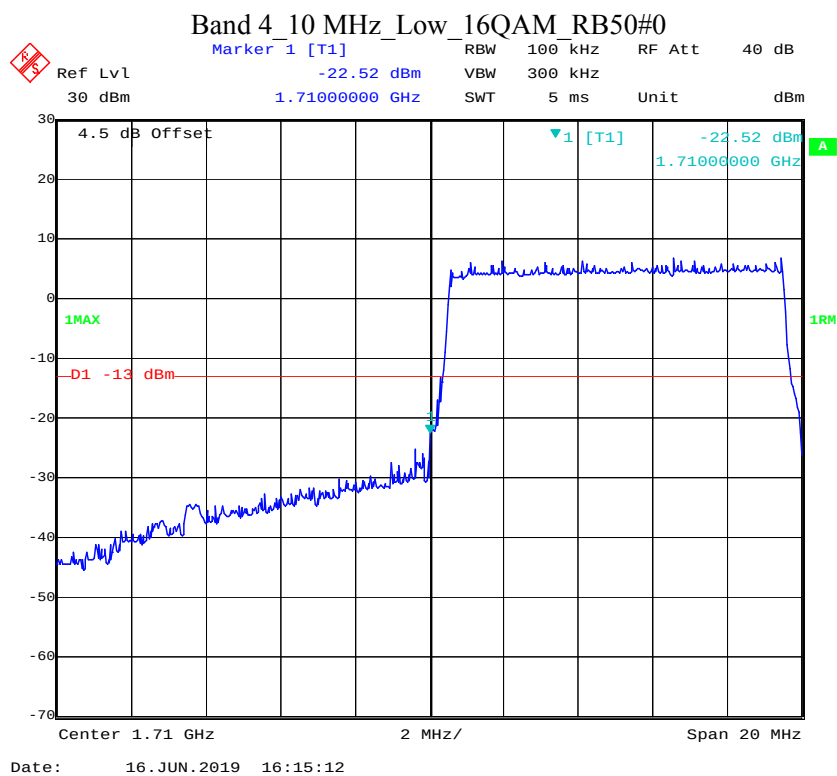
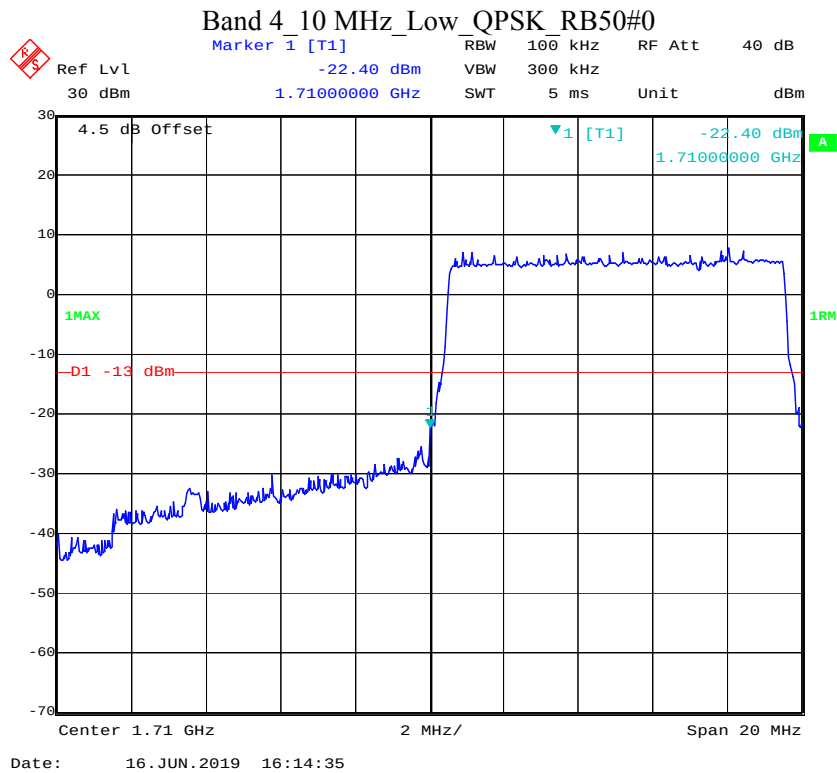


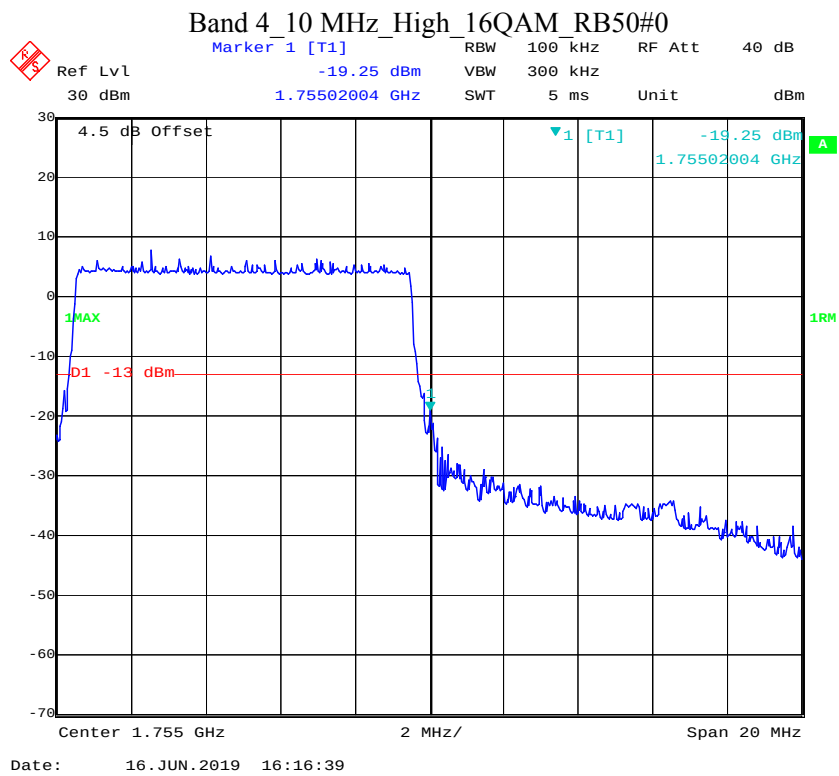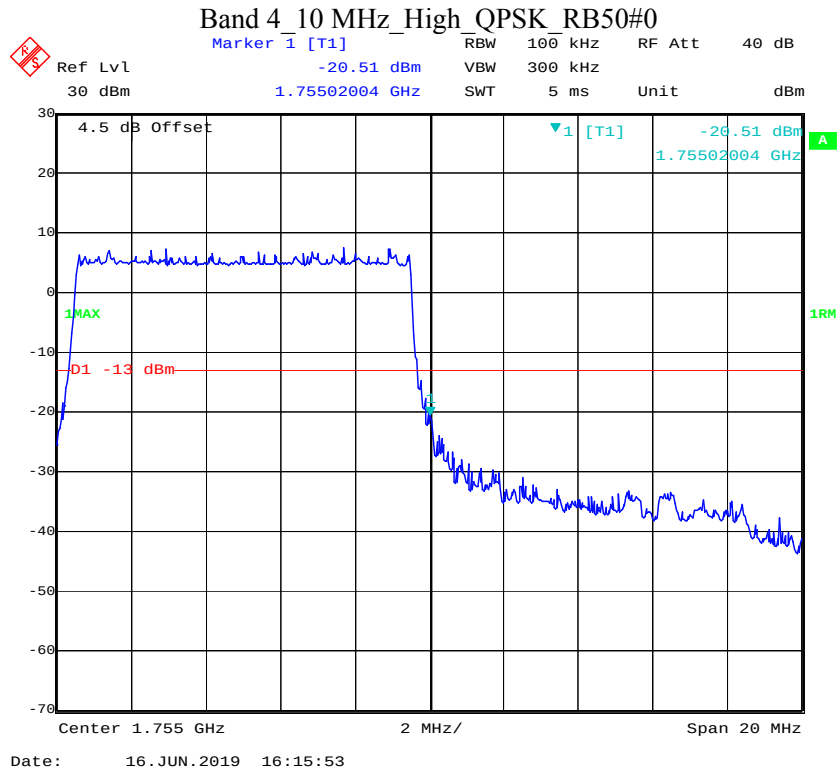


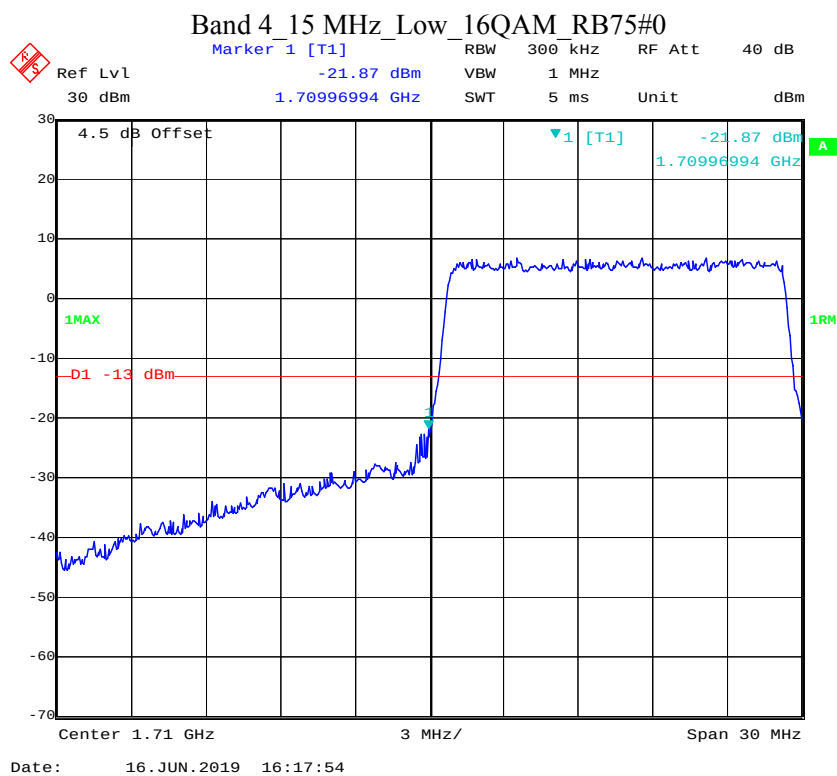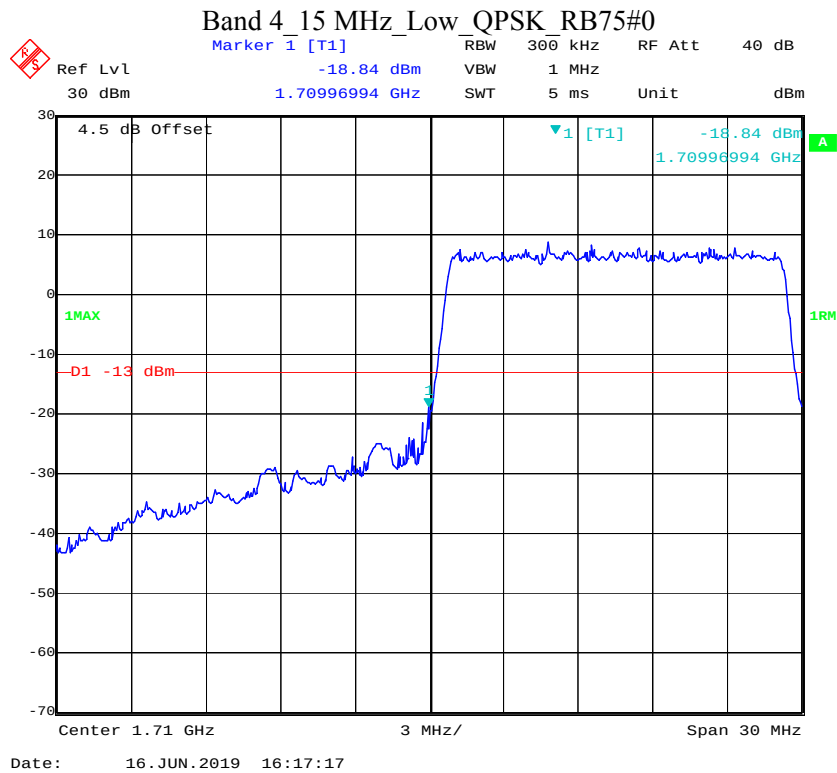

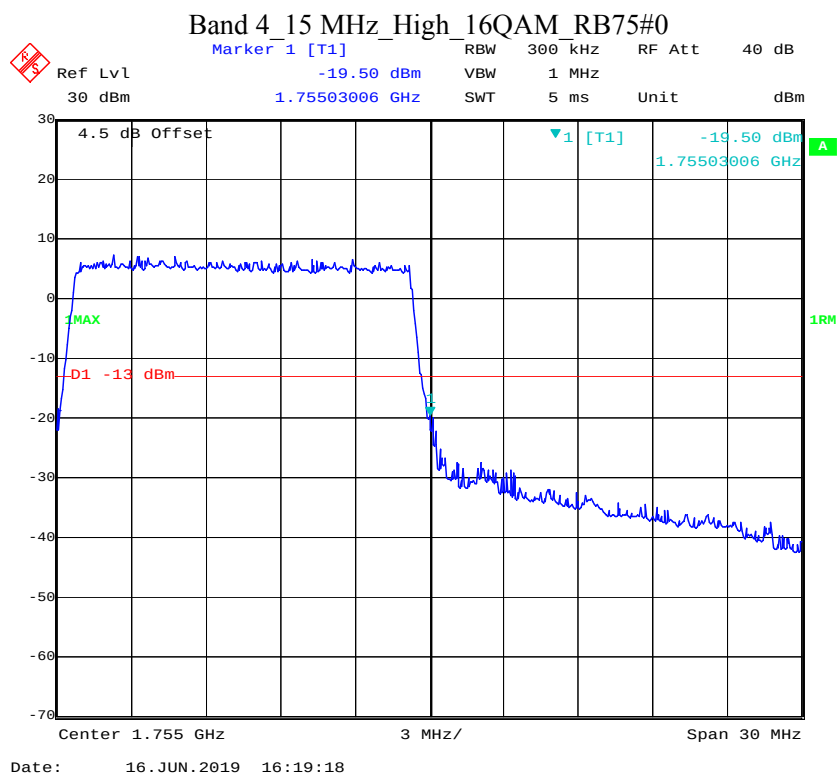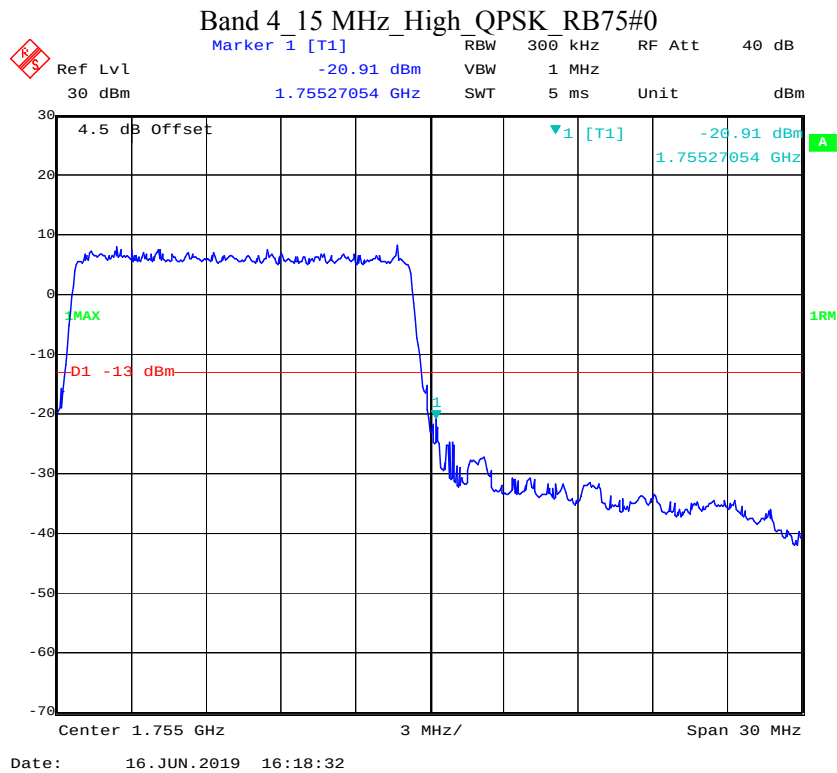


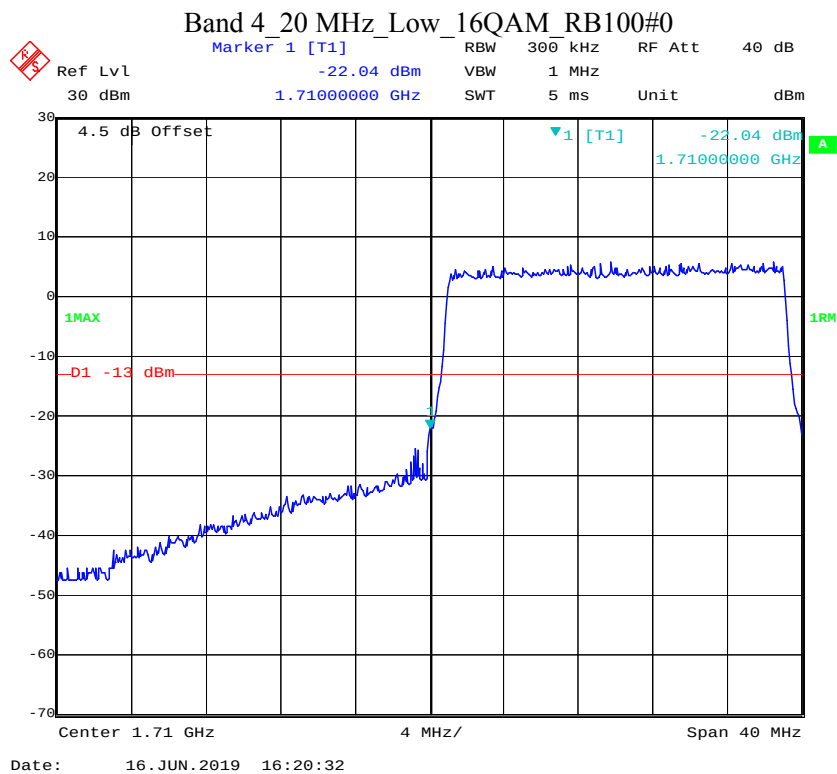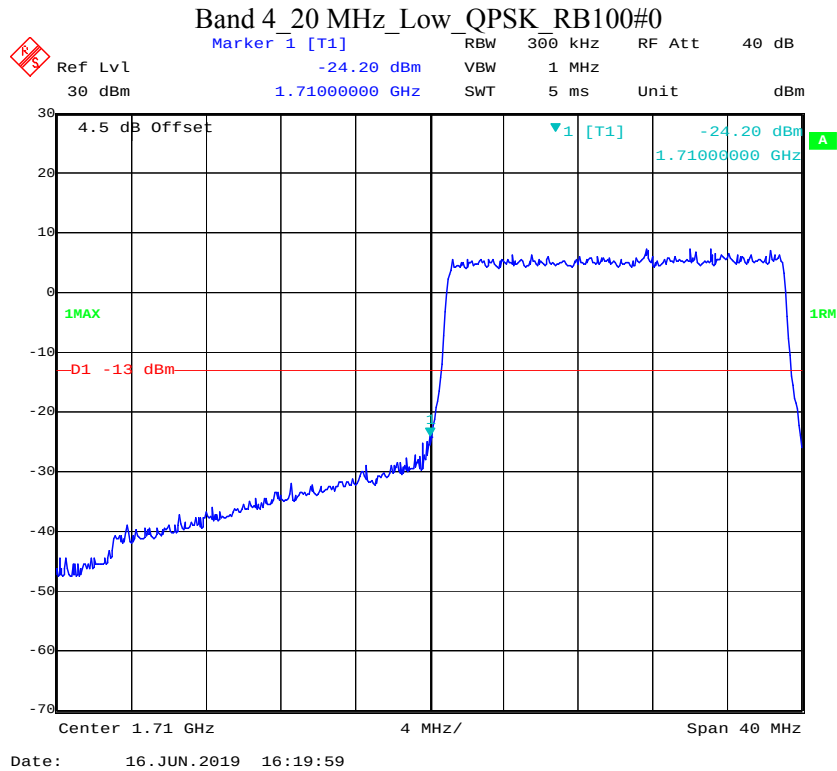

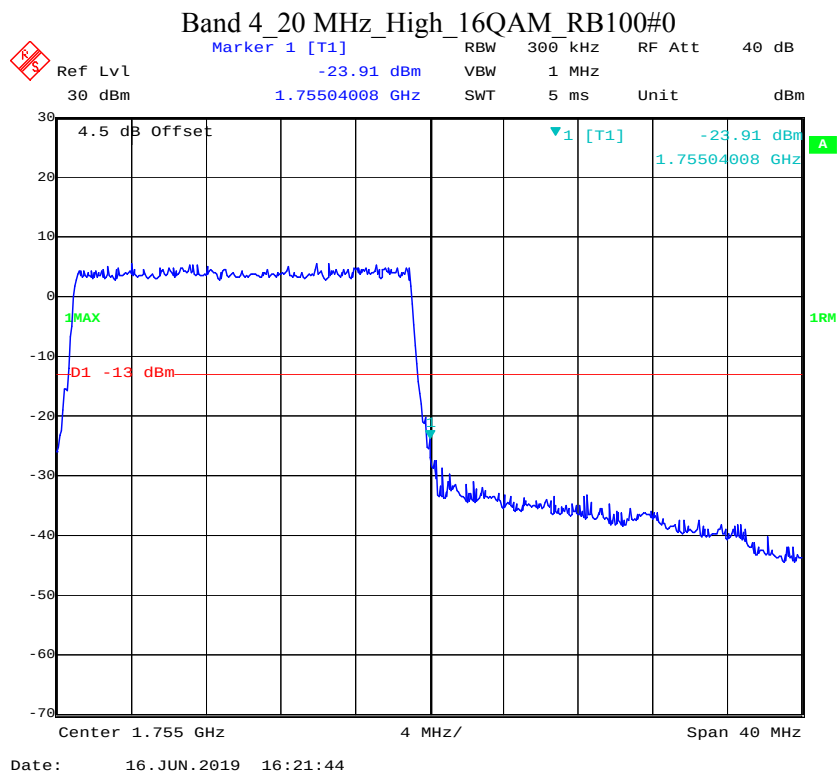
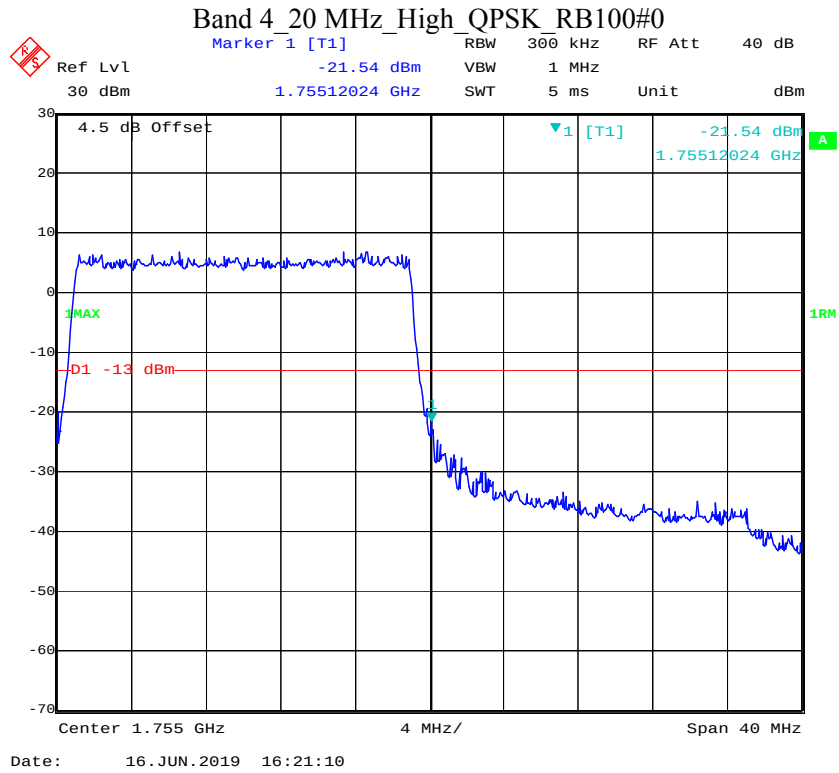


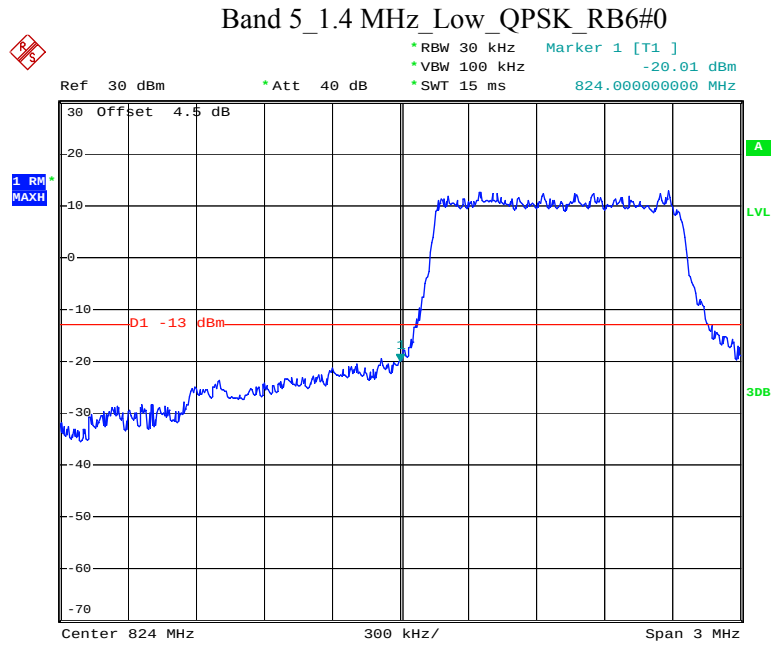



Date: 17.JUN.2019 23:49:54


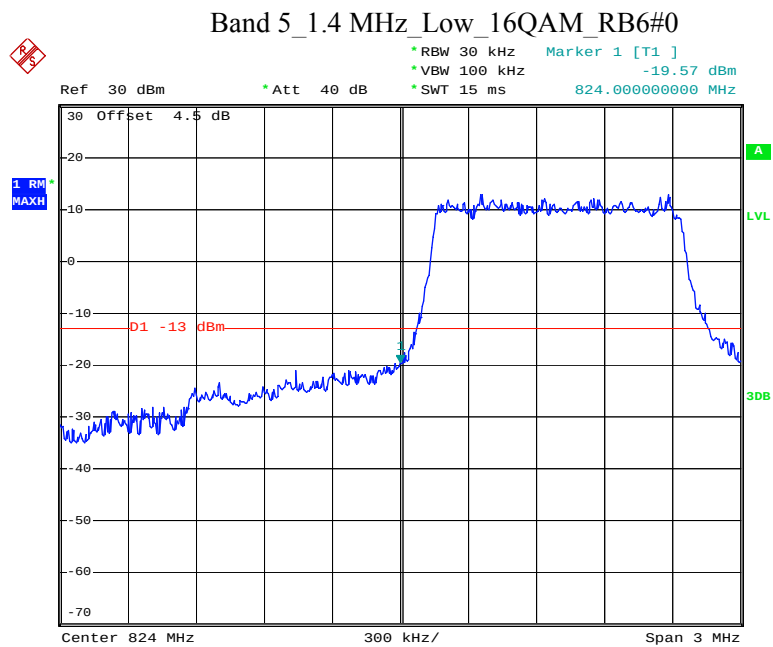



Date: 17.JUN.2019 23:49:02

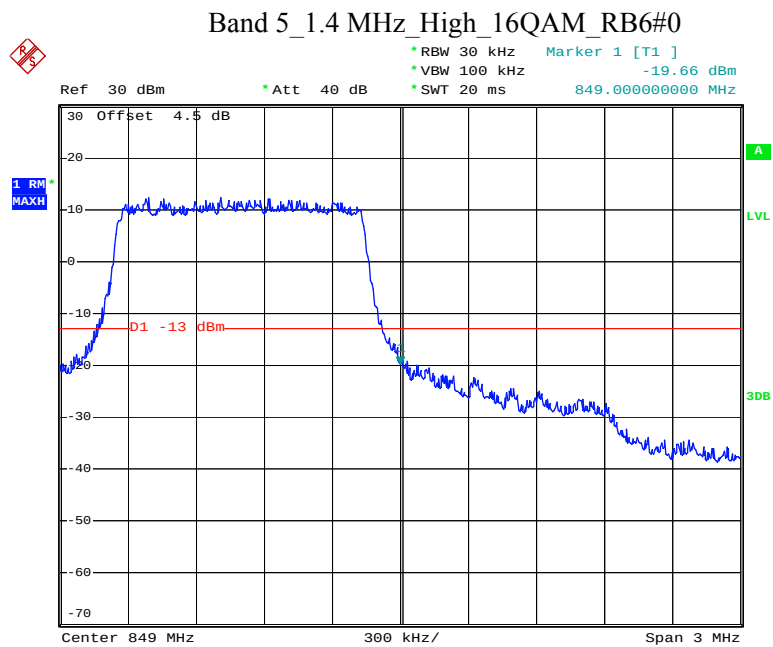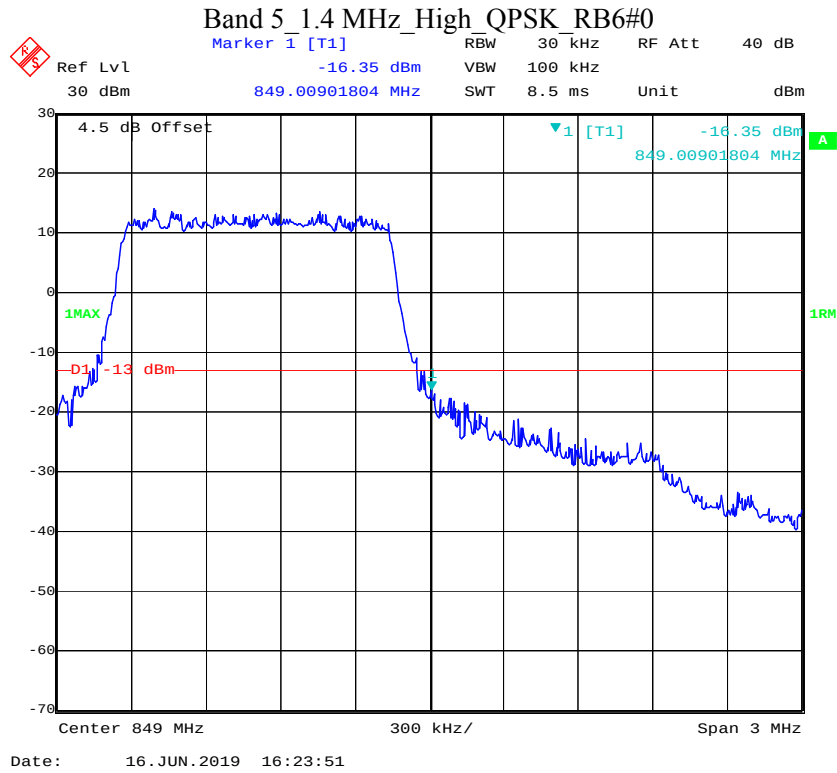


Date: 17.JUN.2019 23:48:02

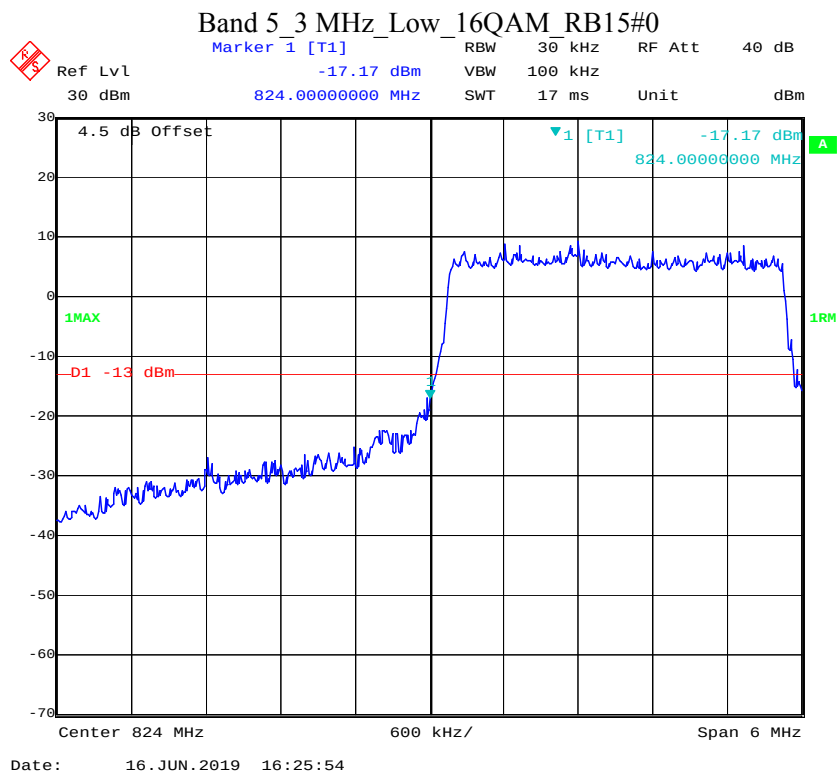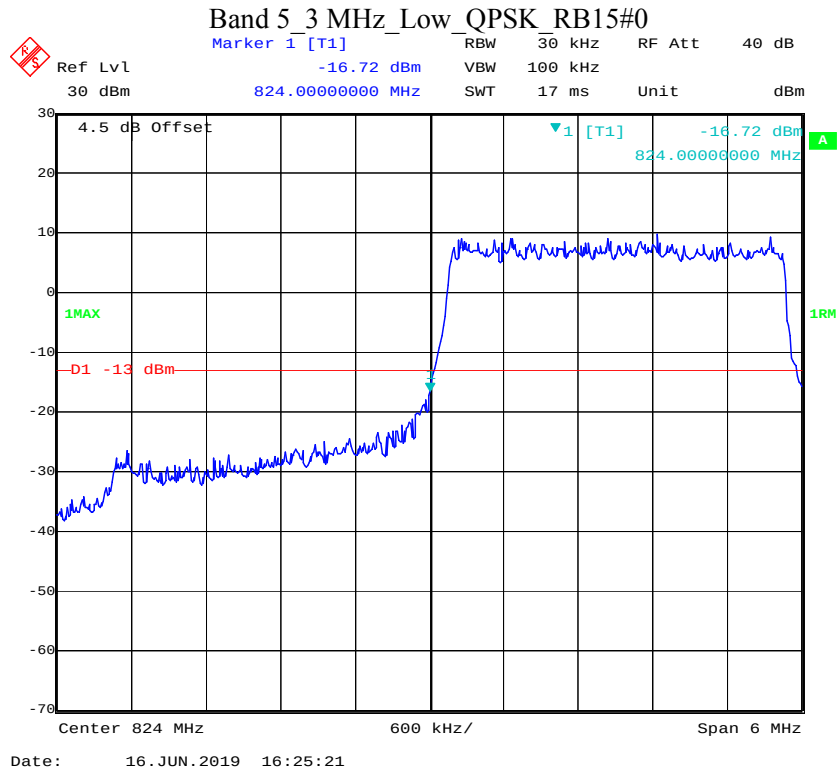

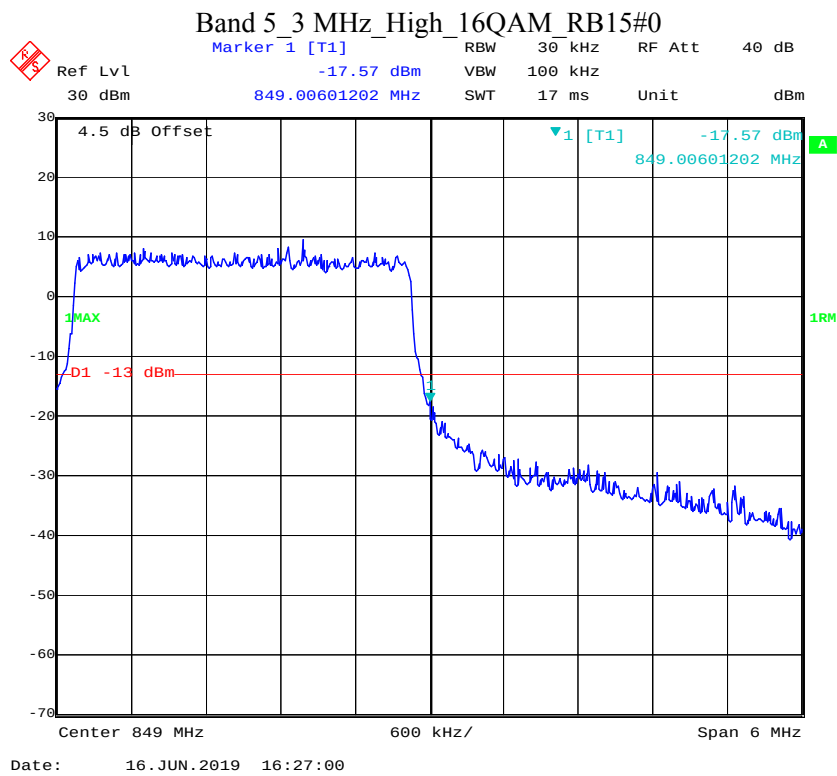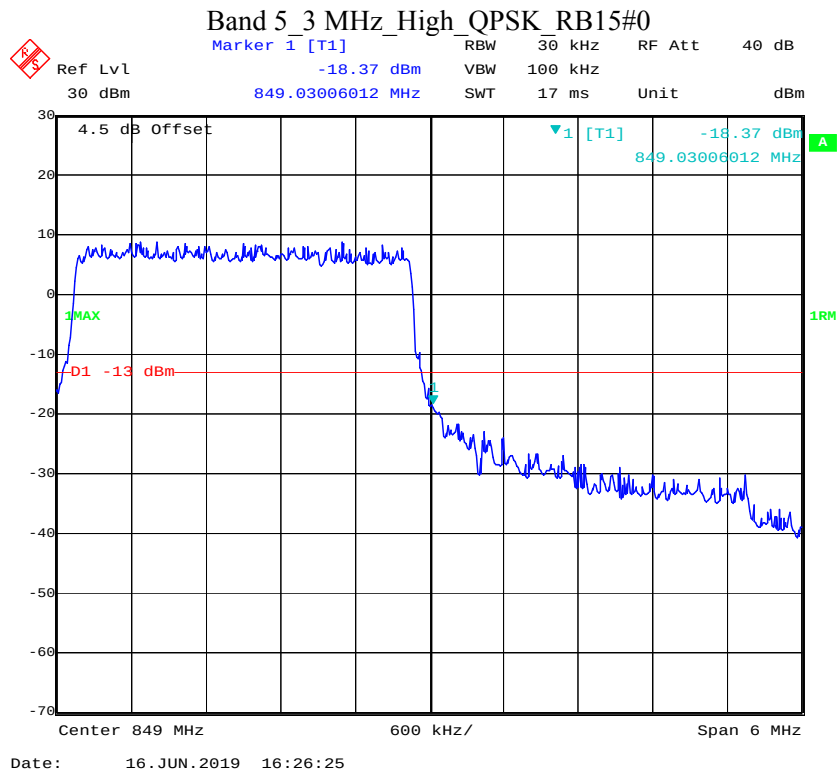


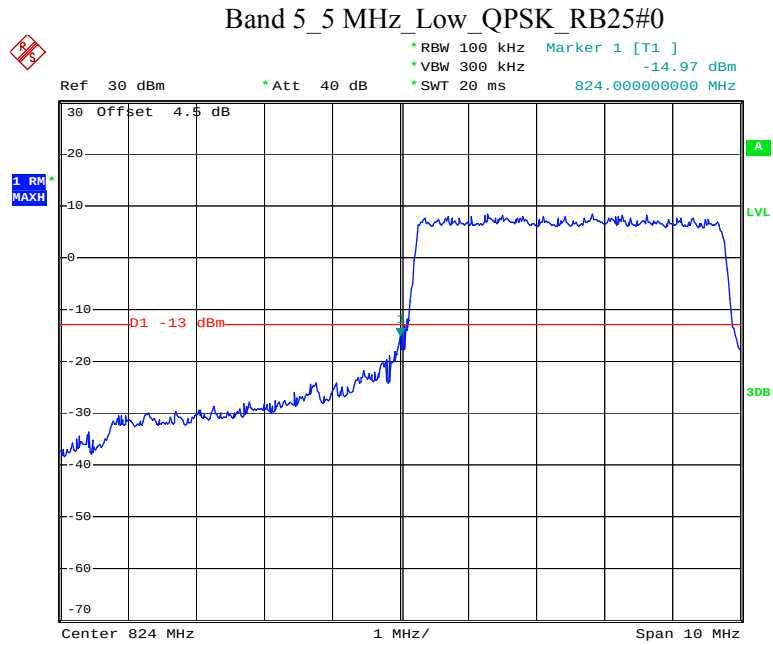


Date: 17.JUN.2019 23:45:19

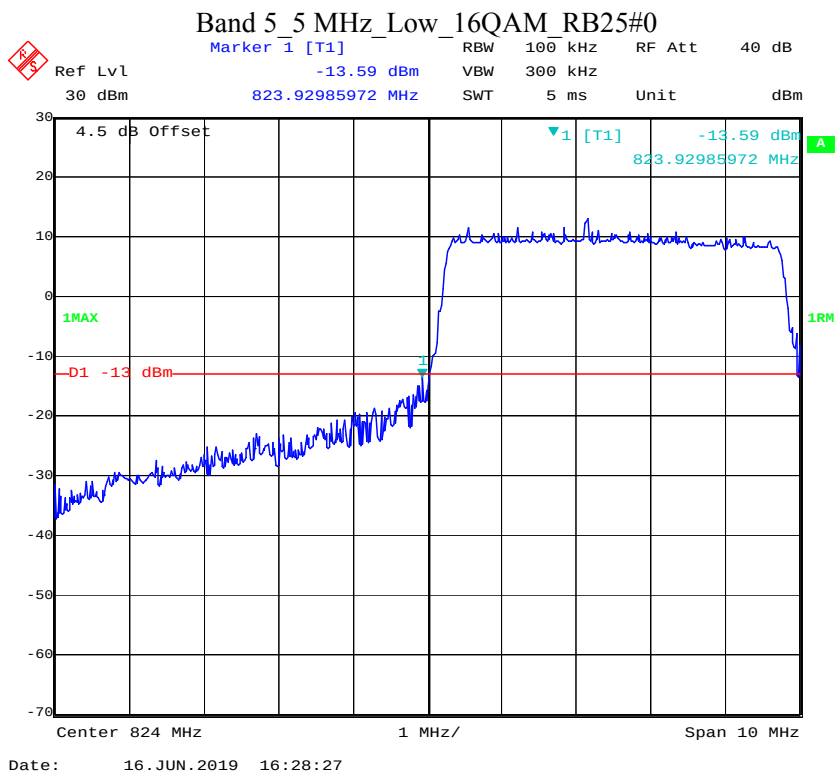



Date: 16.JUN.2019 16:28:27


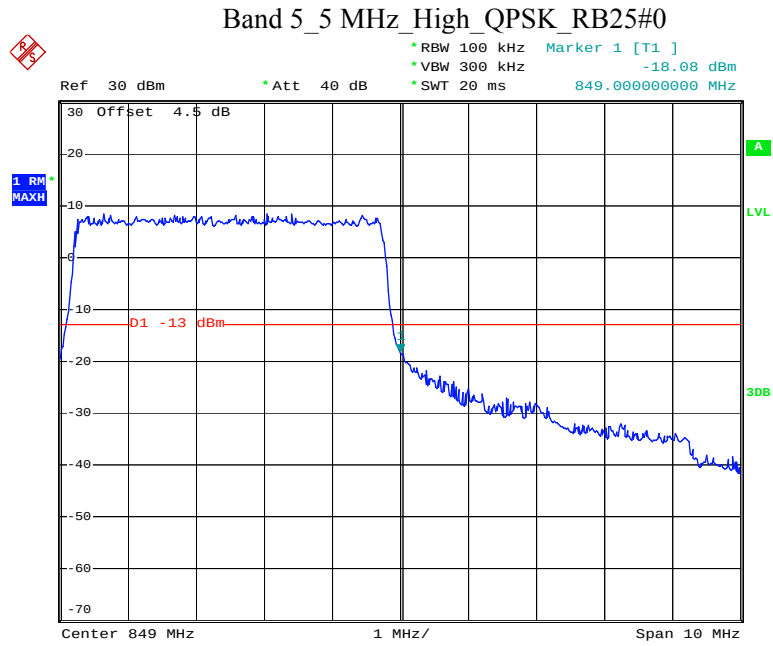



Date: 17.JUN.2019 23:46:01

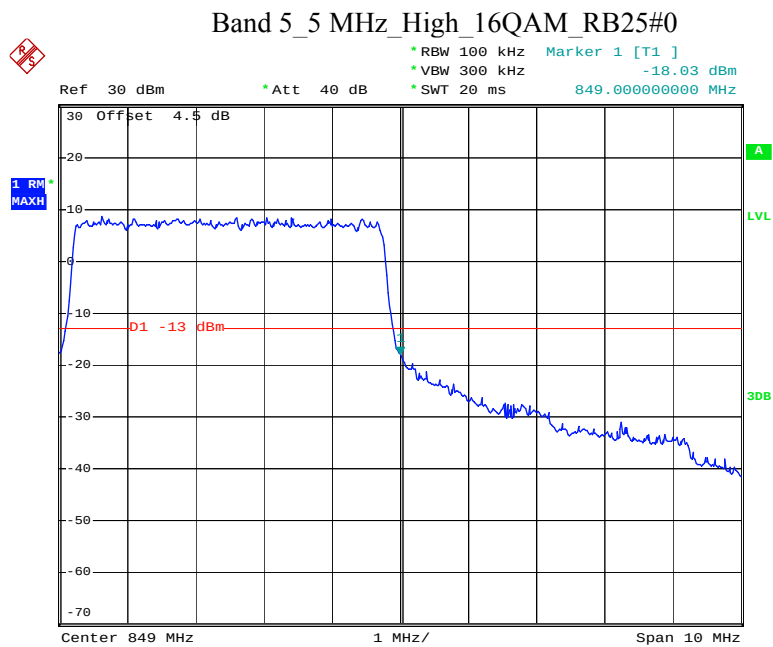


Date: 17.JUN.2019 23:46:27

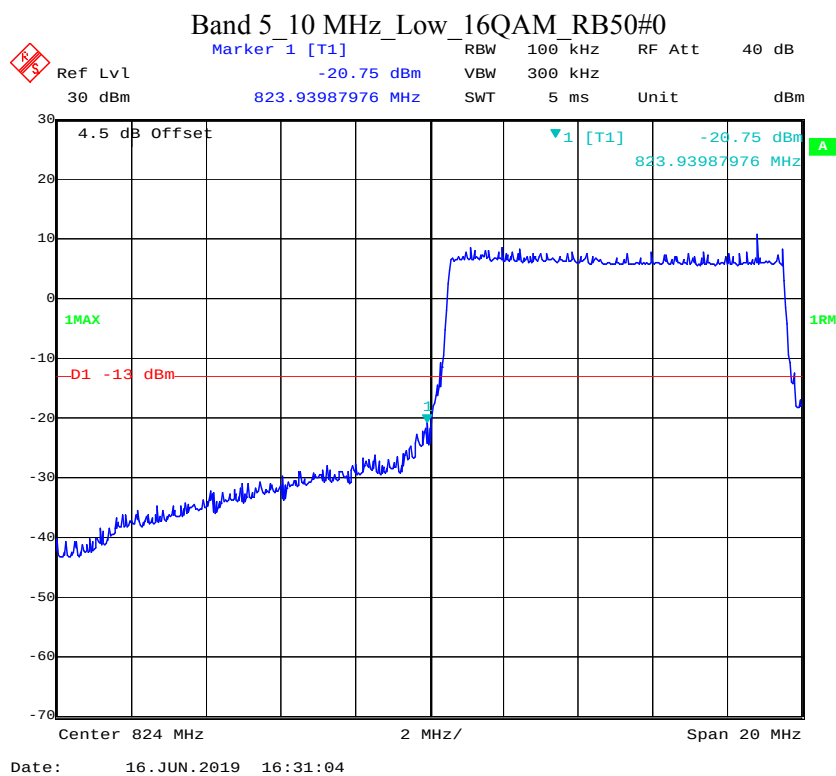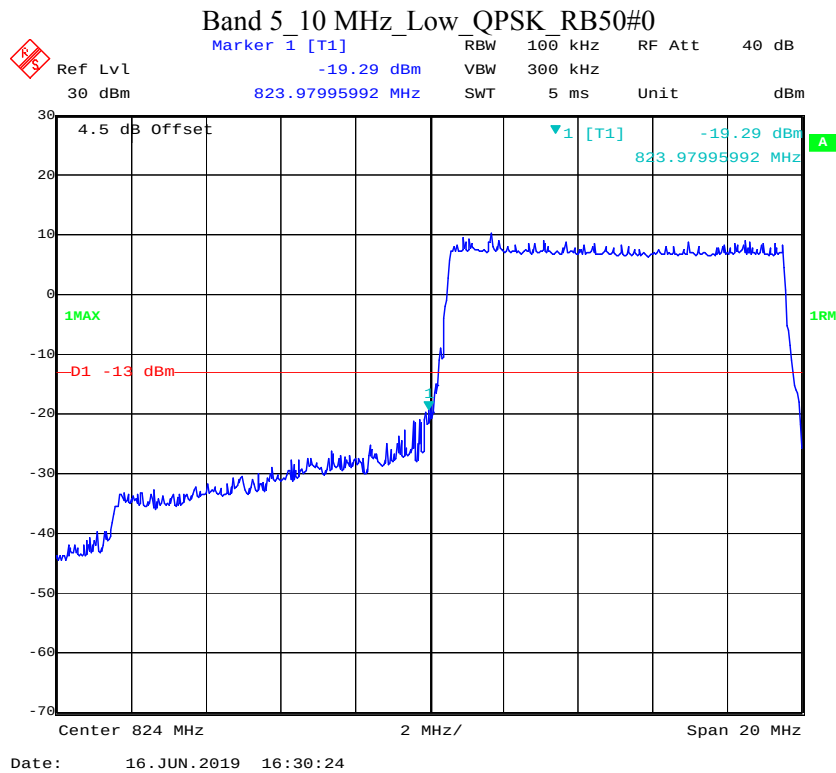

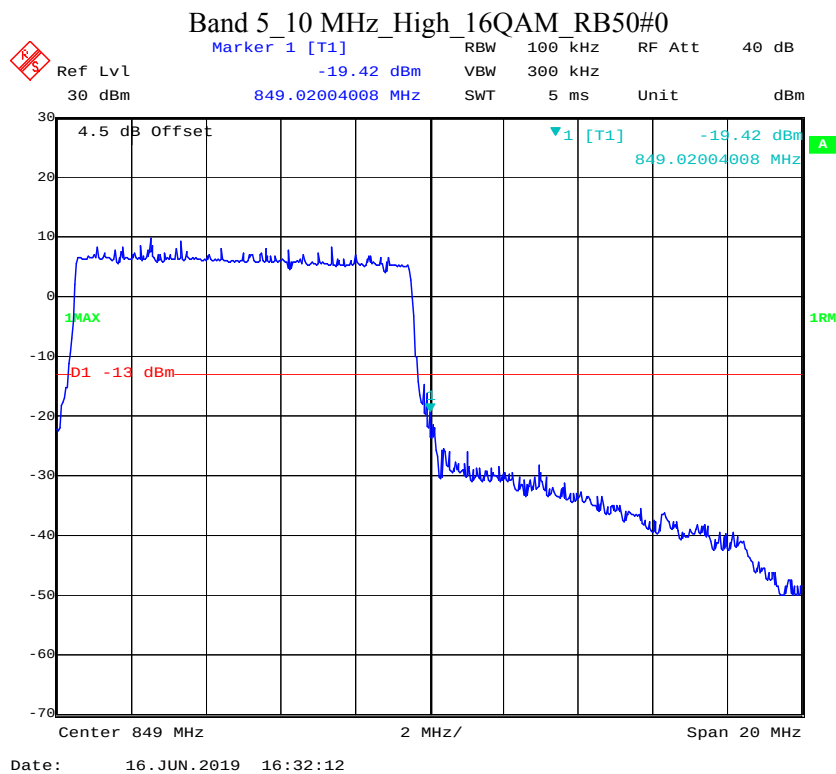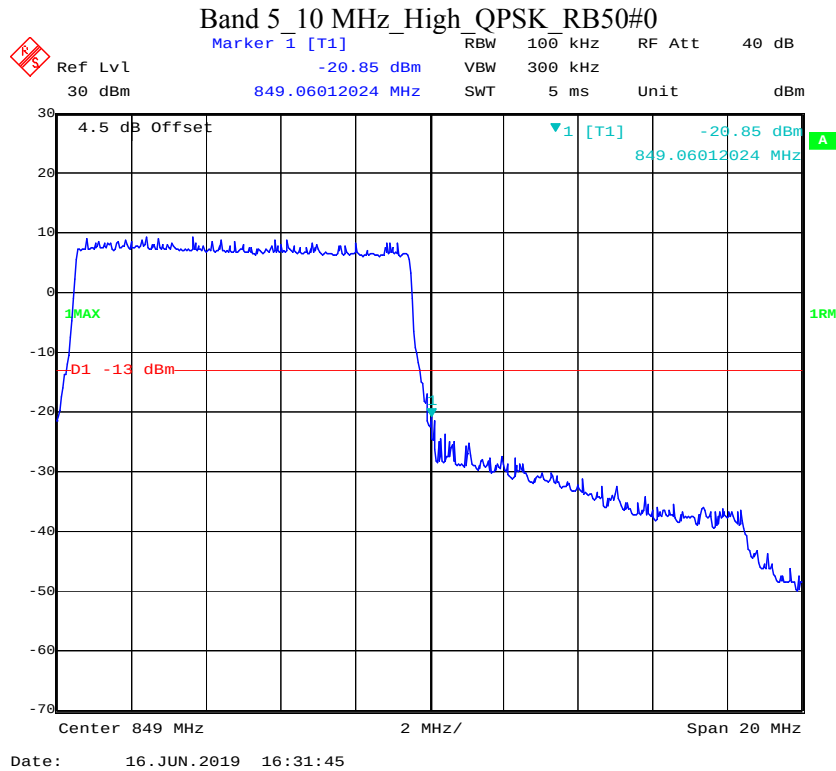


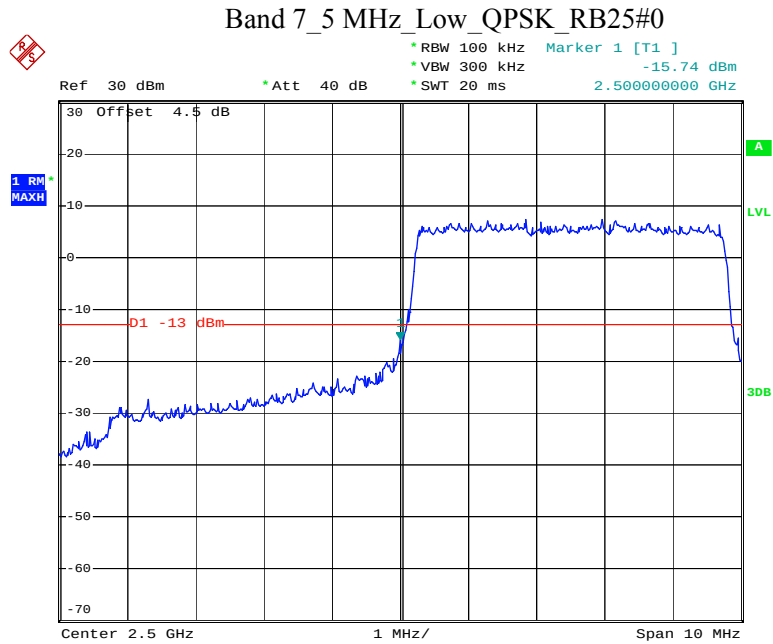


Date: 17.JUN.2019 23:41:57

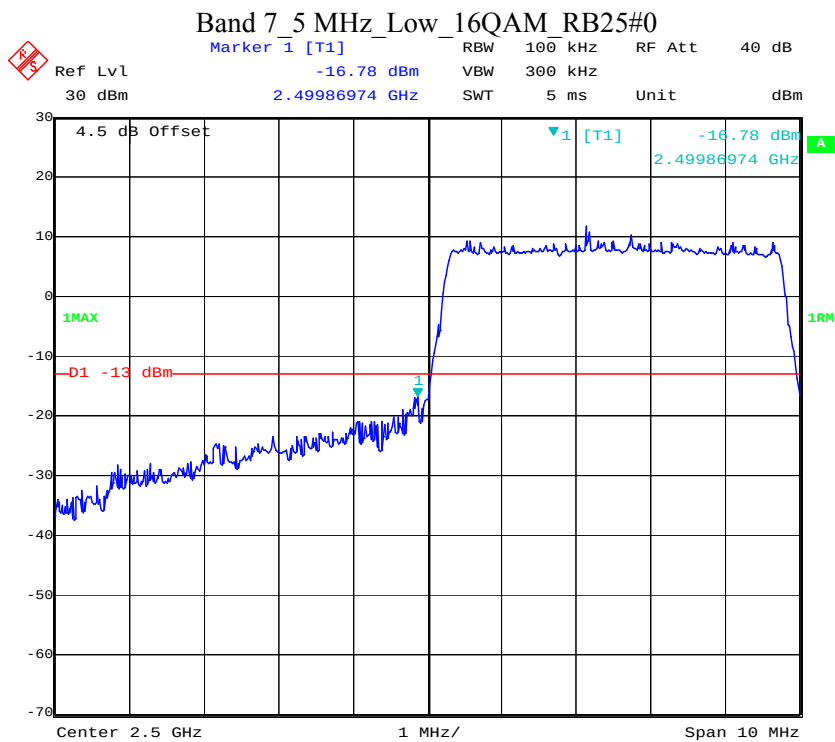



Date: 16.JUN.2019 16:33:29

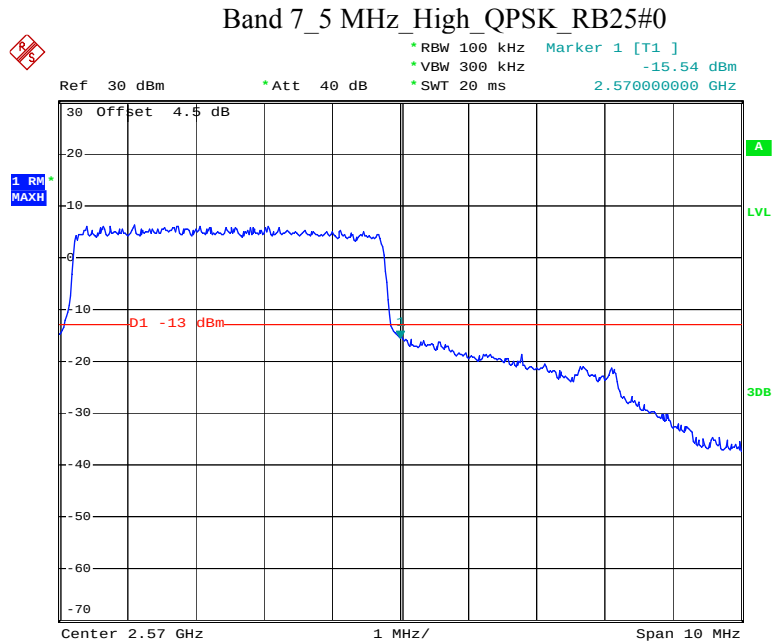




Date: 17.JUN.2019 23:42:56


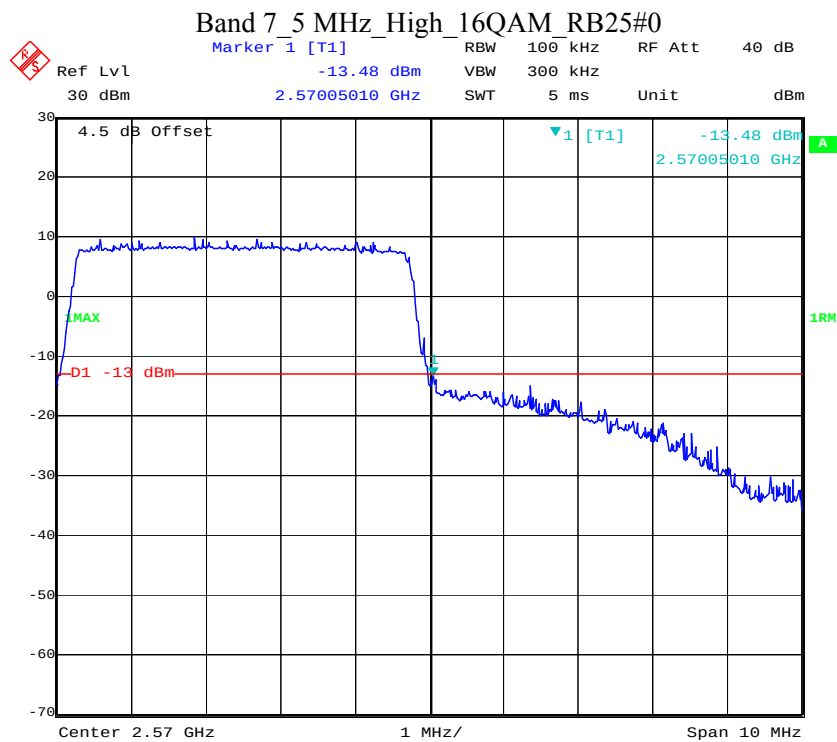




Date: 16.JUN.2019 16:34:28

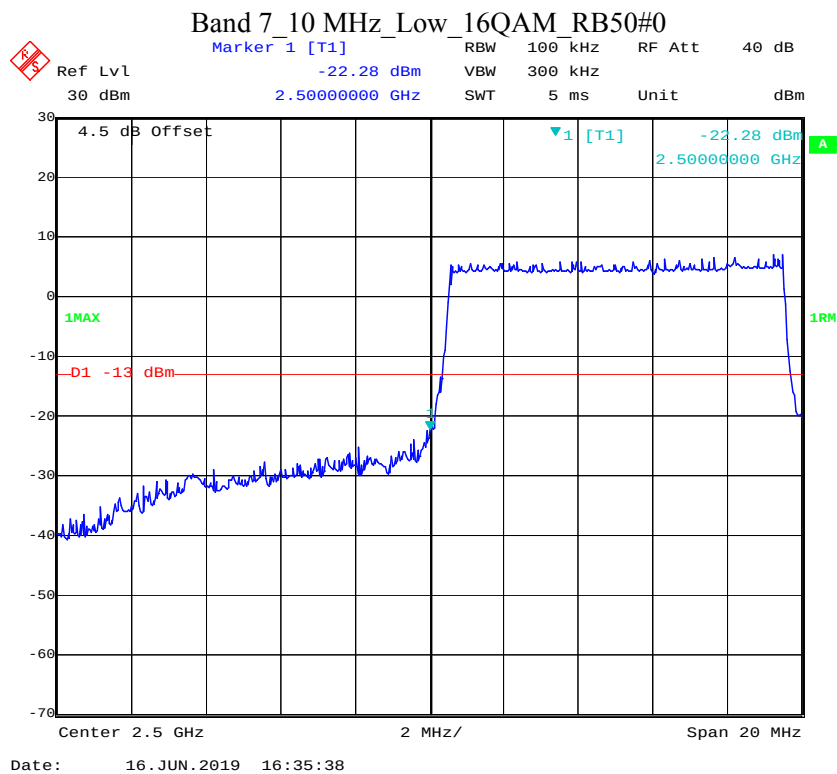
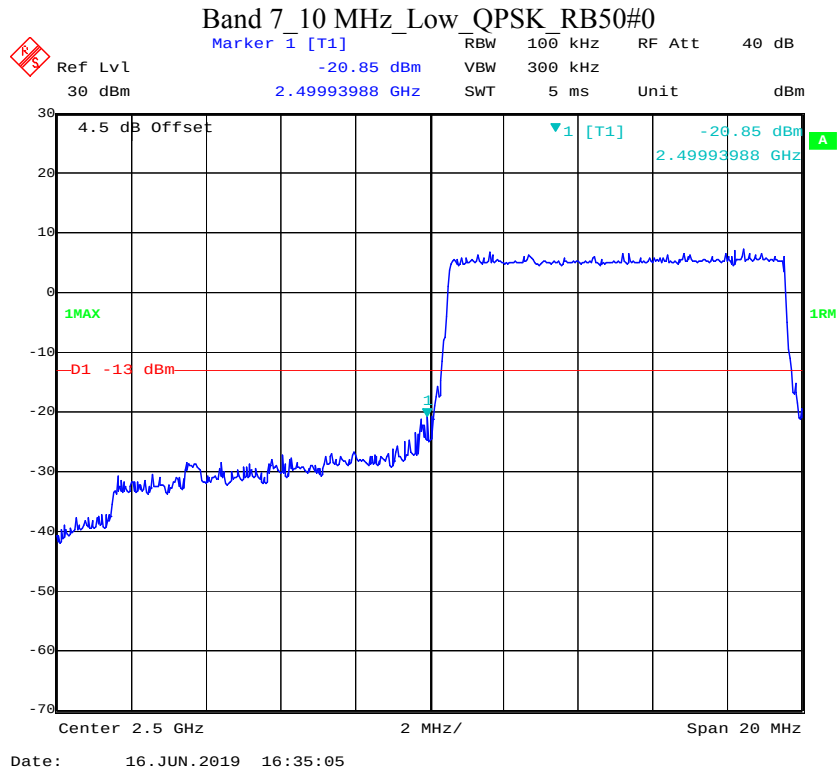


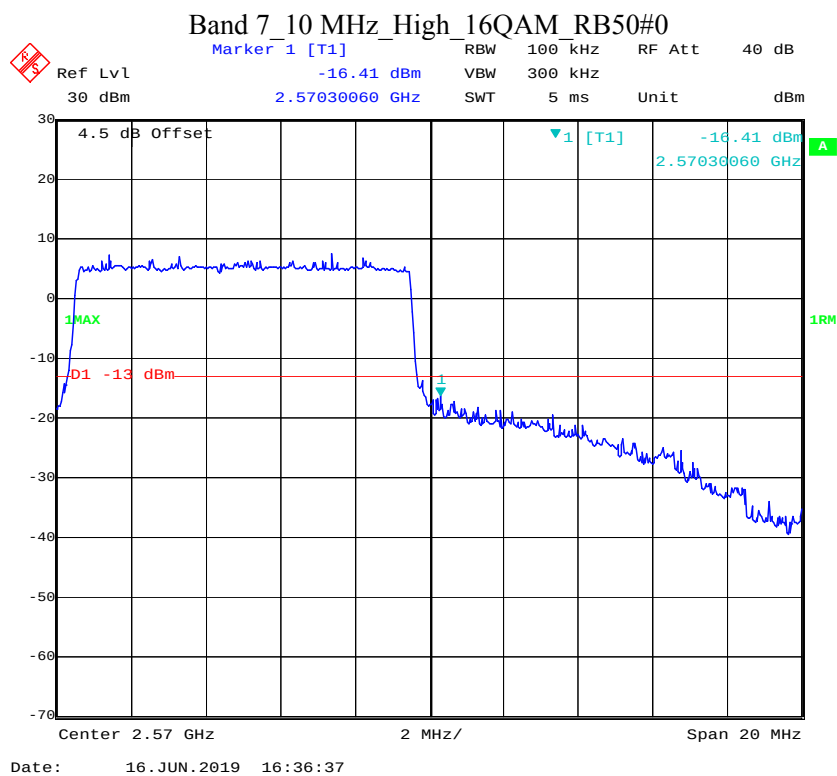


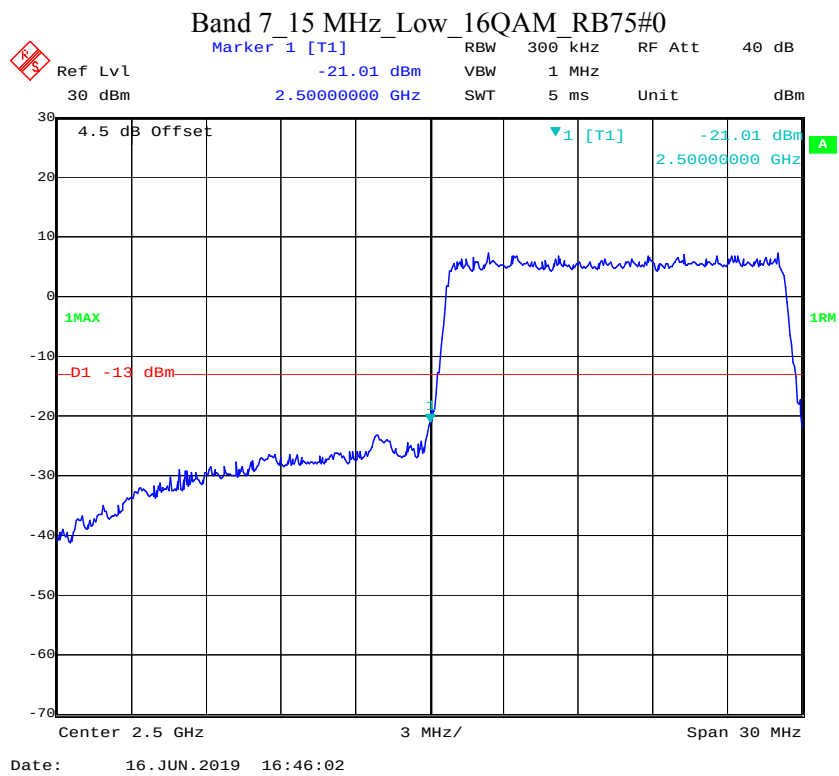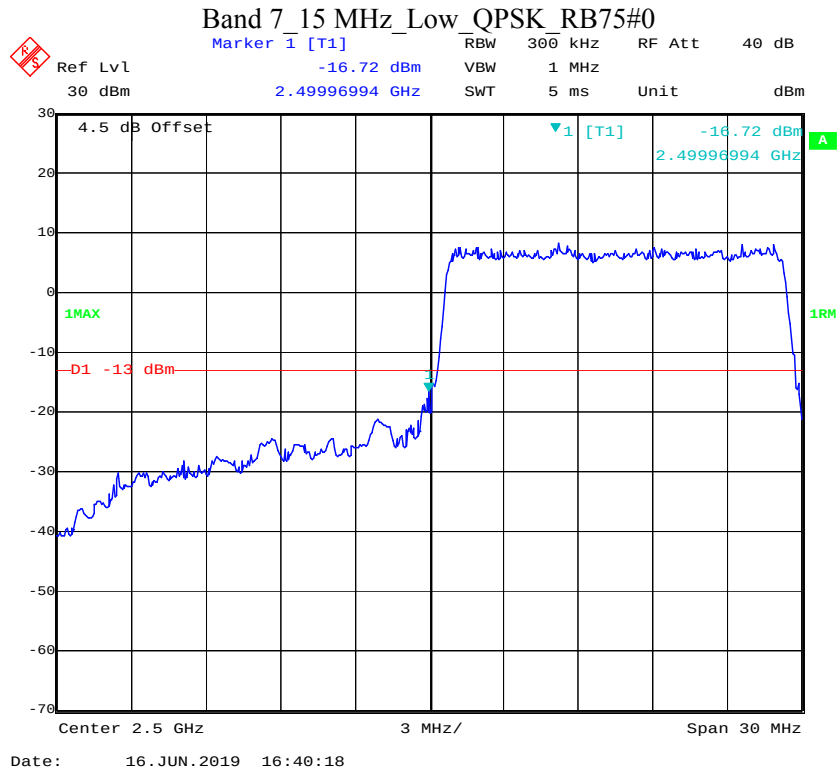

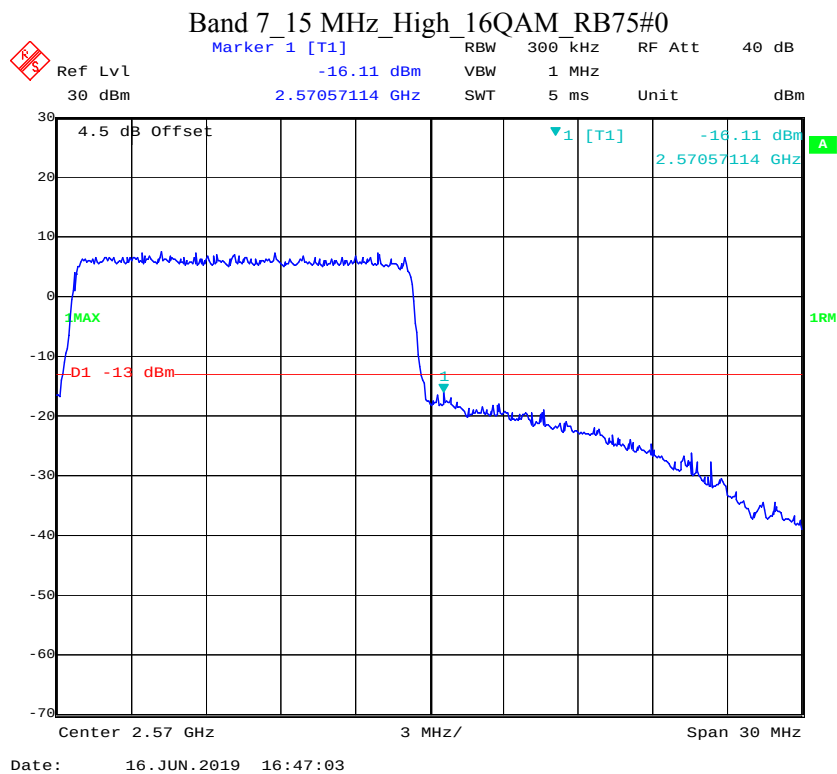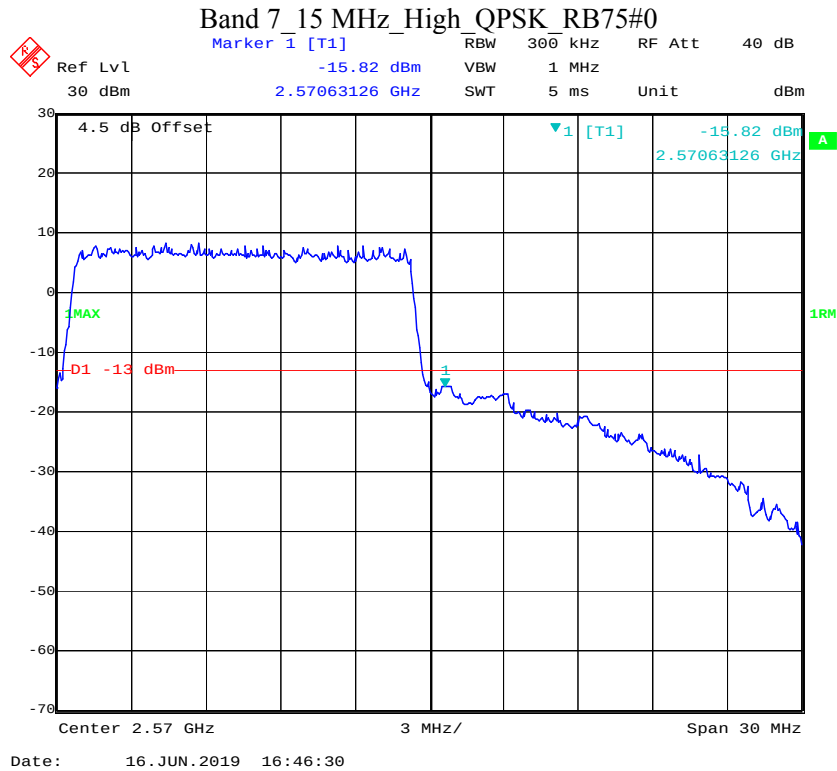


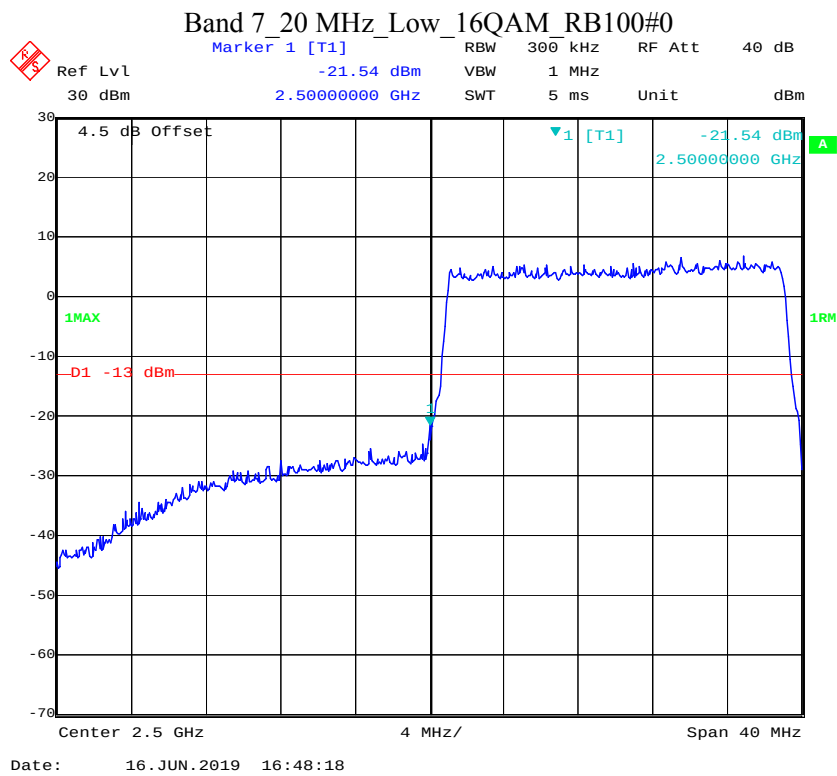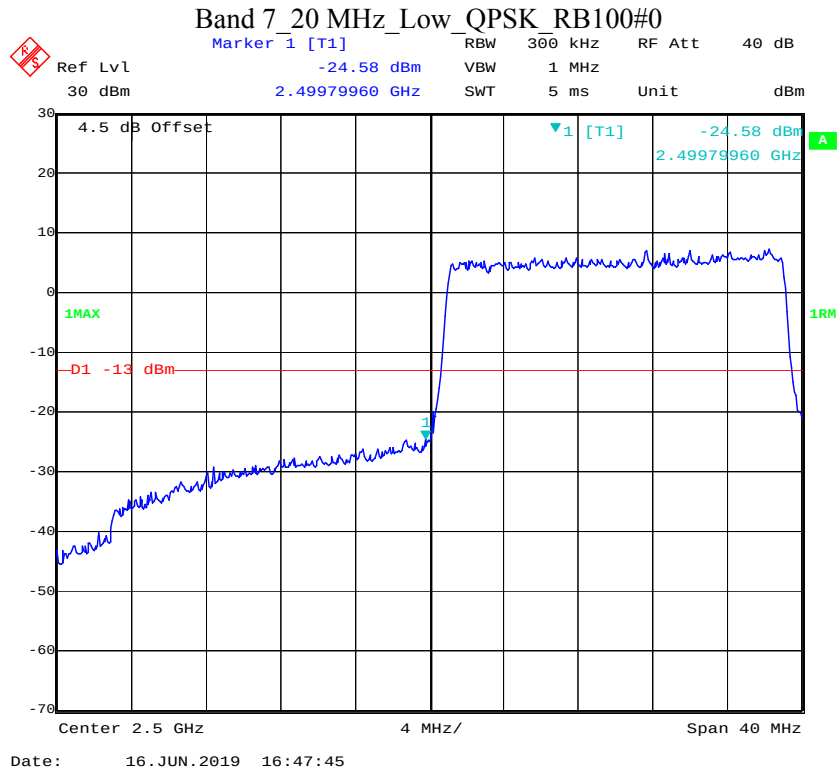

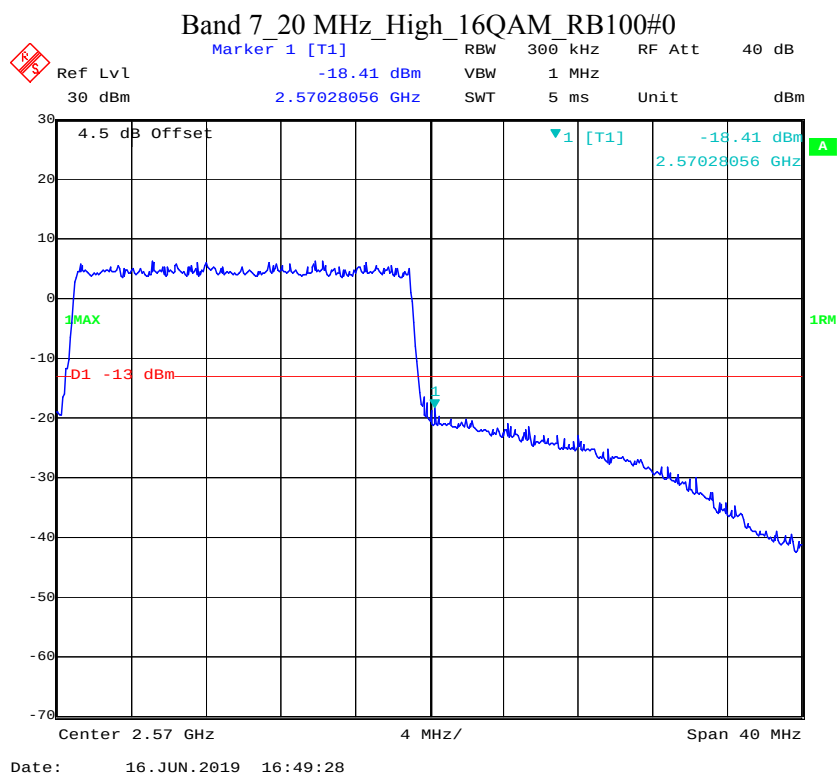
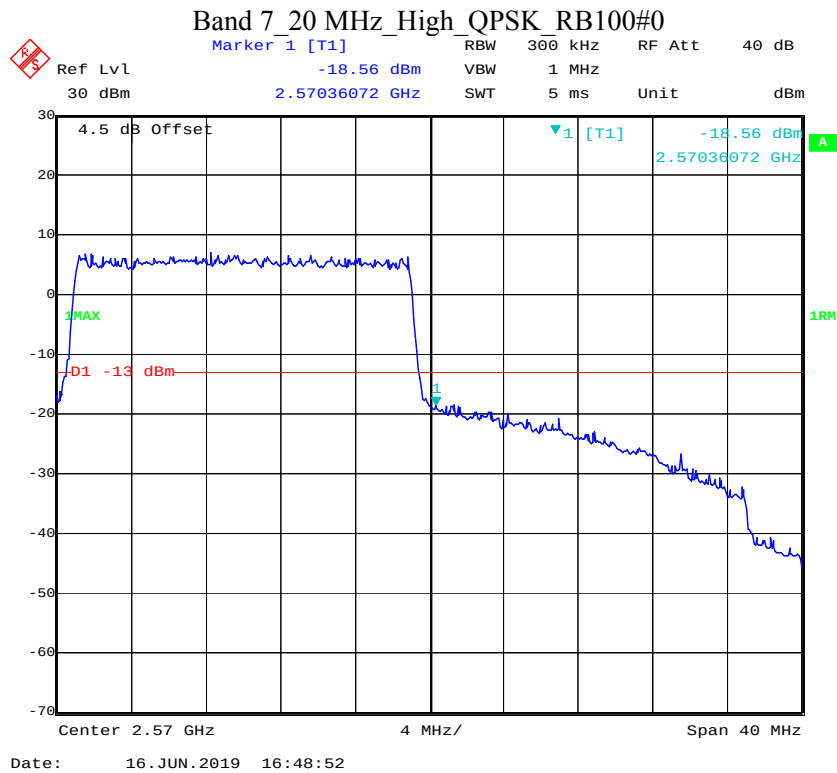



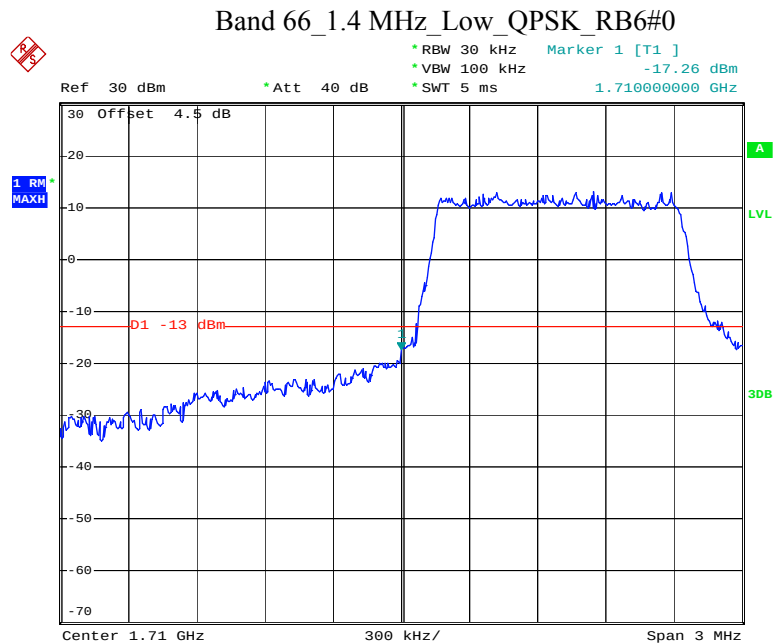




Date: 17.JUN.2019 23:36:46

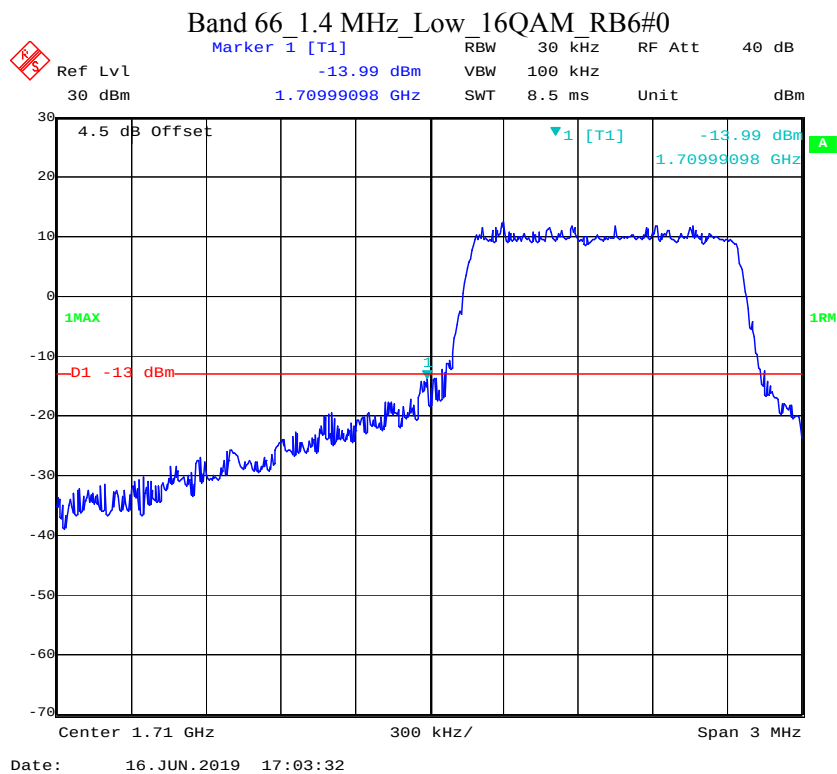


Date: 16.JUN.2019 17:03:32

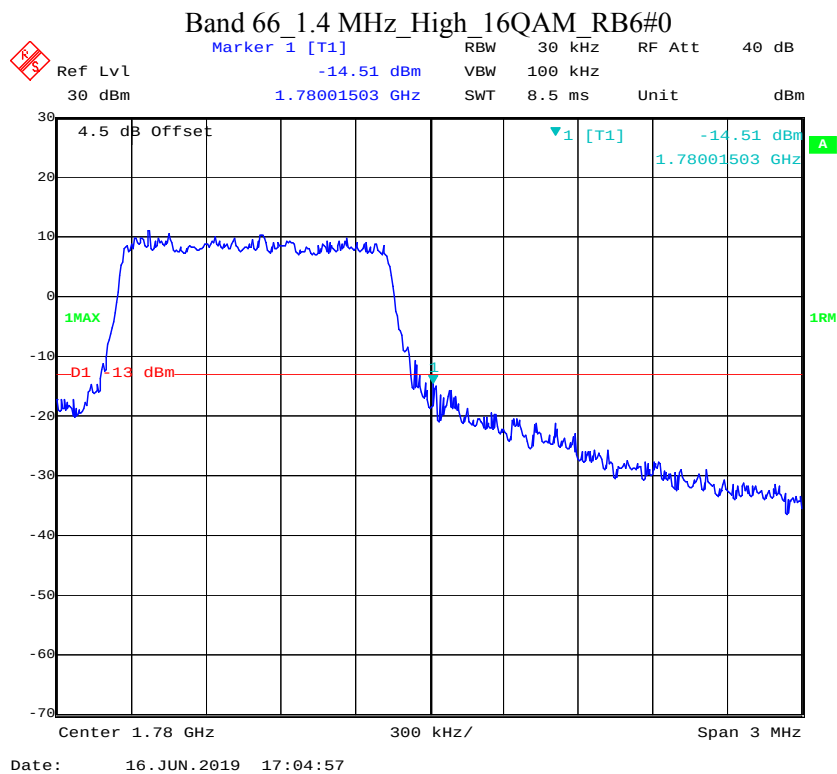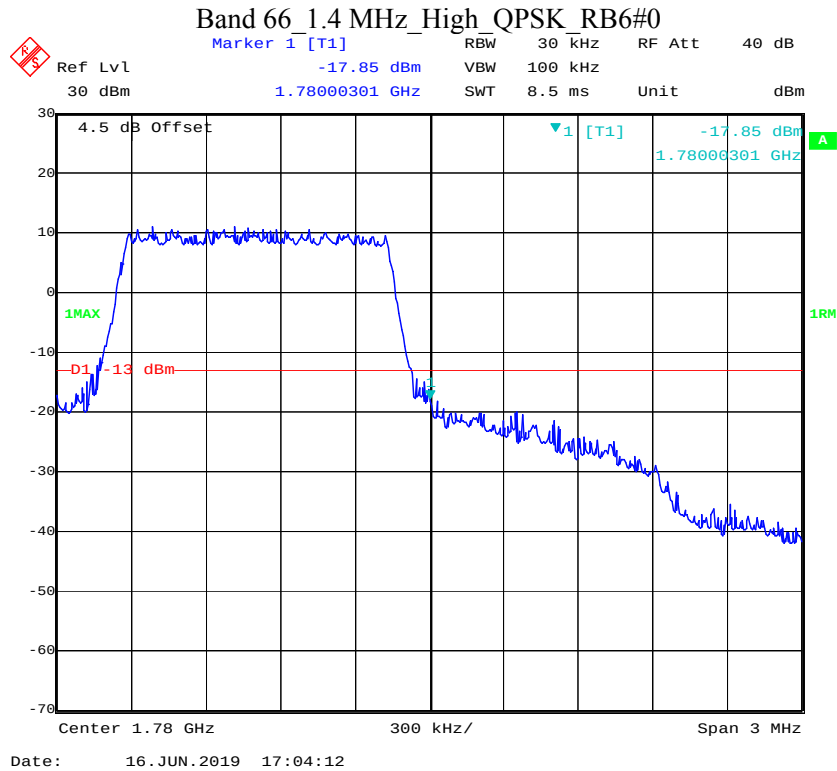


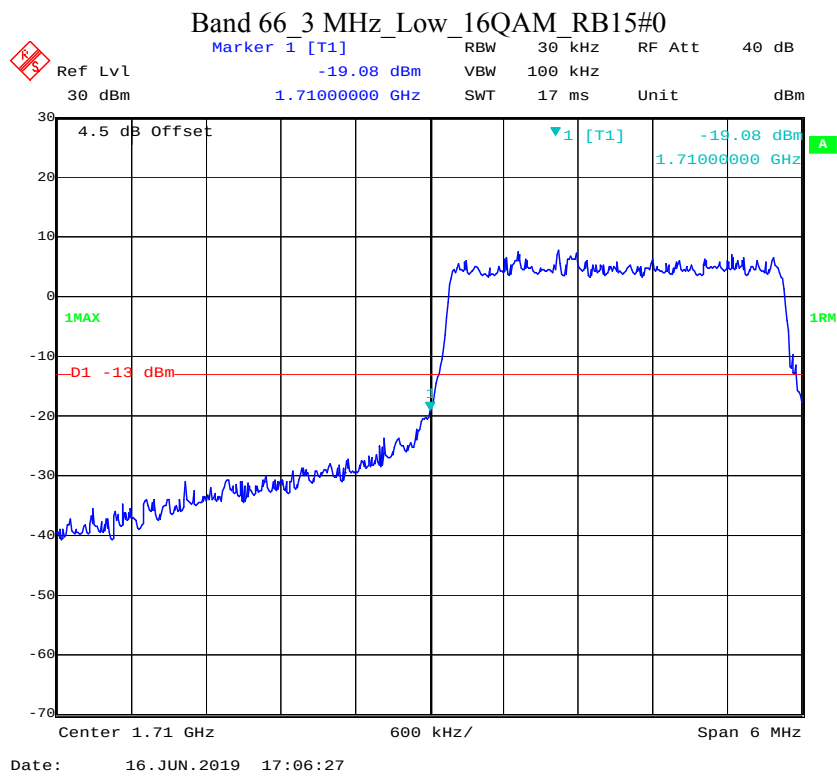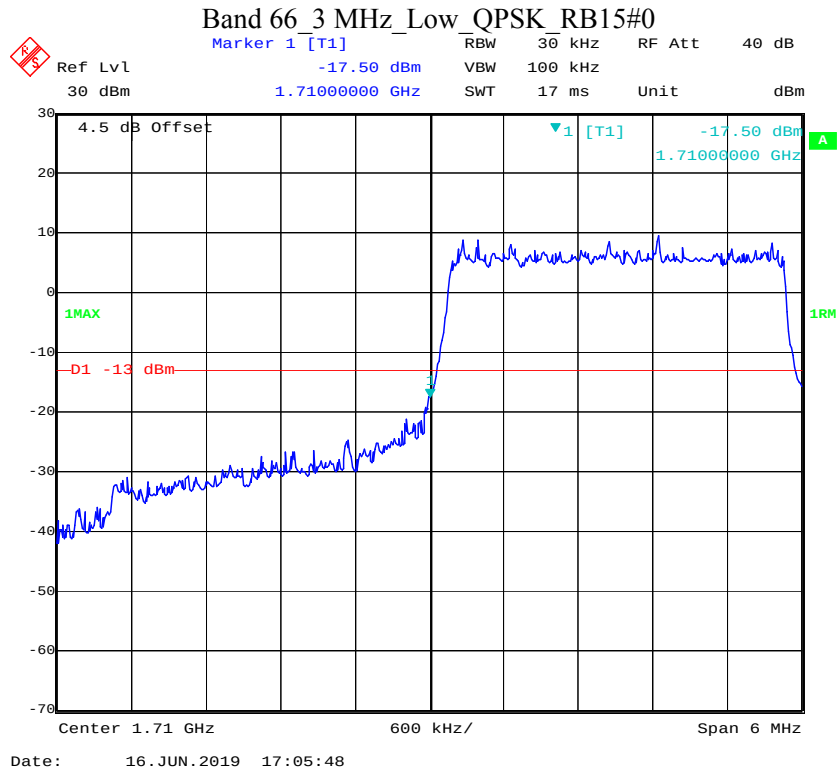

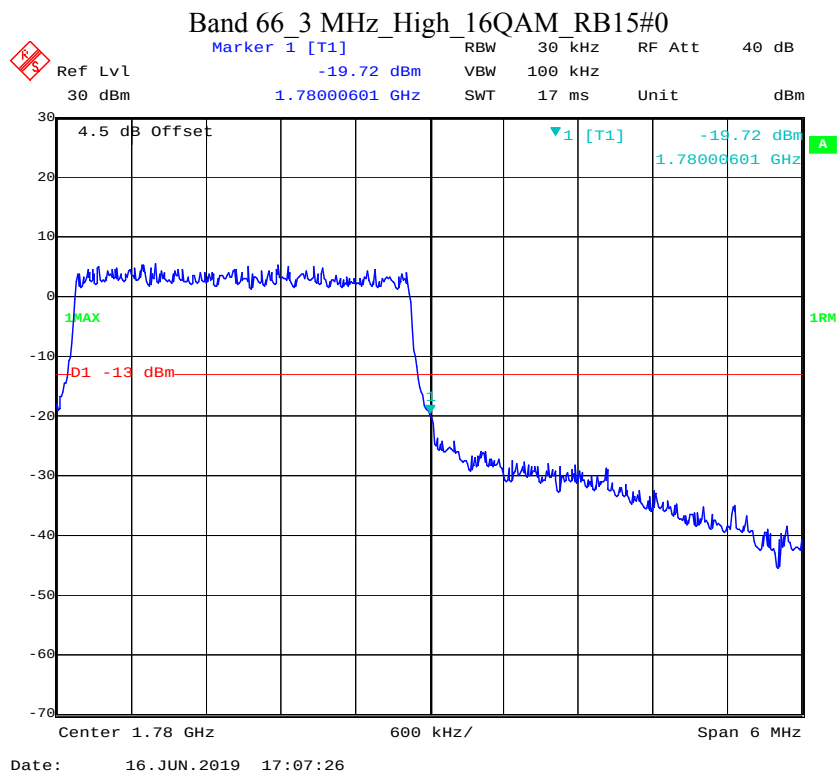
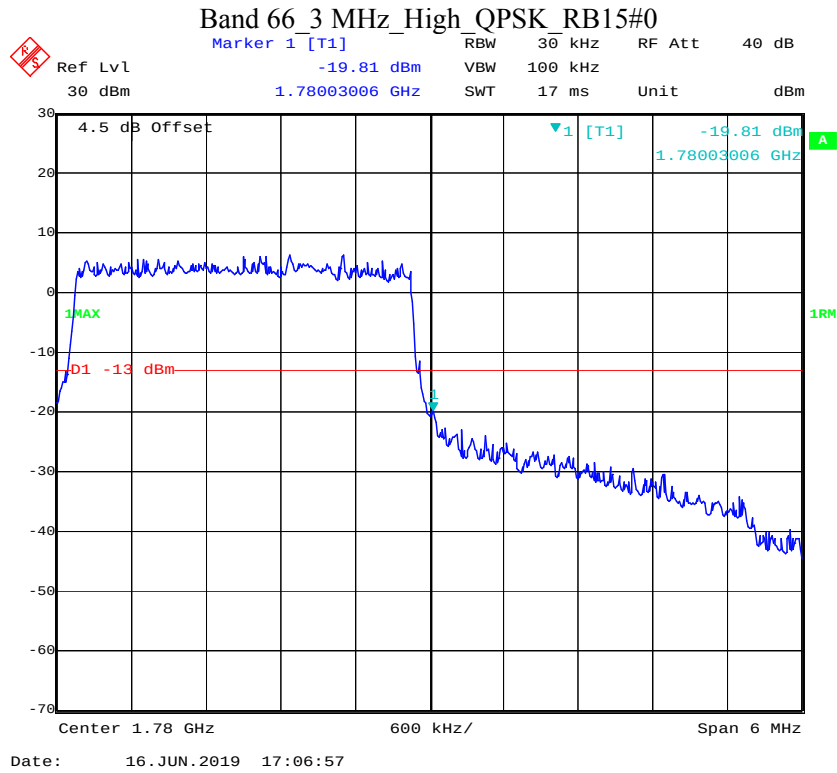



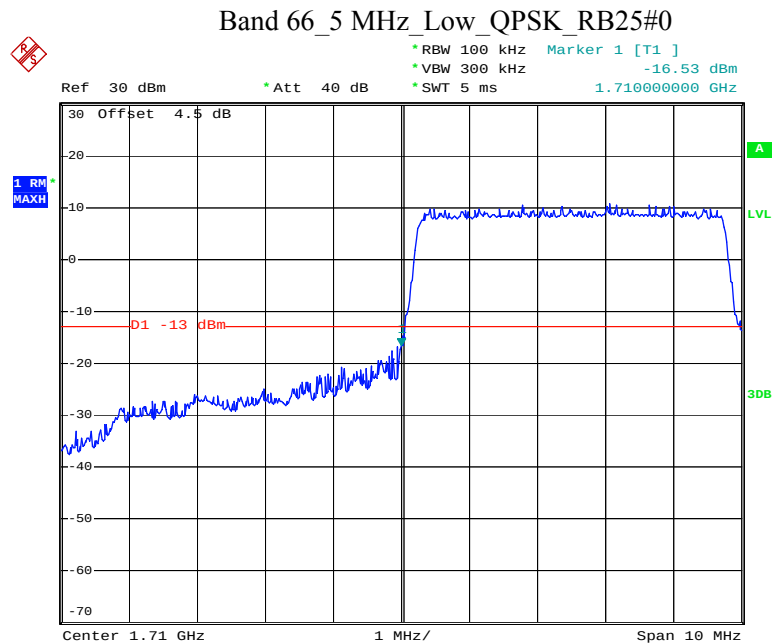




Date: 17.JUN.2019 23:34:35


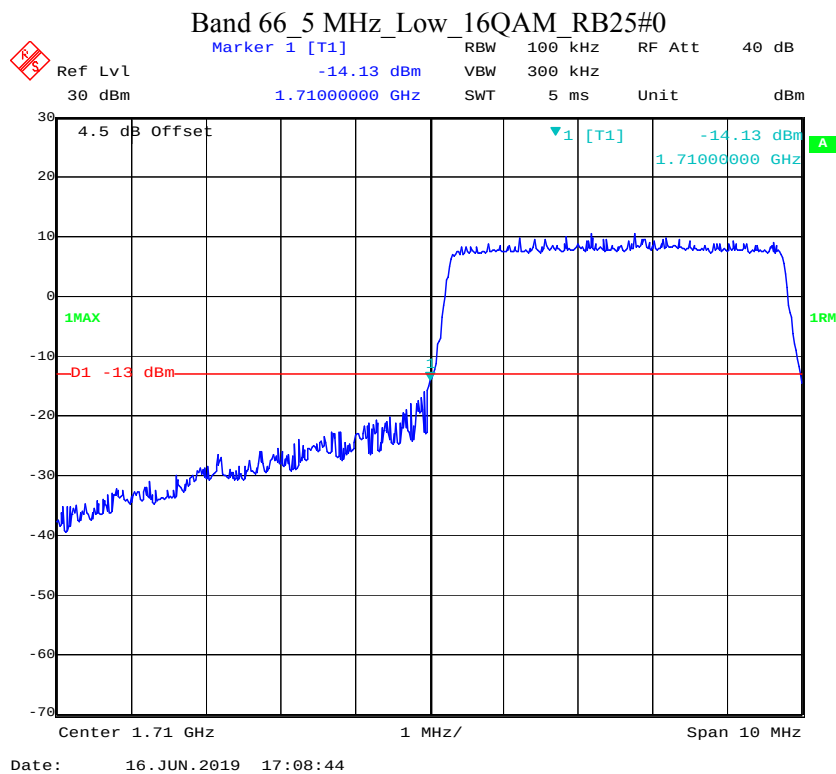




Date: 16.JUN.2019 17:08:44

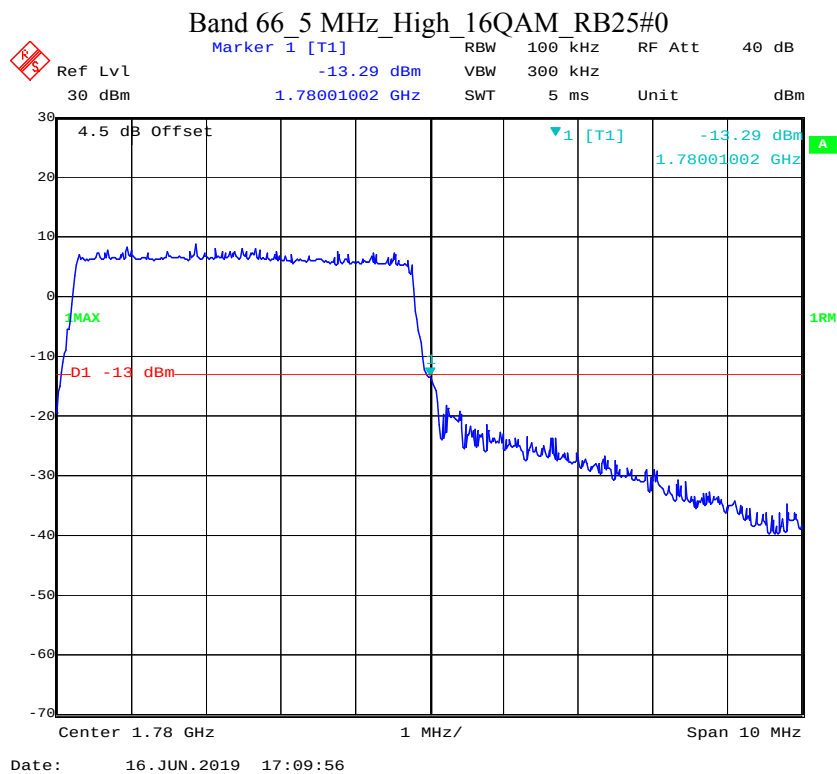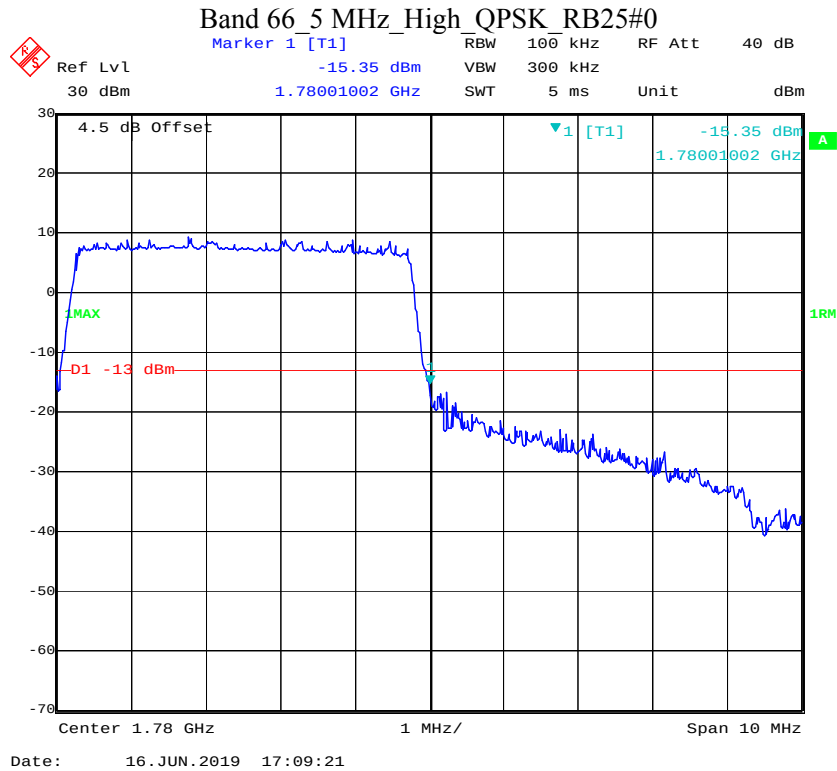

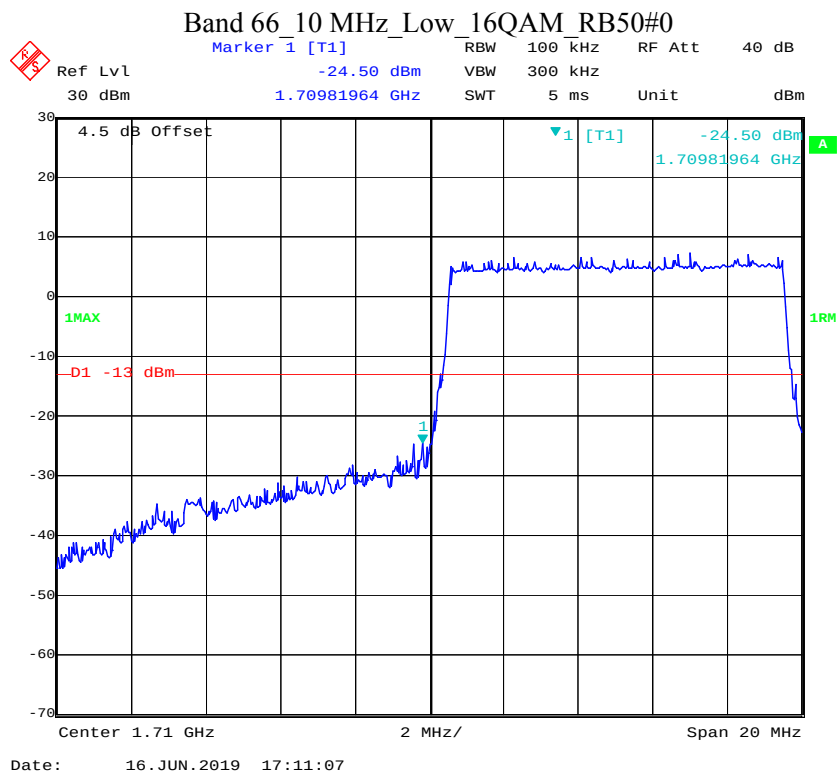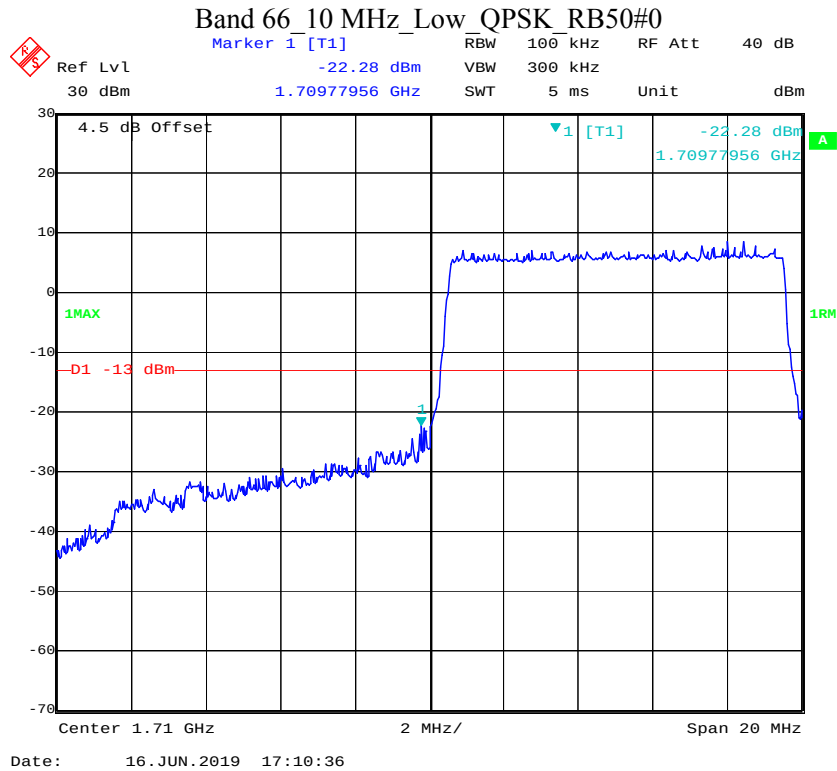


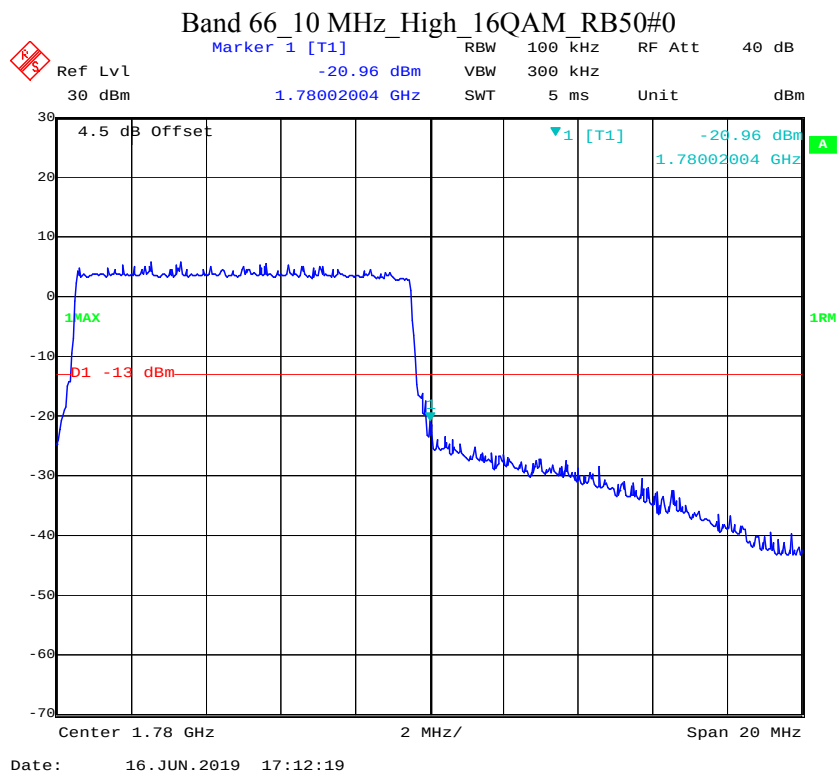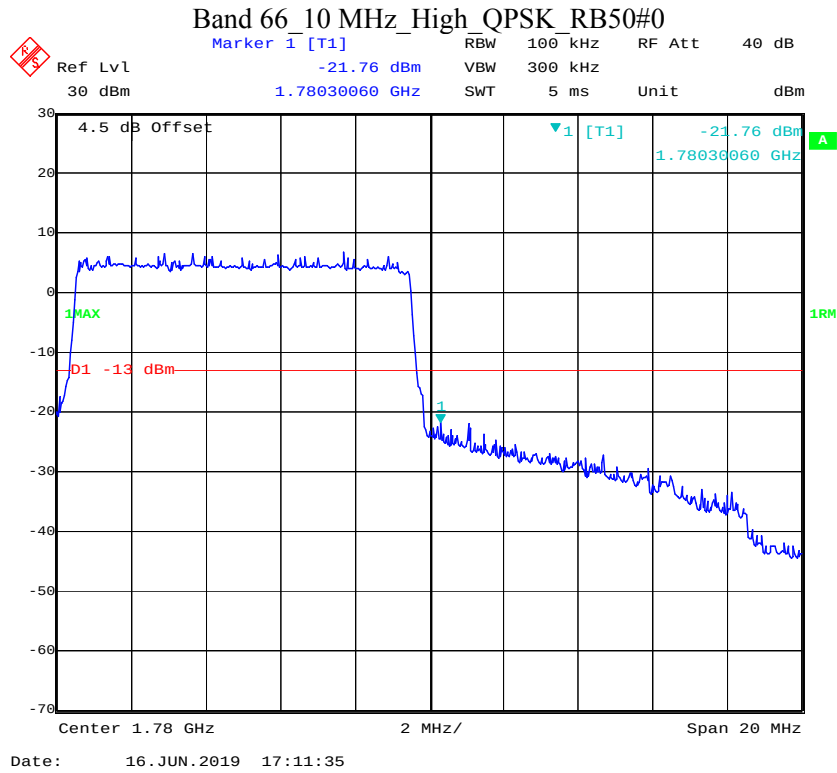

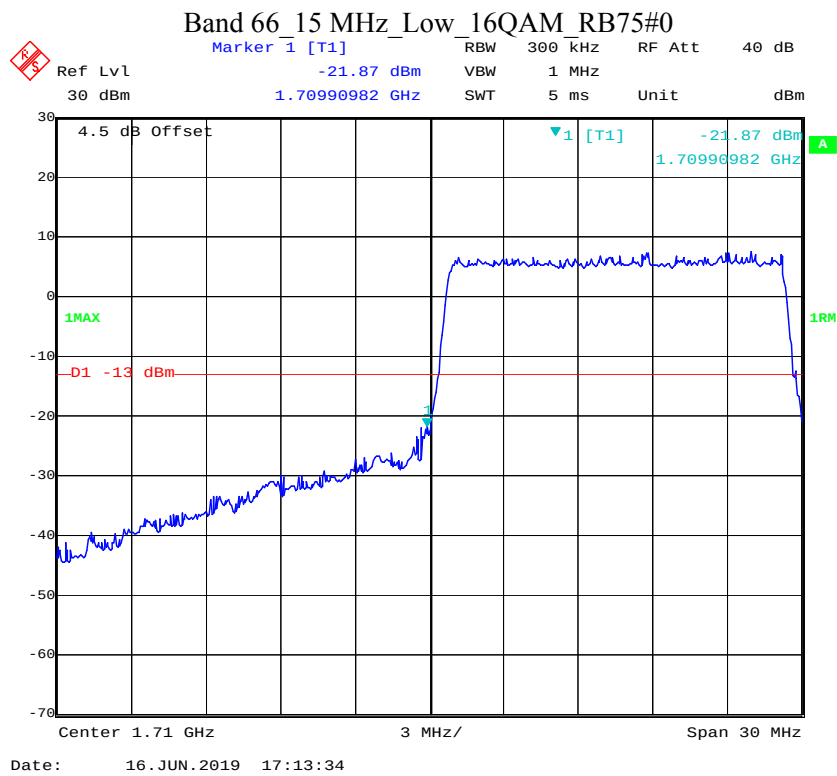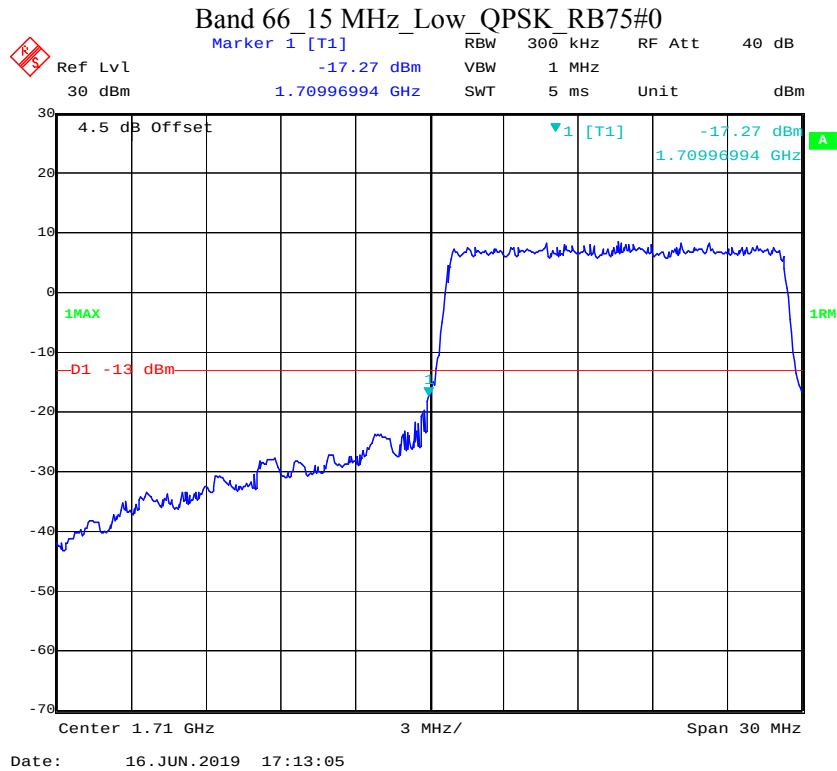


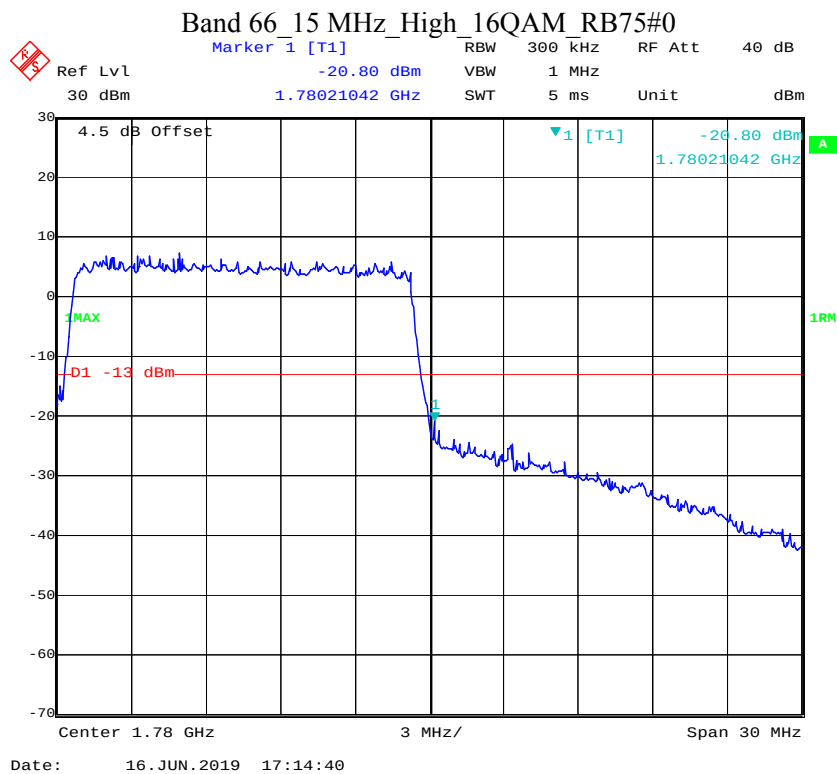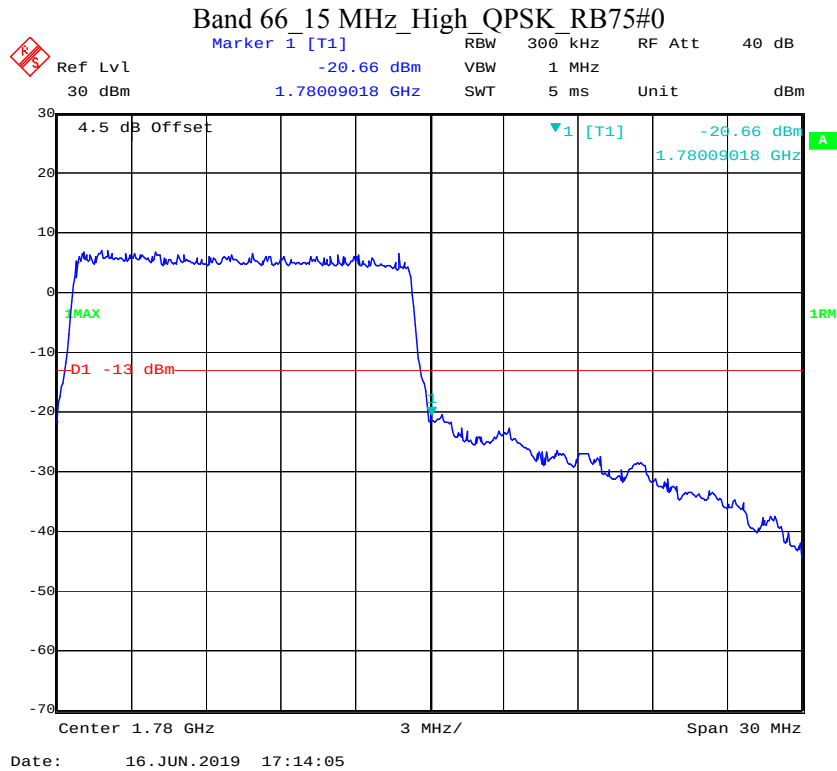


Band 66_20 MHz_Low_QPSK_RB100#0

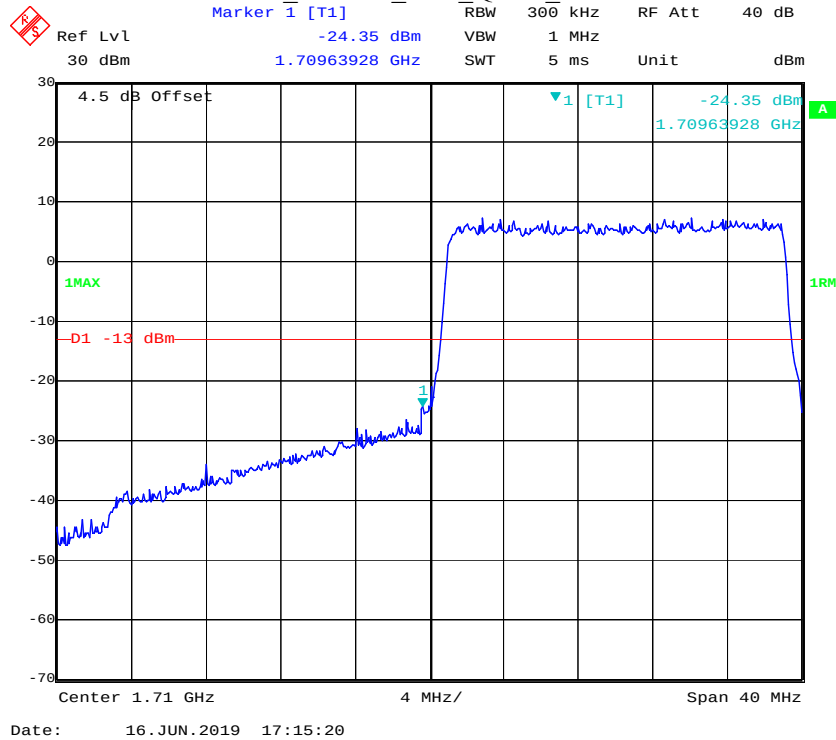


Band 66_20 MHz_Low_16QAM_RB100#0

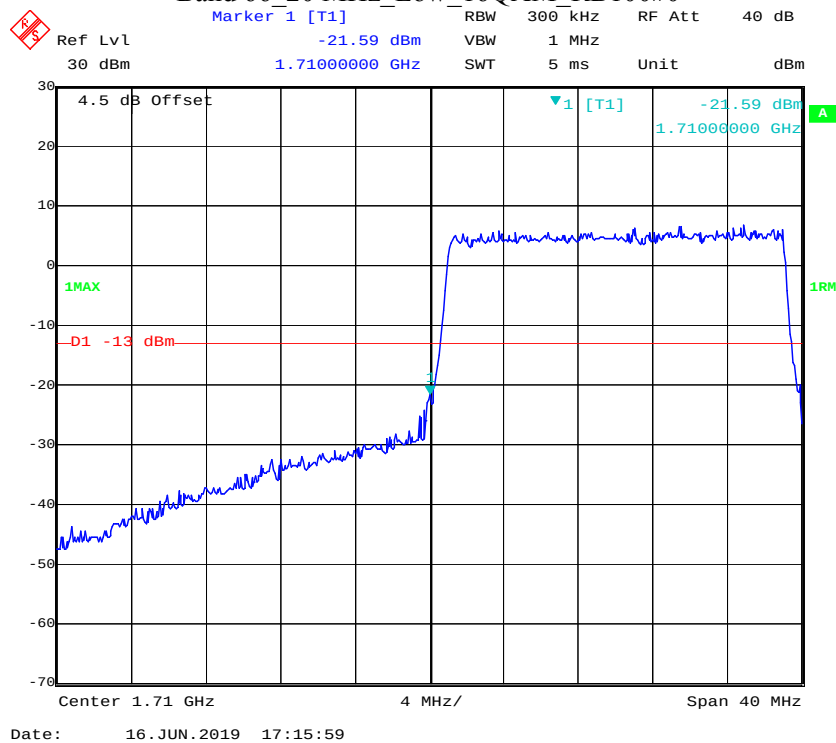

Band 66_20 MHz_High_QPSK_RB100#0

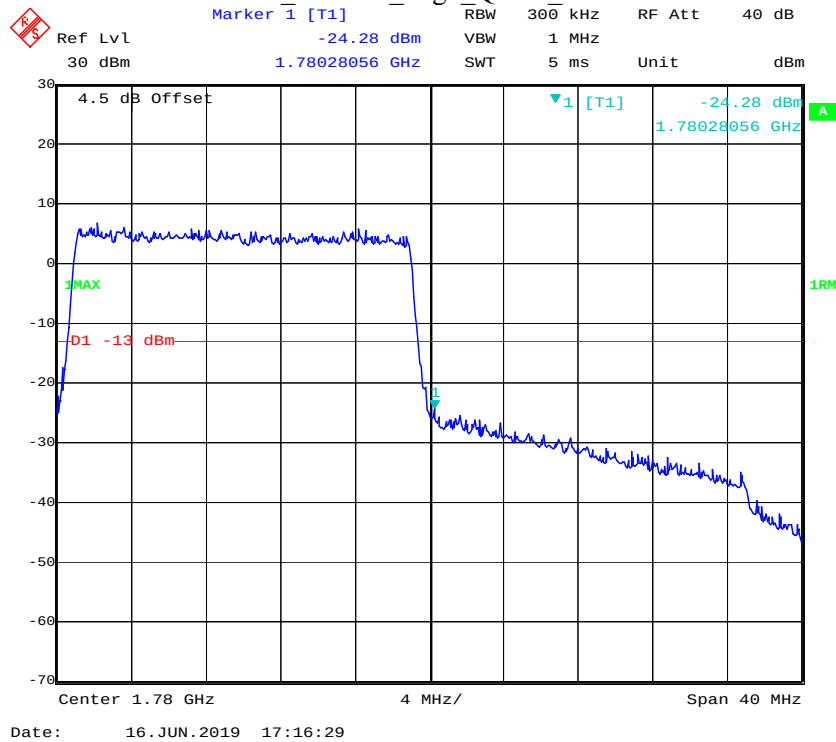

Band 66_20 MHz_High_16QAM_RB100#0

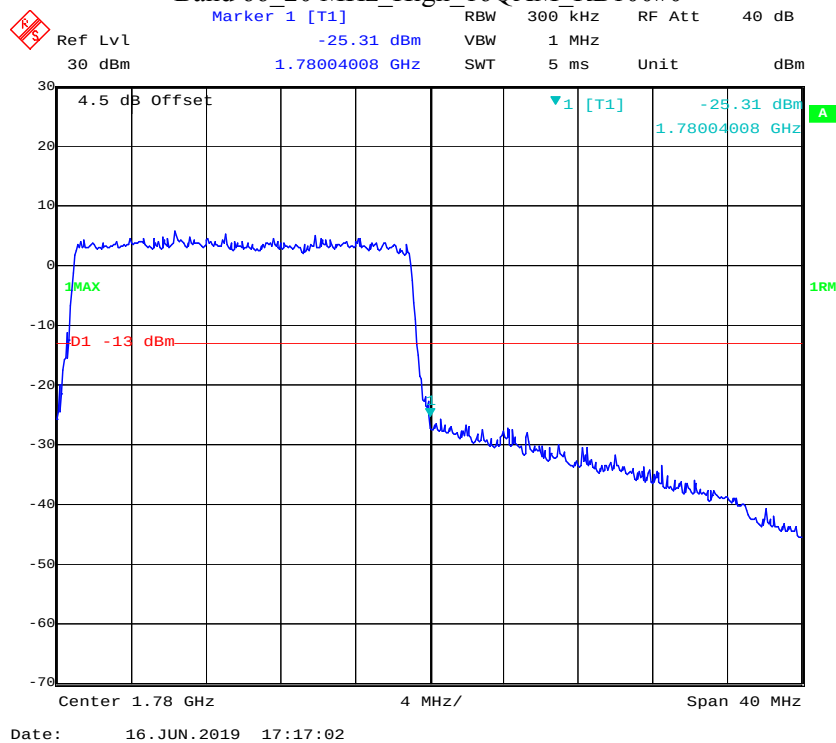

FCC §2.1055, §22.355 & §24.235 & §27.54 - FREQUENCY STABILITY**Applicable Standard**

FCC § 2.1055 (a), § 2.1055 (d), §22.355, §24.235, §27.54

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The power leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: An external variable C power supply was connected to the terminals of the equipment under test. The voltage was set of the nominal value and was then decreased until the transmitter light no longer illuminated. The output frequency was recorded for each battery voltage.

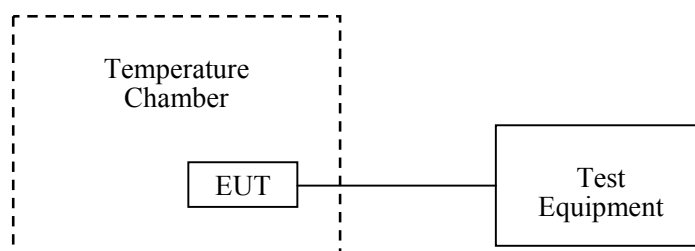

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Universal Radio Communication Tester	CMU200	106 891	2018-12-14	2019-12-14
R&S	Wideband Radio Communication Tester	CMW500	110479	2018-12-10	2019-12-10
ESPEC	Constant temperature and humidity Tester	ESX-4CA	018 463	2019-03-26	2020-03-26
UNI-T	Multimeter	UT39A	M130199938	2018-07-24	2019-07-24
R&S	Spectrum Analyzer	FSP 38	100478	2018-12-10	2019-12-10
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41010012	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24.9 °C
Relative Humidity:	47 %
ATM Pressure:	100.6 kPa

The testing was performed by Blake Yang on 2019-06-16.

WCDMA Band II: R99

Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Results
°C	V _{AC}	Hz	ppm	
-30	120	6	0.00319	Pass
-20		5	0.00266	
-10		7	0.00372	
0		8	0.00426	
10		3	0.00160	
20		9	0.00479	
30		4	0.00213	
40		5	0.00266	
50		6	0.00319	
20	102	4	0.00213	
20	138	7	0.00372	

WCDMA Band V: R99

Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{AC}	Hz	ppm	ppm
-30	120	-2	-0.00239	2.5
-20		-4	-0.00478	
-10		-3	-0.00359	
0		-5	-0.00598	
10		-4	-0.00478	
20		-6	-0.00717	
30		-3	-0.00359	
40		-2	-0.00239	
50		-4	-0.00478	
20	102	-2	-0.00239	
20	138	-1	-0.00120	

LTE Band 2:

QPSK, Channel Bandwidth:10MHz Middle Channel, $f_c = 1880$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V_{AC}	Hz	ppm	
-30	120	7	0.0037	Pass
-20		8	0.0043	
-10		6	0.0032	
0		5	0.0027	
10		8	0.0043	
20		10	0.0053	
30		7	0.0037	
40		6	0.0032	
50		4	0.0021	
20	102	8	0.0043	
20	138	9	0.0048	

16QAM, Channel Bandwidth:10MHz Middle Channel, $f_c = 1880$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V_{AC}	Hz	ppm	
-30	120	4	0.0021	Pass
-20		8	0.0043	
-10		4	0.0021	
0		7	0.0037	
10		9	0.0048	
20		6	0.0032	
30		5	0.0027	
40		10	0.0053	
50		5	0.0027	
20	102	8	0.0043	
20	138	9	0.0048	

LTE Band 4:

QPSK, Channel Bandwidth:10MHz					
Temperature	Voltage	Test Result (MHz)		Limit (MHz)	
°C	V_{AC}	F_L	F_H	F_L	F_H
-30	120	1710.534074	1754.508073	1710	1755
-20		1710.527288	1754.509033	1710	1755
-10		1710.532194	1754.510351	1710	1755
0		1710.533426	1754.510800	1710	1755
10		1710.527645	1754.512287	1710	1755
20		1710.531060	1754.509020	1710	1755
30		1710.529479	1754.510431	1710	1755
40		1710.526426	1754.512878	1710	1755
50		1710.531055	1754.512077	1710	1755
20	102	1710.529575	1754.513463	1710	1755
20	138	1710.529612	1754.510954	1710	1755

16QAM, Channel Bandwidth:10MHz					
Temperature	Voltage	Test Result (MHz)		Limit (MHz)	
°C	V_{AC}	F_L	F_H	F_L	F_H
-30	120	1710.527352	1754.512761	1710	1755
-20		1710.535672	1754.504950	1710	1755
-10		1710.531478	1754.504880	1710	1755
0		1710.535467	1754.505977	1710	1755
10		1710.535559	1754.512852	1710	1755
20		1710.531060	1754.509020	1710	1755
30		1710.528199	1754.512753	1710	1755
40		1710.526455	1754.506464	1710	1755
50		1710.536042	1754.511055	1710	1755
20	102	1710.530692	1754.505209	1710	1755
20	138	1710.535588	1754.511367	1710	1755

LTE Band 5:

Middle Channel, $f_c = 836.5$ MHz, Channel Bandwidth:10MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{AC}	Hz	ppm	ppm
-30	120	-6	-0.0072	2.5
-20		-4	-0.0048	
-10		-3	-0.0036	
0		-5	-0.006	
10		-7	-0.0084	
20		-5	-0.006	
30		-6	-0.0072	
40		-4	-0.0048	
50		-7	-0.0084	
20	102	-6	-0.0072	
20	138	-5	-0.006	

Middle Channel, $f_c = 836.5$ MHz, Channel Bandwidth:10MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{AC}	Hz	ppm	ppm
-30	120	-10	-0.012	2.5
-20		-4	-0.0048	
-10		-8	-0.0096	
0		-7	-0.0084	
10		-6	-0.0072	
20		-5	-0.006	
30		-7	-0.0084	
40		-8	-0.0096	
50		-6	-0.0072	
20	102	-9	-0.0108	
20	138	-4	-0.0048	

LTE Band 7:

QPSK, Channel Bandwidth:10MHz					
Temperature	Voltage	Test Result (MHz)		Limit (MHz)	
°C	V _{AC}	F _L	F _H	F _L	F _H
-30	120	2500.526276	2569.553458	2500	2570
-20		2500.530578	2569.548325	2500	2570
-10		2500.532637	2569.547539	2500	2570
0		2500.526145	2569.545747	2500	2570
10		2500.527175	2569.545590	2500	2570
20		2500.531060	2569.549100	2500	2570
30		2500.527140	2569.547484	2500	2570
40		2500.533288	2569.552775	2500	2570
50		2500.531482	2569.548965	2500	2570
20	102	2500.534818	2569.551920	2500	2570
20	138	2500.529320	2569.544810	2500	2570

16QAM, Channel Bandwidth:10MHz					
Temperature	Voltage	Test Result (MHz)		Limit (MHz)	
°C	V _{AC}	F _L	F _H	F _L	F _H
-30	120	2500.533135	2569.550176	2500	2570
-20		2500.528852	2569.546200	2500	2570
-10		2500.533777	2569.546931	2500	2570
0		2500.534372	2569.552851	2500	2570
10		2500.533640	2569.549364	2500	2570
20		2500.531060	2569.549100	2500	2570
30		2500.531143	2569.549356	2500	2570
40		2500.528820	2569.549019	2500	2570
50		2500.535731	2569.545570	2500	2570
20	102	2500.530101	2569.550043	2500	2570
20	138	2500.531207	2569.552214	2500	2570

LTE Band 66:

QPSK, Channel Bandwidth:10MHz					
Temperature	Voltage	Test Result (MHz)		Limit (MHz)	
°C	V_{AC}	F_L	F_H	F_L	F_H
-30	120	1710.573096	1779.507795	1710	1780
-20		1710.573256	1779.504814	1710	1780
-10		1710.569630	1779.505677	1710	1780
0		1710.569646	1779.506103	1710	1780
10		1710.570088	1779.504944	1710	1780
20		1710.571140	1779.509020	1710	1780
30		1710.574060	1779.512373	1710	1780
40		1710.570410	1779.509491	1710	1780
50		1710.571060	1779.507944	1710	1780
20	102	1710.572919	1779.512244	1710	1780
20	138	1710.569934	1779.513913	1710	1780

16QAM, Channel Bandwidth:10MHz					
Temperature	Voltage	Test Result (MHz)		Limit (MHz)	
°C	V_{AC}	F_L	F_H	F_L	F_H
-30	120	1710.567225	1779.509373	1710	1780
-20		1710.568793	1779.507228	1710	1780
-10		1710.572829	1779.508378	1710	1780
0		1710.570551	1779.509234	1710	1780
10		1710.569482	1779.506629	1710	1780
20		1710.531060	1779.509020	1710	1780
30		1710.575299	1779.513439	1710	1780
40		1710.575763	1779.513248	1710	1780
50		1710.573185	1779.512023	1710	1780
20	102	1710.573783	1779.512225	1710	1780
20	138	1710.566272	1779.511556	1710	1780

Note: The fundamental emissions stay within the authorized bands of operation based on the frequency deviation measured is small, the extreme voltage was declared by applicant.

******* END OF REPORT *******