



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.247

TEST REPORT

For

MFOURTEL MEXICO S.A. DE C.V.

Av. Ejercito Nacional 436 Piso 3 Chapultepec, Morales Miguel Hidalgo D.F 11570, Mexico

FCC ID: CLNM4SPOTCALL1

Report Type: Original Report	Product Type: M4 Spot call 1
Report Number: RDG190527003-00B	
Report Date: 2019-06-22	
Reviewed By:	Jerry Zhang EMC Manager
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	9
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	9
SUPPORT CABLE LIST AND DETAILS	9
CONFIGURATION OF TEST SETUP	10
SUMMARY OF TEST RESULTS	11
FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	12
APPLICABLE STANDARD	12
FCC §15.203 - ANTENNA REQUIREMENT.....	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	15
APPLICABLE STANDARD	15
EUT SETUP	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	16
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST DATA	17
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	19
APPLICABLE STANDARD	19
EUT SETUP	19
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	20
TEST PROCEDURE	20
CORRECTED AMPLITUDE & MARGIN CALCULATION	20
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST DATA	21
FCC §15.247(a) (2)–6 dB EMISSION BANDWIDTH.....	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST EQUIPMENT LIST AND DETAILS.....	38
TEST DATA	38
FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	46
APPLICABLE STANDARD	46
TEST PROCEDURE	46
TEST EQUIPMENT LIST AND DETAILS.....	46

TEST DATA	47
FCC §15.247(d)– 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	48
APPLICABLE STANDARD	48
TEST PROCEDURE	48
TEST EQUIPMENT LIST AND DETAILS.....	48
TEST DATA	49
FCC §15.247(e) - POWER SPECTRAL DENSITY	58
APPLICABLE STANDARD	58
TEST PROCEDURE	58
TEST EQUIPMENT LIST AND DETAILS.....	58
TEST DATA	58

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:		M4 Spot call 1
EUT Model:		M4 Spot call 1
Operation Frequency:		2412-2462 MHz(802.11b/g/n ht20) 2422-2452 MHz(802.11n ht40)
Maximum Peak Output Power (Conducted):		28.14 dBm
Modulation Type:		DSSS, OFDM(802.11b/g/n)
Rated Input Voltage:		12VDC from adapter
Adapter Information	Model:	ES085C-X120100XYF
	Input:	100-240V, 50/60Hz, 0.5A
	Output:	DC12V, 1A
External Dimension:		190mm(L)*179.5mm(W)*43.5mm(H)
Serial Number:		190527003
EUT Received Date:		2019-05-28

Objective

This report is prepared on behalf of *MFOURTEL MEXICO S.A. DE C.V.* in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the compliance of the EUT with FCC Rules Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 22H, 24E, Part 27 PCB submissions with FCC ID: CLNM4SPOTCALL1.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier : CN0022.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in Engineering Mode, which was provided by the manufacturer. This device employs two type of WLAN antenna: inside FPC antenna for Chain 0/1 or external Dipole Antenna for Chain 1, when dipole antenna installed, the system configure to use the dipole antenna by the switcher.

For 2.4GHz band, total 11 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, and 802.11n ht20 modes were test with channel 1,6,11. For 802.11n ht40 mode was tested with channel 3, 6, 9.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations. The device supports SISO in all modes, and MIMO in 802.11n modes, per pretest, MIMO mode was the worst mode and reported for 802.11n modes.

EUT Exercise Software


The software “MP_TEST” was used for testing, which was provided by manufacturer. The maximum power was configured as below table, that provided by the manufacturer:

Mode	Channel	Frequency (MHz)	Data rate	Power level setting
802.11b	Low	2412	1 Mbps	27
	Middle	2437	1 Mbps	27
	High	2462	1 Mbps	27
802.11g	Low	2412	6 Mbps	44
	Middle	2437	6 Mbps	44
	High	2462	6 Mbps	44
802.11n ht20	Low	2412	MCS0	35
	Middle	2437	MCS0	35
	High	2462	MCS0	35
802.11n ht40	Low	2422	MCS0	35
	Middle	2437	MCS0	35
	High	2452	MCS0	35


The maximum duty cycle as following table:

Test mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)
802.11b	100	100	100
802.11g	100	100	100
802.11n ht20	100	100	100
802.11n ht40	100	100	100


802.11b

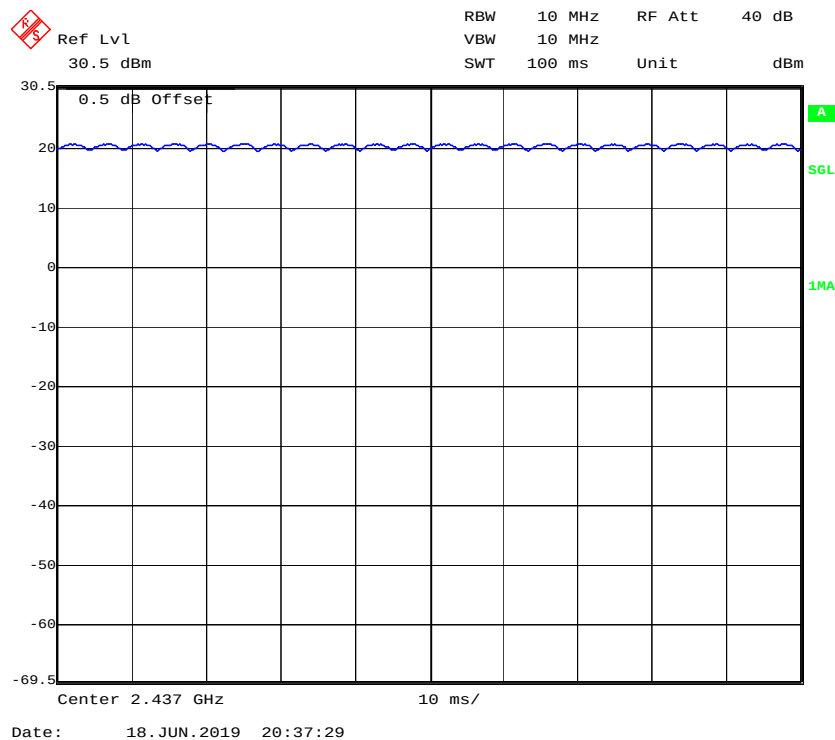


802.11g

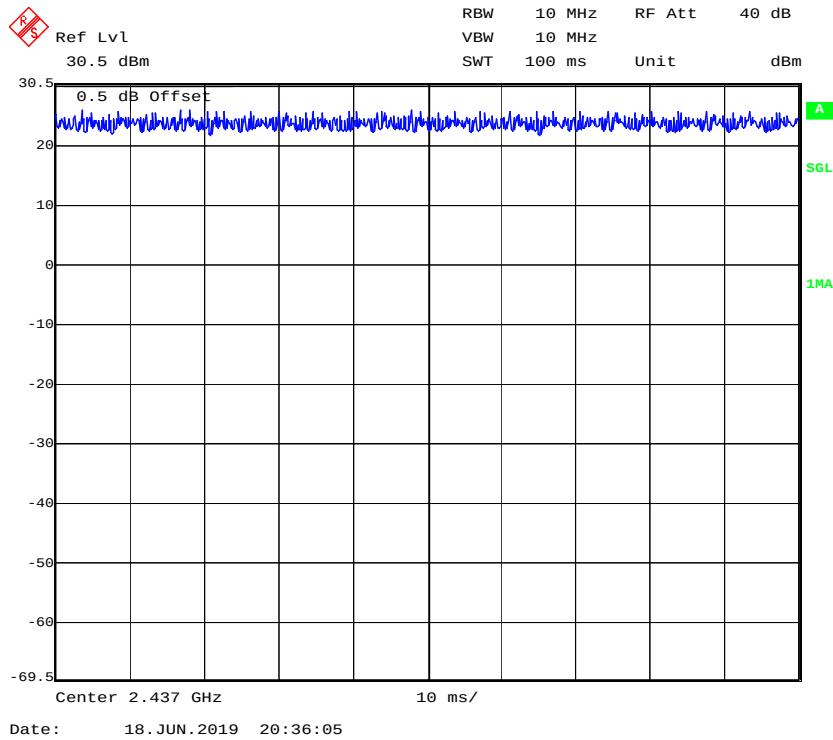

802.11n ht20

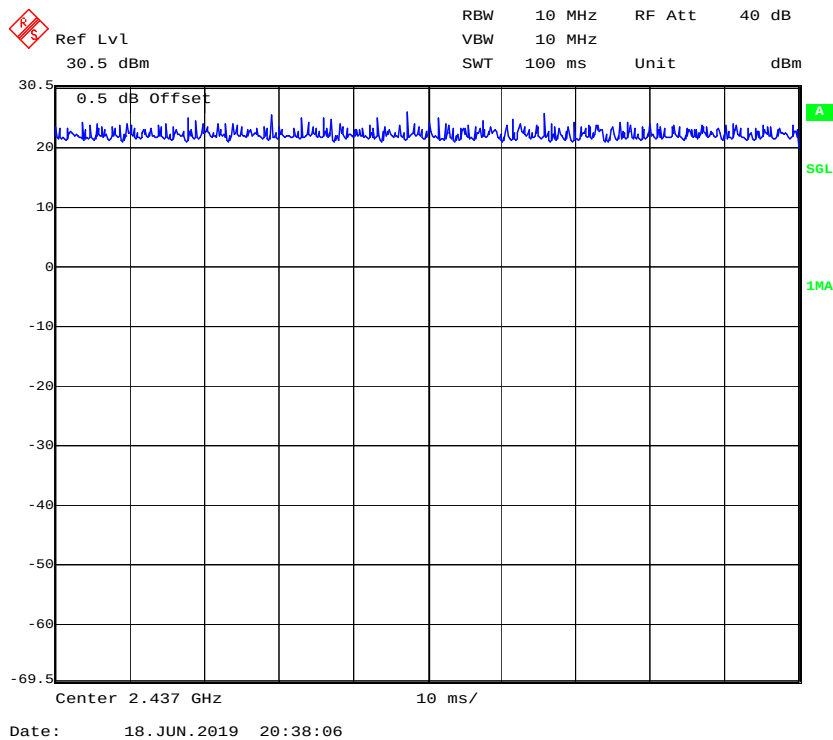

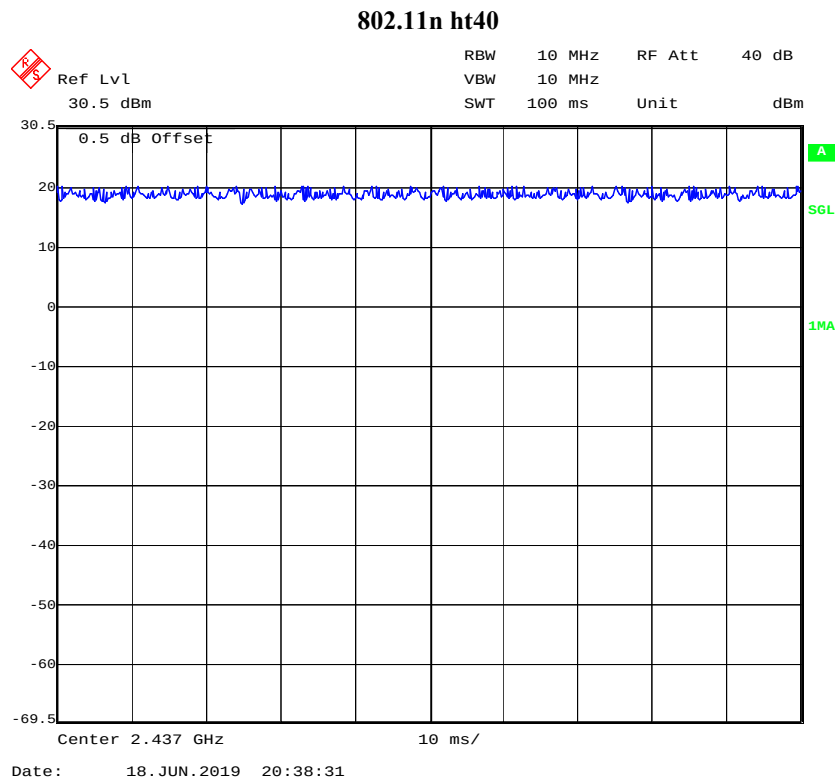

Equipment Modifications

No modification was made to the EUT.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	1CVM0C1
DELL	Laptop	PP11L	1CVM343

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Adapter cable	No	No	1	Adapter	EUT
RJ45 Cable	No	No	10	EUT	Laptop
RJ45 Cable	No	No	10	EUT	Laptop

Configuration of Test Setup

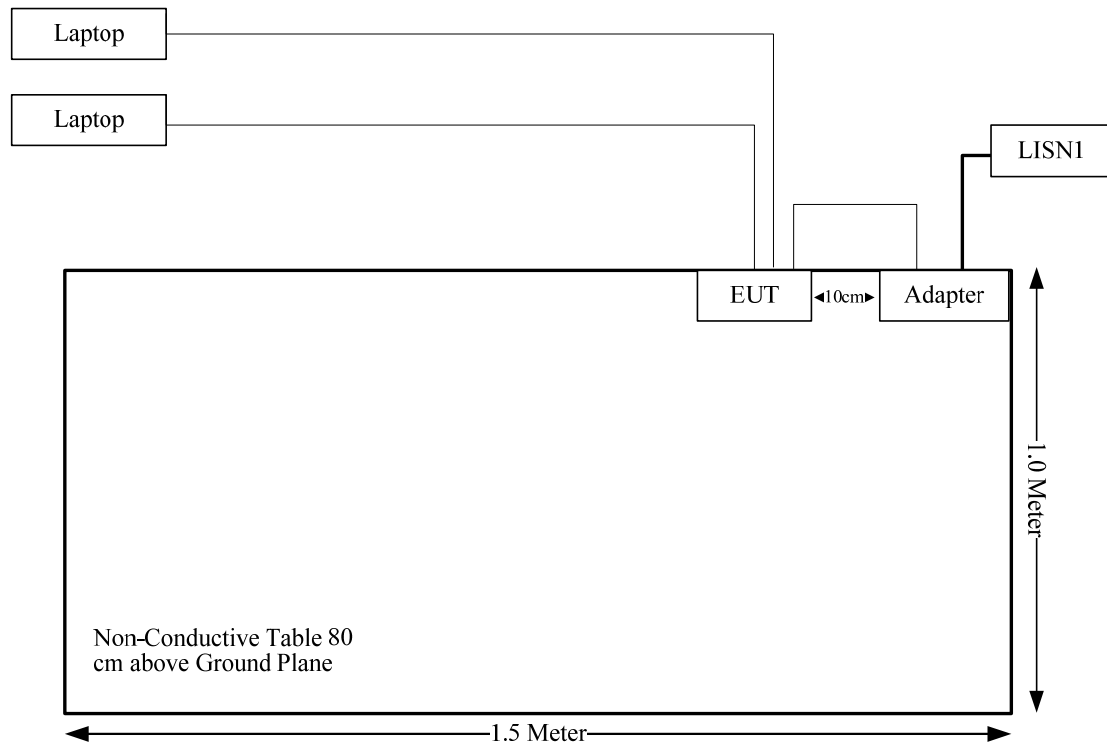

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Calculated Data:

Mode	Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
WLAN	2412-2462	3	2.00	29	794.33	20.00	0.32	1.0
WCDMA band 2	1850-1910	3.8	2.40	22	158.49	20.00	0.08	1.0
WCDMA Band 5	824-849	1	1.26	22	158.49	20.00	0.04	0.55
LTE Band 2	1850-1910	3.8	2.40	22	158.49	20.00	0.08	1.0
LTE band 4	1710-1755	4	2.51	22	158.49	20.00	0.08	1.0
LTE Band 5	824-849	1	1.26	23	199.53	20.00	0.05	0.55
LTE Band 7	2500-2570	3	2.00	22	158.49	20.00	0.06	1.0
LTE Band 66	1710-1780	4	2.51	22	158.49	20.00	0.08	1.0

Note: The maximum gain of inside and external antenna was used for calculation.

The WLAN and WWAN can transmit simultaneously:

$$\sum_i \frac{S_i}{S_{Limit,i}}$$

$$=S_{WLAN}/S_{limit-WLAN} + S_{WWAN}/S_{limit-WWAN}$$

$$=0.32/1+0.05/0.55$$

$$=0.41$$

$$< 1.0$$

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has 2 internal FPC antenna permanently attached to the unit for WLAN or 1 external dipole antenna use a unique type of connector to attach to the EUT, fulfill the requirement of this section. Please refer to the EUT photos and below information:

Antenna	Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
WLAN Inside antenna Chain 0	FPC	50	3.0 dBi/2.4-2.5GHz
WLAN Inside antenna Chain 1	FPC	50	3.0 dBi/2.4-2.5GHz
WLAN external antenna Chain 1	Dipole	50	3.0 dBi/2.4-2.5GHz


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a)

EUT Setup

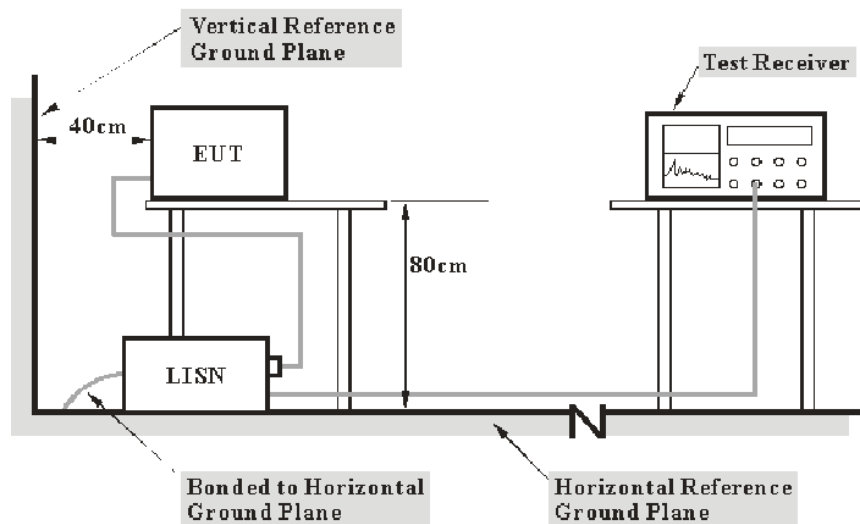

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main lisn with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2018-09-05	2019-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2018-12-10	2019-12-10
R&S	EMI Test Receiver	ESPI	100120	2019-05-09	2020-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	24.1°C
Relative Humidity:	49%
ATM Pressure:	100.6 kPa

The testing was performed by Lily Xie on 2019-06-06.


Test Mode: Transmitting (Wi-Fi mode 802.11b middle channel was the worst)

AC120 V, 60 Hz, Line:

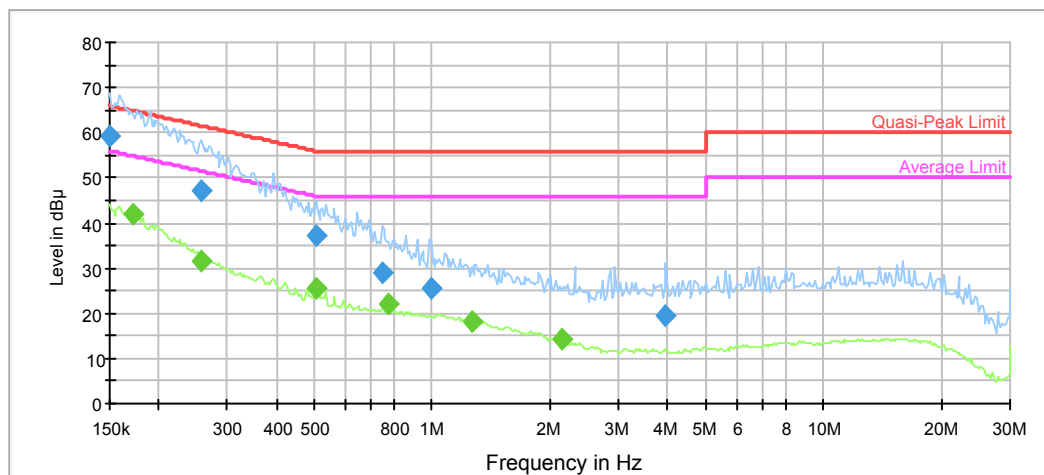

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	59.1	9.000	L1	11.2	6.9	66.0
0.256712	47.1	9.000	L1	10.3	14.4	61.5
0.505009	37.2	9.000	L1	9.9	18.8	56.0
0.744445	29.1	9.000	L1	9.8	26.9	56.0
0.993465	25.4	9.000	L1	9.8	30.6	56.0
3.961170	19.3	9.000	L1	9.8	36.7	56.0

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.172421	42.0	9.000	L1	10.9	12.8	54.8
0.256712	31.7	9.000	L1	10.3	19.8	51.5
0.505009	25.3	9.000	L1	9.9	20.7	46.0
0.774673	22.1	9.000	L1	9.8	23.9	46.0
1.261437	18.2	9.000	L1	9.8	27.8	46.0
2.137462	14.1	9.000	L1	9.7	31.9	46.0

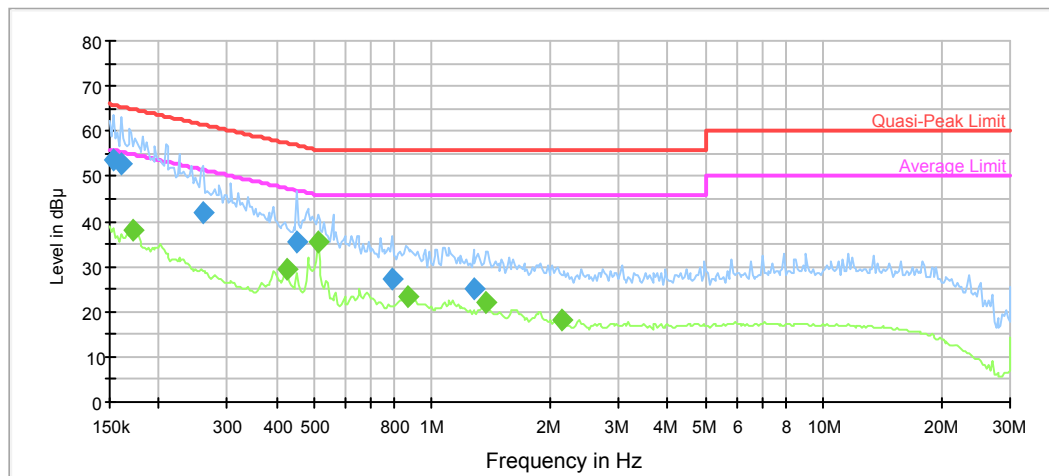AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.153015	53.5	9.000	N	11.1	12.3	65.8
0.160820	52.8	9.000	N	11.0	12.6	65.4
0.259279	42.1	9.000	N	10.3	19.4	61.5
0.452652	35.6	9.000	N	9.9	21.2	56.8
0.790244	27.5	9.000	N	9.8	28.5	56.0
1.274051	25.3	9.000	N	9.8	30.7	56.0

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.172421	38.1	9.000	N	10.9	16.7	54.8
0.426418	29.2	9.000	N	9.9	18.1	47.3
0.510059	35.4	9.000	N	9.9	10.6	46.0
0.864278	23.2	9.000	N	9.8	22.8	46.0
1.365955	22.0	9.000	N	9.8	24.0	46.0
2.137462	18.2	9.000	N	9.8	27.8	46.0


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1GHz:

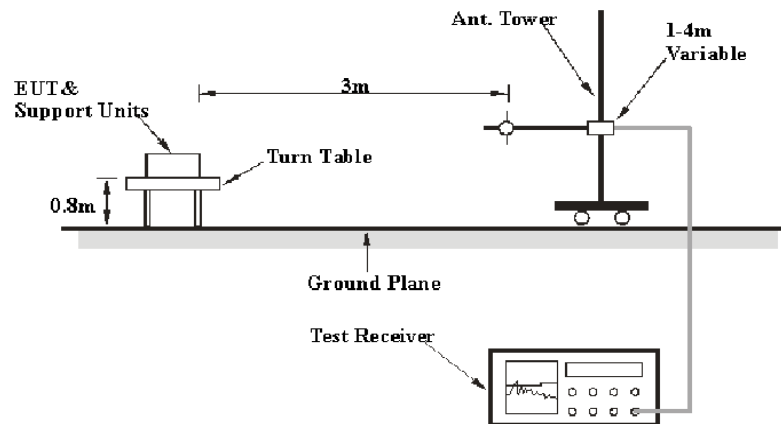

Above 1GHz:

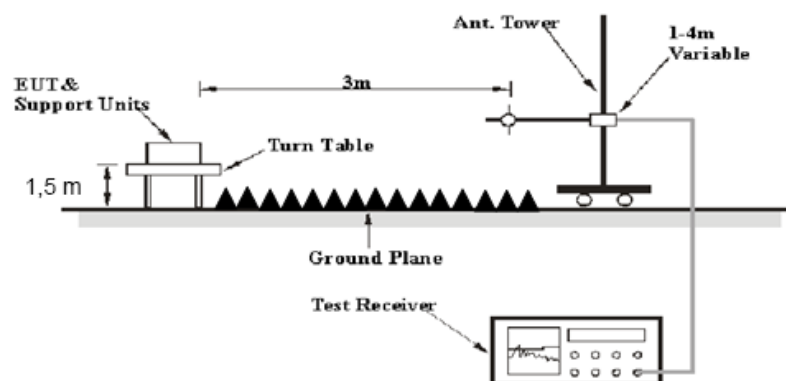

The radiated emission Below 1GHz tests were performed in the 3 meters chamber test site A, above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESR3	102453	2018-06-26	2019-06-26
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2019-05-06	2020-05-06
HP	Amplifier	8447D	2727A05902	2018-09-05	2019-09-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2019-05-09	2020-05-09
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2018-06-27	2019-06-27
MITEQ	Amplifier	AFS42-00101800- 25-S-42	2001271	2018-09-05	2019-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2018-06-27	2019-06-27
E-Microwave	Band-stop Filters	OBSF-2400-2483.5- S	OE01601525	2018-06-16	2019-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2018-06-16	2019-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24.1 oC
Relative Humidity:	49 %*
ATM Pressure:	100.4kPa

* The testing was performed by Blake Yang on 2019-06-06.


Test Result: Compliance, please Refer to the following data

Test Mode: Transmitting


1) 30MHz-1GHz

External antenna(802.11n 2TX was the worst):

Horizontal:

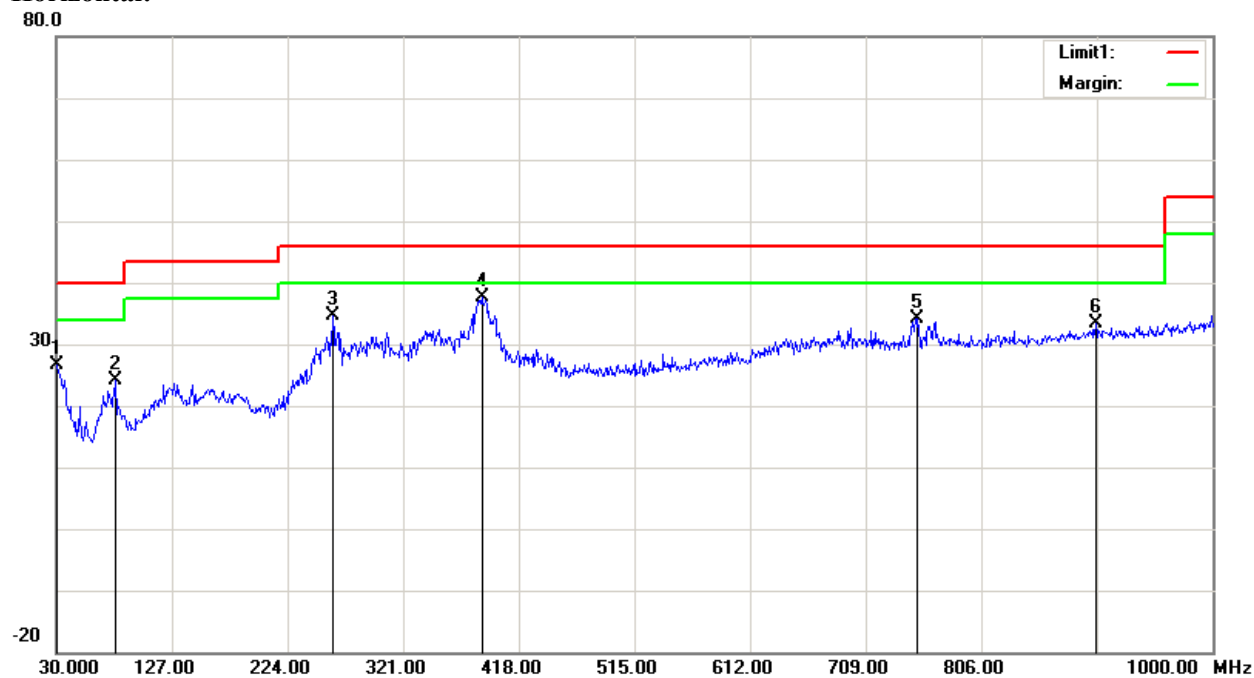


Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	24.93	peak	1.72	26.65	40.00	13.35
79.4700	35.37	peak	-11.20	24.17	40.00	15.83
261.8300	39.56	peak	-4.94	34.62	46.00	11.38
386.9600	40.10	peak	-2.38	37.72	46.00	8.28
752.6500	30.47	peak	3.73	34.20	46.00	11.80
902.0300	33.17	peak	0.14	33.31	46.00	12.69

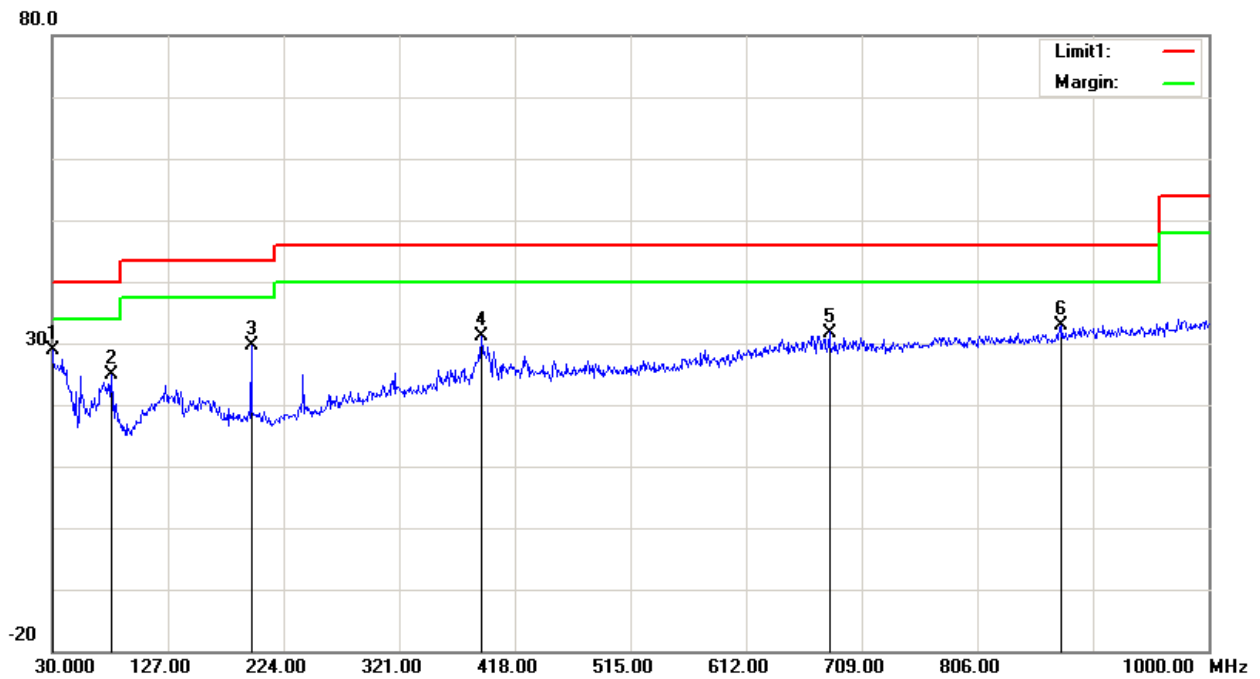Vertical:


Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	27.17	peak	1.72	28.89	40.00	11.11
79.4700	35.96	peak	-11.20	24.76	40.00	15.24
196.8400	36.11	peak	-6.44	29.67	43.50	13.83
389.8700	33.46	peak	-2.34	31.12	46.00	14.88
681.8400	29.09	peak	2.66	31.75	46.00	14.25
876.8100	27.36	peak	5.55	32.91	46.00	13.09

Inside Antenna(802.11n 2TX was the worst):

Horizontal:

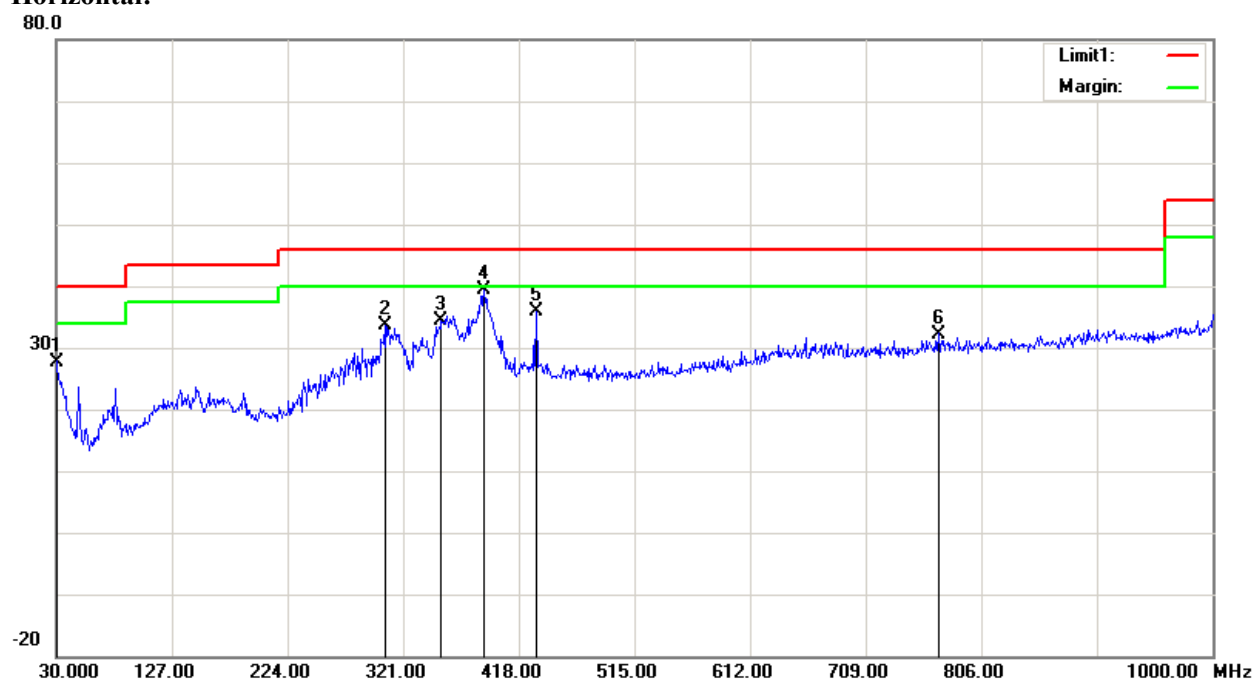

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	26.03	peak	1.72	27.75	40.00	12.25
305.4800	37.44	peak	-3.70	33.74	46.00	12.26
353.0100	37.42	peak	-2.93	34.49	46.00	11.51
388.9000	41.78	peak	-2.35	39.43	46.00	6.57
432.5500	37.18	peak	-1.25	35.93	46.00	10.07
770.1100	27.94	peak	4.31	32.25	46.00	13.75

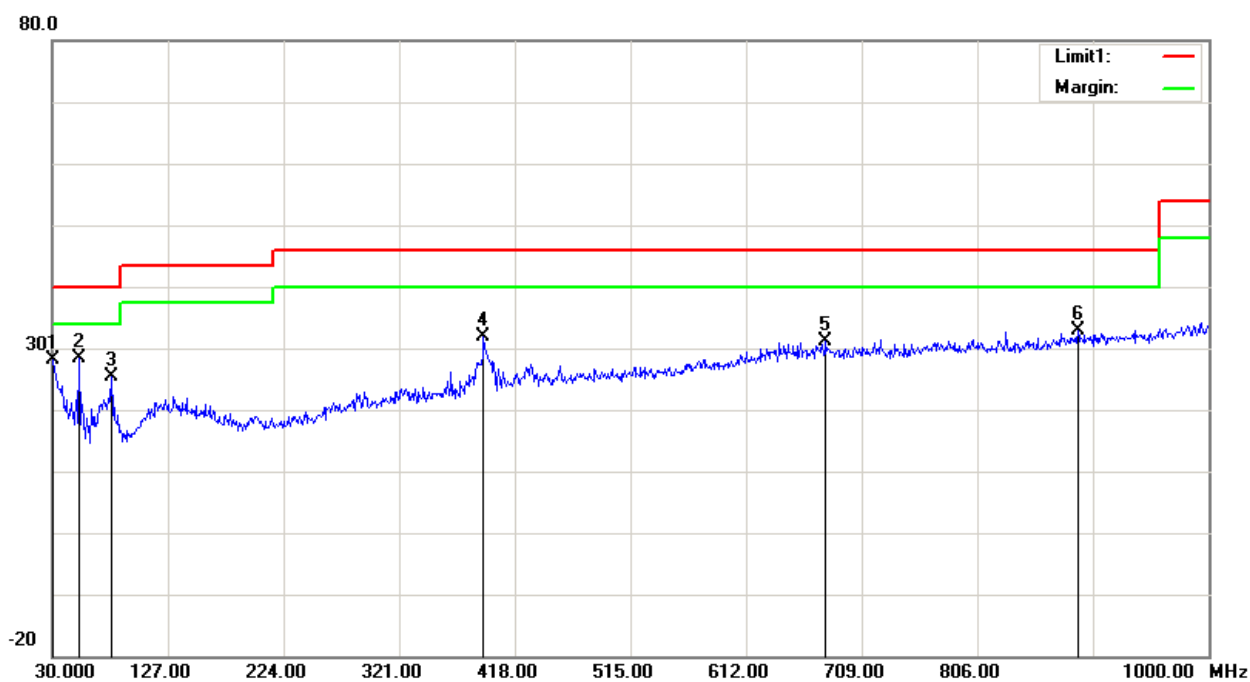Vertical:

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	26.34	peak	1.72	28.06	40.00	11.94
52.3100	40.28	peak	-11.84	28.44	40.00	11.56
79.4700	36.65	peak	-11.20	25.45	40.00	14.55
391.8100	34.23	peak	-2.24	31.99	46.00	14.01
678.9300	28.47	peak	2.63	31.10	46.00	14.90
890.3900	26.96	peak	5.90	32.86	46.00	13.14

**2) 1-25GHz:
802.11b Mode, Chain 0**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	79.73	PK	H	28.12	1.81	0.00	109.66	N/A	N/A
2412.00	75.93	AV	H	28.12	1.81	0.00	105.86	N/A	N/A
2412.00	65.07	PK	V	28.12	1.81	0.00	95.00	N/A	N/A
2412.00	61.30	AV	V	28.12	1.81	0.00	91.23	N/A	N/A
2390.00	29.26	PK	H	28.08	1.80	0.00	59.14	74.00	14.86
2390.00	16.59	AV	H	28.08	1.80	0.00	46.47	54.00	7.53
4824.00	56.25	PK	H	32.95	3.19	37.20	55.19	74.00	18.81
4824.00	54.17	AV	H	32.95	3.19	37.20	53.11	54.00	0.89
7236.00	44.79	PK	H	35.81	4.77	37.27	48.10	74.00	25.90
7236.00	31.91	AV	H	35.81	4.77	37.27	35.22	54.00	18.78
1066.00	64.57	PK	H	23.72	1.54	35.71	54.12	74.00	19.88
1066.00	62.12	AV	H	23.72	1.54	35.71	51.67	54.00	2.33
Middle Channel: 2437 MHz									
2437.00	78.86	PK	H	28.17	1.82	0.00	108.85	N/A	N/A
2437.00	75.11	AV	H	28.17	1.82	0.00	105.10	N/A	N/A
2437.00	64.58	PK	V	28.17	1.82	0.00	94.57	N/A	N/A
2437.00	61.02	AV	V	28.17	1.82	0.00	91.01	N/A	N/A
4874.00	55.74	PK	H	33.05	3.26	37.21	54.84	74.00	19.16
4874.00	53.56	AV	H	33.05	3.26	37.21	52.66	54.00	1.34
7311.00	44.67	PK	H	36.01	4.64	37.36	47.96	74.00	26.04
7311.00	31.80	AV	H	36.01	4.64	37.36	35.09	54.00	18.91
1066.00	64.33	PK	H	23.72	1.54	35.71	53.88	74.00	20.12
1066.00	62.02	AV	H	23.72	1.54	35.71	51.57	54.00	2.43
High Channel: 2462 MHz									
2462.00	79.94	PK	H	28.22	1.83	0.00	109.99	N/A	N/A
2462.00	76.03	AV	H	28.22	1.83	0.00	106.08	N/A	N/A
2462.00	66.54	PK	V	28.22	1.83	0.00	96.59	N/A	N/A
2462.00	61.97	AV	V	28.22	1.83	0.00	92.02	N/A	N/A
2483.50	27.98	PK	H	28.27	1.84	0.00	58.09	74.00	15.91
2483.50	14.69	AV	H	28.27	1.84	0.00	44.80	54.00	9.20
4924.00	56.87	PK	H	33.15	3.27	37.22	56.07	74.00	17.93
4924.00	54.00	AV	H	33.15	3.27	37.22	53.20	54.00	0.80
7386.00	44.82	PK	H	36.20	4.51	37.46	48.07	74.00	25.93
7386.00	31.97	AV	H	36.20	4.51	37.46	35.22	54.00	18.78
1066.00	64.32	PK	H	23.72	1.54	35.71	53.87	74.00	20.13
1066.00	62.33	AV	H	23.72	1.54	35.71	51.88	54.00	2.12

802.11b Mode, Chain 1(Inside Antenna):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	70.74	PK	H	28.12	1.81	0.00	100.67	N/A	N/A
2412.00	66.81	AV	H	28.12	1.81	0.00	96.74	N/A	N/A
2412.00	63.37	PK	V	28.12	1.81	0.00	93.30	N/A	N/A
2412.00	59.44	AV	V	28.12	1.81	0.00	89.37	N/A	N/A
2390.00	27.31	PK	H	28.08	1.80	0.00	57.19	74.00	16.81
2390.00	13.84	AV	H	28.08	1.80	0.00	43.72	54.00	10.28
4824.00	56.75	PK	H	32.95	3.19	37.20	55.69	74.00	18.31
4824.00	53.92	AV	H	32.95	3.19	37.20	52.86	54.00	1.14
7236.00	44.36	PK	H	35.81	4.77	37.27	47.67	74.00	26.33
7236.00	31.60	AV	H	35.81	4.77	37.27	34.91	54.00	19.09
1066.00	59.32	PK	H	23.72	1.54	35.71	48.87	74.00	25.13
1066.00	56.66	AV	H	23.72	1.54	35.71	46.21	54.00	7.79
Middle Channel: 2437 MHz									
2437.00	70.23	PK	H	28.17	1.82	0.00	100.22	N/A	N/A
2437.00	66.49	AV	H	28.17	1.82	0.00	96.48	N/A	N/A
2437.00	63.04	PK	V	28.17	1.82	0.00	93.03	N/A	N/A
2437.00	58.61	AV	V	28.17	1.82	0.00	88.60	N/A	N/A
4874.00	56.64	PK	H	33.05	3.26	37.21	55.74	74.00	18.26
4874.00	53.58	AV	H	33.05	3.26	37.21	52.68	54.00	1.32
7311.00	44.58	PK	H	36.01	4.64	37.36	47.87	74.00	26.13
7311.00	31.82	AV	H	36.01	4.64	37.36	35.11	54.00	18.89
1066.00	59.34	PK	H	23.72	1.54	35.71	48.89	74.00	25.11
1066.00	57.14	AV	H	23.72	1.54	35.71	46.69	54.00	7.31
High Channel: 2462 MHz									
2462.00	69.97	PK	H	28.22	1.83	0.00	100.02	N/A	N/A
2462.00	65.38	AV	H	28.22	1.83	0.00	95.43	N/A	N/A
2462.00	62.53	PK	V	28.22	1.83	0.00	92.58	N/A	N/A
2462.00	57.81	AV	V	28.22	1.83	0.00	87.86	N/A	N/A
2483.50	27.16	PK	H	28.27	1.84	0.00	57.27	74.00	16.73
2483.50	13.58	AV	H	28.27	1.84	0.00	43.69	54.00	10.31
4924.00	55.96	PK	H	33.15	3.27	37.22	55.16	74.00	18.84
4924.00	53.41	AV	H	33.15	3.27	37.22	52.61	54.00	1.39
7386.00	46.52	PK	H	36.20	4.51	37.46	49.77	74.00	24.23
7386.00	33.26	AV	H	36.20	4.51	37.46	36.51	54.00	17.49
1066.00	58.45	PK	H	23.72	1.54	35.71	48.00	74.00	26.00
1066.00	56.22	AV	H	23.72	1.54	35.71	45.77	54.00	8.23

802.11b Mode, Chain 1(External Antenna)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	63.71	PK	H	28.12	1.81	0.00	93.64	N/A	N/A
2412.00	59.74	AV	H	28.12	1.81	0.00	89.67	N/A	N/A
2412.00	69.88	PK	V	28.12	1.81	0.00	99.81	N/A	N/A
2412.00	66.06	AV	V	28.12	1.81	0.00	95.99	N/A	N/A
2390.00	26.58	PK	V	28.08	1.80	0.00	56.46	74.00	17.54
2390.00	13.57	AV	V	28.08	1.80	0.00	43.45	54.00	10.55
4824.00	52.76	PK	V	32.95	3.19	37.20	51.70	74.00	22.30
4824.00	47.42	AV	V	32.95	3.19	37.20	46.36	54.00	7.64
7236.00	44.75	PK	V	35.81	4.77	37.27	48.06	74.00	25.94
7236.00	31.59	AV	V	35.81	4.77	37.27	34.90	54.00	19.10
1066.00	59.34	PK	H	23.72	1.54	35.71	48.89	74.00	25.11
1066.00	57.51	AV	H	23.72	1.54	35.71	47.06	54.00	6.94
Middle Channel: 2437 MHz									
2437.00	62.17	PK	H	28.17	1.82	0.00	92.16	N/A	N/A
2437.00	58.05	AV	H	28.17	1.82	0.00	88.04	N/A	N/A
2437.00	68.31	PK	V	28.17	1.82	0.00	98.30	N/A	N/A
2437.00	64.10	AV	V	28.17	1.82	0.00	94.09	N/A	N/A
4874.00	53.24	PK	V	33.05	3.26	37.21	52.34	74.00	21.66
4874.00	49.16	AV	V	33.05	3.26	37.21	48.26	54.00	5.74
7311.00	45.10	PK	V	36.01	4.64	37.36	48.39	74.00	25.61
7311.00	31.02	AV	V	36.01	4.64	37.36	34.31	54.00	19.69
1066.00	58.22	PK	H	23.72	1.54	35.71	47.77	74.00	26.23
1066.00	56.31	AV	H	23.72	1.54	35.71	45.86	54.00	8.14
High Channel: 2462 MHz									
2462.00	62.27	PK	H	28.22	1.83	0.00	92.32	N/A	N/A
2462.00	58.04	AV	H	28.22	1.83	0.00	88.09	N/A	N/A
2462.00	68.04	PK	V	28.22	1.83	0.00	98.09	N/A	N/A
2462.00	63.82	AV	V	28.22	1.83	0.00	93.87	N/A	N/A
2483.50	27.18	PK	V	28.27	1.84	0.00	57.29	74.00	16.71
2483.50	13.52	AV	V	28.27	1.84	0.00	43.63	54.00	10.37
4924.00	52.63	PK	V	33.15	3.27	37.22	51.83	74.00	22.17
4924.00	47.53	AV	V	33.15	3.27	37.22	46.73	54.00	7.27
7386.00	46.20	PK	V	36.20	4.51	37.46	49.45	74.00	24.55
7386.00	32.65	AV	V	36.20	4.51	37.46	35.90	54.00	18.10
1066.00	58.14	PK	H	23.72	1.54	35.71	47.69	74.00	26.31
1066.00	55.98	AV	H	23.72	1.54	35.71	45.53	54.00	8.47

802.11g Mode, Chain 0

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	81.14	PK	H	28.12	1.81	0.00	111.07	N/A	N/A
2412.00	73.03	AV	H	28.12	1.81	0.00	102.96	N/A	N/A
2412.00	74.11	PK	V	28.12	1.81	0.00	104.04	N/A	N/A
2412.00	66.02	AV	V	28.12	1.81	0.00	95.95	N/A	N/A
2390.00	38.29	PK	H	28.08	1.80	0.00	68.17	74.00	5.83
2390.00	21.65	AV	H	28.08	1.80	0.00	51.53	54.00	2.47
4824.00	57.98	PK	H	32.95	3.19	37.20	56.92	74.00	17.08
4824.00	42.68	AV	H	32.95	3.19	37.20	41.62	54.00	12.38
7236.00	48.53	PK	H	35.81	4.77	37.27	51.84	74.00	22.16
7236.00	33.21	AV	H	35.81	4.77	37.27	36.52	54.00	17.48
1066.00	65.21	PK	H	23.72	1.54	35.71	54.76	74.00	19.24
1066.00	62.31	AV	H	23.72	1.54	35.71	51.86	54.00	2.14
Middle Channel: 2437 MHz									
2437.00	81.72	PK	H	28.17	1.82	0.00	111.71	N/A	N/A
2437.00	73.51	AV	H	28.17	1.82	0.00	103.50	N/A	N/A
2437.00	74.36	PK	V	28.17	1.82	0.00	104.35	N/A	N/A
2437.00	66.37	AV	V	28.17	1.82	0.00	96.36	N/A	N/A
4874.00	55.31	PK	H	33.05	3.26	37.21	54.41	74.00	19.59
4874.00	42.83	AV	H	33.05	3.26	37.21	41.93	54.00	12.07
7311.00	47.59	PK	H	36.01	4.64	37.36	50.88	74.00	23.12
7311.00	33.29	AV	H	36.01	4.64	37.36	36.58	54.00	17.42
1066.00	65.21	PK	H	23.72	1.54	35.71	54.76	74.00	19.24
1066.00	61.98	AV	H	23.72	1.54	35.71	51.53	54.00	2.47
High Channel: 2462 MHz									
2462.00	80.84	PK	H	28.22	1.83	0.00	110.89	N/A	N/A
2462.00	72.37	AV	H	28.22	1.83	0.00	102.42	N/A	N/A
2462.00	73.52	PK	V	28.22	1.83	0.00	103.57	N/A	N/A
2462.00	65.75	AV	V	28.22	1.83	0.00	95.80	N/A	N/A
2483.50	38.25	PK	H	28.27	1.84	0.00	68.36	74.00	5.64
2483.50	19.84	AV	H	28.27	1.84	0.00	49.95	54.00	4.05
4924.00	55.67	PK	H	33.15	3.27	37.22	54.87	74.00	19.13
4924.00	42.96	AV	H	33.15	3.27	37.22	42.16	54.00	11.84
7386.00	46.54	PK	H	36.20	4.51	37.46	49.79	74.00	24.21
7386.00	33.98	AV	H	36.20	4.51	37.46	37.23	54.00	16.77
1066.00	64.21	PK	H	23.72	1.54	35.71	53.76	74.00	20.24
1066.00	61.98	AV	H	23.72	1.54	35.71	51.53	54.00	2.47

802.11g Mode, Chain 1(Inside Antenna)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	77.53	PK	H	28.12	1.81	0.00	107.46	N/A	N/A
2412.00	69.16	AV	H	28.12	1.81	0.00	99.09	N/A	N/A
2412.00	70.27	PK	V	28.12	1.81	0.00	100.20	N/A	N/A
2412.00	62.71	AV	V	28.12	1.81	0.00	92.64	N/A	N/A
2390.00	29.18	PK	H	28.08	1.80	0.00	59.06	74.00	14.94
2390.00	16.58	AV	H	28.08	1.80	0.00	46.46	54.00	7.54
4824.00	62.07	PK	H	32.95	3.19	37.20	61.01	74.00	12.99
4824.00	49.36	AV	H	32.95	3.19	37.20	48.30	54.00	5.70
7236.00	46.25	PK	H	35.81	4.77	37.27	49.56	74.00	24.44
7236.00	33.05	AV	H	35.81	4.77	37.27	36.36	54.00	17.64
1066.00	58.32	PK	H	23.72	1.54	35.71	47.87	74.00	26.13
1066.00	56.31	AV	H	23.72	1.54	35.71	45.86	54.00	8.14
Middle Channel: 2437 MHz									
2437.00	77.36	PK	H	28.17	1.82	0.00	107.35	N/A	N/A
2437.00	69.47	AV	H	28.17	1.82	0.00	99.46	N/A	N/A
2437.00	70.14	PK	V	28.17	1.82	0.00	100.13	N/A	N/A
2437.00	62.33	AV	V	28.17	1.82	0.00	92.32	N/A	N/A
4874.00	60.36	PK	H	33.05	3.26	37.21	59.46	74.00	14.54
4874.00	48.44	AV	H	33.05	3.26	37.21	47.54	54.00	6.46
7311.00	46.75	PK	H	36.01	4.64	37.36	50.04	74.00	23.96
7311.00	33.85	AV	H	36.01	4.64	37.36	37.14	54.00	16.86
1066.00	57.63	PK	H	23.72	1.54	35.71	47.18	74.00	26.82
1066.00	55.68	AV	H	23.72	1.54	35.71	45.23	54.00	8.77
High Channel: 2462 MHz									
2462.00	76.81	PK	H	28.22	1.83	0.00	106.86	N/A	N/A
2462.00	68.94	AV	H	28.22	1.83	0.00	98.99	N/A	N/A
2462.00	69.87	PK	V	28.22	1.83	0.00	99.92	N/A	N/A
2462.00	61.47	AV	V	28.22	1.83	0.00	91.52	N/A	N/A
2483.50	27.96	PK	H	28.27	1.84	0.00	58.07	74.00	15.93
2483.50	15.46	AV	H	28.27	1.84	0.00	45.57	54.00	8.43
4924.00	59.44	PK	H	33.15	3.27	37.22	58.64	74.00	15.36
4924.00	47.42	AV	H	33.15	3.27	37.22	46.62	54.00	7.38
7386.00	47.54	PK	H	36.20	4.51	37.46	50.79	74.00	23.21
7386.00	34.15	AV	H	36.20	4.51	37.46	37.40	54.00	16.60
1066.00	58.98	PK	H	23.72	1.54	35.71	48.53	74.00	25.47
1066.00	56.74	AV	H	23.72	1.54	35.71	46.29	54.00	7.71

802.11g Mode, Chain 1(External Antenna)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	68.00	PK	H	28.12	1.81	0.00	97.93	N/A	N/A
2412.00	60.14	AV	H	28.12	1.81	0.00	90.07	N/A	N/A
2412.00	76.27	PK	V	28.12	1.81	0.00	106.20	N/A	N/A
2412.00	67.72	AV	V	28.12	1.81	0.00	97.65	N/A	N/A
2390.00	28.22	PK	V	28.08	1.80	0.00	58.10	74.00	15.90
2390.00	14.95	AV	V	28.08	1.80	0.00	44.83	54.00	9.17
4824.00	57.08	PK	V	32.95	3.19	37.20	56.02	74.00	17.98
4824.00	44.28	AV	V	32.95	3.19	37.20	43.22	54.00	10.78
7236.00	45.89	PK	V	35.81	4.77	37.27	49.20	74.00	24.80
7236.00	33.28	AV	V	35.81	4.77	37.27	36.59	54.00	17.41
1066.00	59.32	PK	H	23.72	1.54	35.71	48.87	74.00	25.13
1066.00	56.74	AV	H	23.72	1.54	35.71	46.29	54.00	7.71
Middle Channel: 2437 MHz									
2437.00	68.97	PK	H	28.17	1.82	0.00	98.96	N/A	N/A
2437.00	60.25	AV	H	28.17	1.82	0.00	90.24	N/A	N/A
2437.00	76.68	PK	V	28.17	1.82	0.00	106.67	N/A	N/A
2437.00	68.97	AV	V	28.17	1.82	0.00	98.96	N/A	N/A
4874.00	56.88	PK	V	33.05	3.26	37.21	55.98	74.00	18.02
4874.00	44.65	AV	V	33.05	3.26	37.21	43.75	54.00	10.25
7311.00	46.52	PK	V	36.01	4.64	37.36	49.81	74.00	24.19
7311.00	33.41	AV	V	36.01	4.64	37.36	36.70	54.00	17.30
1066.00	58.65	PK	H	23.72	1.54	35.71	48.20	74.00	25.80
1066.00	56.30	AV	H	23.72	1.54	35.71	45.85	54.00	8.15
High Channel: 2462 MHz									
2462.00	65.84	PK	H	28.22	1.83	0.00	95.89	N/A	N/A
2462.00	57.99	AV	H	28.22	1.83	0.00	88.04	N/A	N/A
2462.00	73.53	PK	V	28.22	1.83	0.00	103.58	N/A	N/A
2462.00	65.11	AV	V	28.22	1.83	0.00	95.16	N/A	N/A
2483.50	28.00	PK	V	28.27	1.84	0.00	58.11	74.00	15.89
2483.50	14.85	AV	V	28.27	1.84	0.00	44.96	54.00	9.04
4924.00	57.12	PK	V	33.15	3.27	37.22	56.32	74.00	17.68
4924.00	44.76	AV	V	33.15	3.27	37.22	43.96	54.00	10.04
7386.00	46.36	PK	V	36.20	4.51	37.46	49.61	74.00	24.39
7386.00	32.89	AV	V	36.20	4.51	37.46	36.14	54.00	17.86
1066.00	58.95	PK	H	23.72	1.54	35.71	48.50	74.00	25.50
1066.00	56.31	AV	H	23.72	1.54	35.71	45.86	54.00	8.14

802.11n ht20 Mode,2TX(Inside Antenna)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	76.36	PK	H	28.12	1.81	0.00	106.29	N/A	N/A
2412.00	67.64	AV	H	28.12	1.81	0.00	97.57	N/A	N/A
2412.00	68.98	PK	V	28.12	1.81	0.00	98.91	N/A	N/A
2412.00	58.14	AV	V	28.12	1.81	0.00	88.07	N/A	N/A
2390.00	29.16	PK	H	28.08	1.80	0.00	59.04	74.00	14.96
2390.00	15.40	AV	H	28.08	1.80	0.00	45.28	54.00	8.72
4824.00	54.33	PK	H	32.95	3.19	37.20	53.27	74.00	20.73
4824.00	40.36	AV	H	32.95	3.19	37.20	39.30	54.00	14.70
7236.00	45.87	PK	H	35.81	4.77	37.27	49.18	74.00	24.82
7236.00	33.01	AV	H	35.81	4.77	37.27	36.32	54.00	17.68
1066.00	64.32	PK	H	23.72	1.54	35.71	53.87	74.00	20.13
1066.00	61.35	AV	H	23.72	1.54	35.71	50.90	54.00	3.10
Middle Channel: 2437 MHz									
2437.00	75.11	PK	H	28.17	1.82	0.00	105.10	N/A	N/A
2437.00	65.74	AV	H	28.17	1.82	0.00	95.73	N/A	N/A
2437.00	68.65	PK	V	28.17	1.82	0.00	98.64	N/A	N/A
2437.00	58.97	AV	V	28.17	1.82	0.00	88.96	N/A	N/A
4874.00	52.65	PK	H	33.05	3.26	37.21	51.75	74.00	22.25
4874.00	39.65	AV	H	33.05	3.26	37.21	38.75	54.00	15.25
7311.00	46.36	PK	H	36.01	4.64	37.36	49.65	74.00	24.35
7311.00	32.58	AV	H	36.01	4.64	37.36	35.87	54.00	18.13
1066.00	64.32	PK	H	23.72	1.54	35.71	53.87	74.00	20.13
1066.00	61.31	AV	H	23.72	1.54	35.71	50.86	54.00	3.14
High Channel: 2462 MHz									
2462.00	74.61	PK	H	28.22	1.83	0.00	104.66	N/A	N/A
2462.00	65.65	AV	H	28.22	1.83	0.00	95.70	N/A	N/A
2462.00	66.36	PK	V	28.22	1.83	0.00	96.41	N/A	N/A
2462.00	56.79	AV	V	28.22	1.83	0.00	86.84	N/A	N/A
2483.50	28.67	PK	H	28.27	1.84	0.00	58.78	74.00	15.22
2483.50	14.70	AV	H	28.27	1.84	0.00	44.81	54.00	9.19
4924.00	53.56	PK	H	33.15	3.27	37.22	52.76	74.00	21.24
4924.00	39.98	AV	H	33.15	3.27	37.22	39.18	54.00	14.82
7386.00	46.10	PK	H	36.20	4.51	37.46	49.35	74.00	24.65
7386.00	32.69	AV	H	36.20	4.51	37.46	35.94	54.00	18.06
1066.00	64.22	PK	H	23.72	1.54	35.71	53.77	74.00	20.23
1066.00	61.98	AV	H	23.72	1.54	35.71	51.53	54.00	2.47

802.11n ht20 Mode, 2TX(External Antenna)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	74.22	PK	H	28.12	1.81	0.00	104.15	N/A	N/A
2412.00	65.72	AV	H	28.12	1.81	0.00	95.65	N/A	N/A
2412.00	72.18	PK	V	28.12	1.81	0.00	102.11	N/A	N/A
2412.00	63.54	AV	V	28.12	1.81	0.00	93.47	N/A	N/A
2390.00	29.19	PK	H	28.08	1.80	0.00	59.07	74.00	14.93
2390.00	15.92	AV	H	28.08	1.80	0.00	45.80	54.00	8.20
4824.00	51.36	PK	H	32.95	3.19	37.20	50.30	74.00	23.70
4824.00	39.24	AV	H	32.95	3.19	37.20	38.18	54.00	15.82
7236.00	46.85	PK	H	35.81	4.77	37.27	50.16	74.00	23.84
7236.00	33.69	AV	H	35.81	4.77	37.27	37.00	54.00	17.00
1066.00	65.33	PK	H	23.72	1.54	35.71	54.88	74.00	19.12
1066.00	62.10	AV	H	23.72	1.54	35.71	51.65	54.00	2.35
Middle Channel: 2437 MHz									
2437.00	76.12	PK	H	28.17	1.82	0.00	106.11	N/A	N/A
2437.00	67.52	AV	H	28.17	1.82	0.00	97.51	N/A	N/A
2437.00	74.65	PK	V	28.17	1.82	0.00	104.64	N/A	N/A
2437.00	65.70	AV	V	28.17	1.82	0.00	95.69	N/A	N/A
4874.00	51.33	PK	H	33.05	3.26	37.21	50.43	74.00	23.57
4874.00	39.94	AV	H	33.05	3.26	37.21	39.04	54.00	14.96
7311.00	46.52	PK	H	36.01	4.64	37.36	49.81	74.00	24.19
7311.00	33.54	AV	H	36.01	4.64	37.36	36.83	54.00	17.17
1066.00	65.05	PK	H	23.72	1.54	35.71	54.60	74.00	19.40
1066.00	62.21	AV	H	23.72	1.54	35.71	51.76	54.00	2.24
High Channel: 2462 MHz									
2462.00	76.48	PK	H	28.22	1.83	0.00	106.53	N/A	N/A
2462.00	67.60	AV	H	28.22	1.83	0.00	97.65	N/A	N/A
2462.00	74.12	PK	V	28.22	1.83	0.00	104.17	N/A	N/A
2462.00	65.95	AV	V	28.22	1.83	0.00	96.00	N/A	N/A
2483.50	28.97	PK	H	28.27	1.84	0.00	59.08	74.00	14.92
2483.50	15.71	AV	H	28.27	1.84	0.00	45.82	54.00	8.18
4924.00	50.25	PK	H	33.15	3.27	37.22	49.45	74.00	24.55
4924.00	38.46	AV	H	33.15	3.27	37.22	37.66	54.00	16.34
7386.00	46.44	PK	H	36.20	4.51	37.46	49.69	74.00	24.31
7386.00	32.36	AV	H	36.20	4.51	37.46	35.61	54.00	18.39
1066.00	64.32	PK	H	23.72	1.54	35.71	53.87	74.00	20.13
1066.00	61.96	AV	H	23.72	1.54	35.71	51.51	54.00	2.49

802.11n ht40 Mode, 2TX(Inside Antenna)




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2422 MHz									
2422.00	73.64	PK	H	28.14	1.81	0.00	103.59	N/A	N/A
2422.00	63.54	AV	H	28.14	1.81	0.00	93.49	N/A	N/A
2422.00	66.32	PK	V	28.14	1.81	0.00	96.27	N/A	N/A
2422.00	56.74	AV	V	28.14	1.81	0.00	86.69	N/A	N/A
2390.00	29.65	PK	H	28.08	1.80	0.00	59.53	74.00	14.47
2390.00	16.10	AV	H	28.08	1.80	0.00	45.98	54.00	8.02
4844.00	50.56	PK	H	32.99	3.22	37.20	49.57	74.00	24.43
4844.00	38.21	AV	H	32.99	3.22	37.20	37.22	54.00	16.78
7266.00	45.69	PK	H	35.89	4.72	37.31	48.99	74.00	25.01
7266.00	33.41	AV	H	35.89	4.72	37.31	36.71	54.00	17.29
1066.00	64.32	PK	H	23.72	1.54	35.71	53.87	74.00	20.13
1066.00	62.25	AV	H	23.72	1.54	35.71	51.80	54.00	2.20
Middle Channel: 2437 MHz									
2437.00	71.63	PK	H	28.17	1.82	0.00	101.62	N/A	N/A
2437.00	61.47	AV	H	28.17	1.82	0.00	91.46	N/A	N/A
2437.00	64.25	PK	V	28.17	1.82	0.00	94.24	N/A	N/A
2437.00	54.72	AV	V	28.17	1.82	0.00	84.71	N/A	N/A
4874.00	49.52	PK	H	33.05	3.26	37.21	48.62	74.00	25.38
4874.00	37.41	AV	H	33.05	3.26	37.21	36.51	54.00	17.49
7311.00	45.48	PK	H	36.01	4.64	37.36	48.77	74.00	25.23
7311.00	33.05	AV	H	36.01	4.64	37.36	36.34	54.00	17.66
1066.00	64.32	PK	H	23.72	1.54	35.71	53.87	74.00	20.13
1066.00	62.36	AV	H	23.72	1.54	35.71	51.91	54.00	2.09
High Channel: 2452 MHz									
2452.00	71.83	PK	H	28.20	1.83	0.00	101.86	N/A	N/A
2452.00	61.58	AV	H	28.20	1.83	0.00	91.61	N/A	N/A
2452.00	64.19	PK	V	28.20	1.83	0.00	94.22	N/A	N/A
2452.00	54.63	AV	V	28.20	1.83	0.00	84.66	N/A	N/A
2483.50	29.51	PK	H	28.27	1.84	0.00	59.62	74.00	14.38
2483.50	15.25	AV	H	28.27	1.84	0.00	45.36	54.00	8.64
4904.00	48.69	PK	H	33.11	3.30	37.21	47.89	74.00	26.11
4904.00	36.55	AV	H	33.11	3.30	37.21	35.75	54.00	18.25
7356.00	45.51	PK	H	36.13	4.56	37.42	48.78	74.00	25.22
7356.00	32.68	AV	H	36.13	4.56	37.42	35.95	54.00	18.05
1066.00	63.58	PK	H	23.72	1.54	35.71	53.13	74.00	20.87
1066.00	61.35	AV	H	23.72	1.54	35.71	50.90	54.00	3.10

802.11n ht40 Mode, 2TX(External Antenna)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2422 MHz									
2422.00	73.52	PK	H	28.14	1.81	0.00	103.47	N/A	N/A
2422.00	64.09	AV	H	28.14	1.81	0.00	94.04	N/A	N/A
2422.00	70.20	PK	V	28.14	1.81	0.00	100.15	N/A	N/A
2422.00	61.03	AV	V	28.14	1.81	0.00	90.98	N/A	N/A
2390.00	29.76	PK	H	28.08	1.80	0.00	59.64	74.00	14.36
2390.00	17.24	AV	H	28.08	1.80	0.00	47.12	54.00	6.88
4844.00	47.15	PK	H	32.99	3.22	37.20	46.16	74.00	27.84
4844.00	34.60	AV	H	32.99	3.22	37.20	33.61	54.00	20.39
7266.00	46.30	PK	H	35.89	4.72	37.31	49.60	74.00	24.40
7266.00	33.71	AV	H	35.89	4.72	37.31	37.01	54.00	16.99
1066.00	64.33	PK	H	23.72	1.54	35.71	53.88	74.00	20.12
1066.00	62.30	AV	H	23.72	1.54	35.71	51.85	54.00	2.15
Middle Channel: 2437 MHz									
2437.00	72.53	PK	H	28.17	1.82	0.00	102.52	N/A	N/A
2437.00	63.14	AV	H	28.17	1.82	0.00	93.13	N/A	N/A
2437.00	69.32	PK	V	28.17	1.82	0.00	99.31	N/A	N/A
2437.00	60.17	AV	V	28.17	1.82	0.00	90.16	N/A	N/A
4874.00	46.58	PK	H	33.05	3.26	37.21	45.68	74.00	28.32
4874.00	34.12	AV	H	33.05	3.26	37.21	33.22	54.00	20.78
7311.00	46.23	PK	H	36.01	4.64	37.36	49.52	74.00	24.48
7311.00	33.25	AV	H	36.01	4.64	37.36	36.54	54.00	17.46
1066.00	64.15	PK	H	23.72	1.54	35.71	53.70	74.00	20.30
1066.00	62.22	AV	H	23.72	1.54	35.71	51.77	54.00	2.23
High Channel: 2452 MHz									
2452.00	73.12	PK	H	28.20	1.83	0.00	103.15	N/A	N/A
2452.00	63.31	AV	H	28.20	1.83	0.00	93.34	N/A	N/A
2452.00	70.26	PK	V	28.20	1.83	0.00	100.29	N/A	N/A
2452.00	60.98	AV	V	28.20	1.83	0.00	91.01	N/A	N/A
2483.50	28.58	PK	H	28.27	1.84	0.00	58.69	74.00	15.31
2483.50	15.63	AV	H	28.27	1.84	0.00	45.74	54.00	8.26
4904.00	47.74	PK	H	33.11	3.30	37.21	46.94	74.00	27.06
4904.00	34.12	AV	H	33.11	3.30	37.21	33.32	54.00	20.68
7356.00	46.33	PK	H	36.13	4.56	37.42	49.60	74.00	24.40
7356.00	32.36	AV	H	36.13	4.56	37.42	35.63	54.00	18.37
1066.00	64.70	PK	H	23.72	1.54	35.71	54.25	74.00	19.75
1066.00	62.18	AV	H	23.72	1.54	35.71	51.73	54.00	2.27




Test plots(Chain 0, 802.11 b mode High channel was the worst)
Horizontal:

Fundamental
Test with Band
Rejection Filter

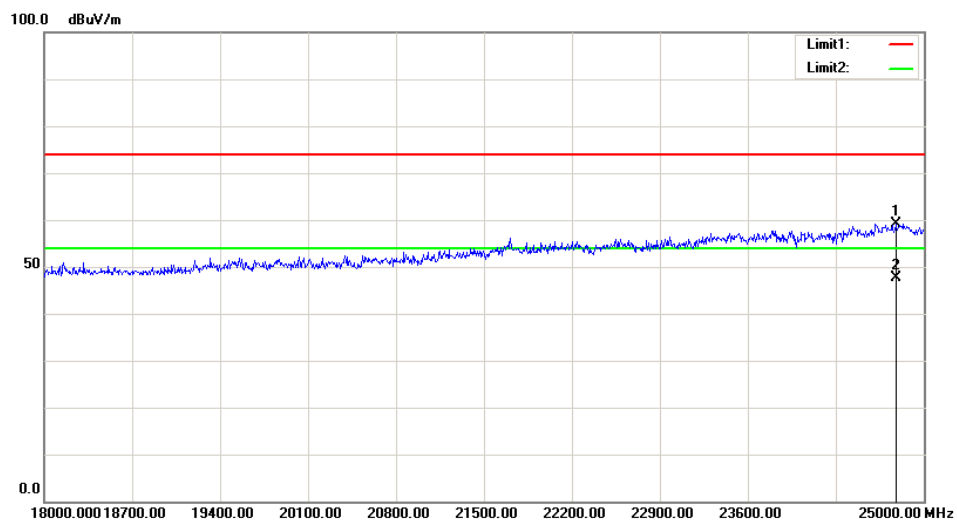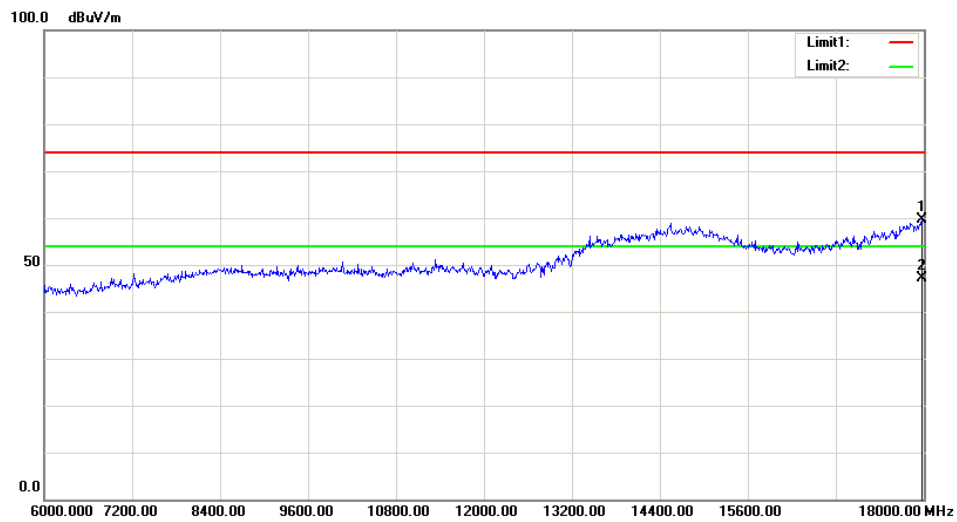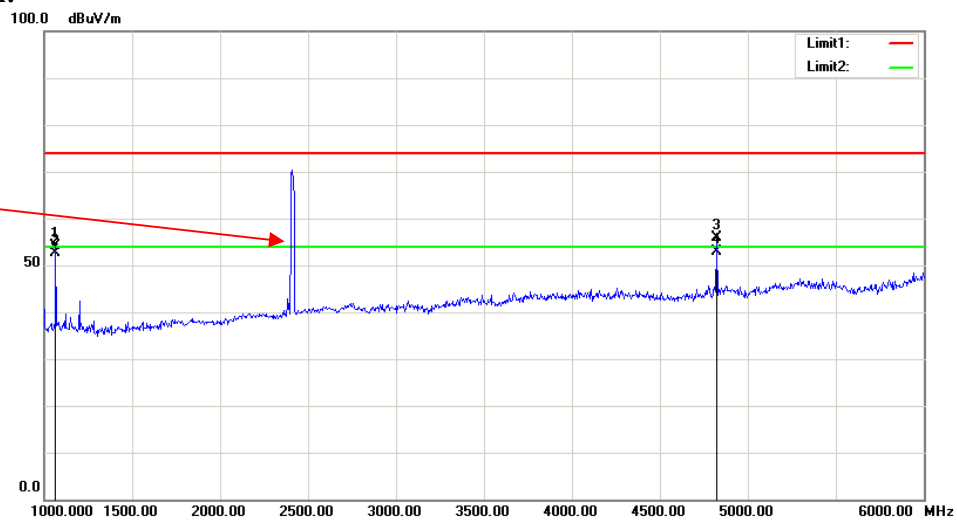

Vertical:

Fundamental
Test with Band
Rejection Filter

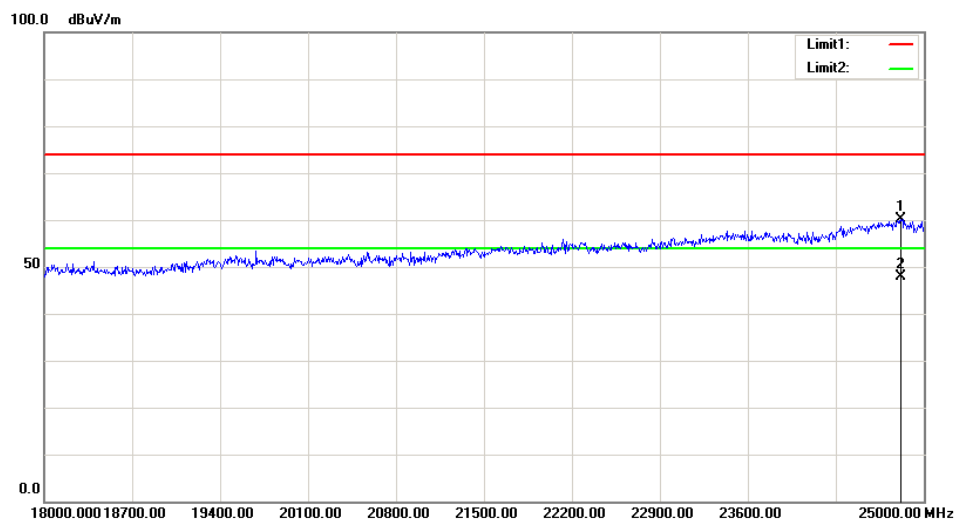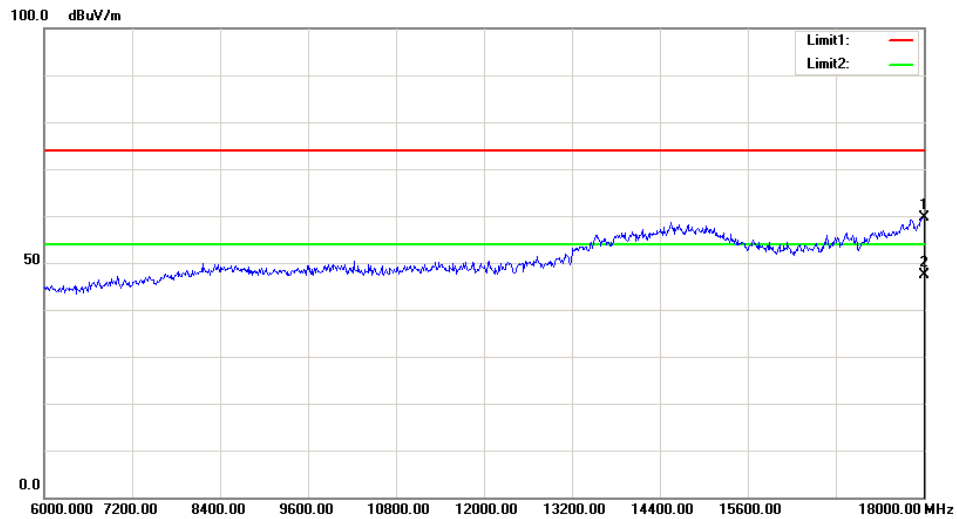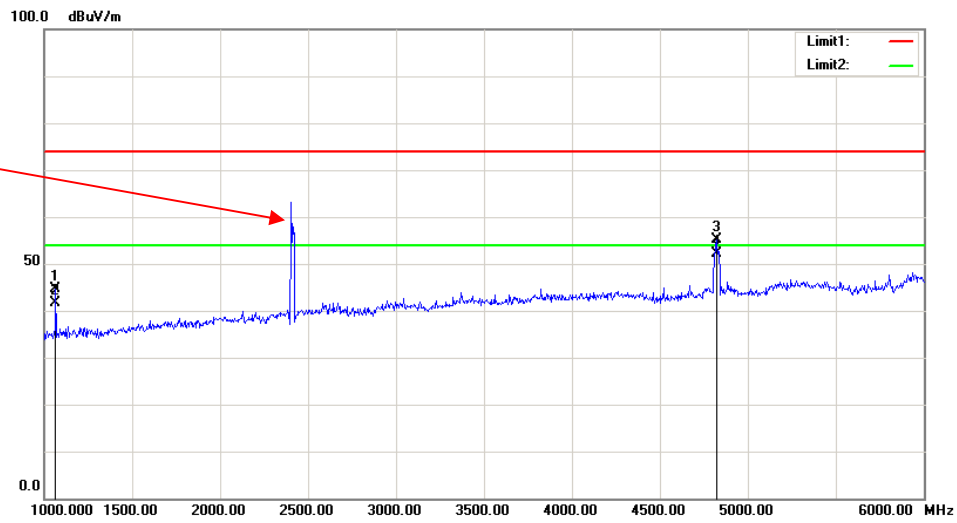

FCC §15.247(a) (2)–6 dB EMISSION BANDWIDTH


Applicable Standard

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2018-08-03	2019-08-03
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.9 °C
Relative Humidity:	43 %
ATM Pressure:	100.5 kPa


* The testing was performed by Blake Yang on 2019-06-18.



Test Mode: Transmitting



Test Result: Compliant. Test only performed at chain 0, please refer to the following table and plots.



Test mode	Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
802.11b	Low	2412	10.100	≥ 0.5
	Middle	2437	9.940	≥ 0.5
	High	2462	10.100	≥ 0.5
802.11g	Low	2412	16.593	≥ 0.5
	Middle	2437	16.593	≥ 0.5
	High	2462	16.593	≥ 0.5
802.11n ht20	Low	2412	17.715	≥ 0.5
	Middle	2437	17.715	≥ 0.5
	High	2462	17.635	≥ 0.5
802.11n ht40	Low	2422	36.393	≥ 0.5
	Middle	2437	36.393	≥ 0.5
	High	2452	36.393	≥ 0.5

Please refer to following plots:

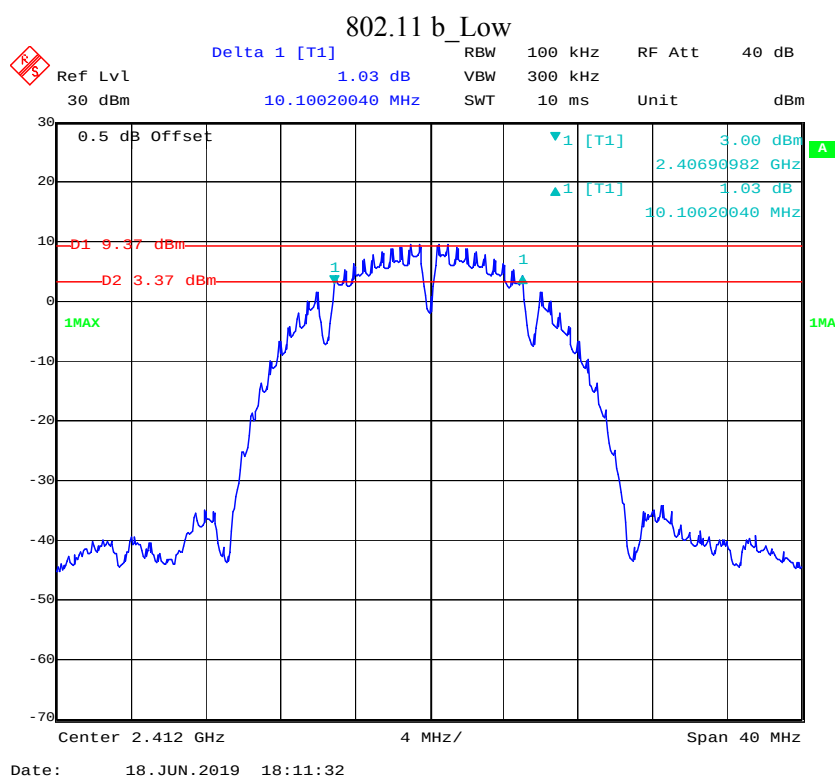


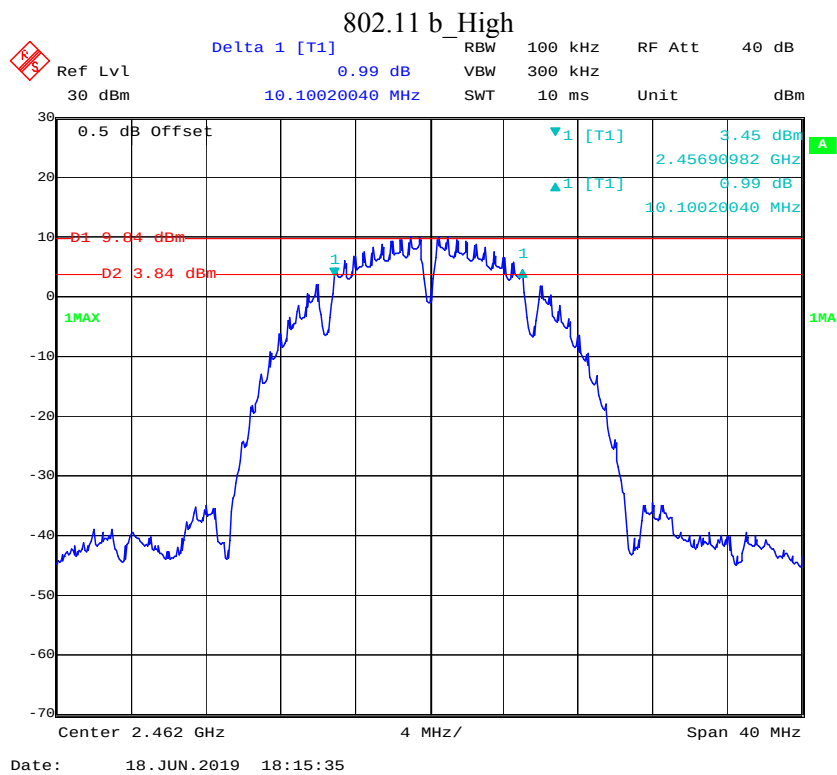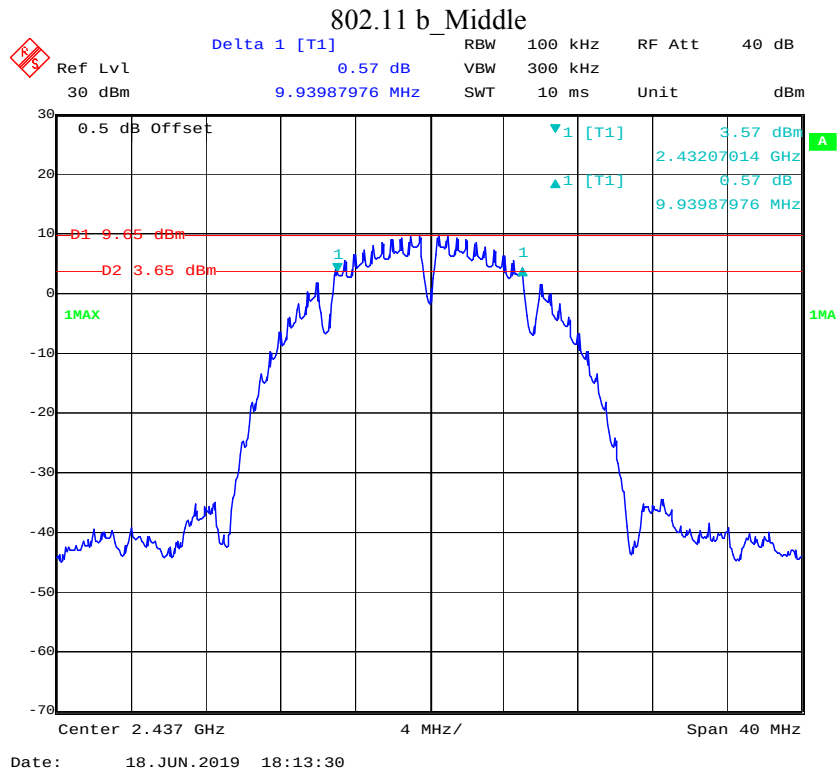

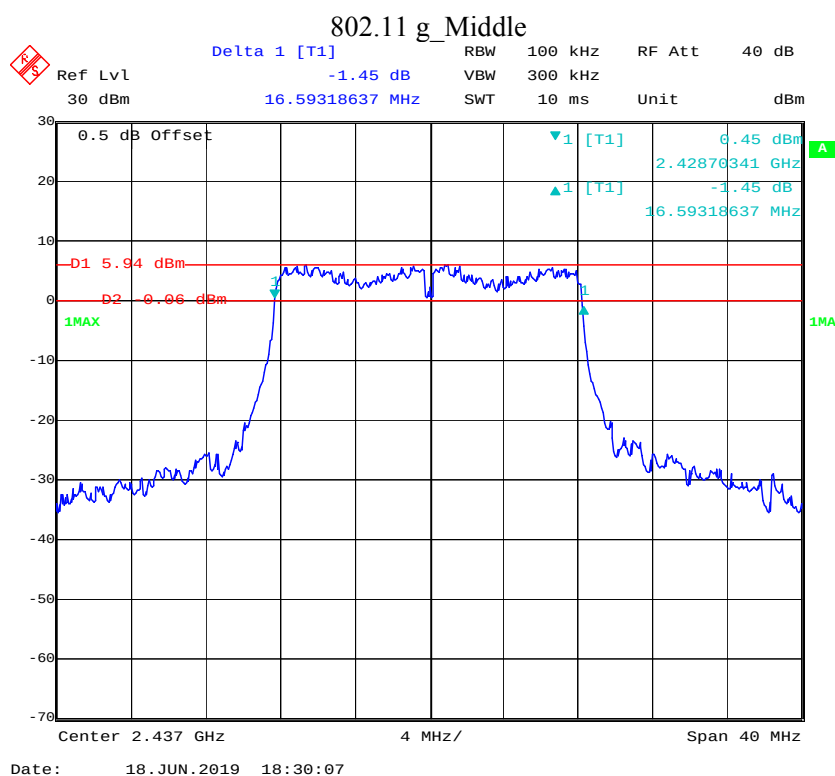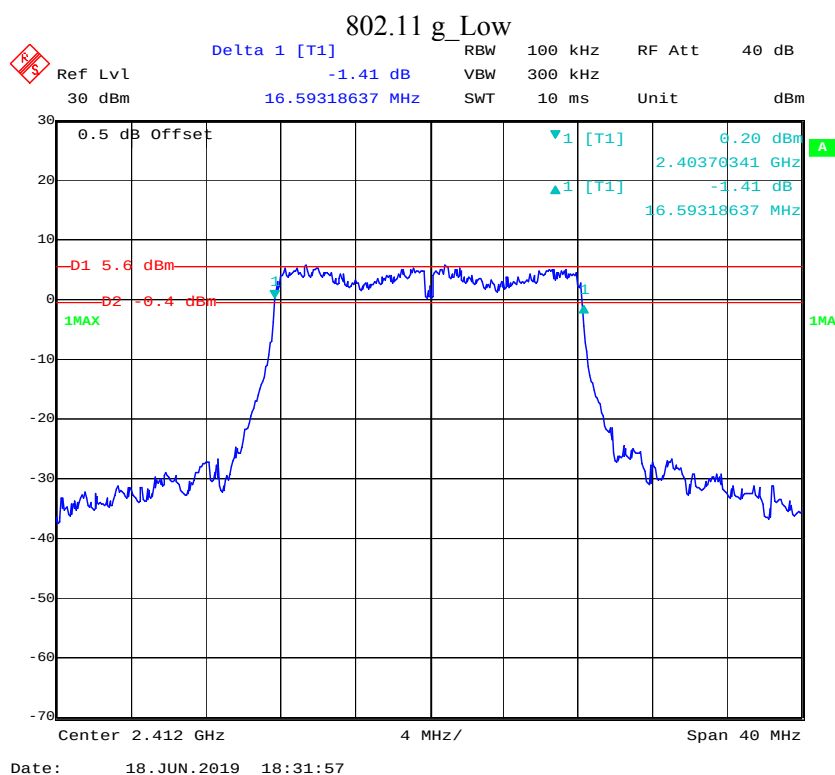


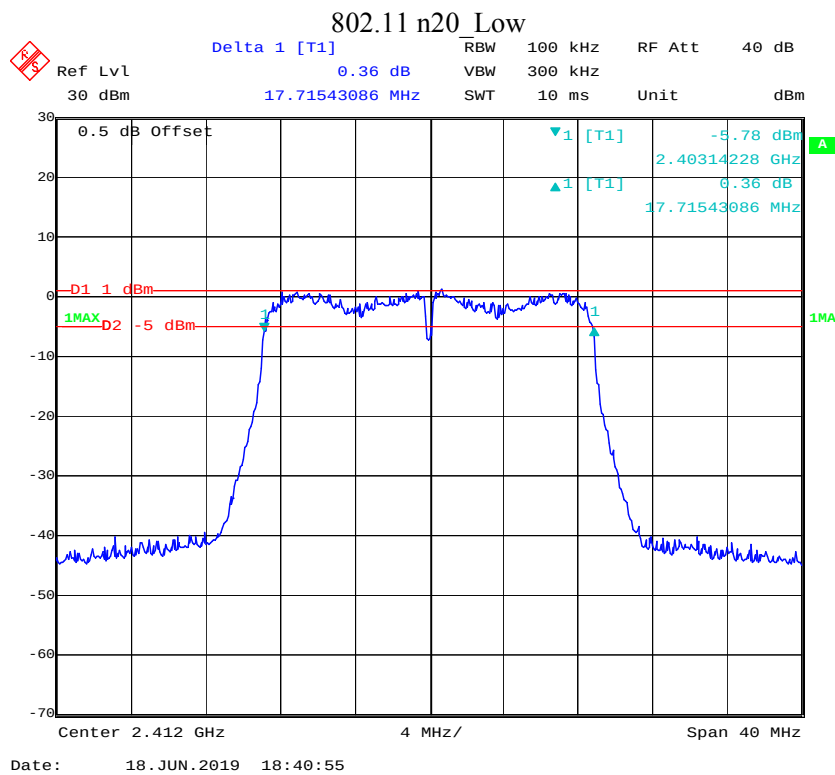
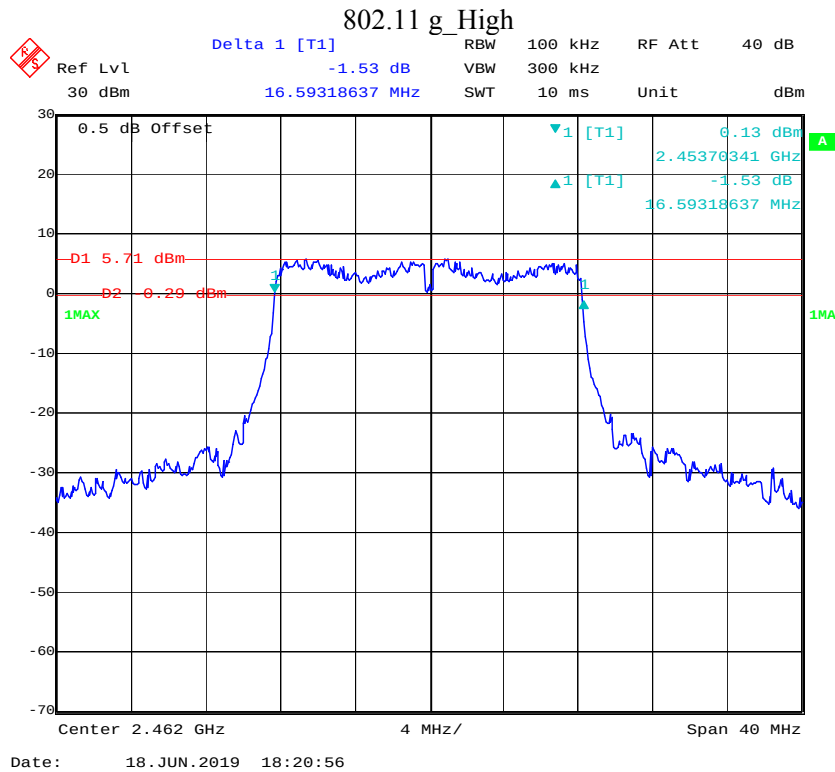



802.11 n20_Middle

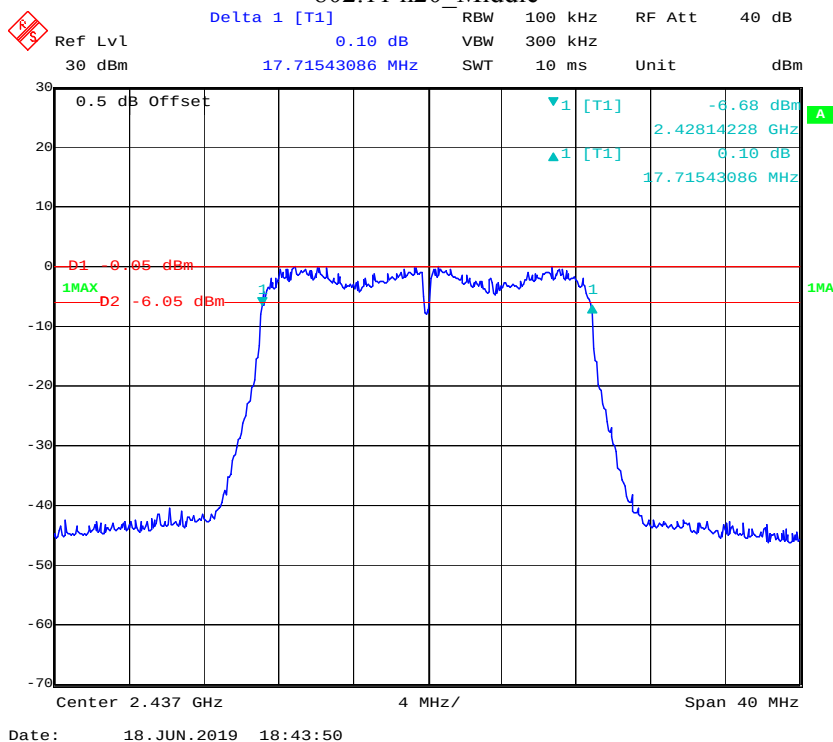

802.11 n20_High

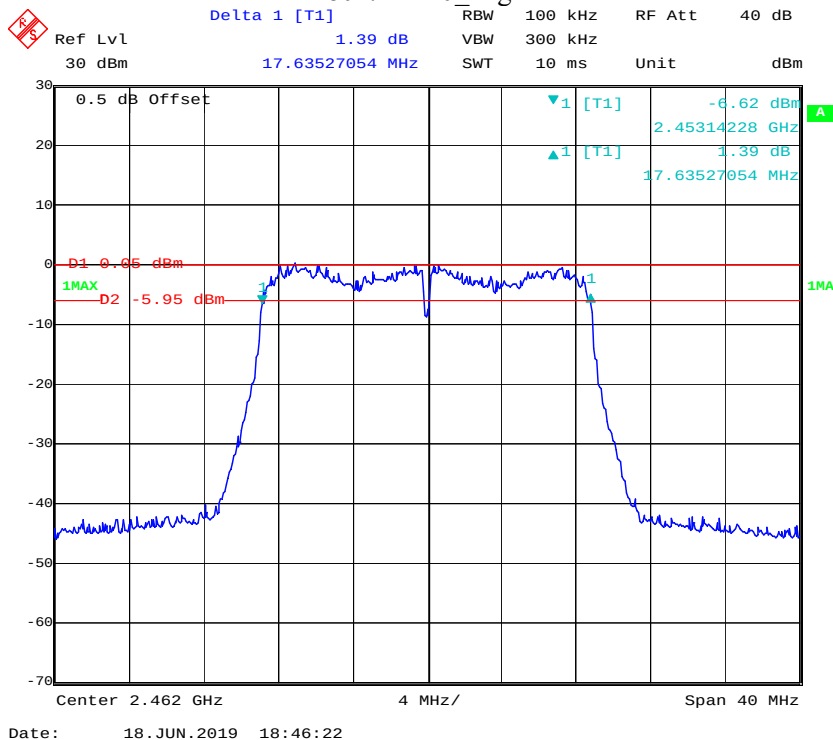

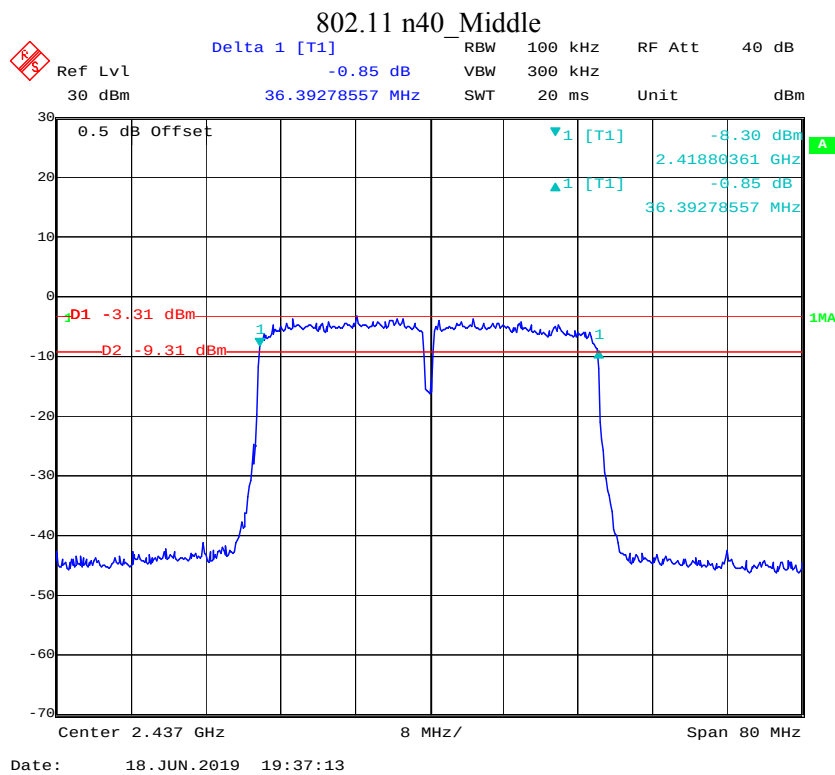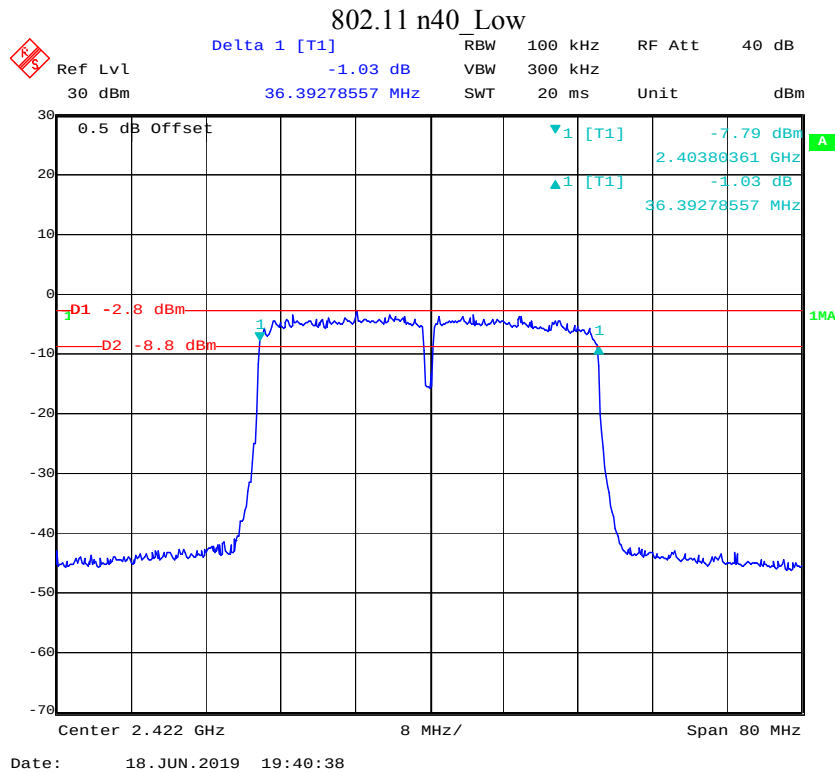

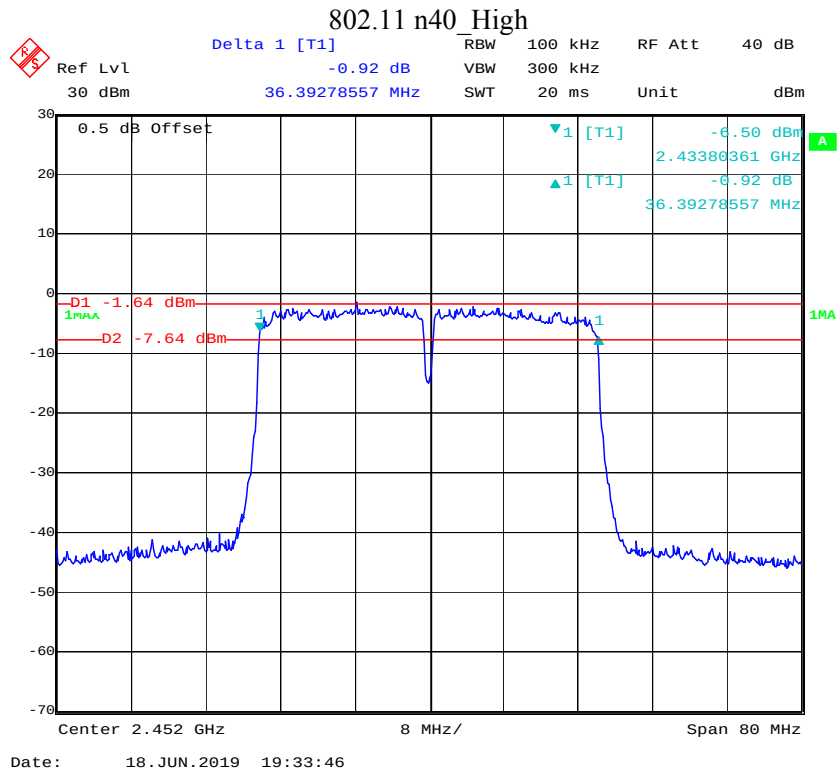


FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER**Applicable Standard**

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.
4. Set the power Meter to test Peak output power, record the result as peak power.
5. Set the power meter to test average output power, record the result as average power.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2018-12-10	2019-12-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25.9 °C
Relative Humidity:	43%
ATM Pressure:	100.5 kPa

* The testing was performed by Blake Yang on 2019-06-18.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table.

Test mode	Channel	Frequency (MHz)	Conducted Peak Output Power (dBm)			Limit (dBm)
			Chain 0	Chain 1	Total	
802.11b	Low	2412	20.82	18.27	/	30
	Middle	2437	20.96	19.11	/	30
	High	2462	21.36	18.66	/	30
802.11g	Low	2412	26.80	28.14	/	30
	Middle	2437	26.76	28.06	/	30
	High	2462	26.67	28.01	/	30
802.11n ht20	Low	2412	23.24	23.07	26.17	30
	Middle	2437	23.35	23.28	26.33	30
	High	2462	22.73	22.24	25.50	30
802.11n ht40	Low	2422	22.96	23.04	26.01	30
	Middle	2437	23.08	23.25	26.18	30
	High	2452	23.12	23.18	26.16	30

Note:

The maximum antenna gain is 3.0 dBi. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

So:

Directional gain = $G_{ANT} + \text{Array Gain} = 3.0 \text{ dBi} < 6 \text{ dBi}$

FCC §15.247(d)– 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

According to FCC§15.247(d):In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2018-08-03	2019-08-03
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	25.9 °C
Relative Humidity:	43 %
ATM Pressure:	100.5 kPa

The testing was performed by Blake Yang on 2019-06-18.


Test mode: Transmitting

Test Result: Compliant. Please refer to following plots.


802.11 b_Low Chain 0

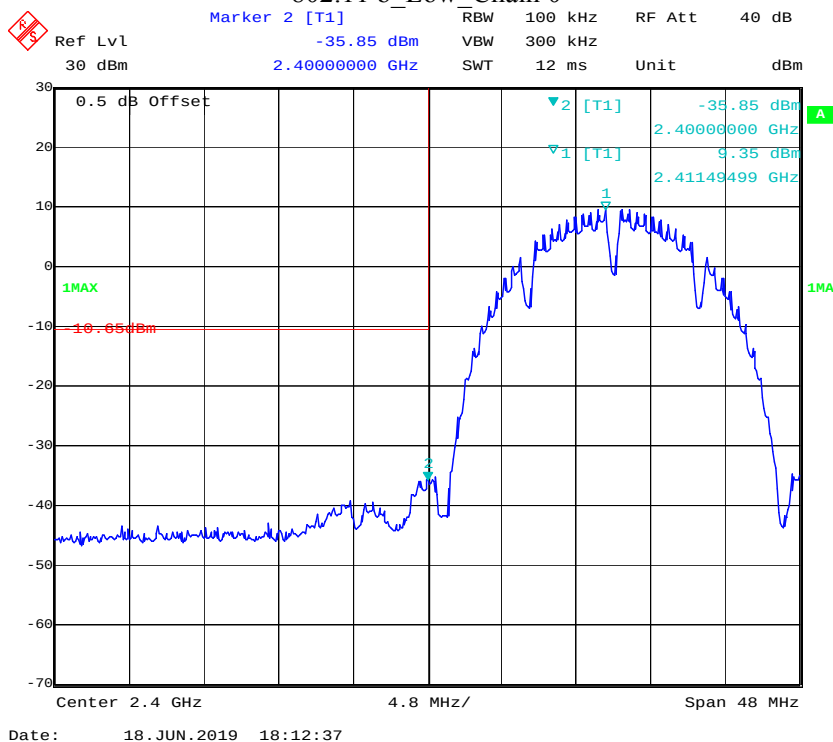


802.11 b_Low Chain 1


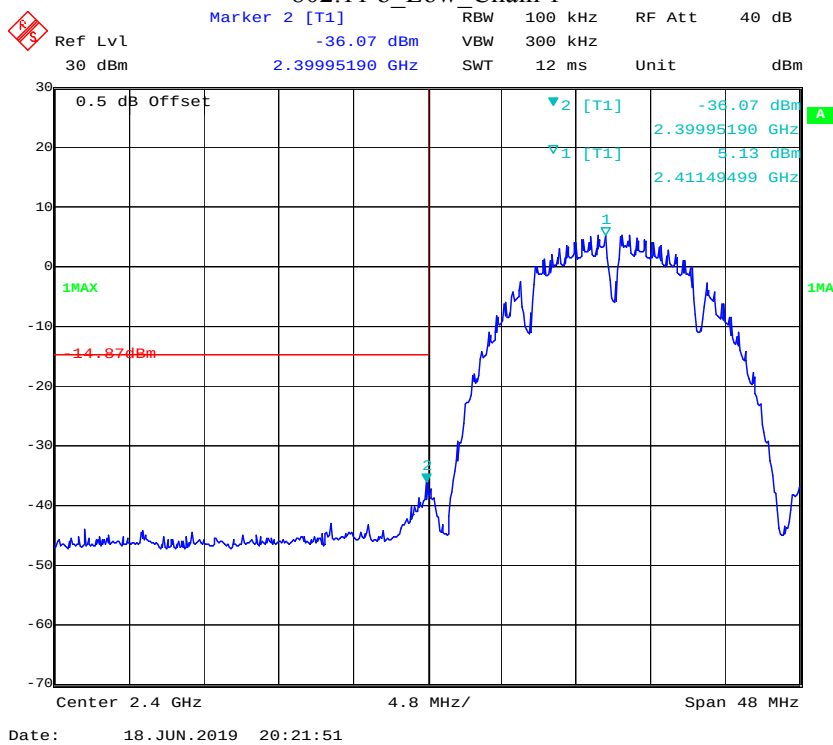




802.11 b_High_Chain 0


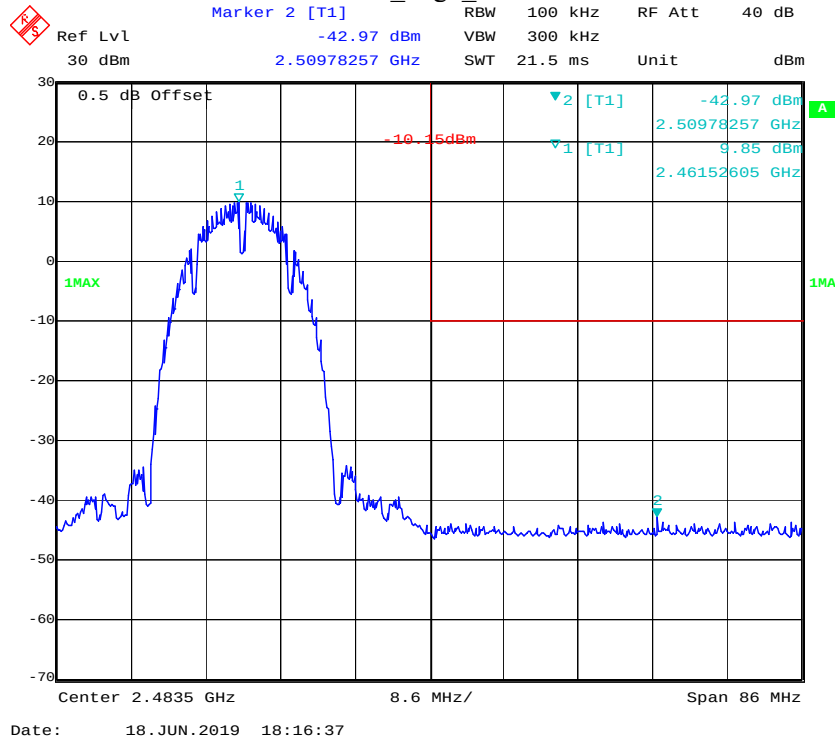




802.11 b_High_Chain 1


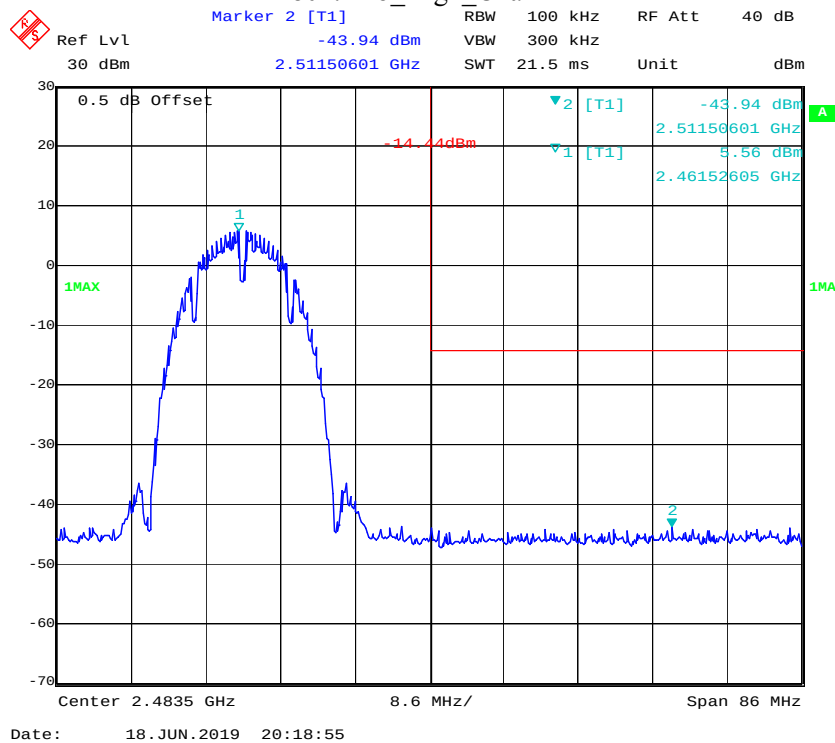


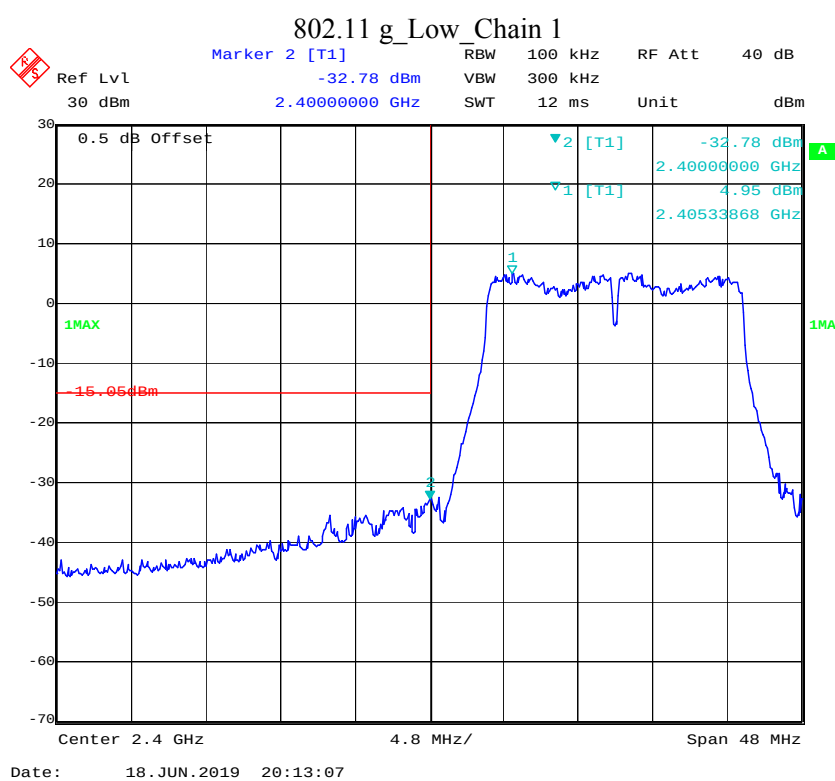
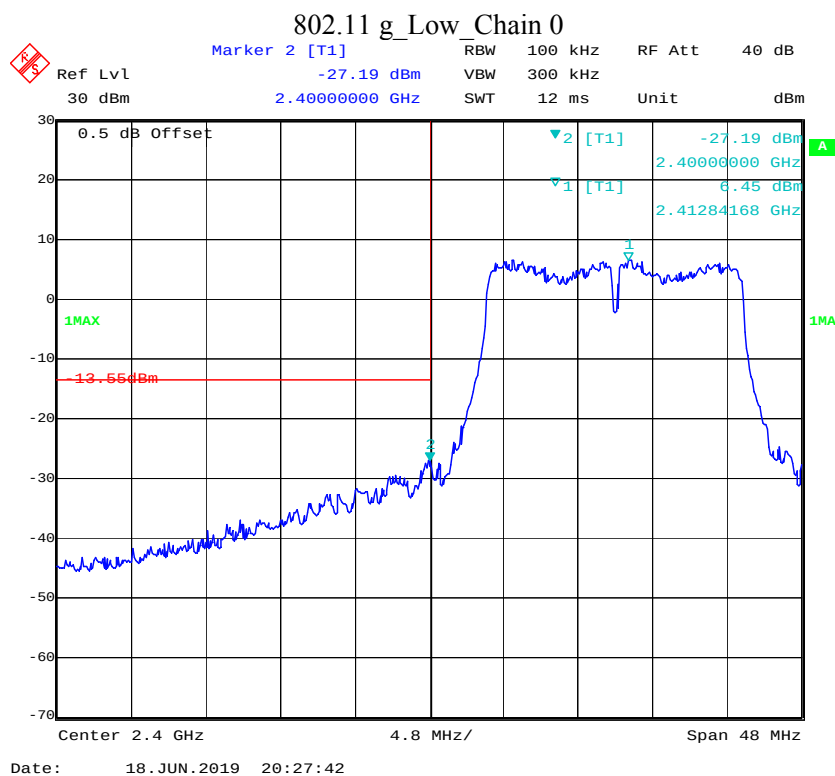


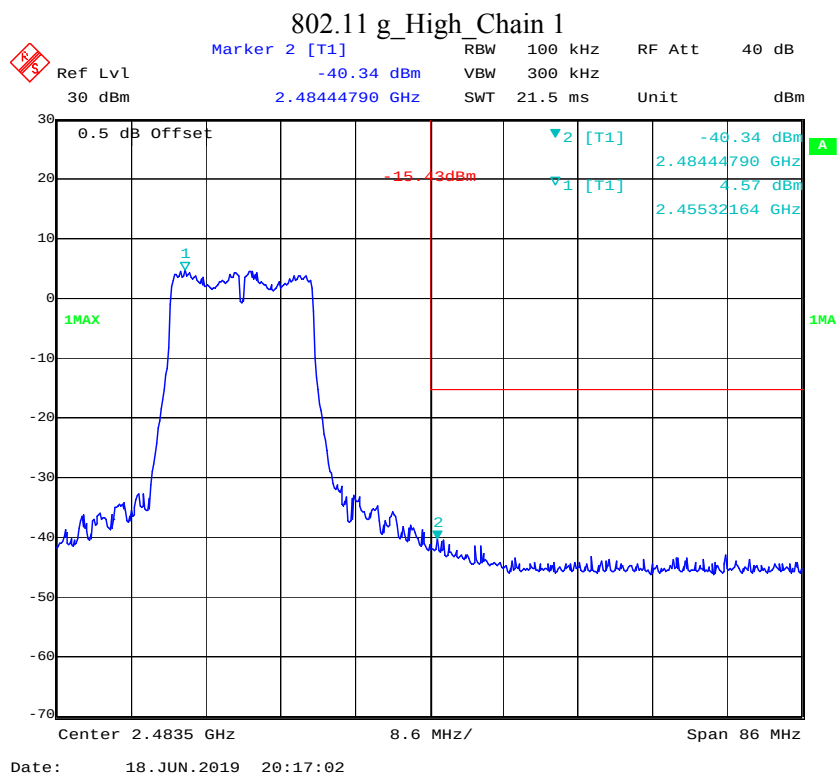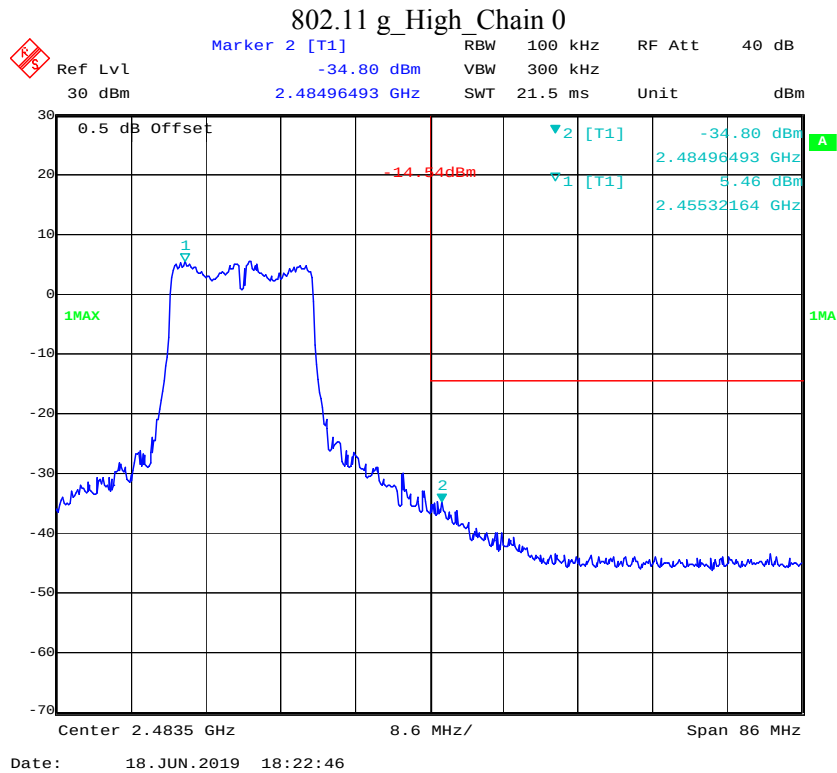

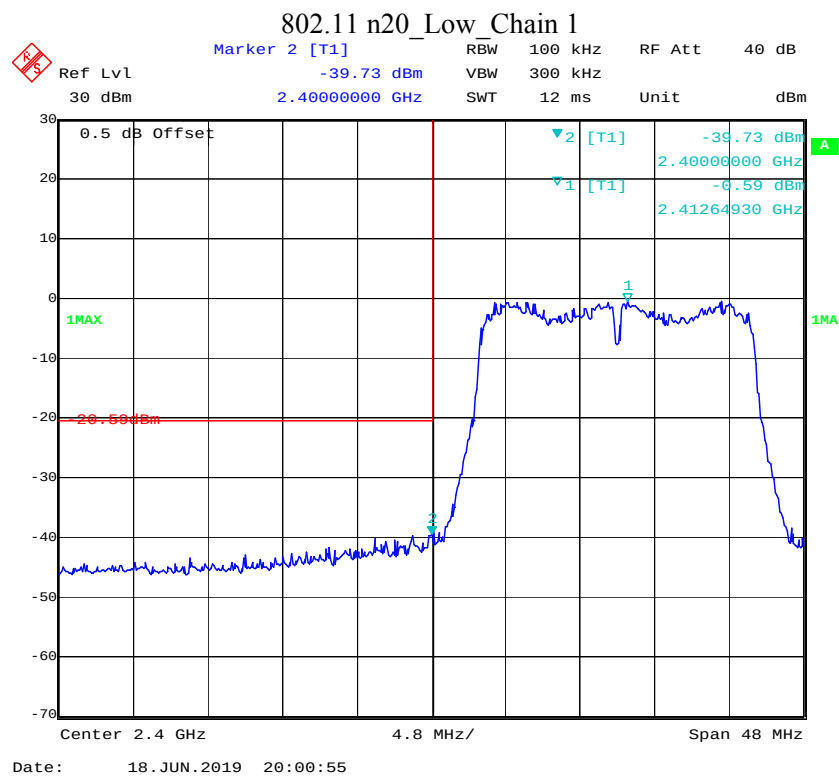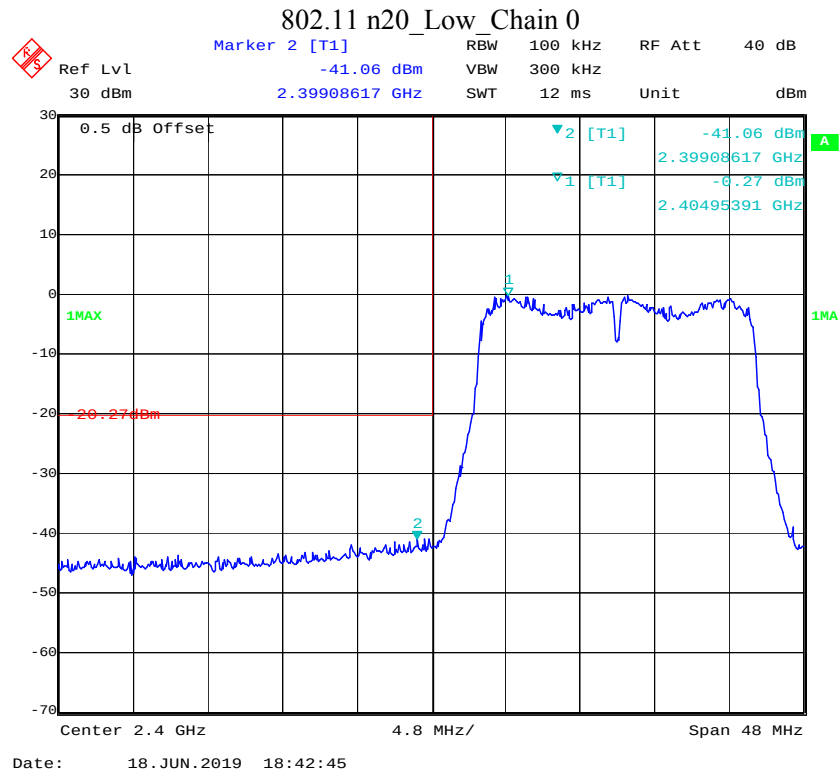

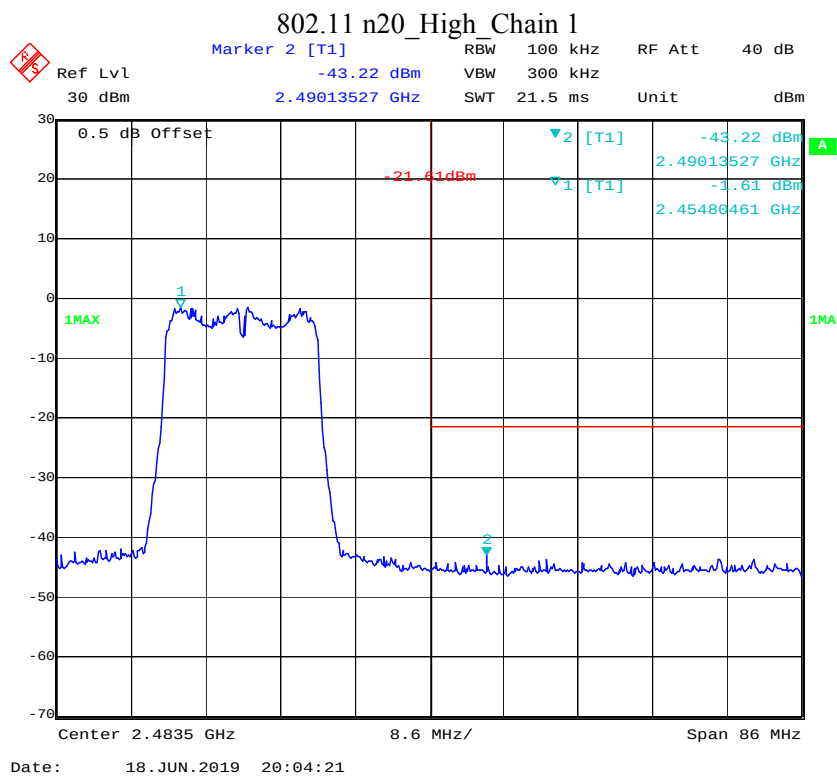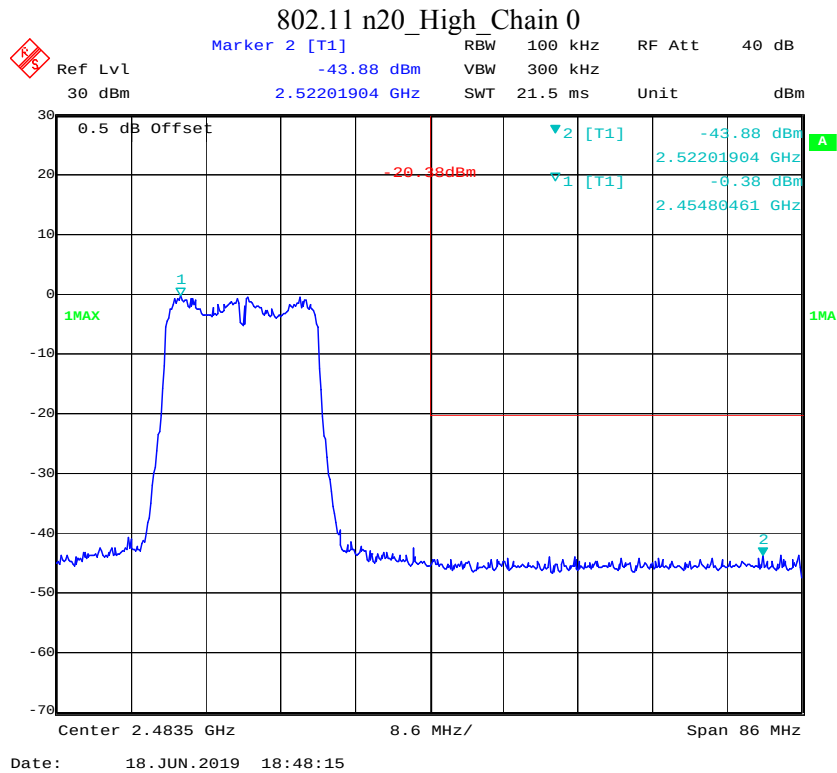

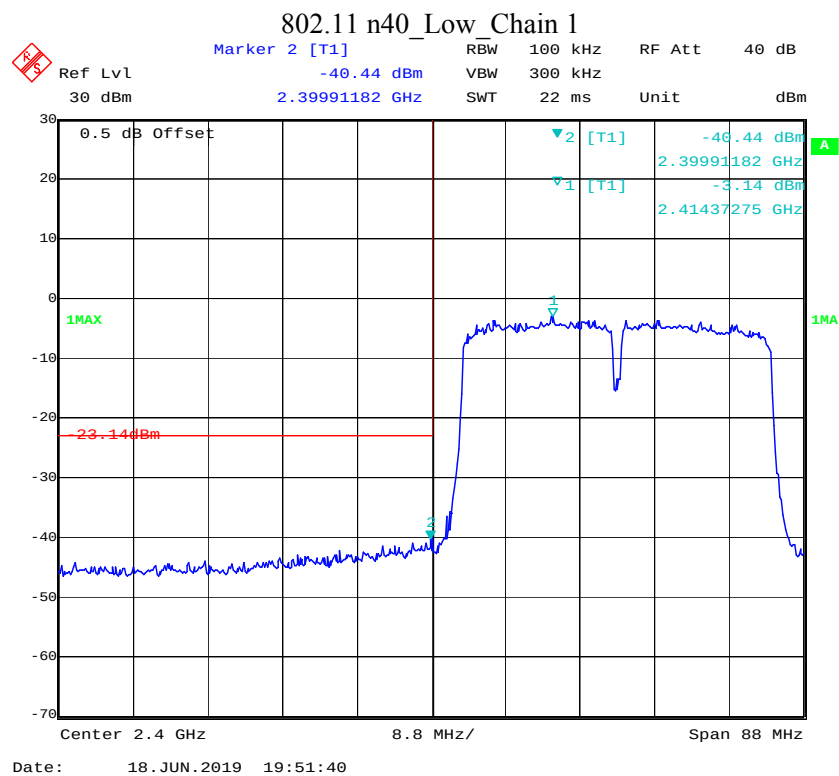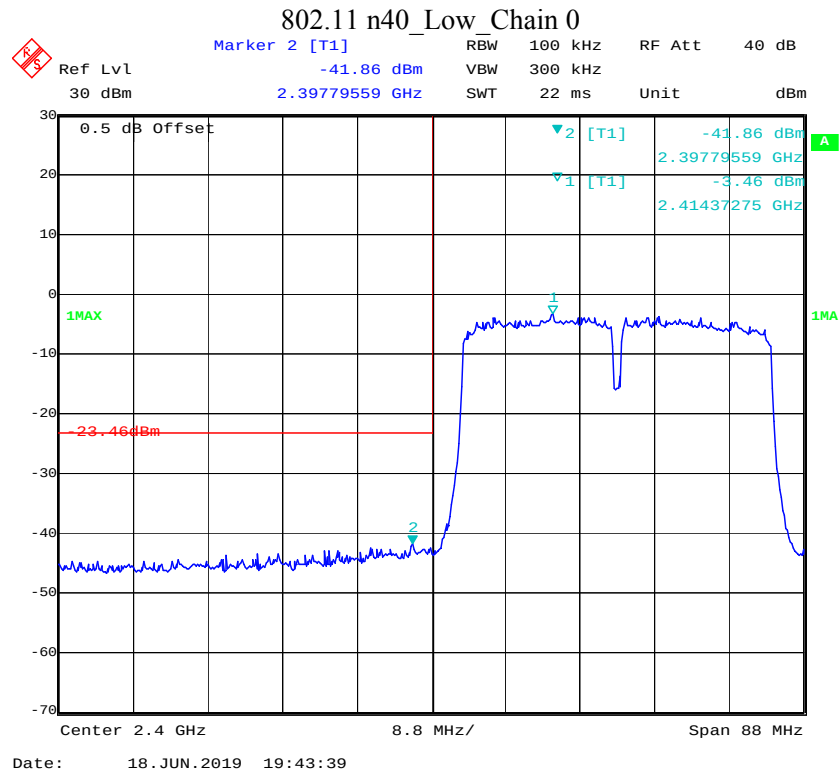

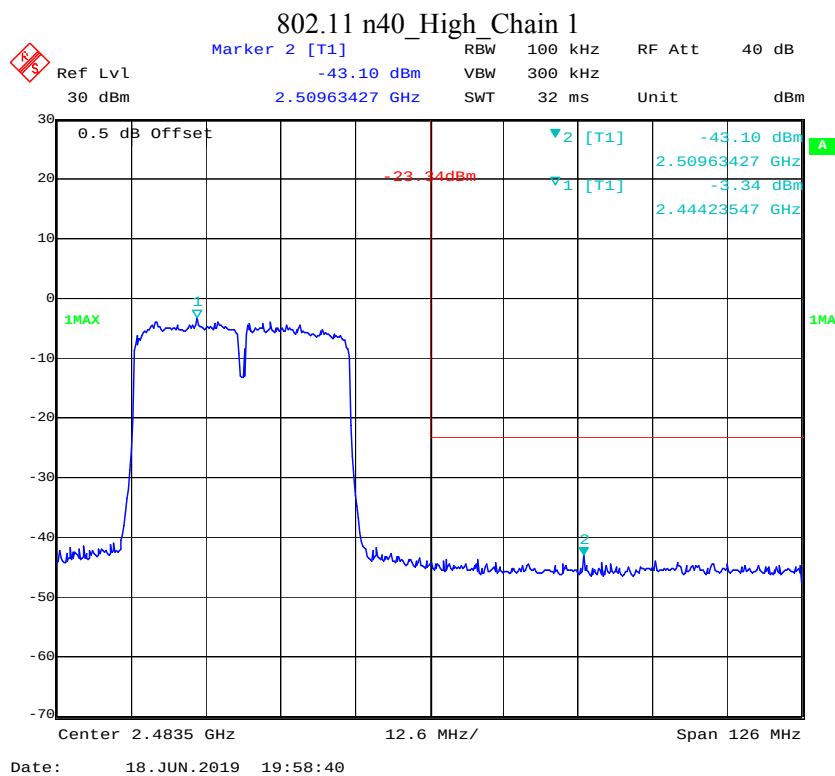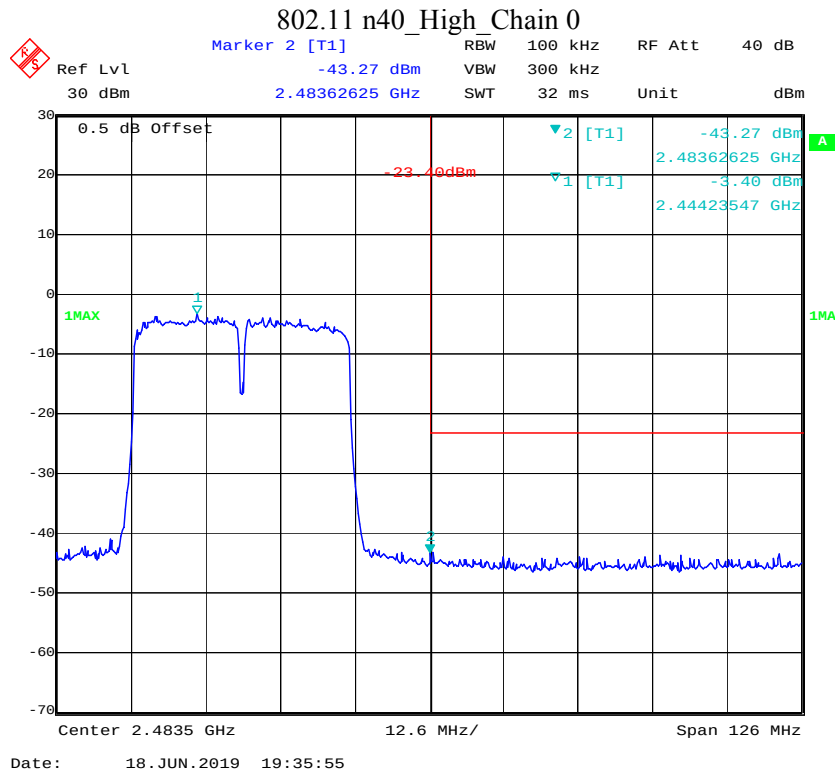

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW = 3 kHz, VBW = 10 kHz, Set the span to 1.5 times the DTS bandwidth.
4. Use the peak marker function to determine the maximum amplitude level.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2018-08-03	2019-08-03
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.9 °C
Relative Humidity:	43 %
ATM Pressure:	100.5 kPa

* The testing was performed by Blake Yang on 2019-06-18.

Test Result: Compliance

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots

Test mode	Channel	Frequency (MHz)	PSD (dBm/3kHz)			Limit (dBm/3kHz)
			Chain 0	Chain 1	Total	
802.11b	Low	2412	-9.84	-13.77	/	≤ 8
	Middle	2437	-9.74	-12.20	/	≤ 8
	High	2462	-9.45	-13.36	/	≤ 8
802.11g	Low	2412	-9.51	-9.25	/	≤ 8
	Middle	2437	-9.68	-9.40	/	≤ 8
	High	2462	-9.99	-9.62	/	≤ 8
802.11n ht20	Low	2412	-12.83	-12.85	-9.83	≤ 8
	Middle	2437	-13.20	-13.65	-10.41	≤ 8
	High	2462	-13.18	-13.78	-10.46	≤ 8
802.11n ht40	Low	2422	-14.97	-14.71	-11.83	≤ 8
	Middle	2437	-15.22	-15.27	-12.23	≤ 8
	High	2452	-14.74	-14.94	-11.83	≤ 8



Note 1: The maximum antenna gain is 3.0 dBi. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:



$$\text{Array Gain} = 10 \log(N_{\text{ANT}}/N_{\text{SS}}) \text{ dB.}$$



So:



$$\text{Directional gain} = G_{\text{ANT}} + \text{Array Gain} = 3.0\text{dBi} + 10 * \log(2/1) = 6.0\text{dBi}$$



Please refer to following plots:

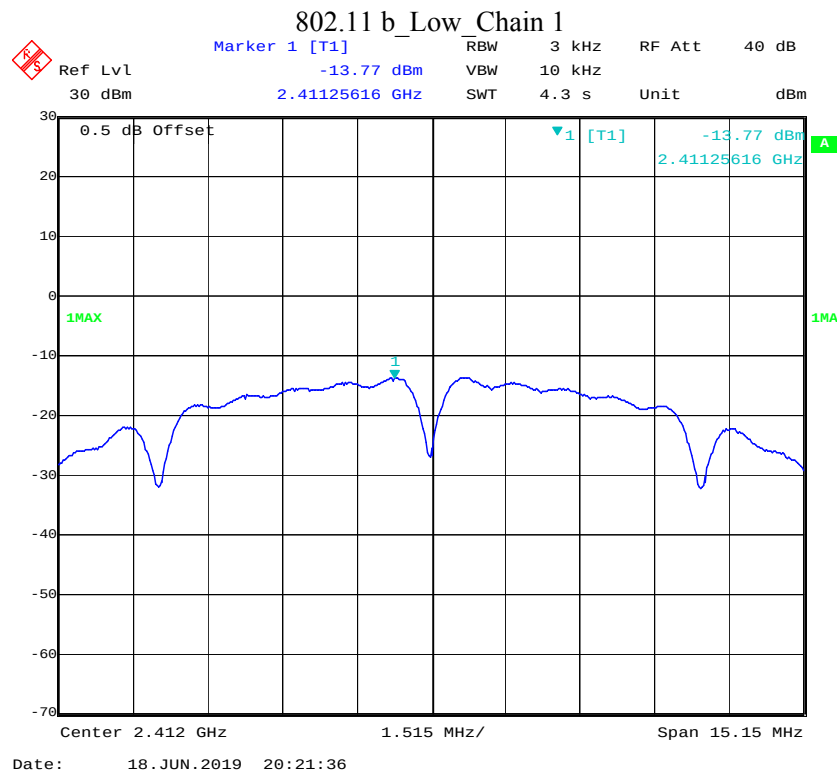
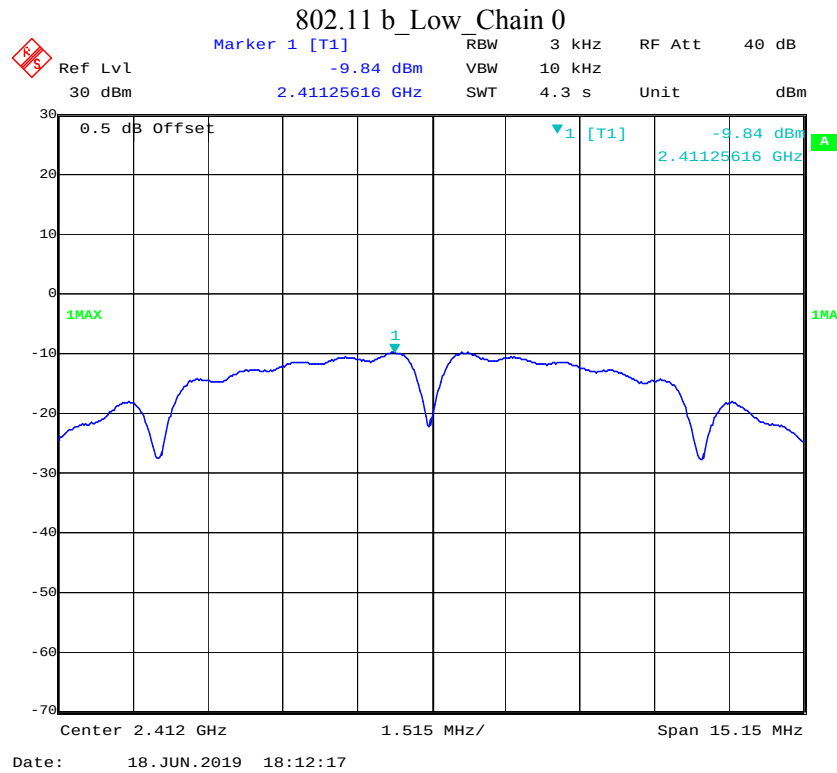


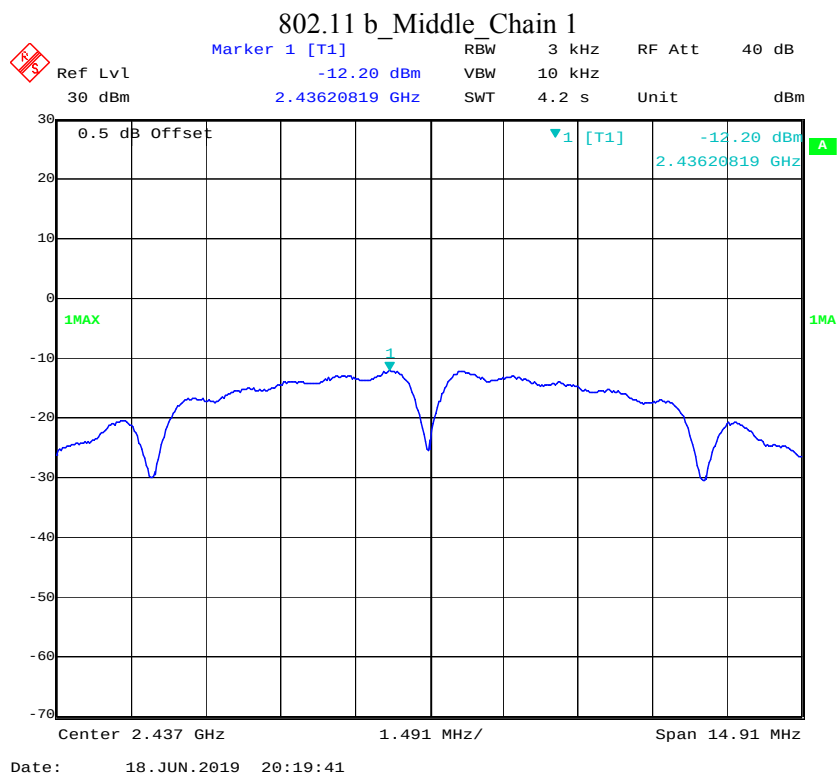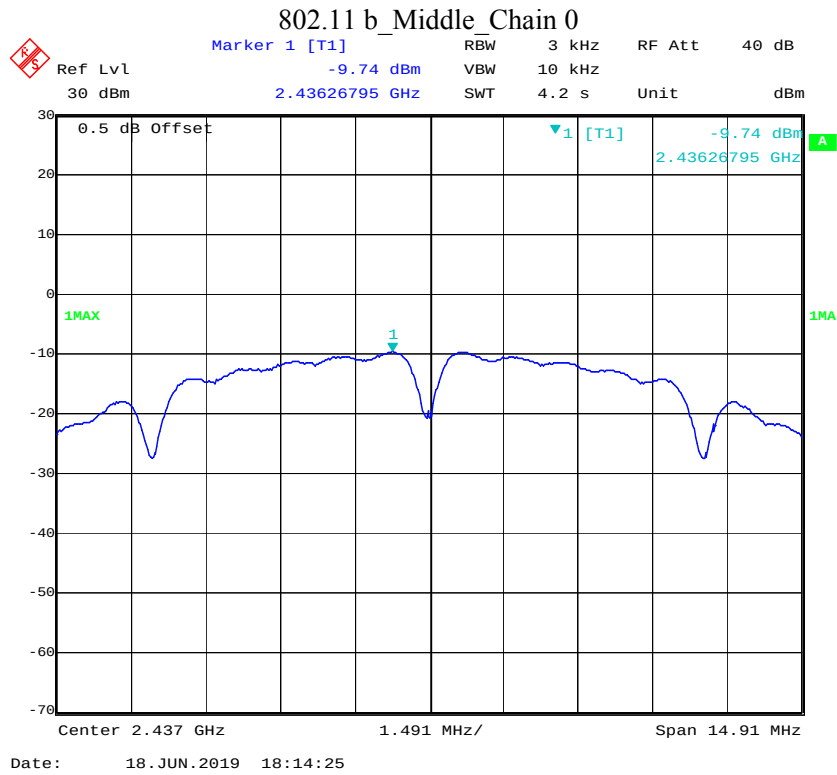

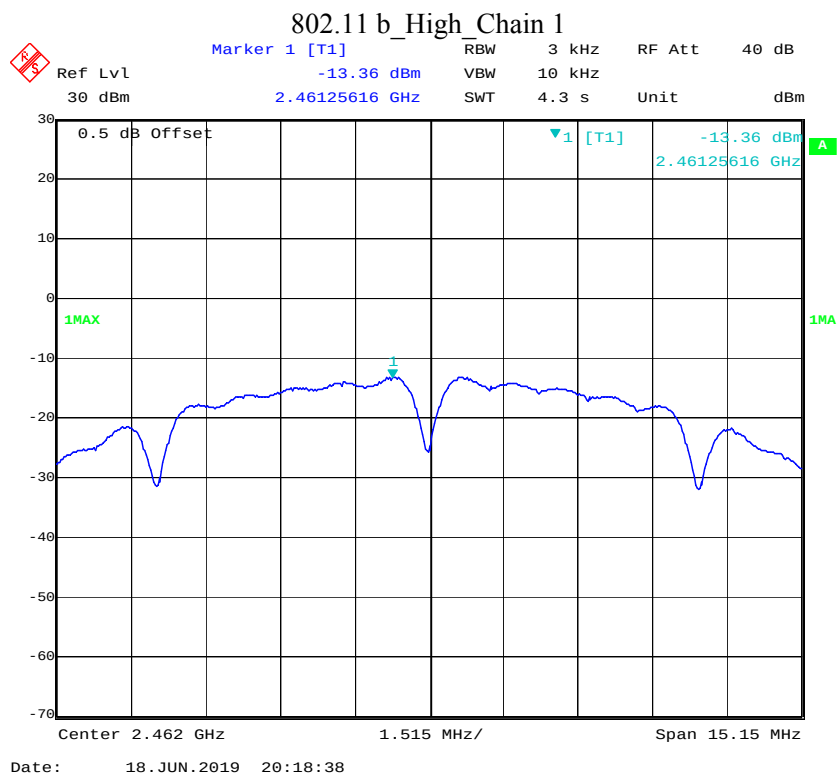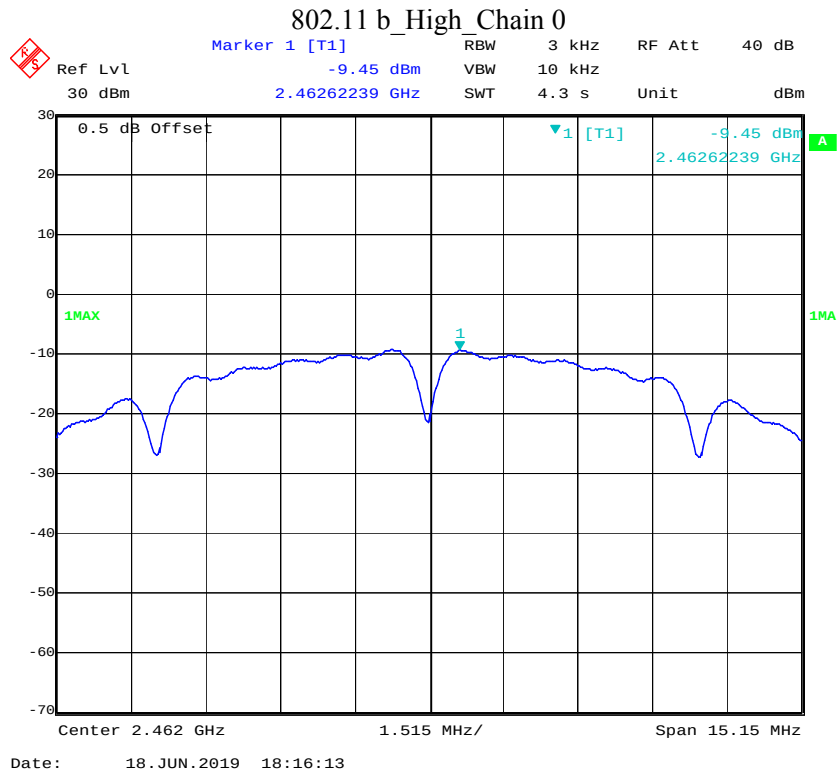


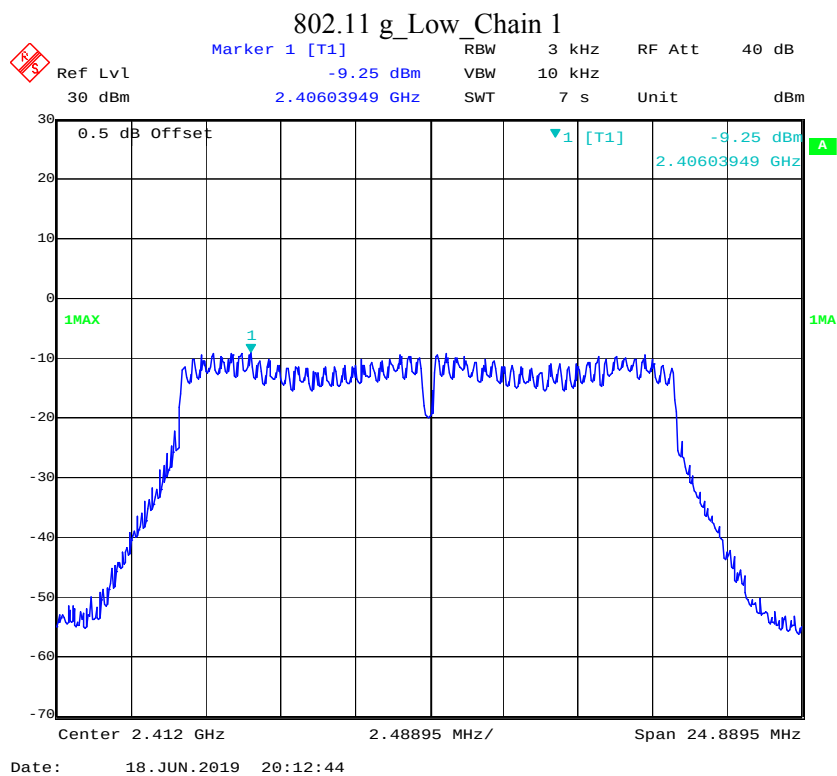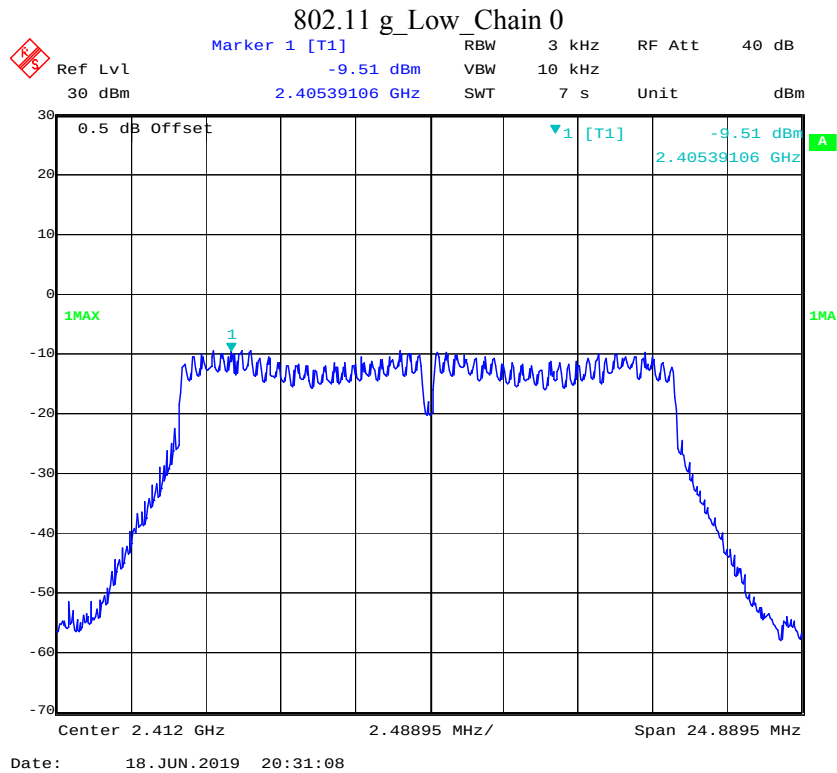

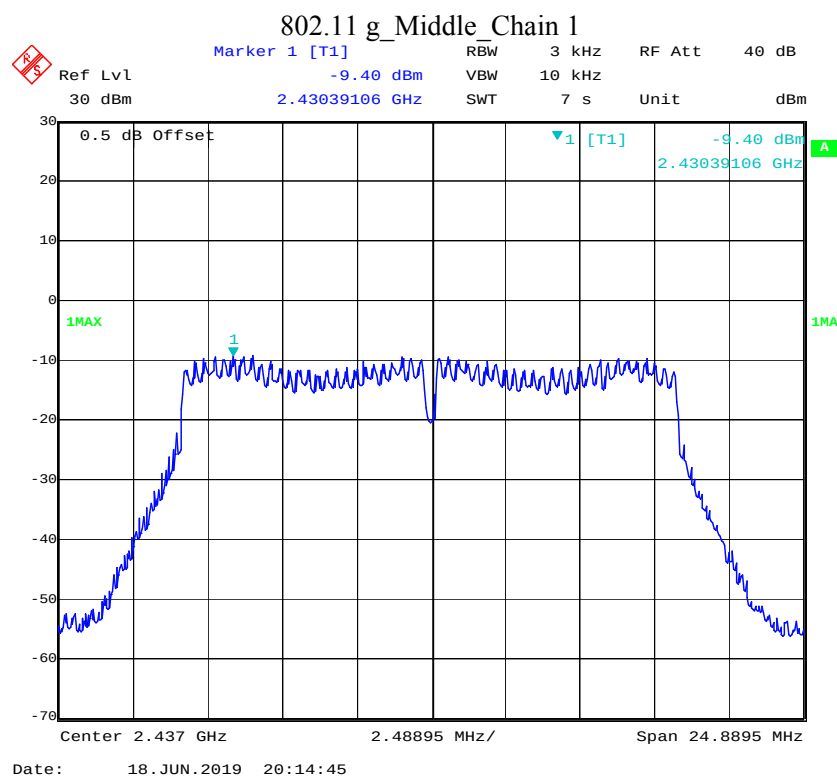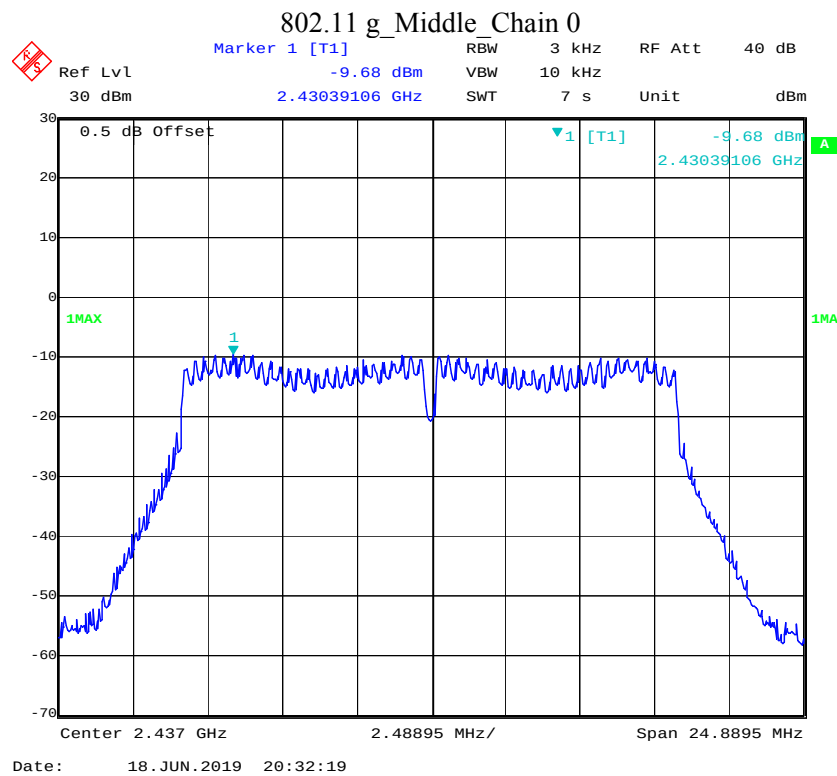


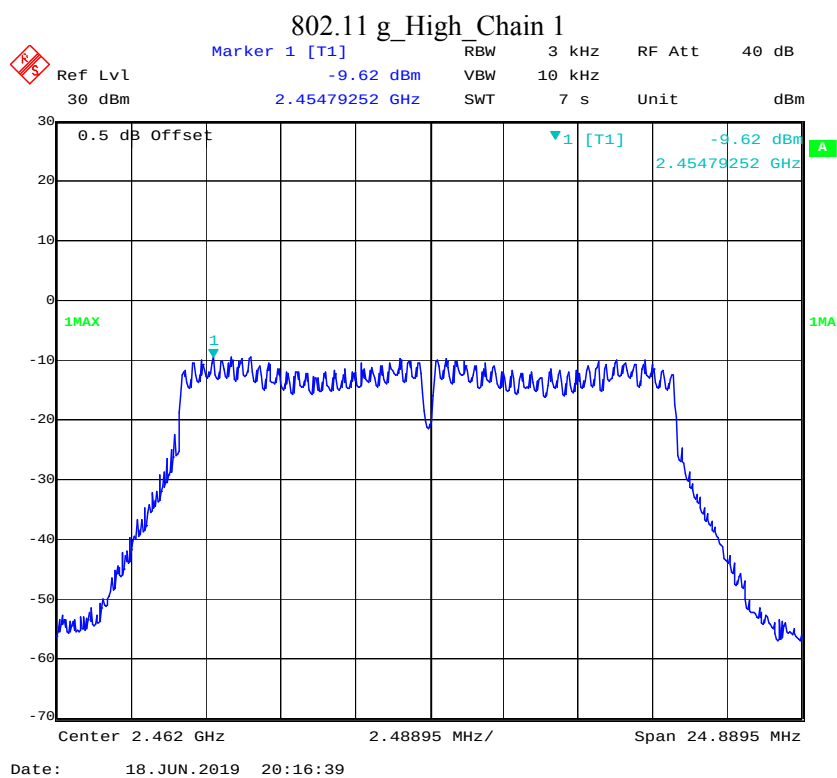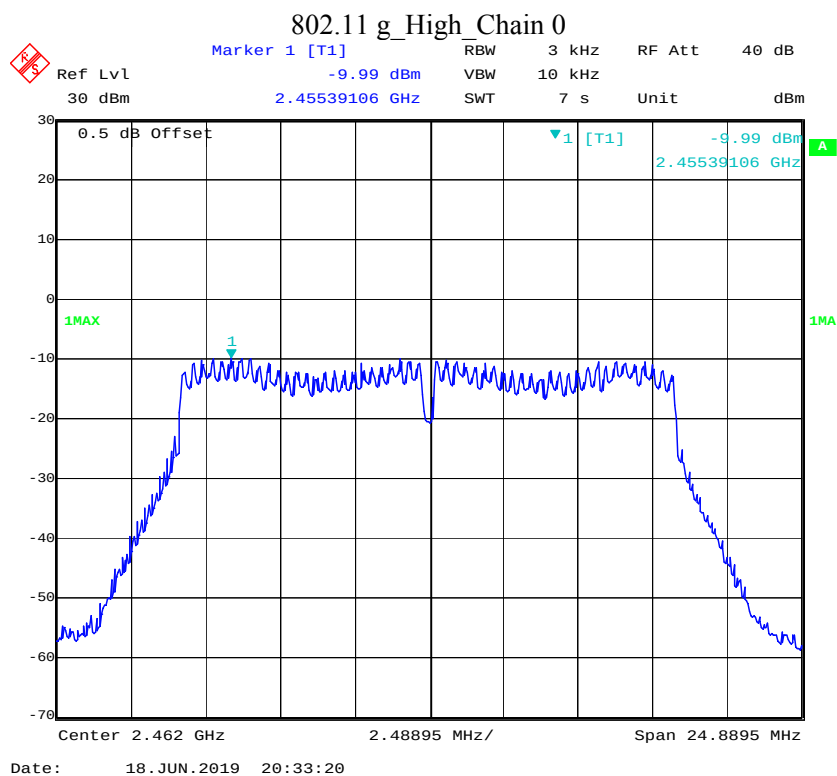


802.11 n20_Low_Chain 0

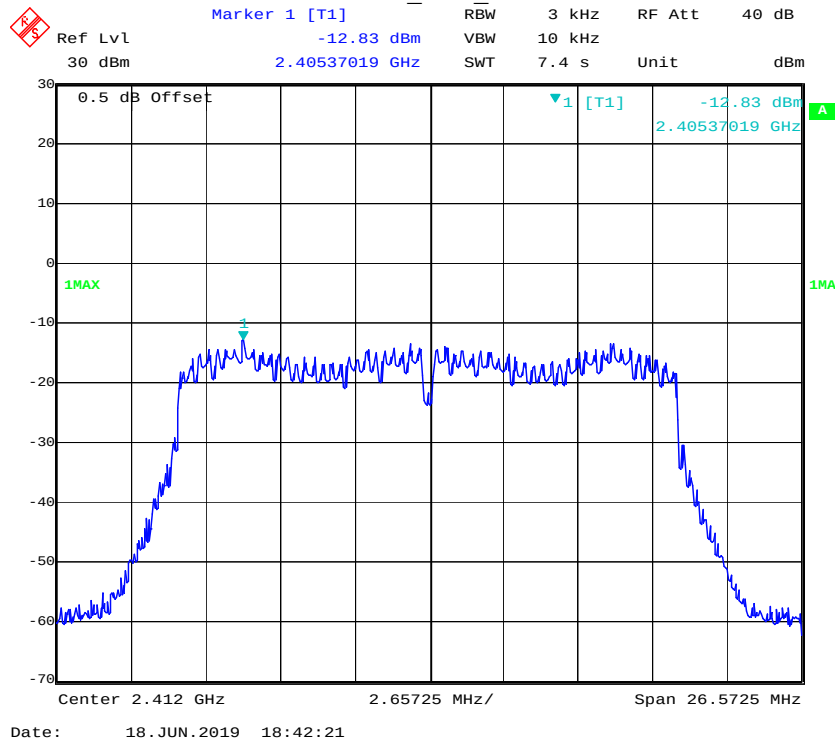


802.11 n20_Low_Chain 1


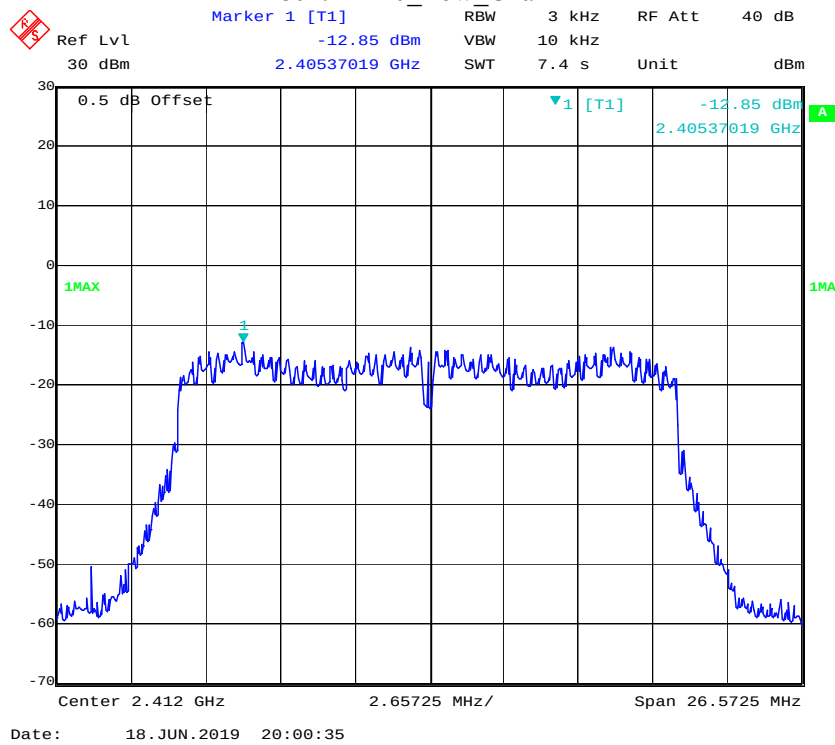




802.11 n20_Middle_Chain 0

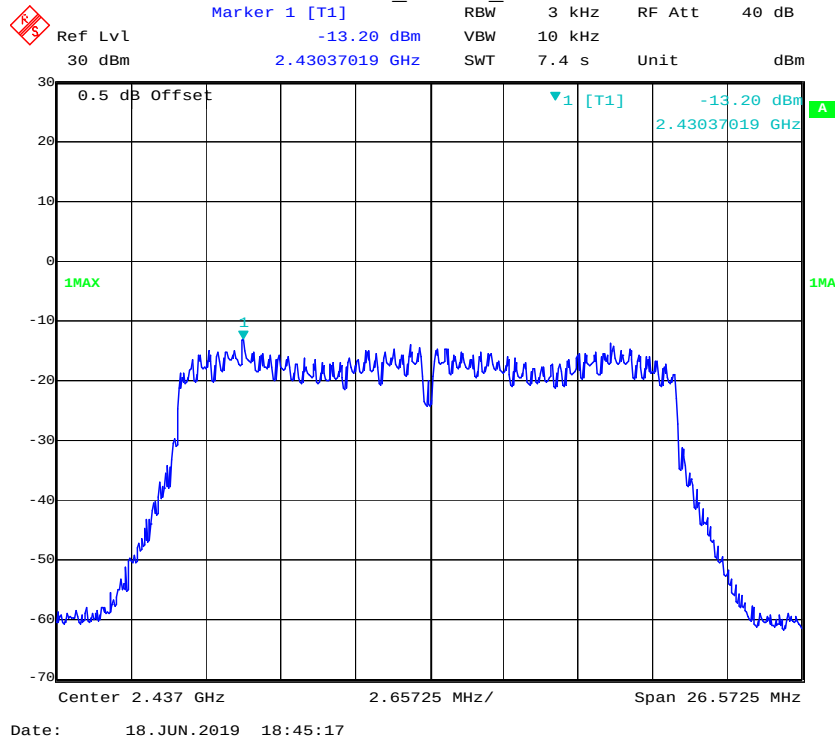


802.11 n20_Middle_Chain 1

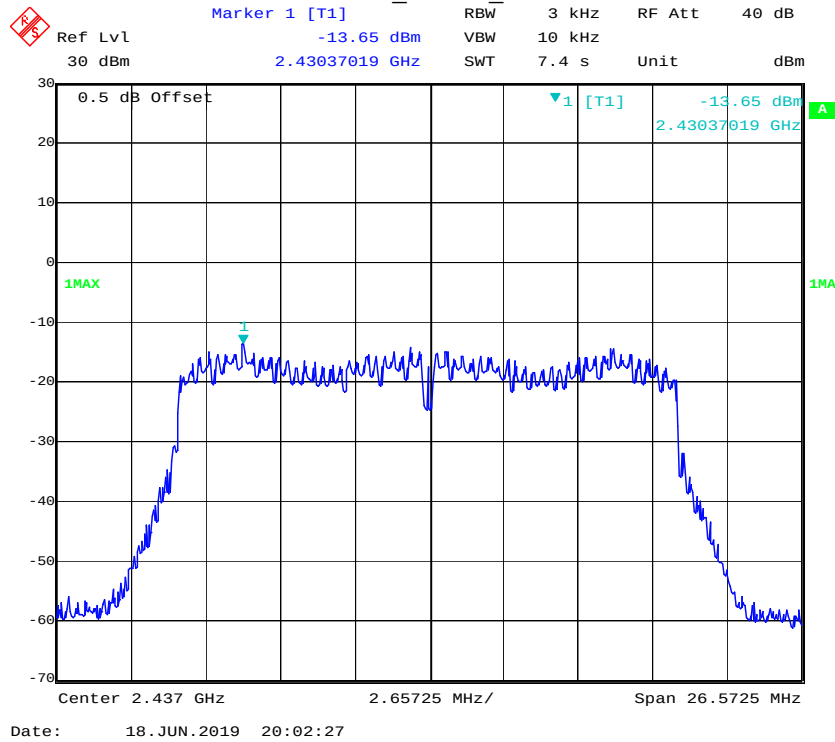

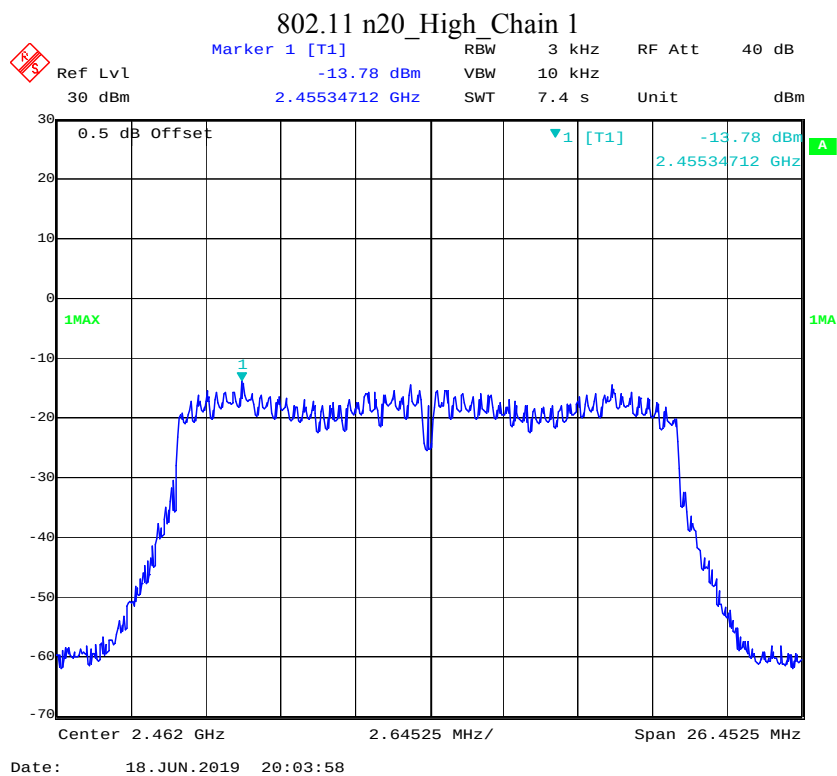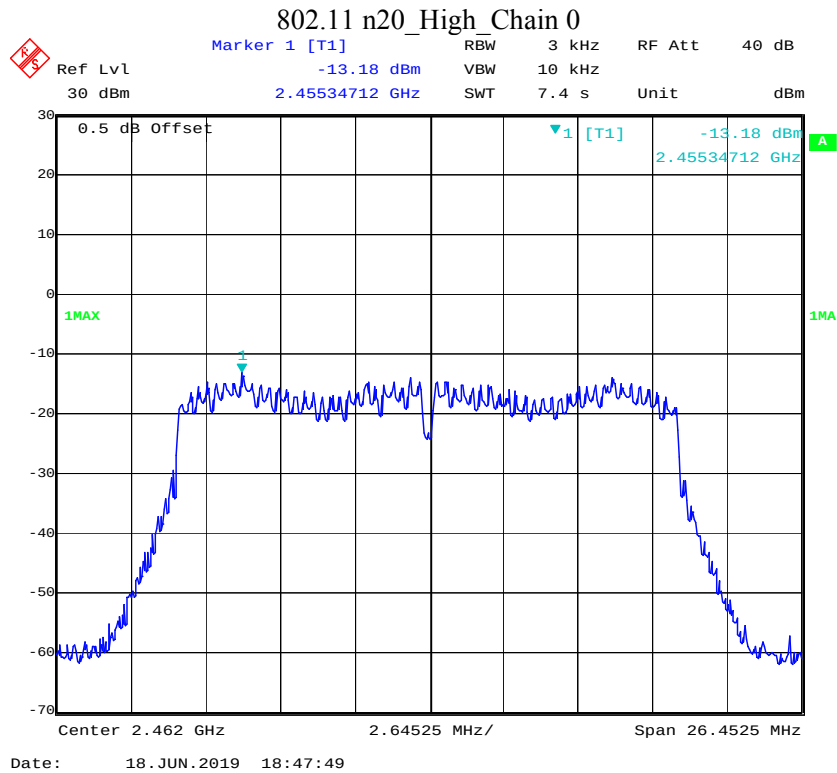


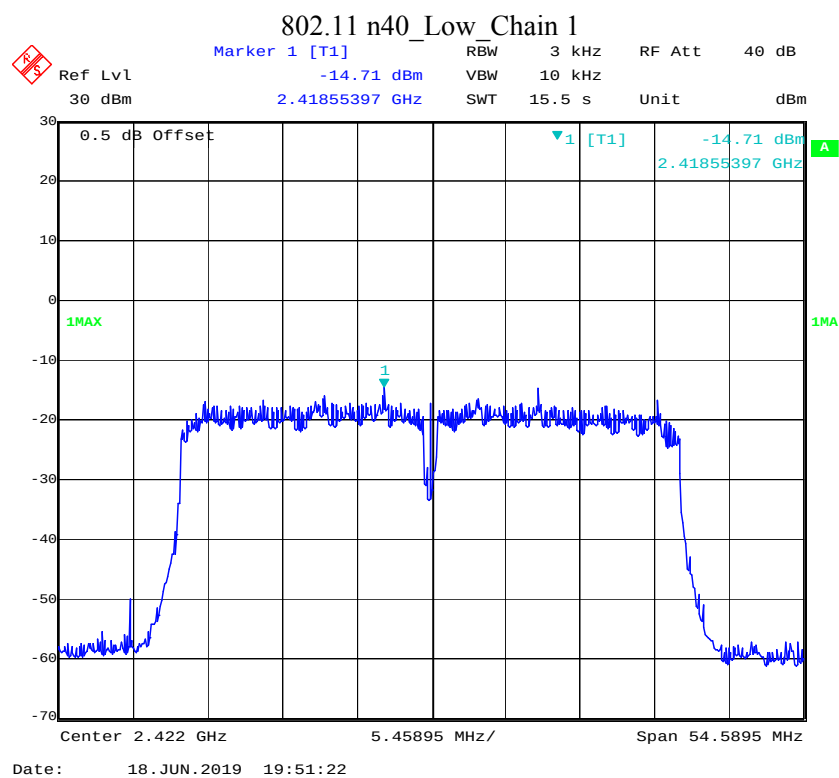
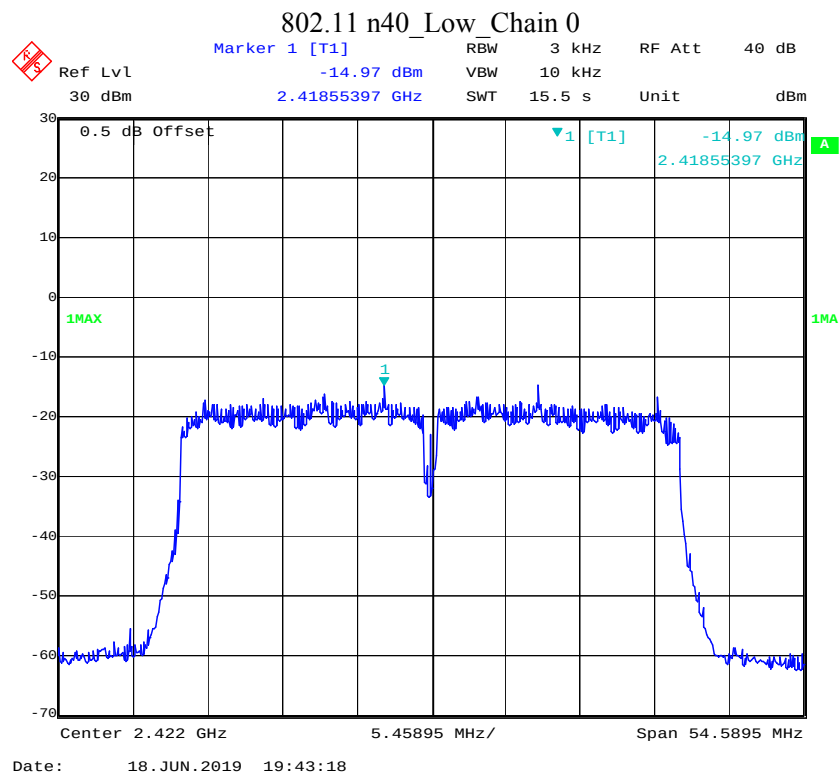


802.11 n40_Middle_Chain 0

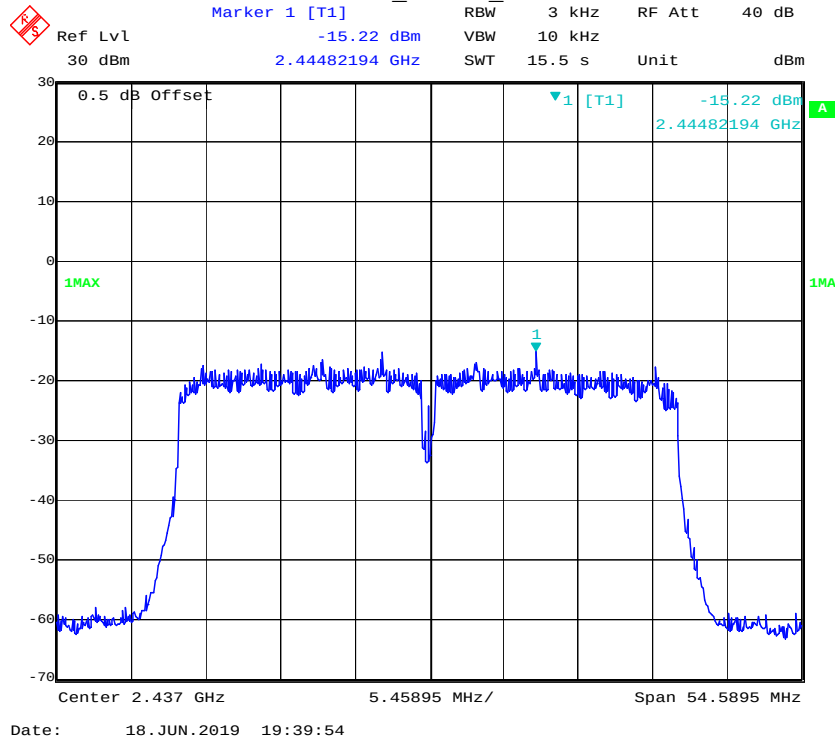

802.11 n40_Middle_Chain 1

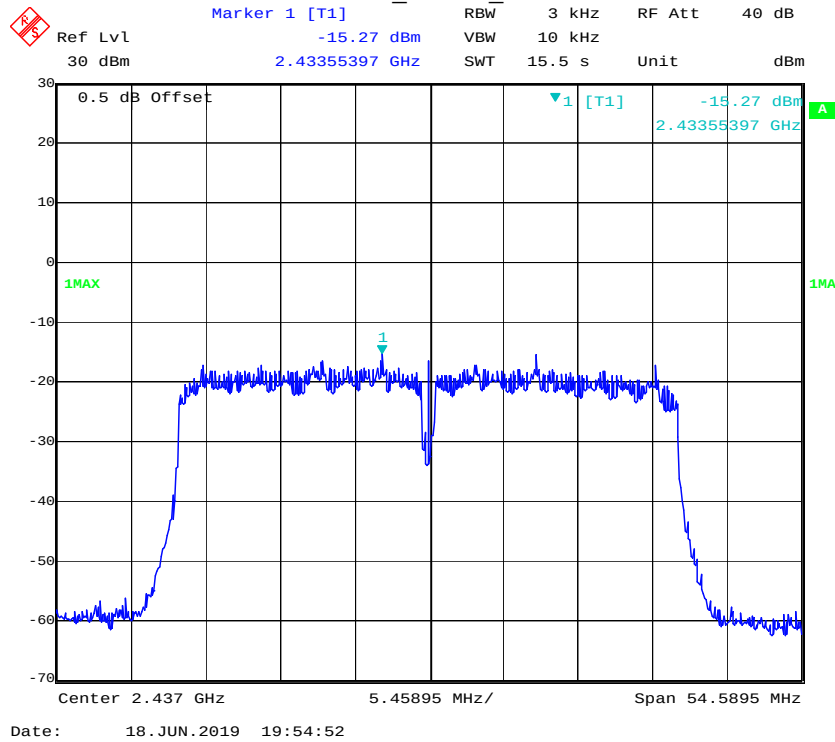

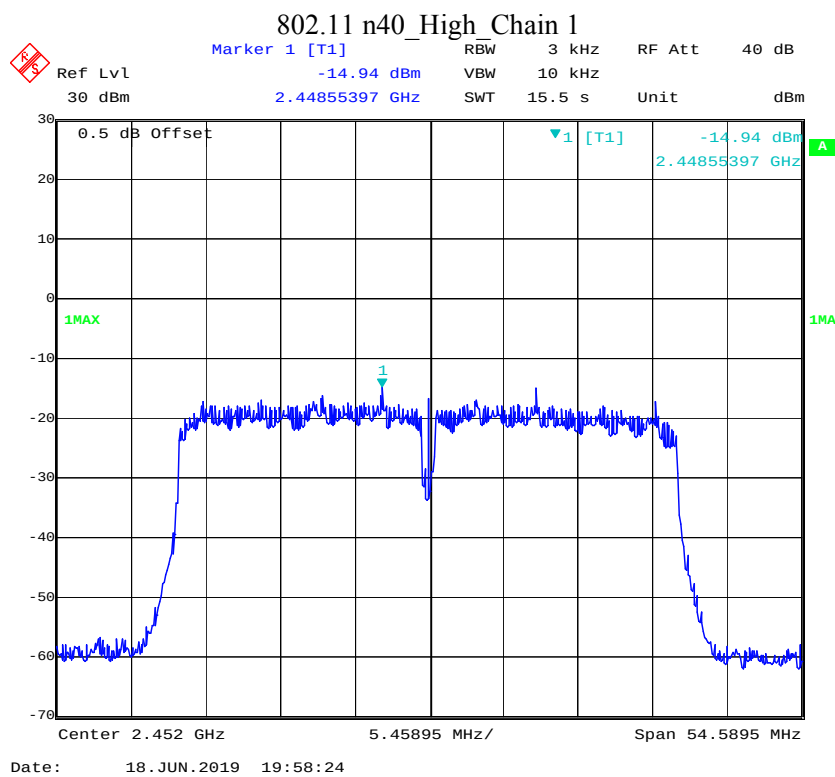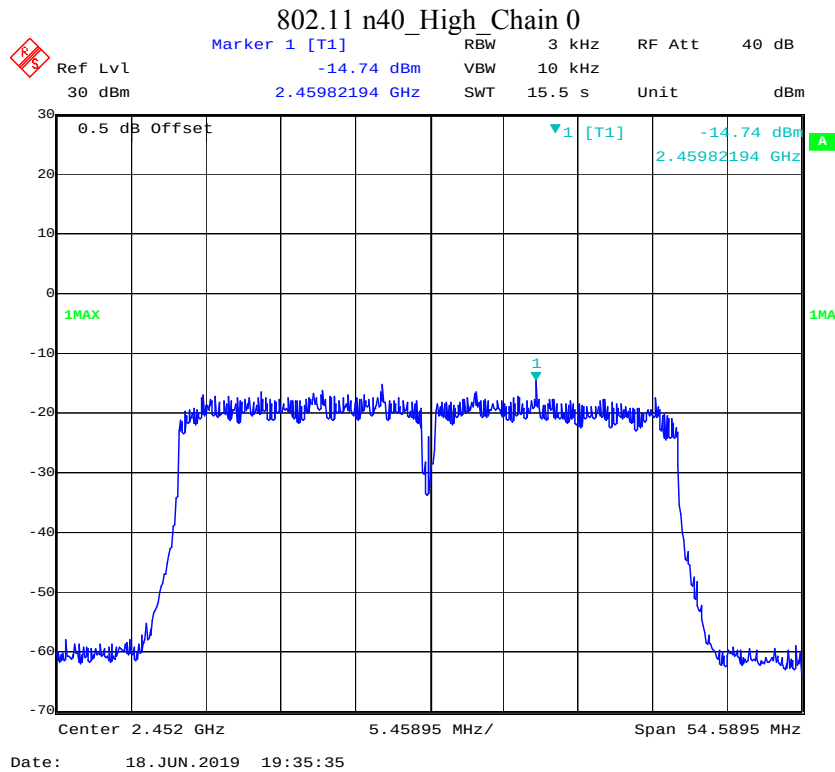

***** END OF REPORT *****