


RF TEST REPORT



Report No.: 17070522-FCC-R1

Supersede Report No.: N/A

Applicant	MFOURTEL MEXICO S.A. DE C.V.	
Product Name	LTE Mobile Phone	
Model No.	M4 SS4458-R	
Serial No.	N/A	
Test Standard	FCC Part 22(H):2016 ;FCC Part 24(E):2016; ANSI/TIA-603-D: 2010	
Test Date	June 27 to July 11, 2017	
Issue Date	July 12, 2017	
Test Result	☒ Pass ☐ Fail	
Equipment complied with the specification ☒		
Equipment did not comply with the specification ☐		
		
Loren Luo Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	17070522-FCC-R1
Page	3 of 90

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	10
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	11
6.1 RF EXPOSURE (SAR).....	11
6.2 RF OUTPUT POWER	12
6.3 PEAK-AVERAGE RATIO.....	24
6.4 OCCUPIED BANDWIDTH.....	28
6.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	39
6.6 SPURIOUS RADIATED EMISSIONS.....	52
6.7 BAND EDGE.....	58
6.8 FREQUENCY STABILITY	68
ANNEX A. TEST INSTRUMENT.....	72
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	74
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	86
ANNEX C.II. EUT OPERATING CONKITIONS	88
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	89
ANNEX E. DECLARATION OF SIMILARITY	90

1. Report Revision History

Report No.	Report Version	Description	Issue Date
17070522-FCC-R1	NONE	Original	July 12, 2017

2. Customer information

Applicant Name	MFOURTEL MEXICO S.A. DE C.V.
Applicant Add	Av. Ejército Nacional 436 Piso 3 Chapultepec Morales Miguel Hidalgo Distrito Federal 11570.
Manufacturer	CK Telecom Limited
Manufacturer Add	Technology Road.High-Tech Development Zone. Heyuan, Guangdong,P.R.China.

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

4. Equipment under Test (EUT) Information

Description of EUT: LTE Mobile Phone

Main Model: M4 SS4458-R

Serial Model: N/A

Date EUT received: June 26, 2017

Test Date(s): June 27 to July 11, 2017

Equipment Category : PCE

Antenna Gain:

- GSM850: -0.5dBi
- PCS1900: 1dBi
- UMTS-FDD Band V: -0.5dBi
- UMTS-FDD Band II: 1dBi
- LTE Band II: 1dBi
- LTE Band IV: 1dBi
- LTE Band VII: 1.5dBi
- LTE Band XIII: -0.7dBi
- WIFI: -0.5dBi
- Bluetooth/BLE: -0.5dBi
- GPS: -1dBi

Antenna Type: PIFA antenna

Type of Modulation:

- GSM / GPRS: GMSK
- EGPRS: GMSK, 8PSK
- UMTS-FDD: QPSK
- LTE Band: QPSK, 16QAM
- 802.11b/g/n: DSSS, OFDM
- Bluetooth: GFSK, π /4DQPSK, 8DPSK
- BLE: GFSK
- GPS: BPSK

RF Operating Frequency (ies):

GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz
 PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz
 UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz
 UMTS-FDD Band II TX: 1852.4 ~ 1907.6 MHz;
 RX: 1932.4 ~ 1987.6 MHz
 LTE Band II TX: 1850.7 ~ 1909.3 MHz; RX : 1930.7 ~ 1989.3 MHz
 LTE Band IV TX: 1710.7 ~ 1754.3 MHz; RX : 2110.7 ~ 2154.3 MHz
 LTE Band VII TX: 2502.5 ~ 2567.5 MHz; RX : 2622.5 ~ 2687.5 MHz
 LTE Band XIII TX: 779.5 ~ 784.5 MHz; RX : 748.5 ~ 753.5 MHz
 WIFI: 802.11b/g/n(20M): 2412-2462 MHz
 WIFI: 802.11n(40M): 2422-2452 MHz
 Bluetooth& BLE: 2402-2480 MHz
 GPS: 1575.42 MHz

Maximum Conducted

AV Power to Antenna:

GSM Voice: GSM850: 32.54 dBm
 PCS1900: 29.60 dBm
 GPRS: GSM850: 32.52 dBm
 PCS1900: 29.54 dBm
 EGPRS(MSC5): GSM850: 26.15 dBm
 PCS1900: 26.69 dBm
 RMC: UMTS-FDD Band V: 22.38 dBm
 UMTS-FDD Band II: 22.11 dBm
 HSUPA: UMTS-FDD Band V: 21.78 dBm
 UMTS-FDD Band II: 21.61 dBm
 HSDPA: UMTS-FDD Band V: 21.87 dBm
 UMTS-FDD Band II: 21.54 dBm

	GSM Voce:GSM850: 25.39dBm / ERP
	PCS1900: 26.60dBm / EIRP
	GPRS:GSM850: 25.37dBm / ERP
	PCS1900: 26.54 dBm / EIRP
	EGPRS(MCS5):GSM850: 19.00 dBm / ERP
ERP/EIRP:	PCS1900: 23.69dBm / EIRP
	RMC:UMTS-FDD Band V: 15.23 dBm / ERP
	UMTS-FDD Band II: 19.11 dBm / EIRP
	HSDPA:UMTS-FDD Band V: 14.63 dBm / ERP
	UMTS-FDD Band II: 18.61 dBm / EIRP
	HSUPA:UMTS-FDD Band V: 14.72 dBm / ERP
	UMTS-FDD Band II: 18.54 dBm / EIRP
	GSM 850: 124CH
	PCS1900: 299CH
	UMTS-FDD Band V : 102CH
	UMTS-FDD Band II : 277CH
Number of Channels:	WIFI :802.11b/g/n(20M): 11CH
	WIFI :802.11n(40M): 7CH
	Bluetooth: 79CH
	BLE: 40CH
	GPS:1CH
Port:	USB Port, Earphone Port
	Adapter:
	Model: A8-501000
	Input: AC100-240V~50/60Hz,150mA
Input Power:	Output: DC 5.0V,1000mA
	Battery
	Model: M3000A
	Spec: 3.85V,11.55Wh,3000mAh
	Charge Limit: 4.4Vdc
Trade Name :	M4

Brand Name: M4

GPRS/ EGPRS Multi-slot class 8/10/12

FCC ID: CLNSS4458-R

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§ 1.1307; § 2.1093	RF Exposure (SAR)	Compliance
§2.1046; § 22.913(a); § 24.232(c); § 27.50(c.10) ;	RF Output Power	Compliance
§ 24.232 (d) ;	Peak-Average Ratio	Compliance
§ 2.1049; § 22.905; § 22.917; § 24.238;	99% & -26 dB Occupied Bandwidth	Compliance
§ 2.1051; § 22.917(a); § 24.238(a);	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917(a); § 24.238(a);	Field Strength of Spurious Radiation	Compliance
§ 22.917(a); § 24.238(a);	Out of band emission, Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235;	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

Note: Testing was performed by configuring EUT to maximum output power status, the declared output power class for different

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS

6.1 RF Exposure (SAR)

Test Result: Pass

The EUT is a portable device, thus requires SAR evaluation;


Please refer to RF Exposure Evaluation Report: 17070522-FCC-H.

6.2 RF Output Power

Temperature	25°C
Relative Humidity	55%
Atmospheric Pressure	1012mbar
Test date :	July 10, 2017
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§22.913 (a)	a)	ERP:38.45dBm	☒
§24.232 (c)	b)	EIRP:33dBm	☒

Test Setup	 Base Station EUT
------------	--

Test Procedure	For Conducted Power: - The transmitter output port was connected to base station. - Set EUT at maximum power through base station. - Select lowest, middle, and highest channels for each band and different test mode. For ERP/EIRP: According with KDB 971168 v02r02 - The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable. - The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis. - The frequency range up to tenth harmonic of the fundamental frequency was investigated.
----------------	---

	- Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution. - Spurious emissions in dB = $10 \log (\text{TX power in Watts}/0.001)$ – the absolute level - Spurious attenuation limit in dB = $43 + 10 \log_{10} (\text{power out in Watts})$.
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

Conducted Power

GSM Mode:

Burst Average Power (dBm);								
Band	GSM850				PCS1900			
Channel	128	190	251	Tune up Power tolerant	512	661	810	Tune up Power tolerant
Frequency (MHz)	824.2	836.6	848.8	/	1850.2	1880	1909.8	/
GSM Voice (1 uplink),GMSK	32.54	32.43	32.42	32±1	29.48	29.52	29.60	29±1
GPRS Multi-Slot Class 8 (1 uplink),GMSK	32.52	32.43	32.43	32±1	29.46	29.48	29.54	29±1
GPRS Multi-Slot Class 8 (2 uplink),GMSK	30.86	30.71	30.69	30±1	27.89	27.95	28.01	28±1
GPRS Multi-Slot Class 10 (3 uplink) GMSK	29.32	29.15	29.1	29±1	25.87	25.91	26.02	26±1
GPRS Multi-Slot Class 12 (4 uplink) GMSK	28.41	28.23	28.19	28±1	24.86	24.93	25.06	24±1
EGPRS Multi-Slot Class 8 (1 uplink) GMSK MCS1	32.48	32.38	32.37	32±1	29.62	29.66	29.67	29±1
EGPRS Multi-Slot Class 10 (2 uplink) GMSK MCS1	30.84	30.7	30.69	30±1	28.11	28.15	28.23	28±1
EGPRS Multi-Slot Class 10 (3 uplink) GMSK MCS1	29.31	29.15	29.11	29±1	26.07	26.14	26.23	26±1
EGPRS Multi-Slot Class 12 (4 uplink) GMSK MCS1	28.39	28.22	28.18	28±1	25.10	25.17	25.26	25±1
EGPRS Multi-Slot Class 8 (1 uplink) 8PSK MCS5	26.15	25.95	25.70	26±1	26.35	26.34	26.69	26±1

EGPRS Multi-Slot Class 10 (2 uplink) 8PSK MCS5	25.23	25.07	24.82	25±1	25.63	25.30	25.35	25±1
EGPRS Multi-Slot Class 10 (3 uplink) 8PSK MCS5	22.28	22.09	21.83	22±1	22.69	22.30	22.32	22±1
EGPRS Multi-Slot Class 12 (4 uplink) 8PSK MCS5	21.01	20.82	20.47	21.3±1	21.52	21.18	21.17	21.3±1

Remark :

GPRS, CS1 coding scheme.

EGPRS, MCS1 coding scheme.

EGPRS, MCS5 coding scheme.

Multi-Slot Class 8 , Support Max 4 downlink, 1 uplink , 5 working link

Multi-Slot Class 10 , Support Max 4 downlink, 2 uplink , 5 working link

Multi-Slot Class 12 , Support Max 4 downlink, 4 uplink , 5 working link

UMTS Mode:

UMTS-FDD Band V

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)	Tune up Power tolerant
RMC 12.2kbps	4132	826.4	22.36	23±1
	4175	835	22.31	23±1
	4233	846.6	22.38	23±1
HSDPA Subtest1	4132	826.4	21.63	22±1
	4175	835	21.63	22±1
	4233	846.6	21.78	22±1
HSDPA Subtest2	4132	826.4	21.74	22±1
	4175	835	21.68	22±1
	4233	846.6	21.78	22±1
HSDPA Subtest3	4132	826.4	21.58	22±1
	4175	835	21.58	22±1
	4233	846.6	21.73	22±1
HSDPA Subtest4	4132	826.4	21.77	22±1
	4175	835	21.73	22±1
	4233	846.6	21.64	22±1
HSUPA Subtest1	4132	826.4	21.71	22±1
	4175	835	21.52	22±1
	4233	846.6	21.73	22±1
HSUPA Subtest2	4132	826.4	21.67	22±1
	4175	835	21.47	22±1
	4233	846.6	21.52	22±1
HSUPA Subtest3	4132	826.4	21.57	22±1
	4175	835	21.61	22±1
	4233	846.6	21.70	22±1
HSUPA Subtest4	4132	826.4	21.45	22±1
	4175	835	21.60	22±1
	4233	846.6	21.57	22±1
HSUPA Subtest5	4132	826.4	21.85	22±1
	4175	835	21.61	22±1
	4233	846.6	21.87	22±1

UMTS-FDD Band II

Band/ Time Slot configuration	Channel	Frequency	Average power (dBm)	Tune up Power tolerant
RMC 12.2kbps	9262	1852.4	22.10	22±1
	9400	1880	22.11	22±1
	9538	1907.6	22.04	22±1
HSDPA Subtest1	9262	1852.4	21.40	22±1
	9400	1880	21.32	22±1
	9538	1907.6	21.33	22±1
HSDPA Subtest2	9262	1852.4	21.41	22±1
	9400	1880	21.61	22±1
	9538	1907.6	21.44	22±1
HSDPA Subtest3	9262	1852.4	21.40	22±1
	9400	1880	21.43	22±1
	9538	1907.6	21.33	22±1
HSDPA Subtest4	9262	1852.4	21.45	22±1
	9400	1880	21.44	22±1
	9538	1907.6	21.37	22±1
HSUPA Subtest1	9262	1852.4	21.43	22±1
	9400	1880	21.35	22±1
	9538	1907.6	21.27	22±1
HSUPA Subtest2	9262	1852.4	21.32	22±1
	9400	1880	21.28	22±1
	9538	1907.6	21.19	22±1
HSUPA Subtest3	9262	1852.4	21.30	22±1
	9400	1880	21.35	22±1
	9538	1907.6	21.40	22±1
HSUPA Subtest4	9262	1852.4	21.39	22±1
	9400	1880	21.17	22±1
	9538	1907.6	21.18	22±1
HSUPA Subtest5	9262	1852.4	21.49	22±1
	9400	1880	21.54	22±1
	9538	1907.6	21.31	22±1

ERP & EIRP

GSM Voice

ERP for Cellular Band (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	19.82	V	6.1	0.53	25.39	38.45
824.2	18.97	H	6.1	0.53	24.54	38.45
836.6	19.61	V	6.2	0.53	25.28	38.45
836.6	18.63	H	6.2	0.53	24.30	38.45
848.8	19.6	V	6.2	0.53	25.27	38.45
848.8	18.9	H	6.2	0.53	24.57	38.45

EIRP for PCS Band (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	19.32	V	7.88	0.72	26.48	33
1850.2	18.43	H	7.88	0.72	25.59	33
1880	19.36	V	7.88	0.72	26.52	33
1880	17.85	H	7.88	0.72	25.01	33
1909.8	19.46	V	7.86	0.72	26.60	33
1909.8	17.51	H	7.86	0.72	24.65	33

GPRS:

ERP for Cellular Band (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	19.8	V	6.1	0.53	25.37	38.45
824.2	18.54	H	6.1	0.53	24.11	38.45
836.6	19.61	V	6.2	0.53	25.28	38.45
836.6	18.41	H	6.2	0.53	24.08	38.45
848.8	19.61	V	6.2	0.53	25.28	38.45
848.8	18.73	H	6.2	0.53	24.40	38.45

EIRP for PCS Band (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	19.3	V	7.88	0.72	26.46	33
1850.2	18.09	H	7.88	0.72	25.25	33
1880	19.32	V	7.88	0.72	26.48	33
1880	18.1	H	7.88	0.72	25.26	33
1909.8	19.4	V	7.86	0.72	26.54	33
1909.8	18.6	H	7.86	0.72	25.74	33

EGPRS (MCS5):

ERP for Cellular Band (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	13.43	V	6.1	0.53	19.00	38.45
824.2	12.5	H	6.1	0.53	18.07	38.45
836.6	13.13	V	6.2	0.53	18.8	38.45
836.6	11.17	H	6.2	0.53	16.84	38.45
848.8	12.88	V	6.2	0.53	18.55	38.45
848.8	11.92	H	6.2	0.53	17.59	38.45

EIRP for PCS Band (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	16.53	V	7.88	0.72	23.69	33
1850.2	15.57	H	7.88	0.72	22.73	33
1880	16.18	V	7.88	0.72	23.34	33
1880	14.76	H	7.88	0.72	21.92	33
1909.8	16.21	V	7.86	0.72	23.35	33
1909.8	15.25	H	7.86	0.72	22.39	33

RMC

ERP for UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
826.4	9.64	V	6.1	0.53	15.21	38.45
826.4	8.62	H	6.1	0.53	14.19	38.45
835	9.49	V	6.2	0.53	15.16	38.45
835	8.3	H	6.2	0.53	13.97	38.45
846.6	9.56	V	6.2	0.53	15.23	38.45
846.6	8.67	H	6.2	0.53	14.34	38.45

EIRP for UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.4	11.94	V	7.88	0.72	19.1	33
1852.4	10.87	H	7.88	0.72	18.03	33
1880	11.95	V	7.88	0.72	19.11	33
1880	10.96	H	7.88	0.72	18.12	33
1907.6	11.9	V	7.86	0.72	19.04	33
1907.6	10.59	H	7.86	0.72	17.73	33

HSDPA

ERP for UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
826.4	9.05	V	6.1	0.53	14.62	38.45
826.4	7.88	H	6.1	0.53	13.45	38.45
835	8.91	V	6.2	0.53	14.58	38.45
835	7.58	H	6.2	0.53	13.25	38.45
846.6	8.96	V	6.2	0.53	14.63	38.45
846.6	7.7	H	6.2	0.53	13.37	38.45

EIRP for UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.4	11.29	V	7.88	0.72	18.45	33
1852.4	9.97	H	7.88	0.72	17.13	33
1880	11.45	V	7.88	0.72	18.61	33
1880	9.59	H	7.88	0.72	16.75	33
1907.6	11.3	V	7.86	0.72	18.44	33
1907.6	10.46	H	7.86	0.72	17.6	33

HSUPA

ERP for UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
826.4	9.13	V	6.1	0.53	14.7	38.45
826.4	7.53	H	6.1	0.53	13.1	38.45
835	8.79	V	6.2	0.53	14.46	38.45
835	7.48	H	6.2	0.53	13.15	38.45
846.6	9.05	V	6.2	0.53	14.72	38.45
846.6	8.27	H	6.2	0.53	13.94	38.45


EIRP for UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.4	11.33	V	7.88	0.72	18.49	33
1852.4	9.39	H	7.88	0.72	16.55	33
1880	11.38	V	7.88	0.72	18.54	33
1880	9.85	H	7.88	0.72	17.01	33
1907.6	11.17	V	7.86	0.72	18.31	33
1907.6	9.53	H	7.86	0.72	16.67	33

6.3 Peak-Average Ratio

Temperature	25°C
Relative Humidity	55%
Atmospheric Pressure	1012mbar
Test date :	July 10, 2017
Tested By :	Loren Luo

Requirement(s):

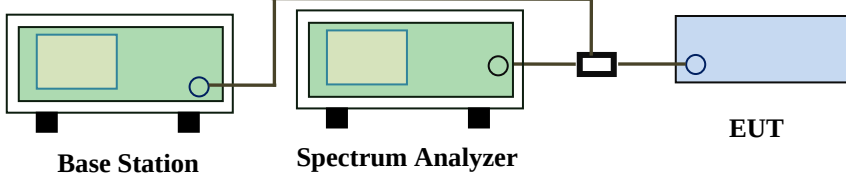Spec	Item	Requirement	Applicable
§24.232(d)	a)	The peak-to-average ratio (PAR) of the transmission may not exceed 13dB.	☒
Test Setup	 Base Station Spectrum Analyzer EUT		
Test Procedure	According with KDB 971168 v02r02 5.7.2 Alternate procedure for PAPR 5.1.2 Peak power measurements with a peak power meter The total peak output power may be measured using a broadband peak RF power meter. The power meter must have a video bandwidth that is greater than or equal to the emission bandwidth and utilize a fast-responding diode detector. 5.2.3 Average power measurement with average power meter As an alternative to the use of a spectrum/signal analyzer or EMI receiver to perform a measurement of the total in-band average output power, a wideband RF average power meter with a thermocouple detector or equivalent can be used under certain conditions If the EUT can be configured to transmit continuously (i.e., the burst duty cycle $\geq 98\%$) and at all times the EUT is transmitting at its maximum output		

	power level, then a conventional wide-band RF power meter can be used. If the EUT cannot be configured to transmit continuously (i.e., the burst duty cycle < 98%), then there are two options for the use of an average power meter. First, a gated average power meter can be used to perform the measurement if the gating parameters can be adjusted such that the power is measured only over active transmission bursts at maximum output power levels. A conventional average power meter can also be used if the measured burst duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent) by performing the measurement over the on/off burst cycles and then correcting (increasing) the measured level by a factor equal to $10\log(1/\text{duty cycle})$
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A
 Test Plot ☐ Yes (See below) ☒ N/A

GSM : GSM 1900 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1850.2	30.43	29.48	0.95
1880	30.43	29.52	0.91
1909.8	30.41	29.6	0.81

GPRS 1900 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1850.2	30.42	29.46	0.96
1880	30.46	29.48	0.98
1909.8	30.52	29.54	0.98

EGPRS (MSC5) 1900 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1850.2	27.69	26.69	1.00
1880	27.88	26.34	1.54
1909.8	27.63	26.35	1.28

RMC : UMTS-FDD Band 2 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1852.4	25.11	22.1	3.01
1880	25.13	22.11	3.02
1907.6	25.12	22.04	3.08

HSDPA : UMTS-FDD Band 2 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1852.4	23.42	21.43	1.99
1880	23.42	21.35	2.07
1907.6	23.23	21.27	1.96


HSUPA : UMTS-FDD Band 2 PK-AV POWER (PART 24E)

Frequency (MHz)	Conducted power(dBm)		Peak-Average Ratio(PAR)
	Peak	Average	
1852.4	23.20	21.40	1.80
1880	23.41	21.32	2.09
1907.6	23.16	21.33	1.83

6.4 Occupied Bandwidth

Temperature	25°C
Relative Humidity	55%
Atmospheric Pressure	1012mbar
Test date :	July 10, 2017
Tested By :	Loren Luo

Requirement(s):

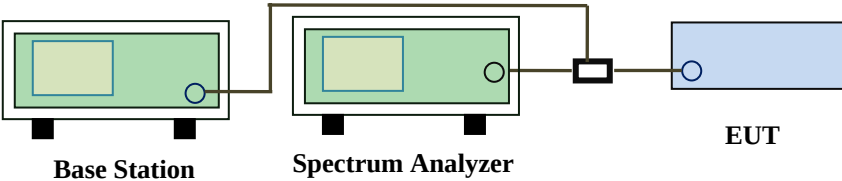Spec	Item	Requirement	Applicable
§2.1049, §22.917, §22.905 §24.238	a)	99% Occupied Bandwidth(kHz)	☒
	b)	26 dB Bandwidth(kHz)	☒
Test Setup			
Test Procedure	- The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers.		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

GSM Voice:

Cellular Band (Part 22H) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	246.1984	316.230
190	836.6	245.9955	319.630
251	848.8	244.2035	320.743

PCS Band (Part 24E) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850	251.3533	323.834
661	1880	249.8677	319.442
810	1910	245.7295	319.298

GPRS:

Cellular Band (Part 22H) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	254.2016	316.442
190	836.6	244.5529	320.324
251	848.8	251.9945	323.158

PCS Band (Part 24E) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850	245.6815	322.778
661	1880	247.3721	323.471
810	1910	250.0082	321.602

EGPRS (MSC 5):

Cellular Band (Part 22H) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	248.9395	317.075
190	836.6	247.5097	321.620
251	848.8	246.2438	321.063

PCS Band (Part 24E) result

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850	244.1939	319.611
661	1880	248.3235	323.468
810	1910	242.9124	319.341

RMC:

UMTS-FDD Band V (Part 22H)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
4132	826.6	4.2136	4.874
4175	835.0	4.2091	4.860
4233	846.4	4.2119	4.900

UMTS-FDD Band II (Part 24E)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1853	4.2151	4.928
9400	1880	4.2253	4.936
9538	1907	4.2124	4.931

HSDPA:

UMTS-FDD Band V (Part 22H)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
4132	826.6	4.2038	4.873
4175	835.0	4.2071	4.880
4233	846.4	4.2035	4.890

UMTS-FDD Band II (Part 24E)

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1853	4.2396	4.925
9400	1880	4.2475	4.940
9538	1907	4.2018	4.910

HSUPA:

UMTS-FDD Band V (Part 22H)


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
4132	826.6	4.2139	4.862
4175	835.0	4.2125	4.870
4233	846.4	4.2126	4.896

UMTS-FDD Band II (Part 24E)


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
9262	1853	4.2258	4.912
9400	1880	4.2184	4.897
9538	1907	4.2066	4.914

Test Plots


GSM Voice:

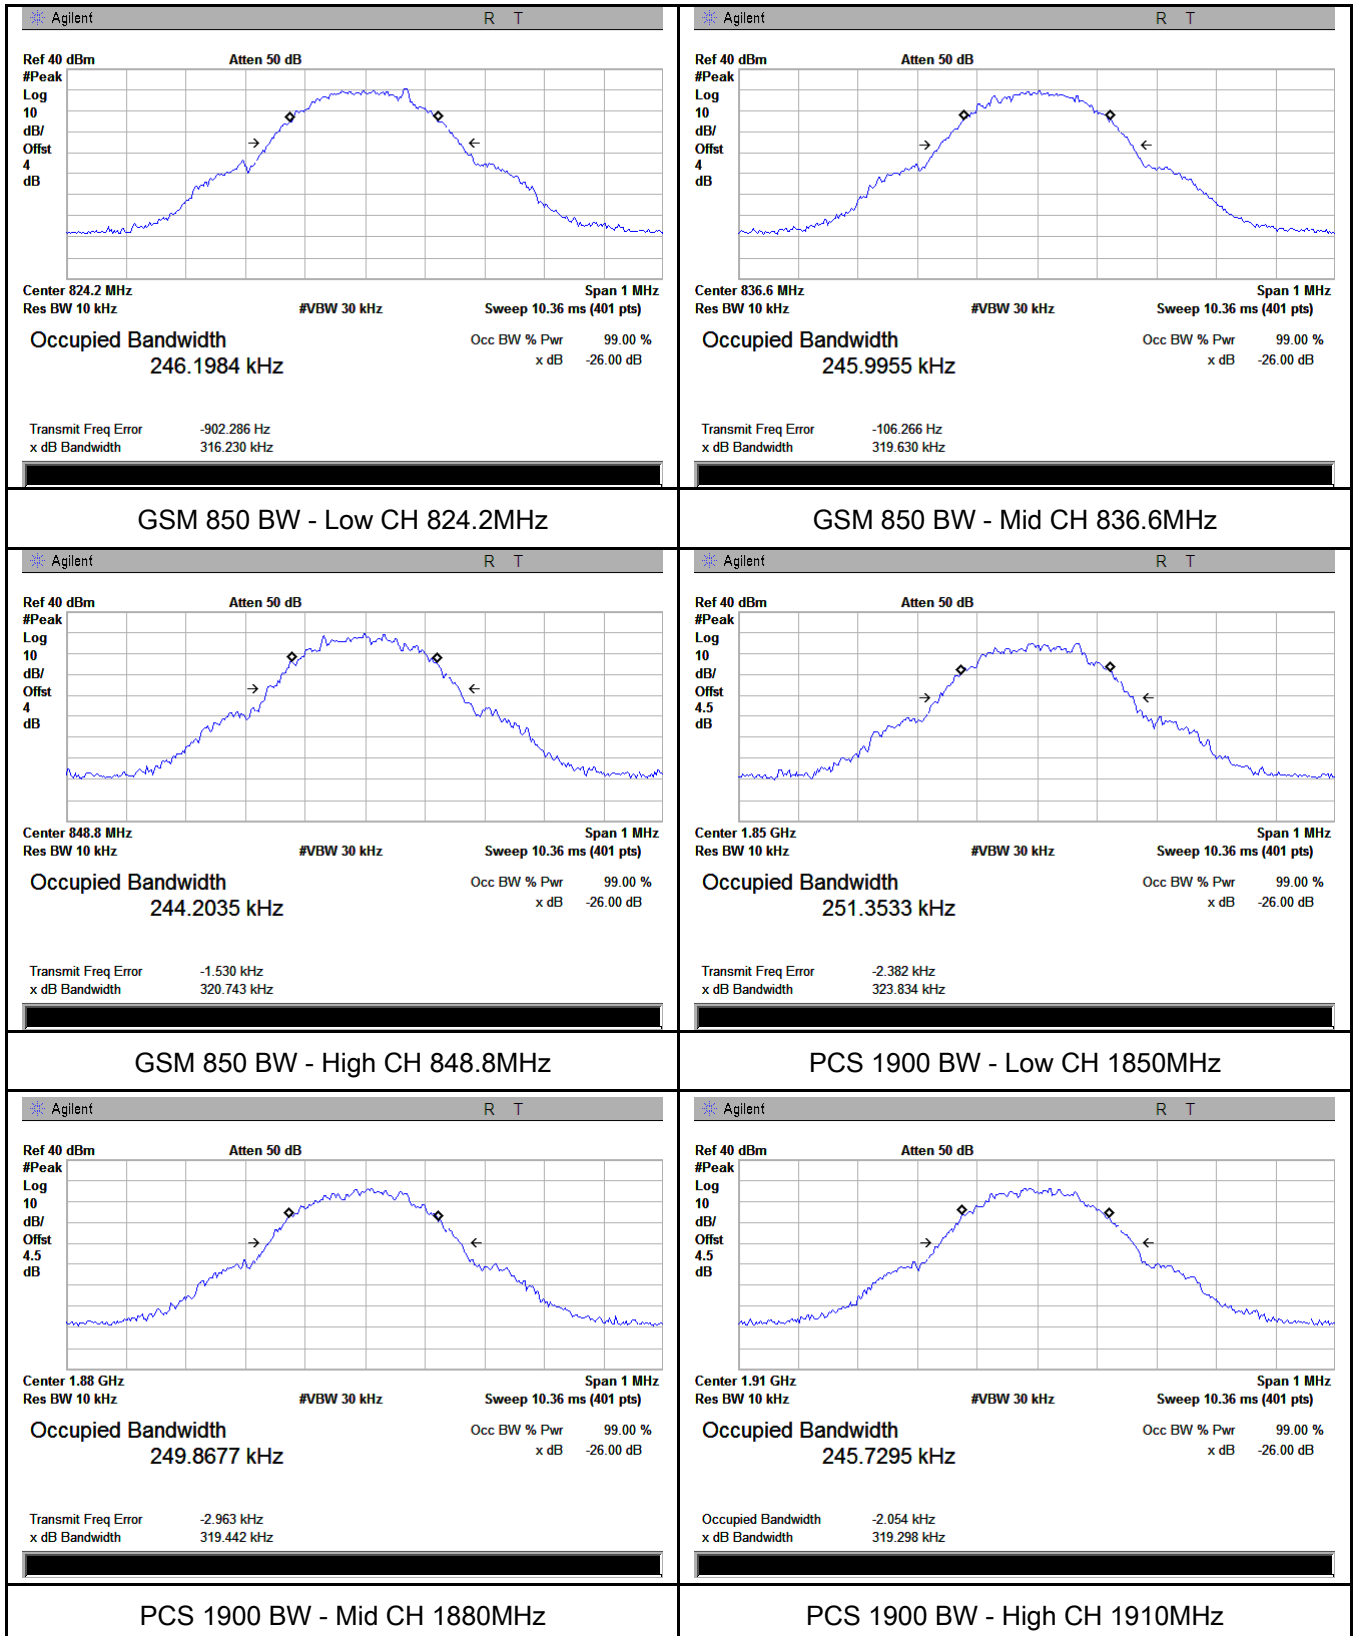


GPRS:

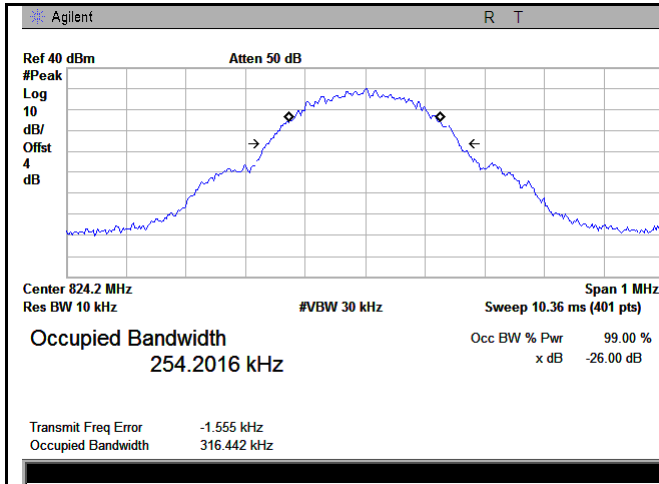


GSM 850 BW - Low CH 824.2MHz

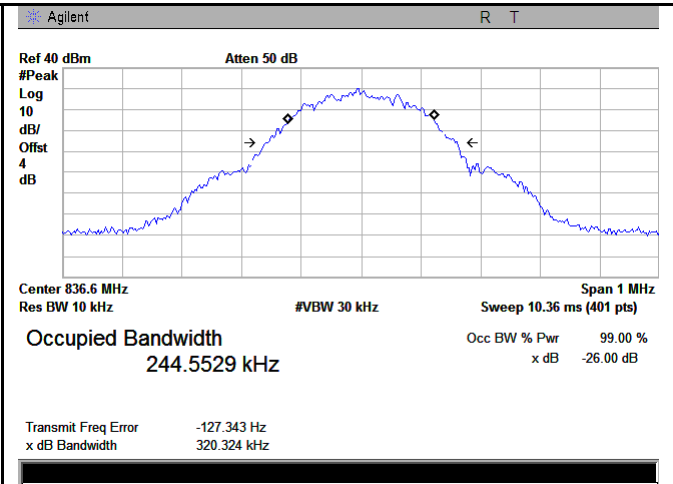


GSM 850 BW - Mid CH 836.6MHz

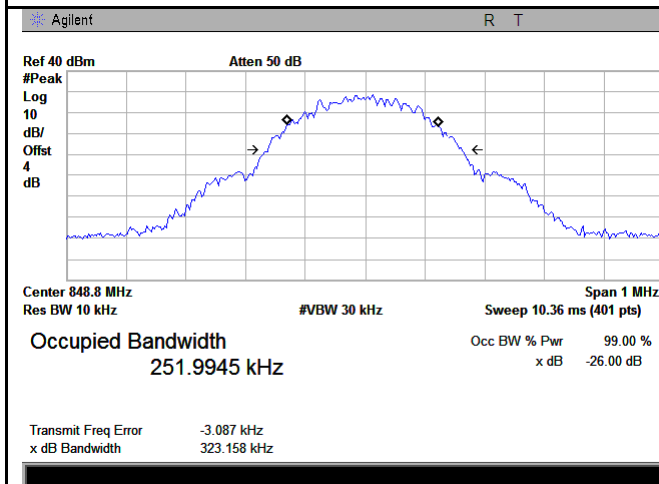


GSM 850 BW - High CH 848.8MHz

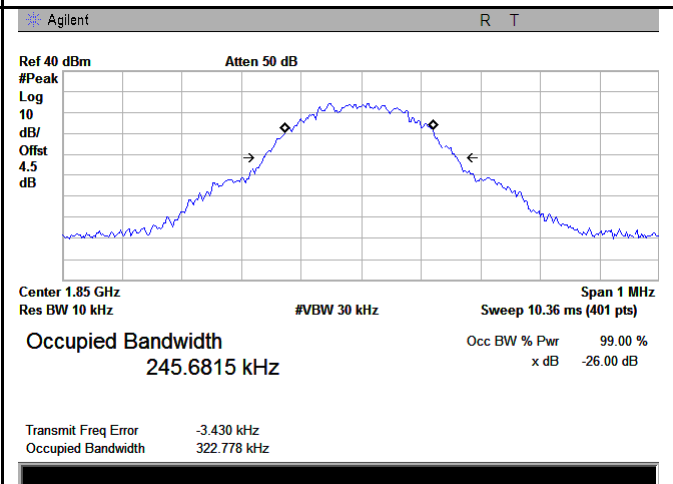

PCS 1900 BW - Low CH 1850MHz

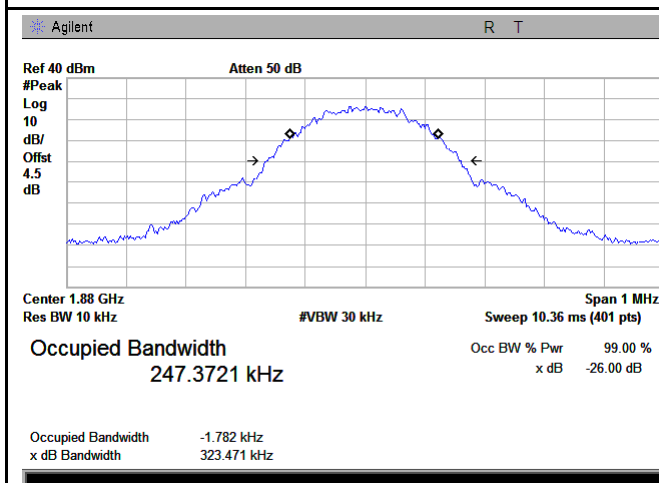


PCS 1900 BW - Mid CH 1880MHz

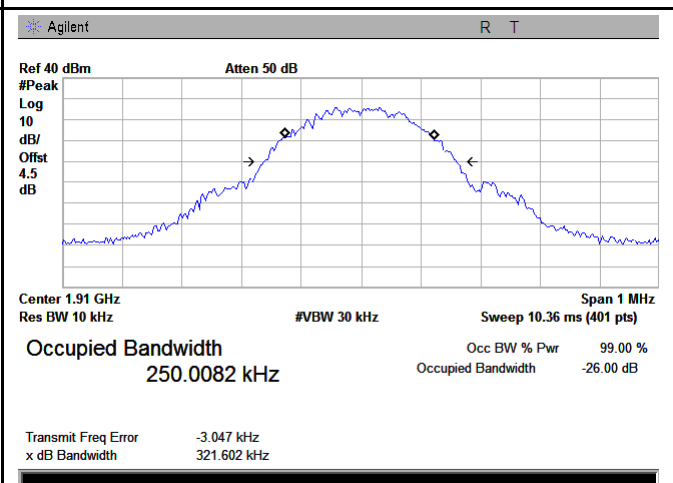


PCS 1900 BW - High CH 1910MHz


EGPRS (MCS5):

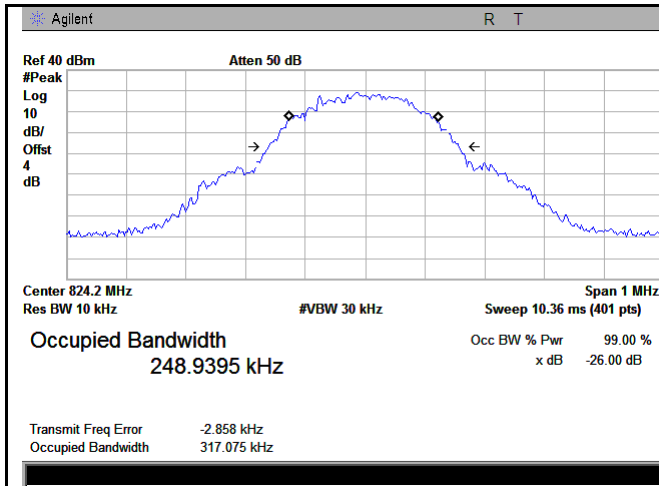


GSM 850 BW - Low CH 824.2MHz

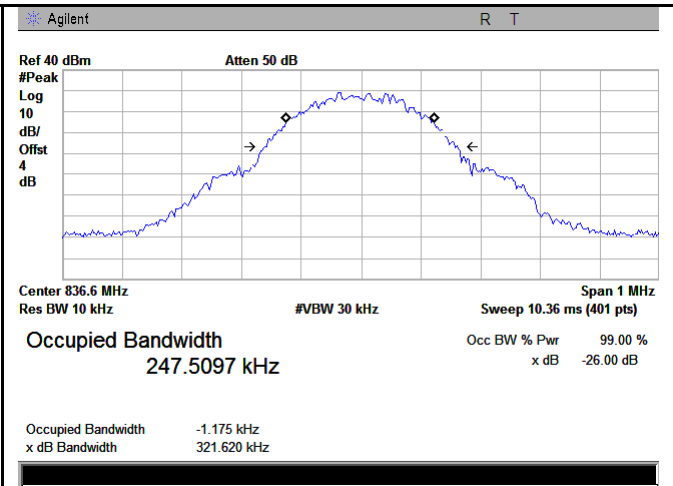


GSM 850 BW - Mid CH 836.6MHz

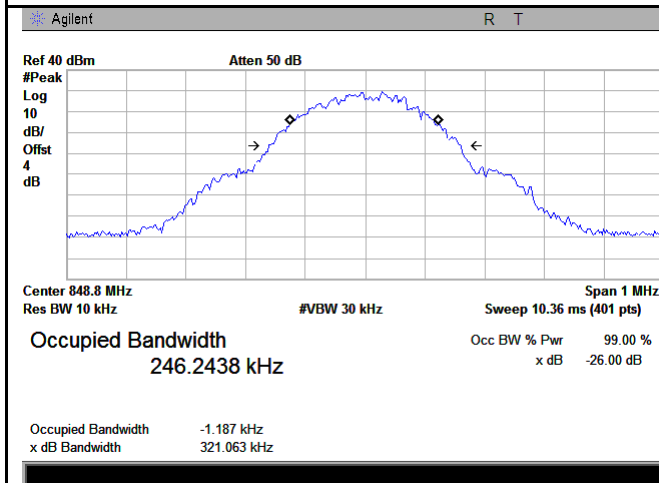


GSM 850 BW - High CH 848.8MHz

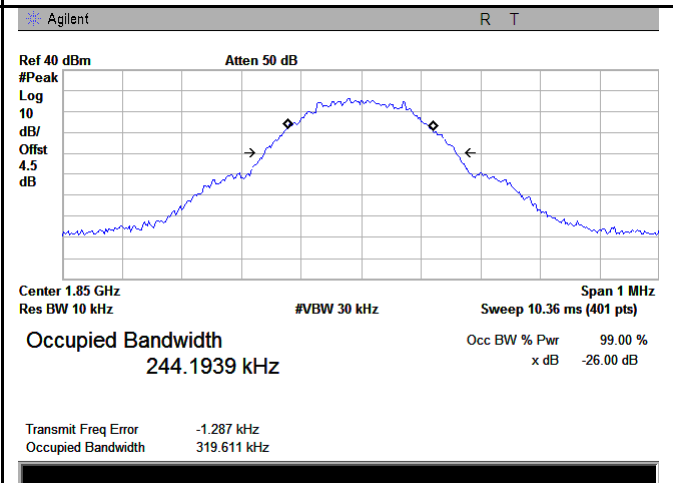

PCS 1900 BW - Low CH 1850MHz

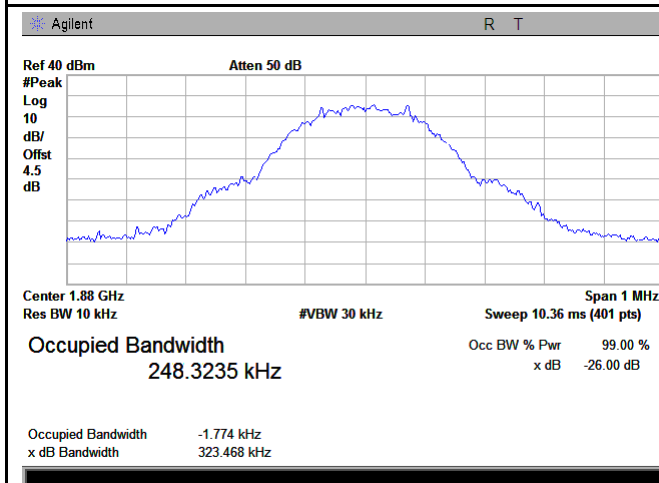


PCS 1900 BW - Mid CH 1880MHz

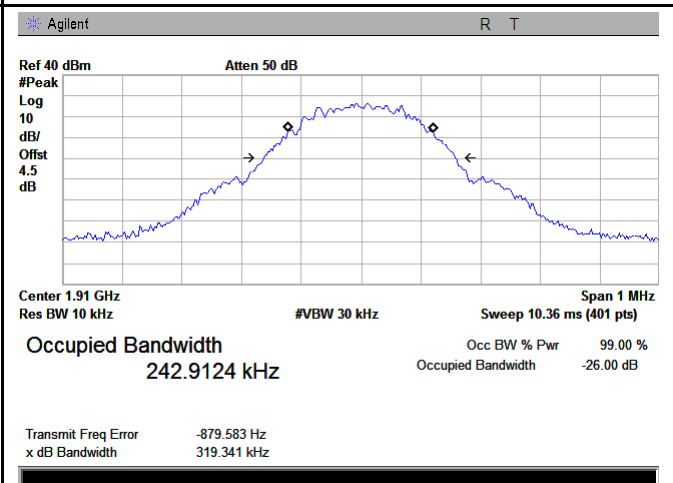


PCS 1900 BW - High CH 1910MHz


RMC:

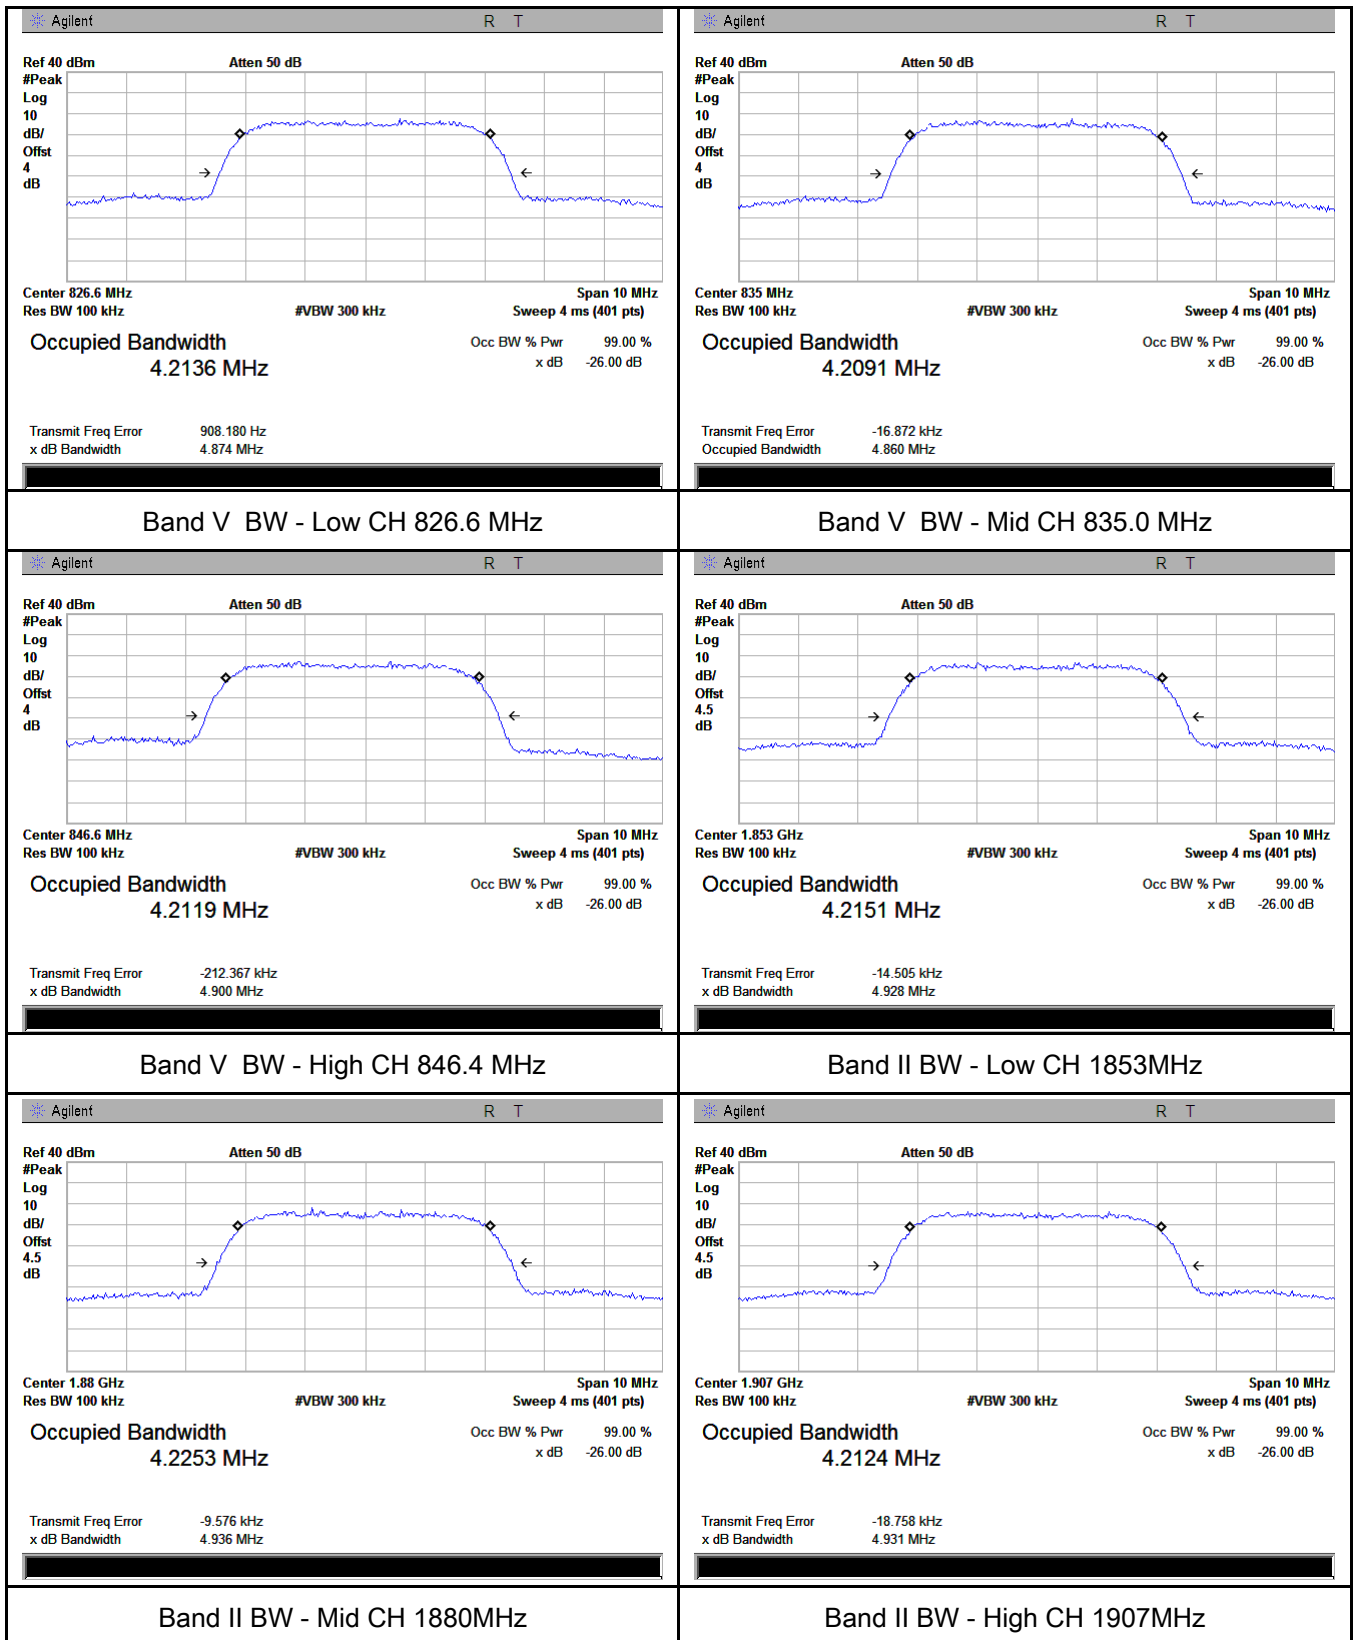

HSDPA:

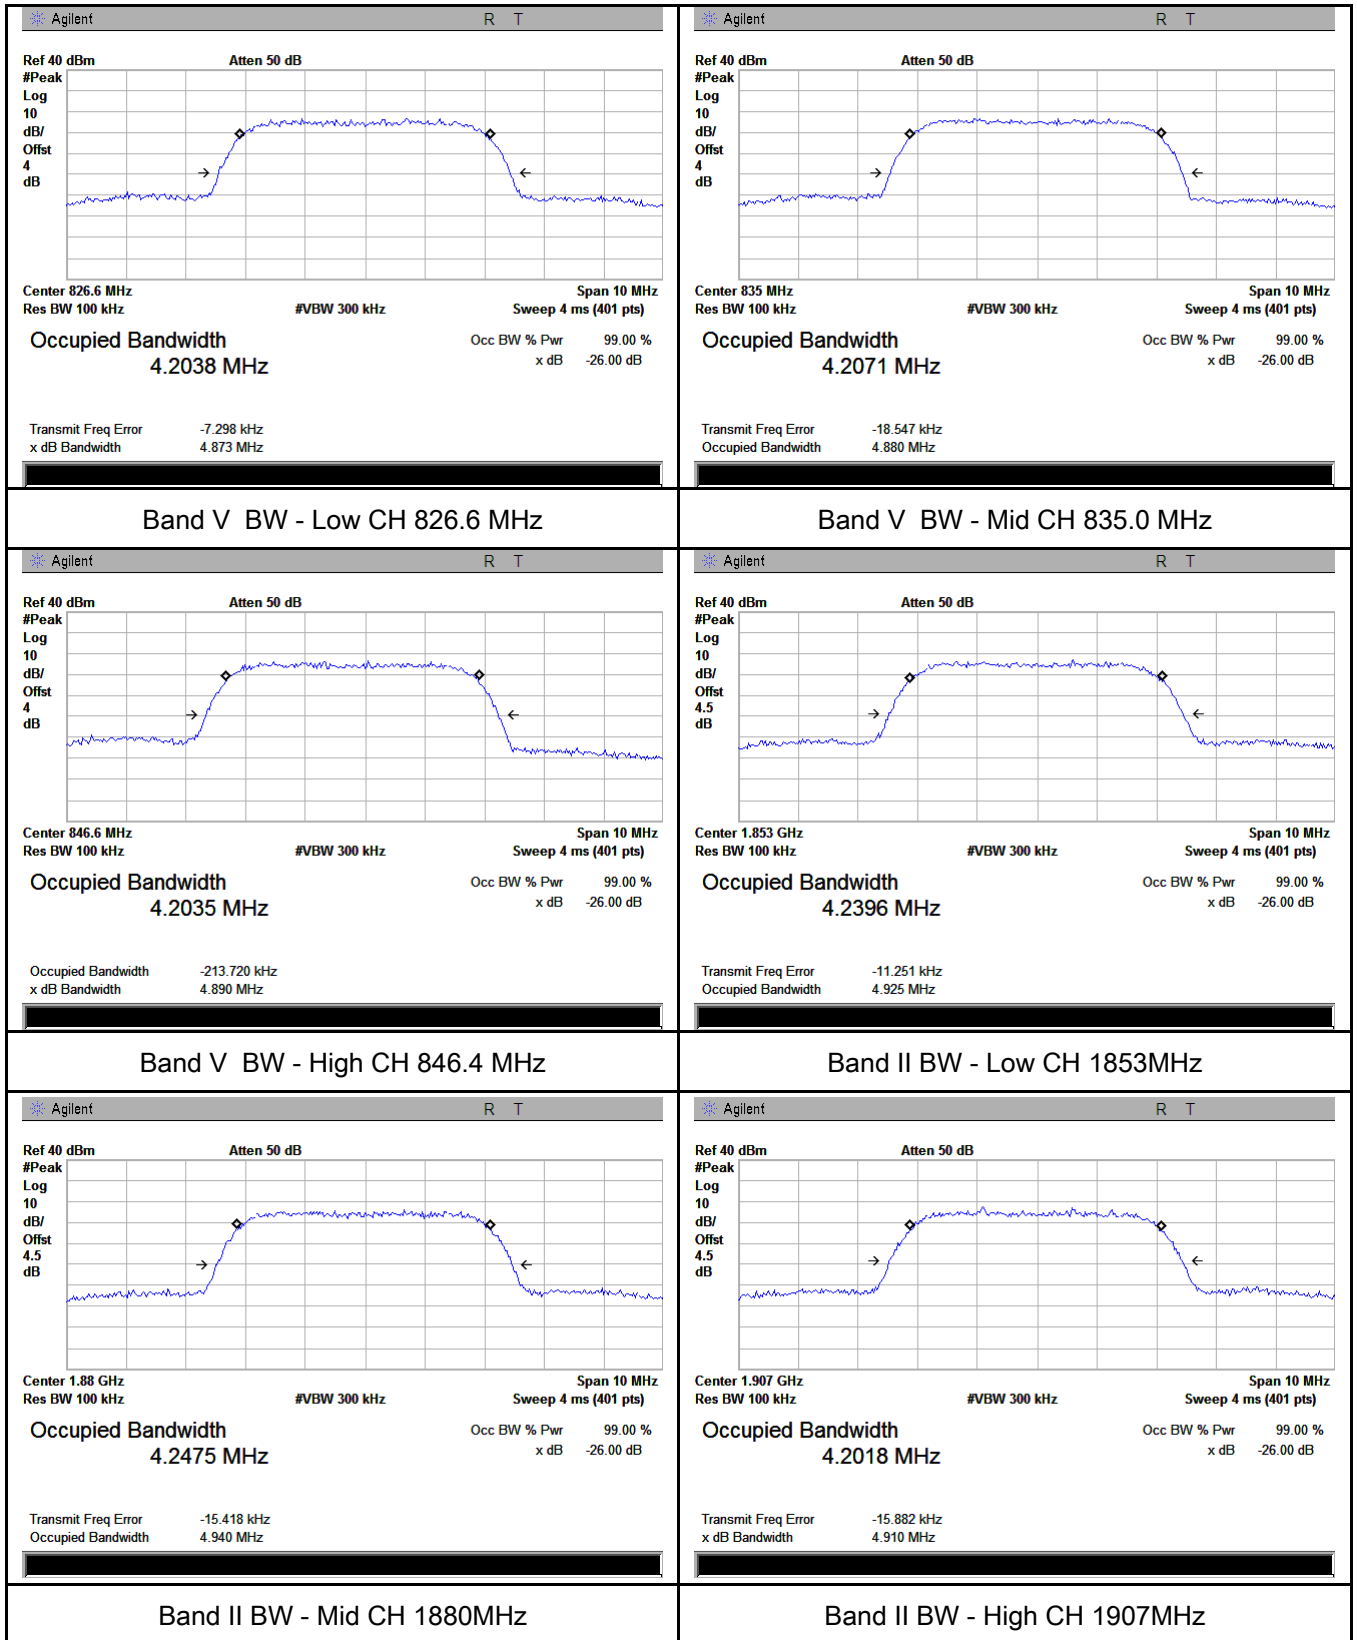


HSUPA:

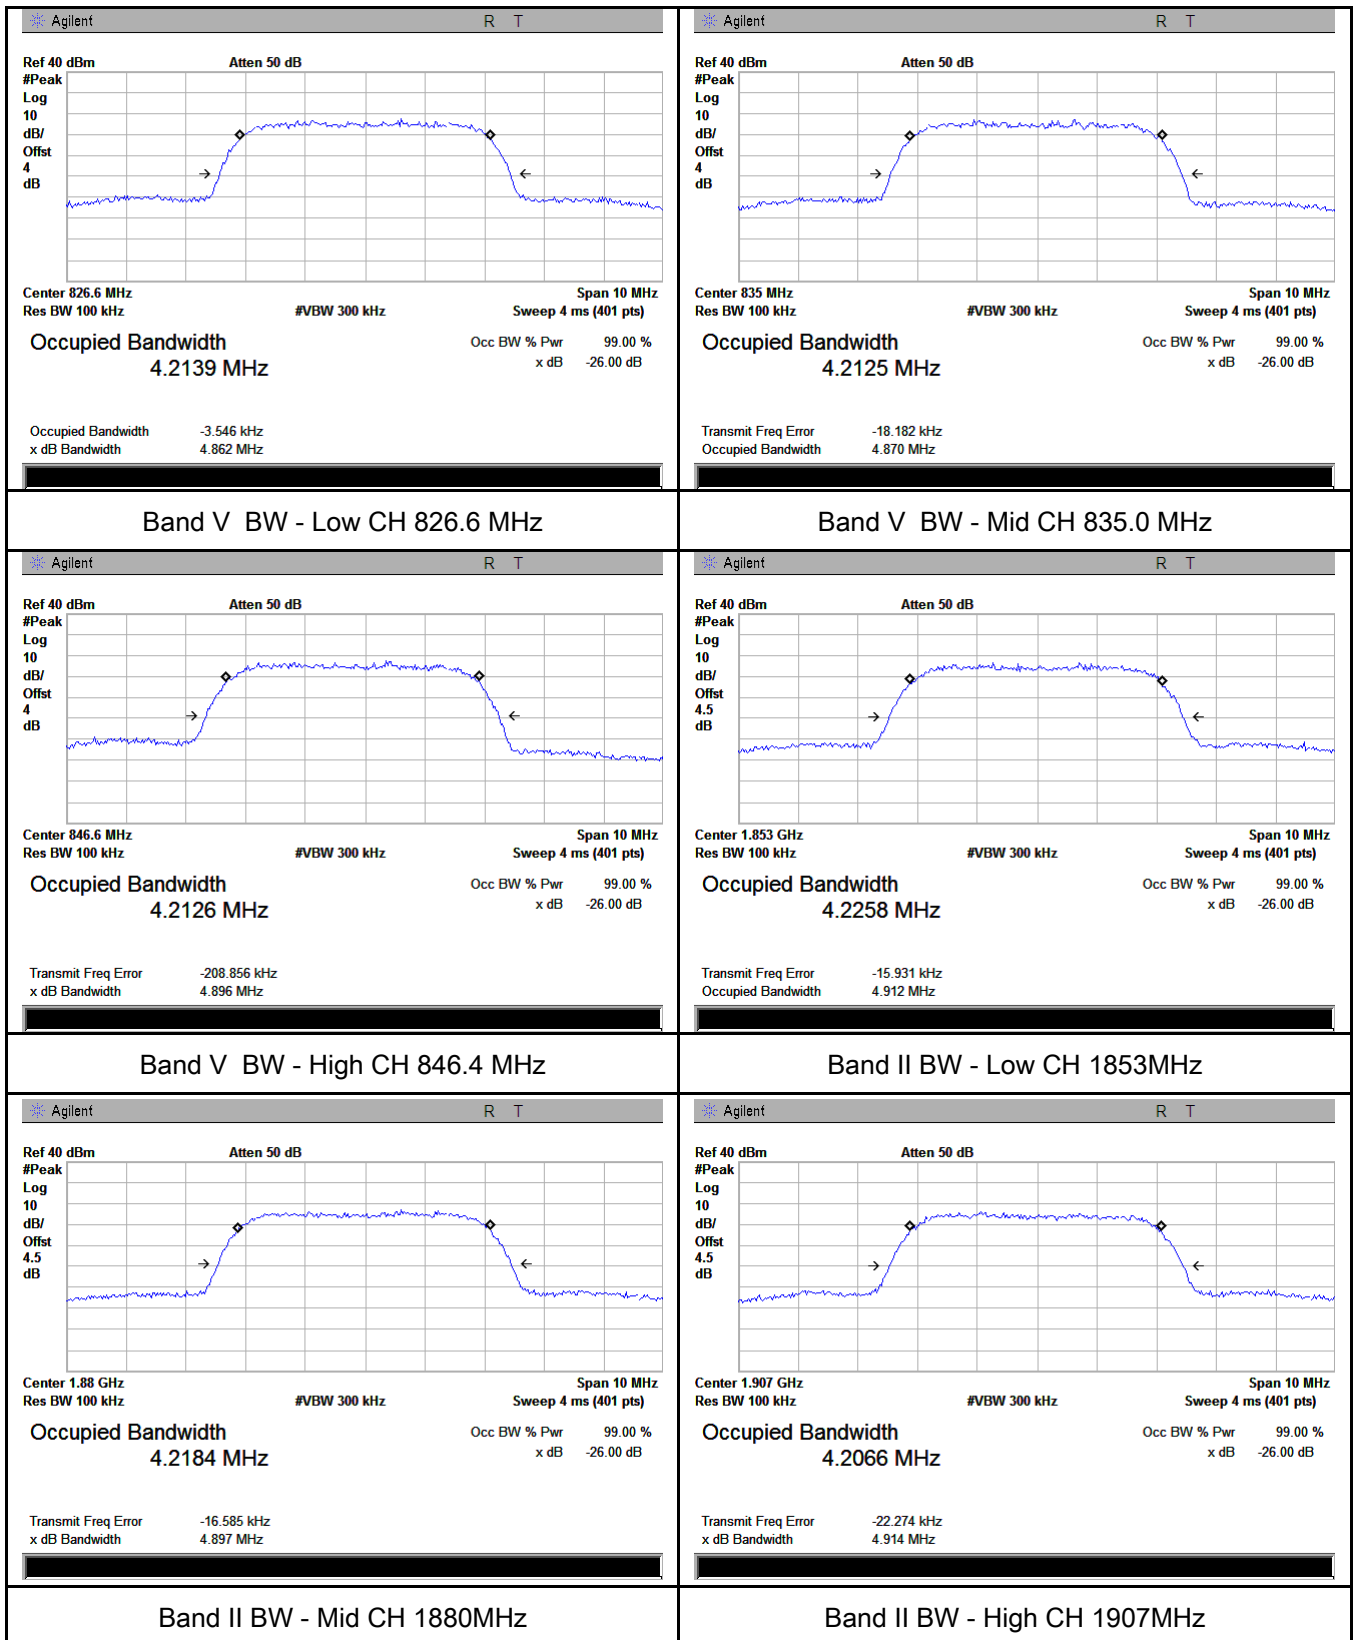

6.5 Spurious Emissions at Antenna Terminals

Temperature	25°C
Relative Humidity	55%
Atmospheric Pressure	1012mbar
Test date :	July 10, 2017
Tested By :	Loren Luo

Requirement(s):

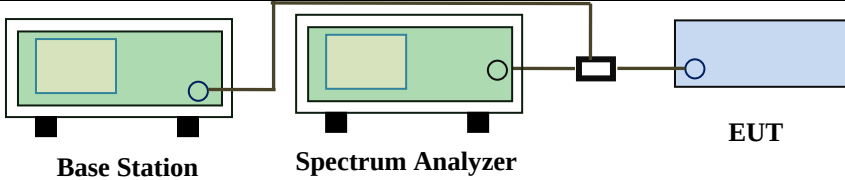
Spec	Item	Requirement	Applicable
§2.1051, §22.917(a)& §24.238(a)	a)	The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB	☒
Test Setup			
Test Procedure	- The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The Band Edges of low and high channels for the highest RF powers were measured. - Setting RBW as roughly BW/100.		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A
 Test Plot ☒ Yes (See below) ☐ N/A


Test Plots

GSM Voice:

Cellular Band (Part 22H) result


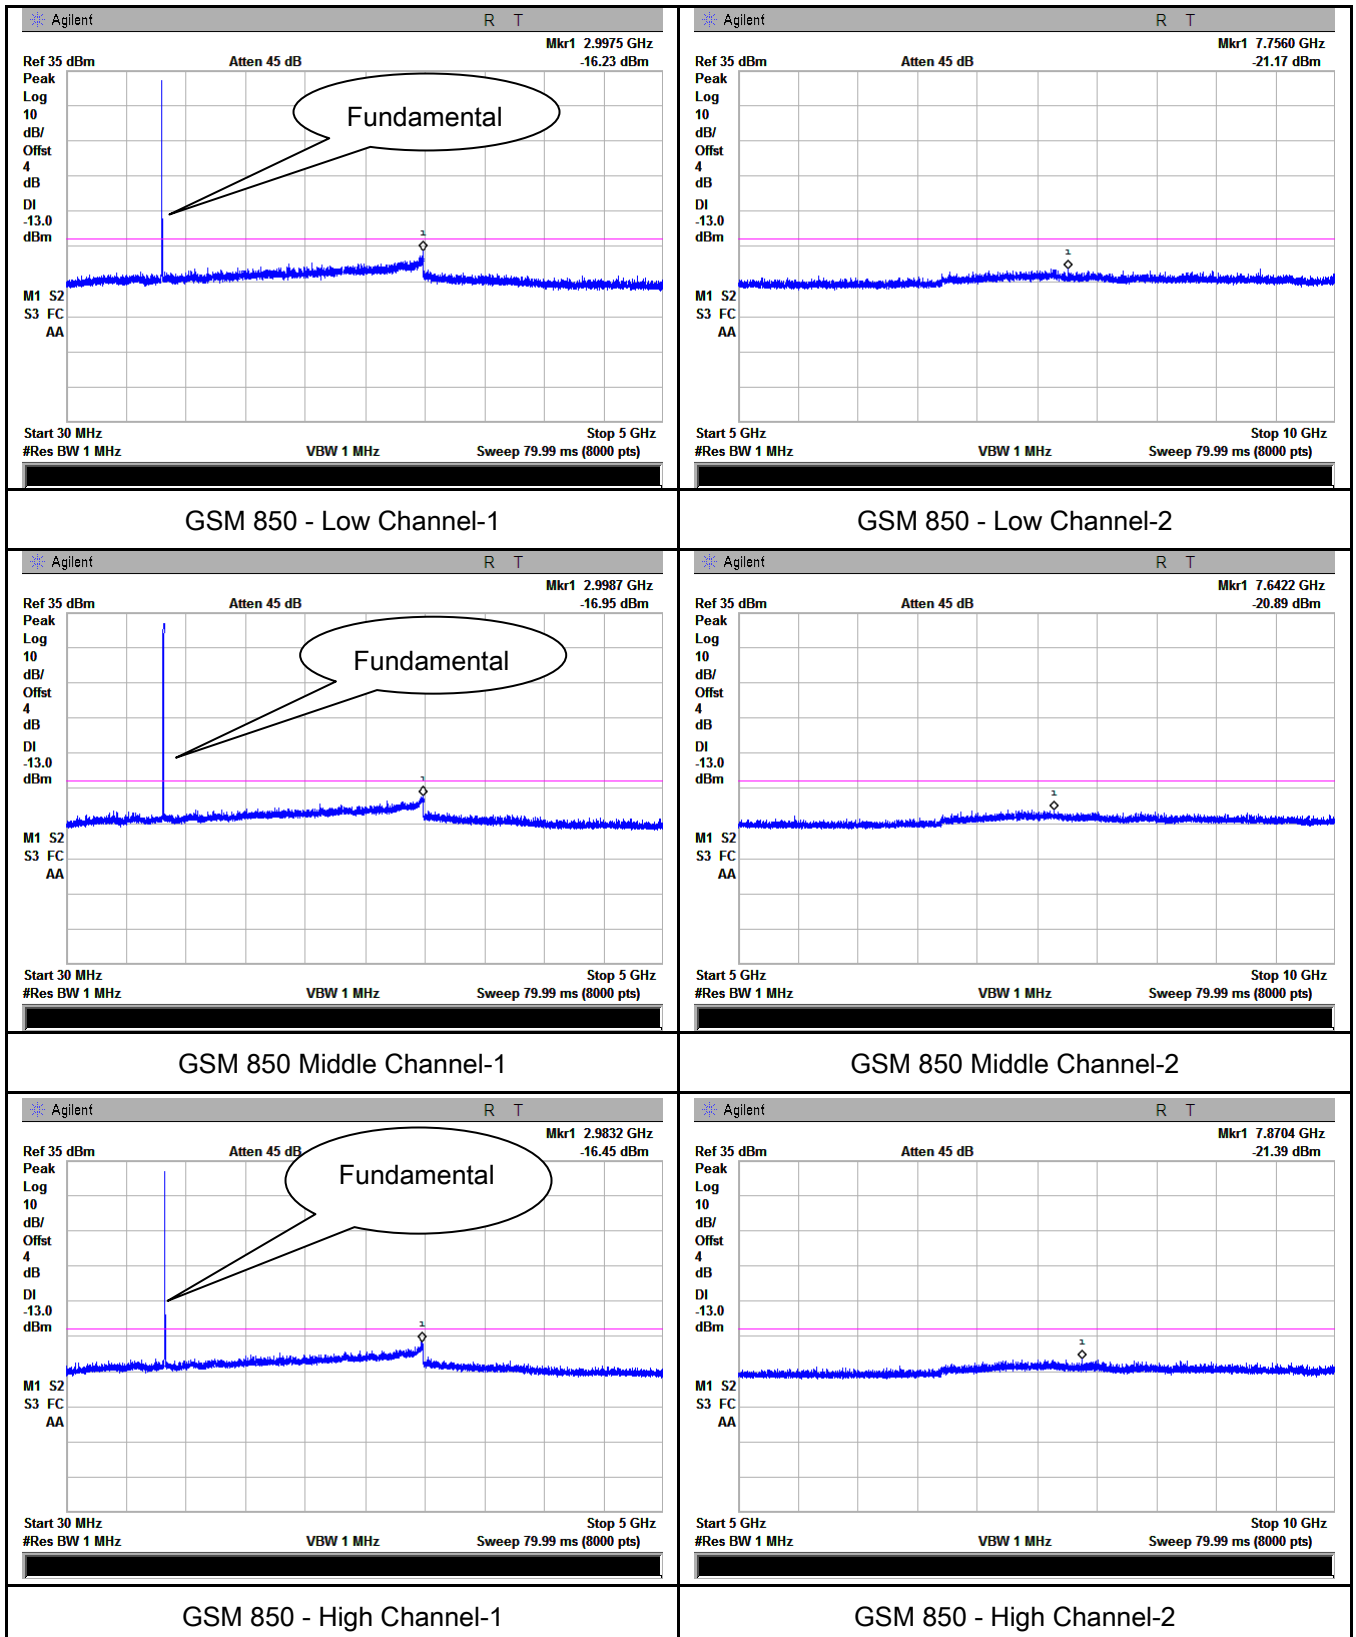


PCS Band (Part24E) result

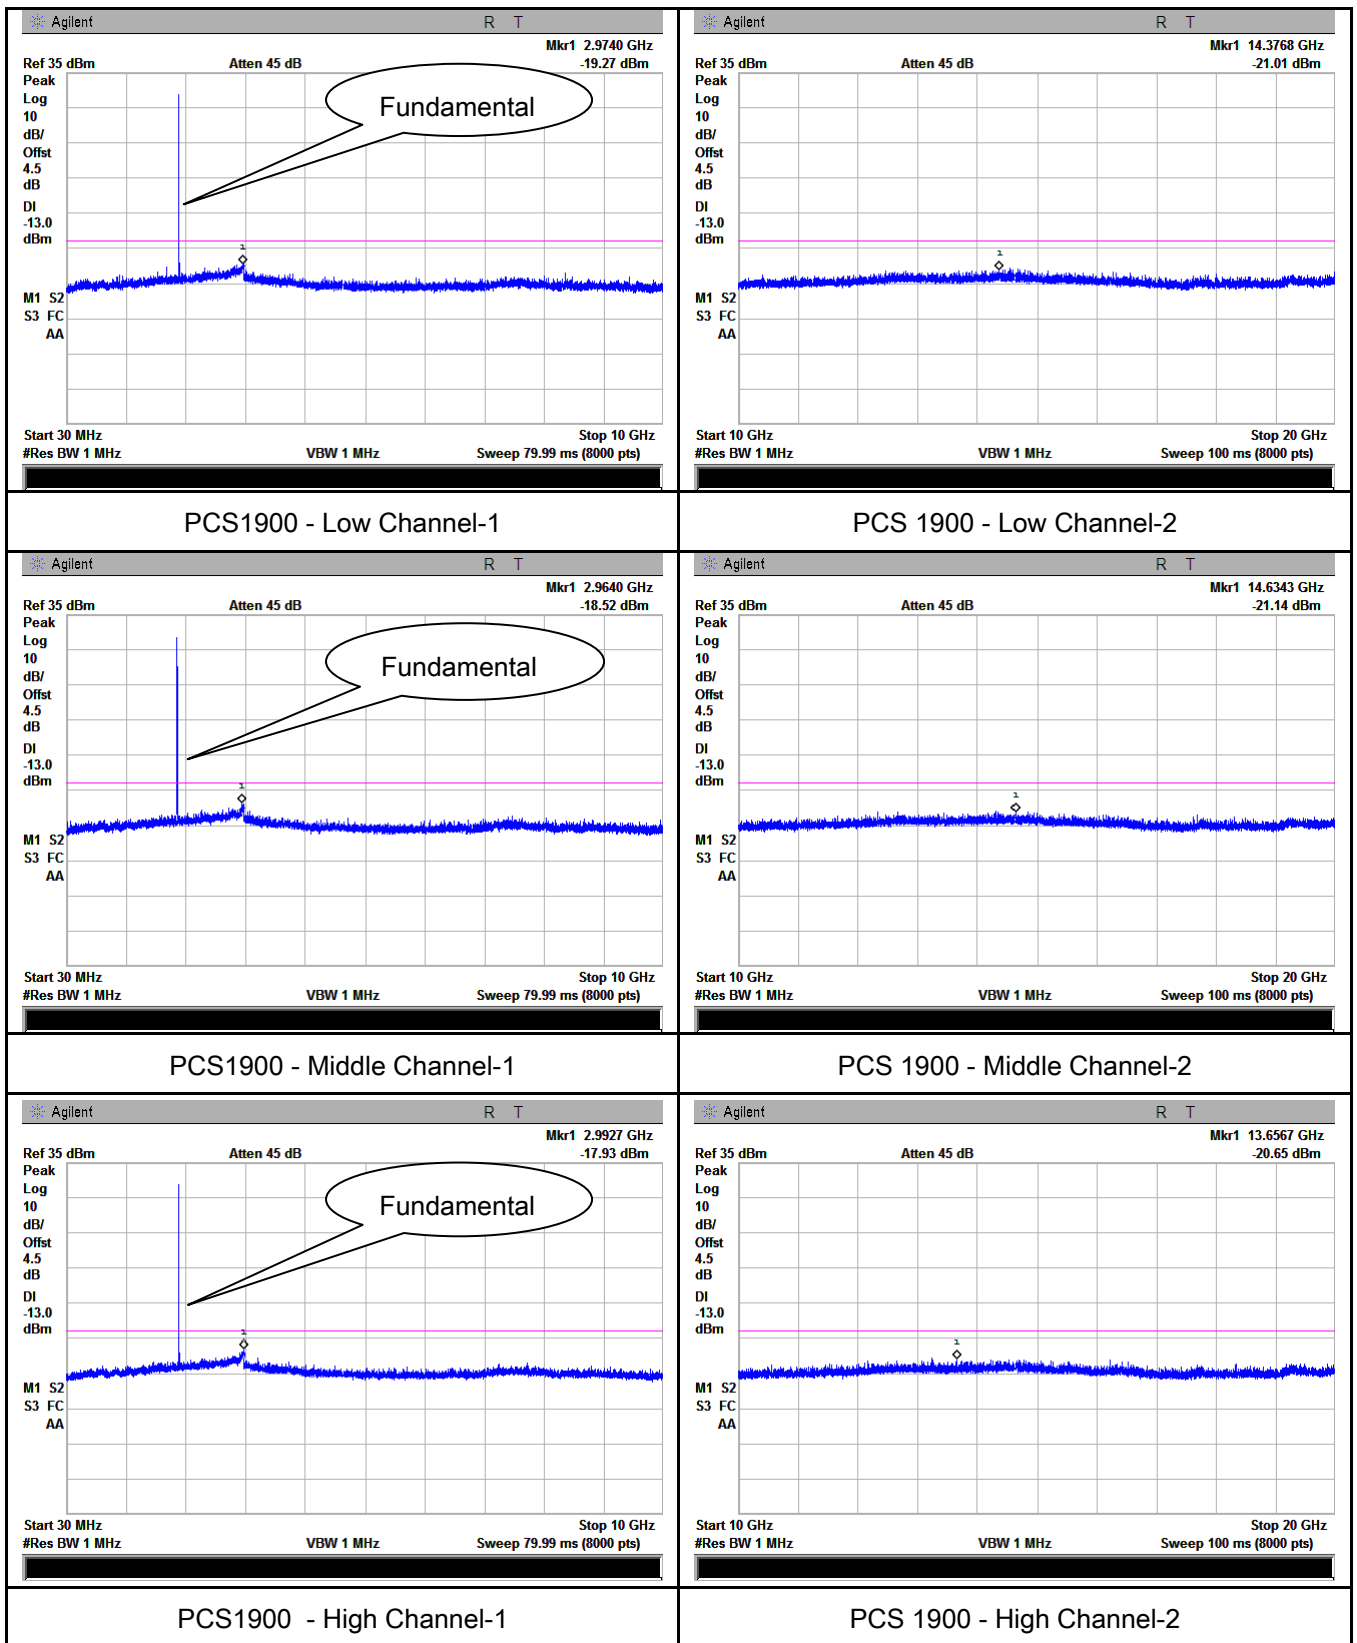



GPRS:

Cellular Band (Part 22H) result

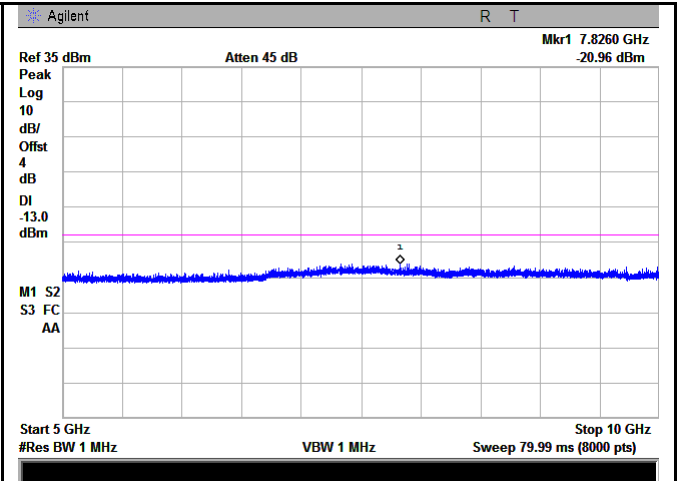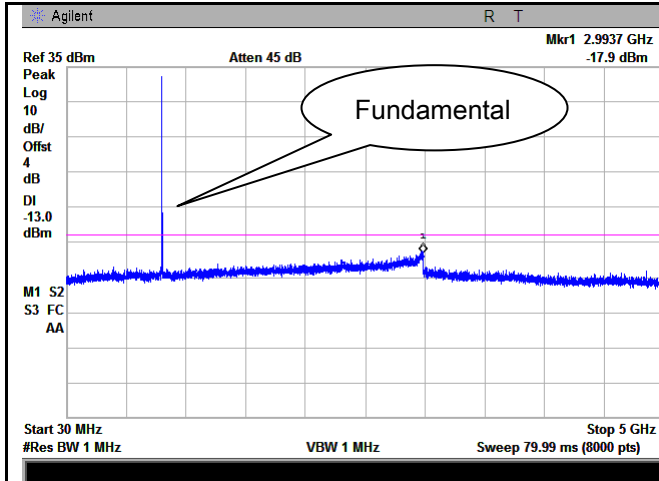



GSM 850 - Low Channel-1

GSM 850 - Low Channel-2

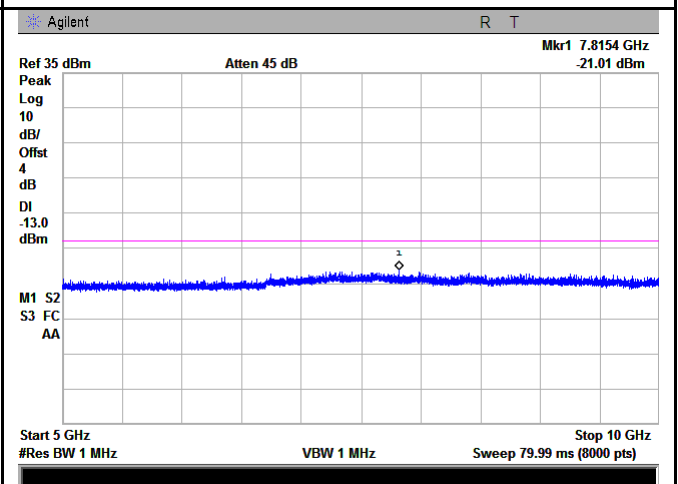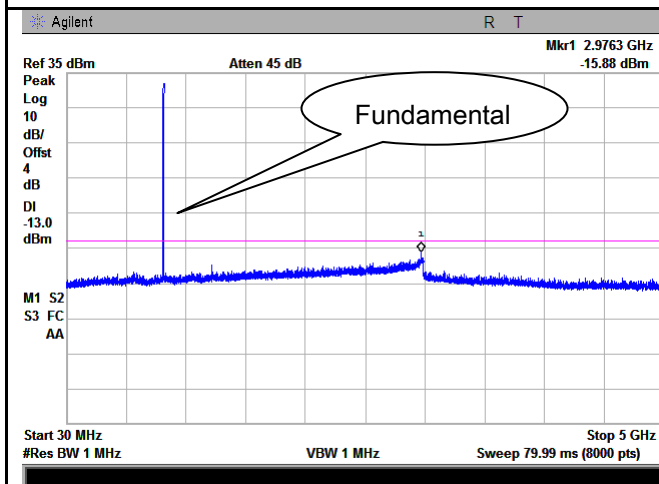

GSM 850 Middle Channel-1


GSM 850 Middle Channel-2

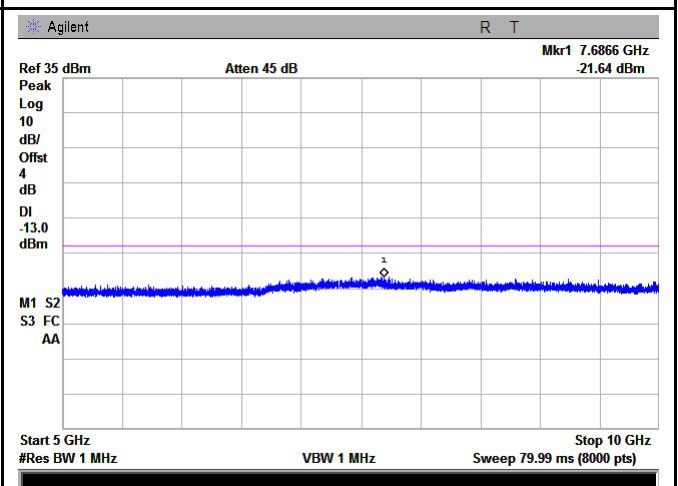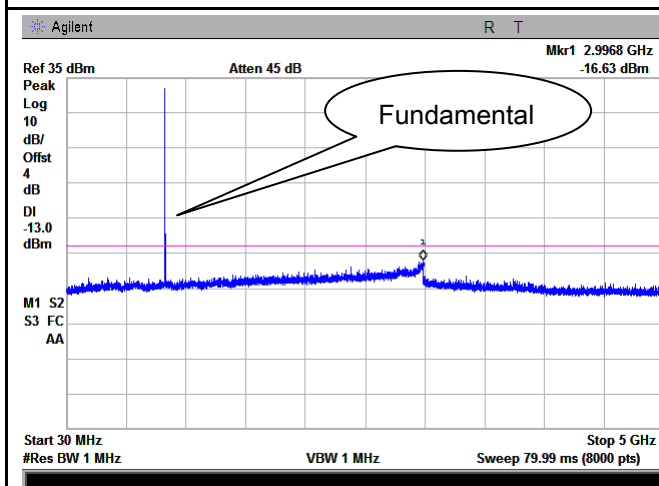


GSM 850 - High Channel-1

GSM 850 - High Channel-2


PCS Band (Part24E) result

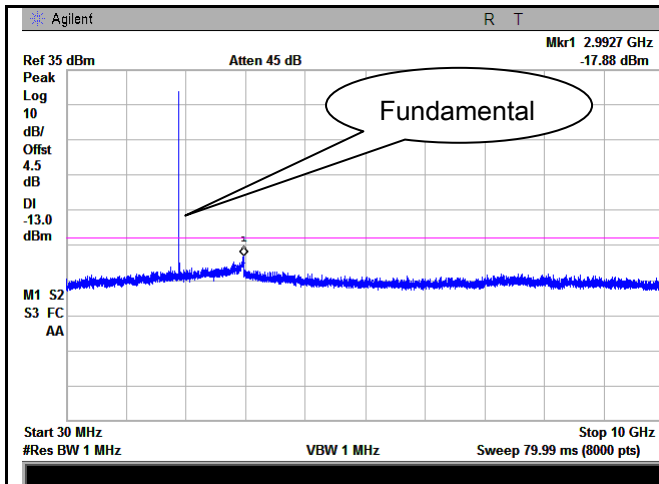


PCS1900 - Low Channel-1

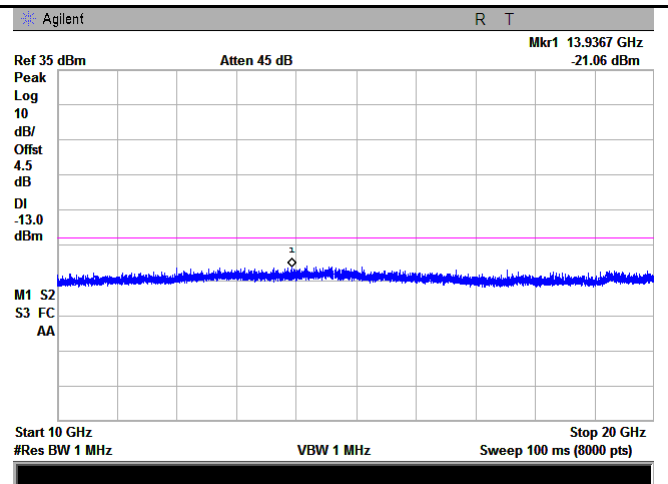


PCS 1900 - Low Channel-2

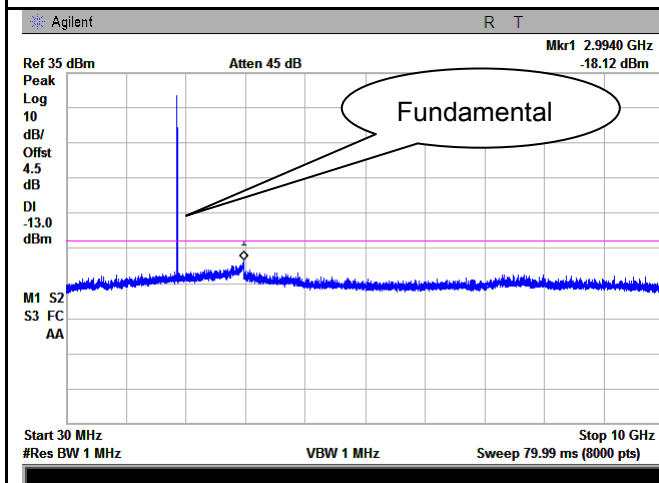


PCS1900 - Middle Channel-1

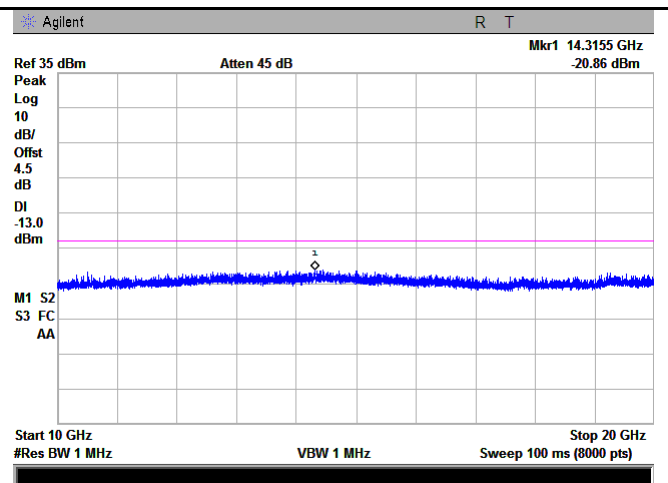

PCS 1900 - Middle Channel-2

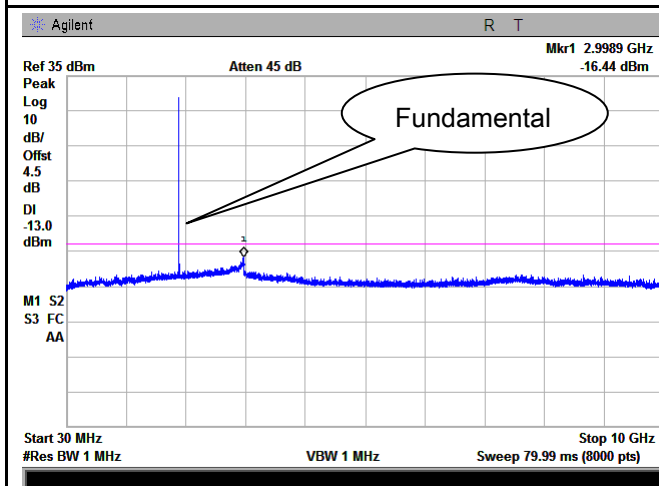


PCS1900 - High Channel-1

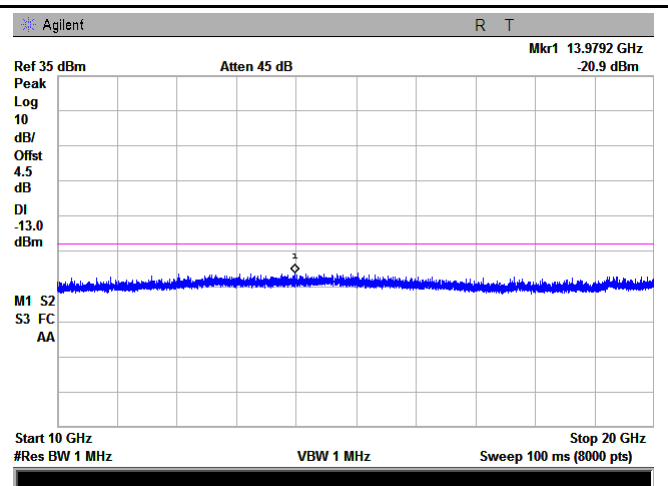


PCS 1900 - High Channel-2

EGPRS (MSC 5):

Cellular Band (Part 22H) result

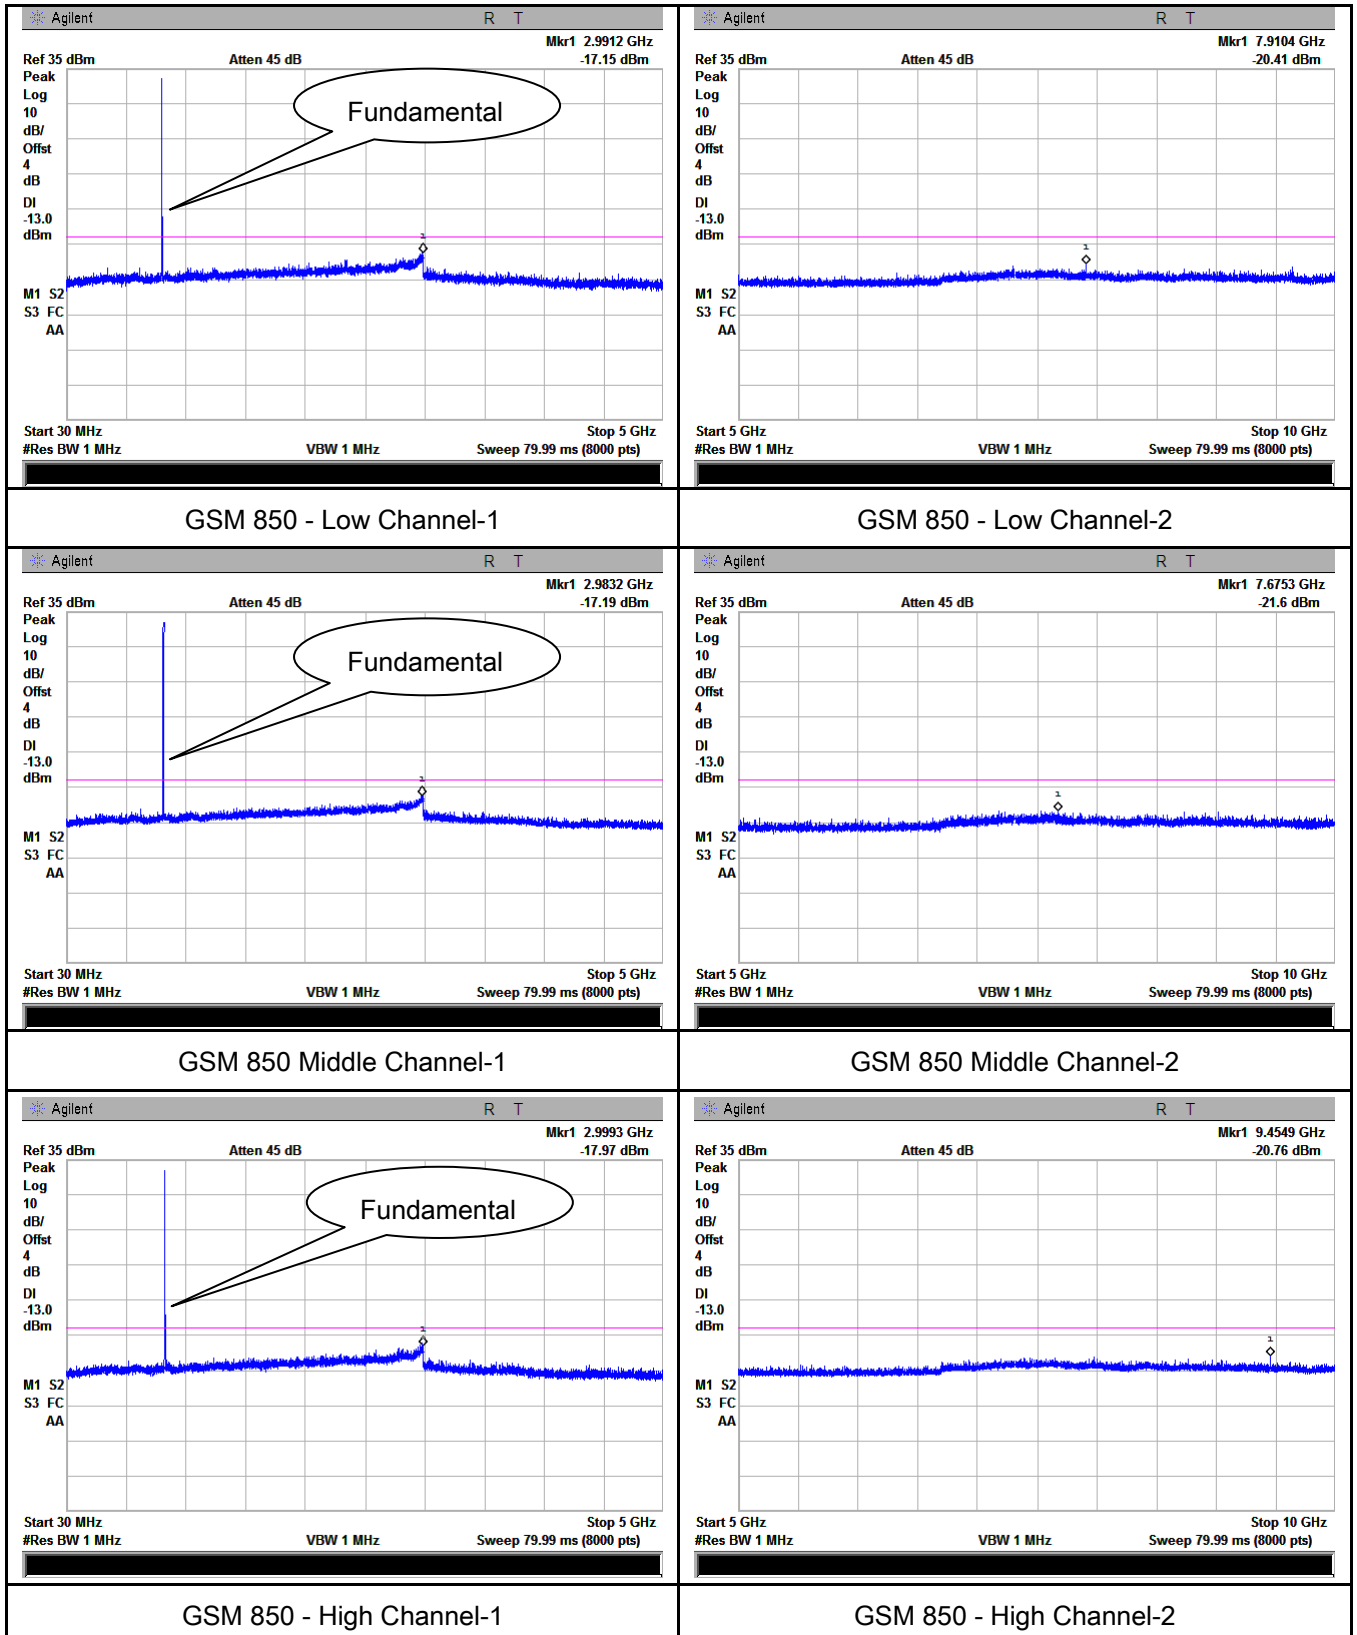


PCS Band (Part24E) result

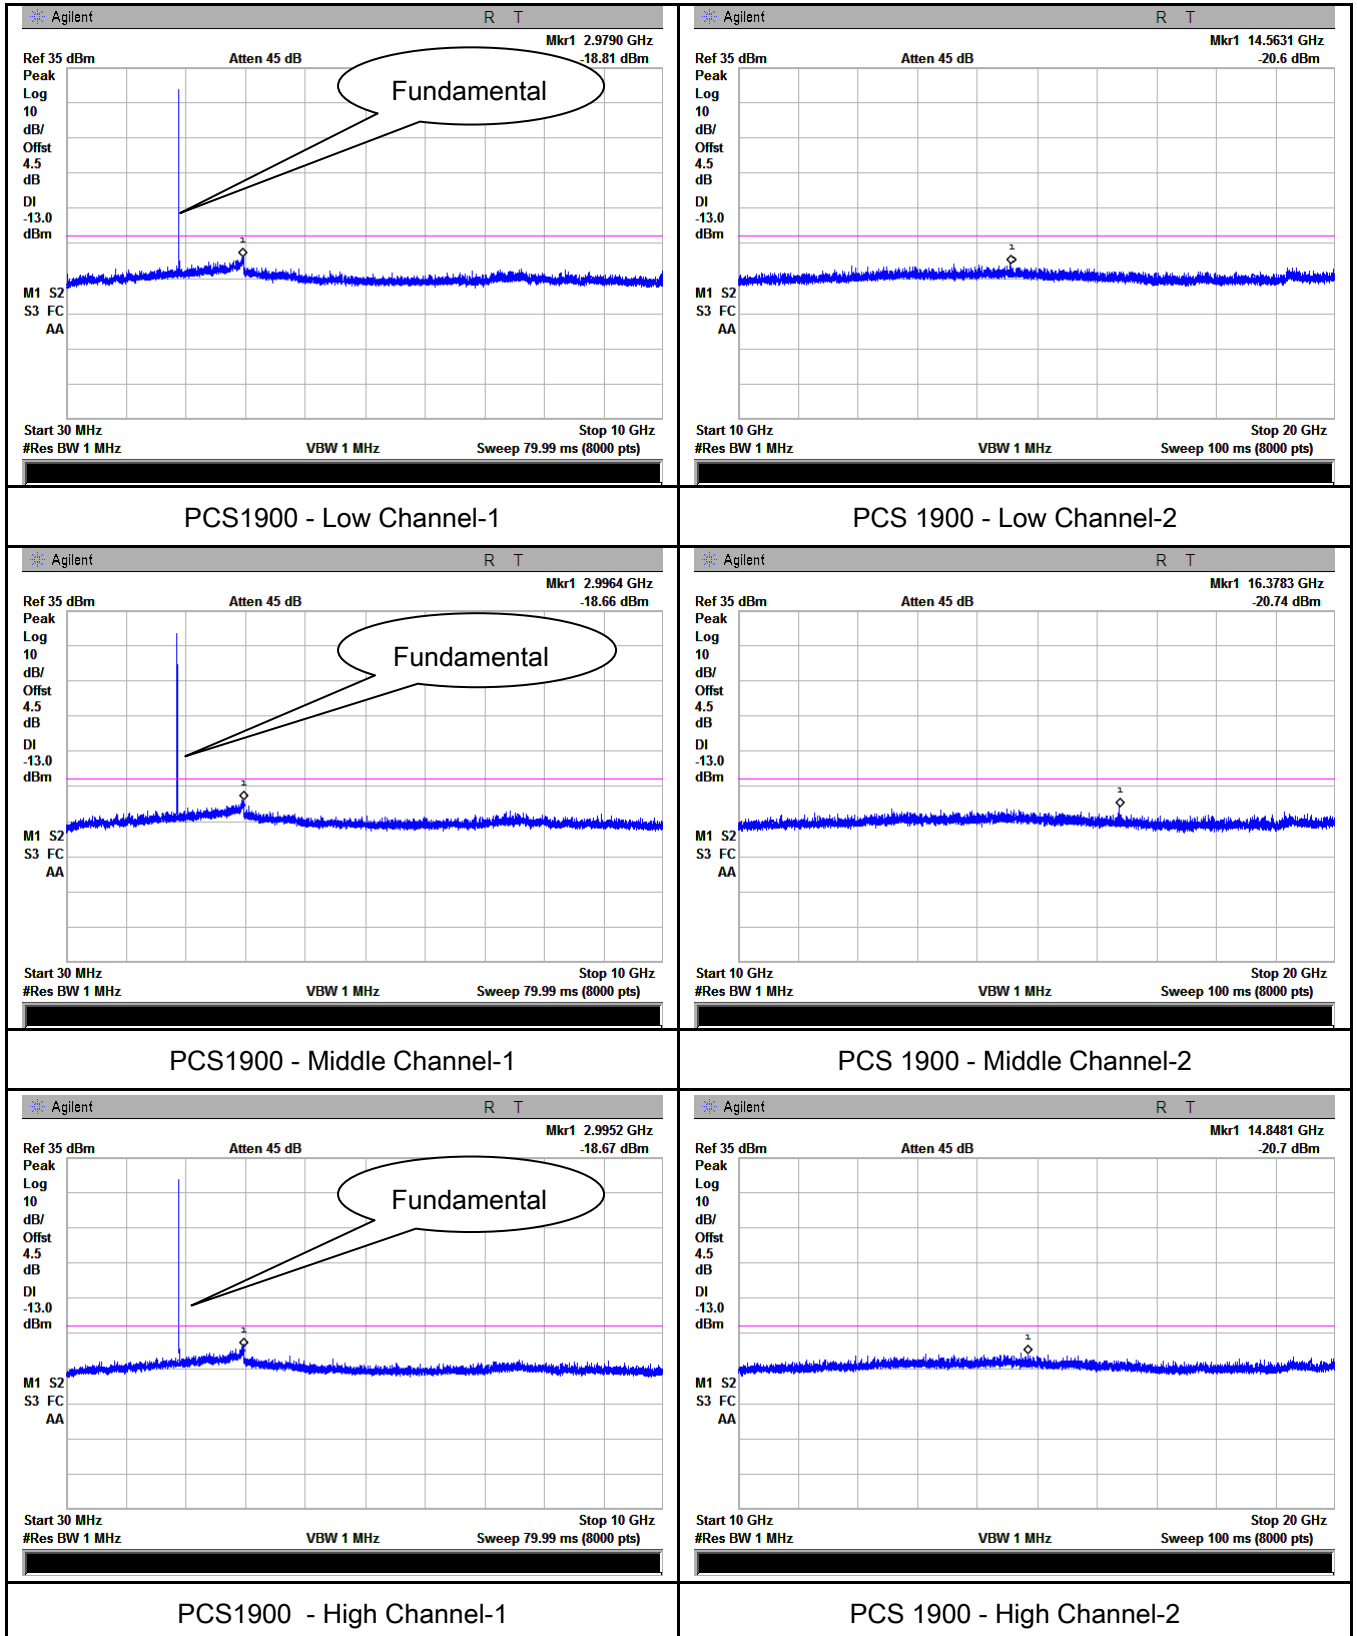


RMC


UMTS-FDD Band V (Part 22H)

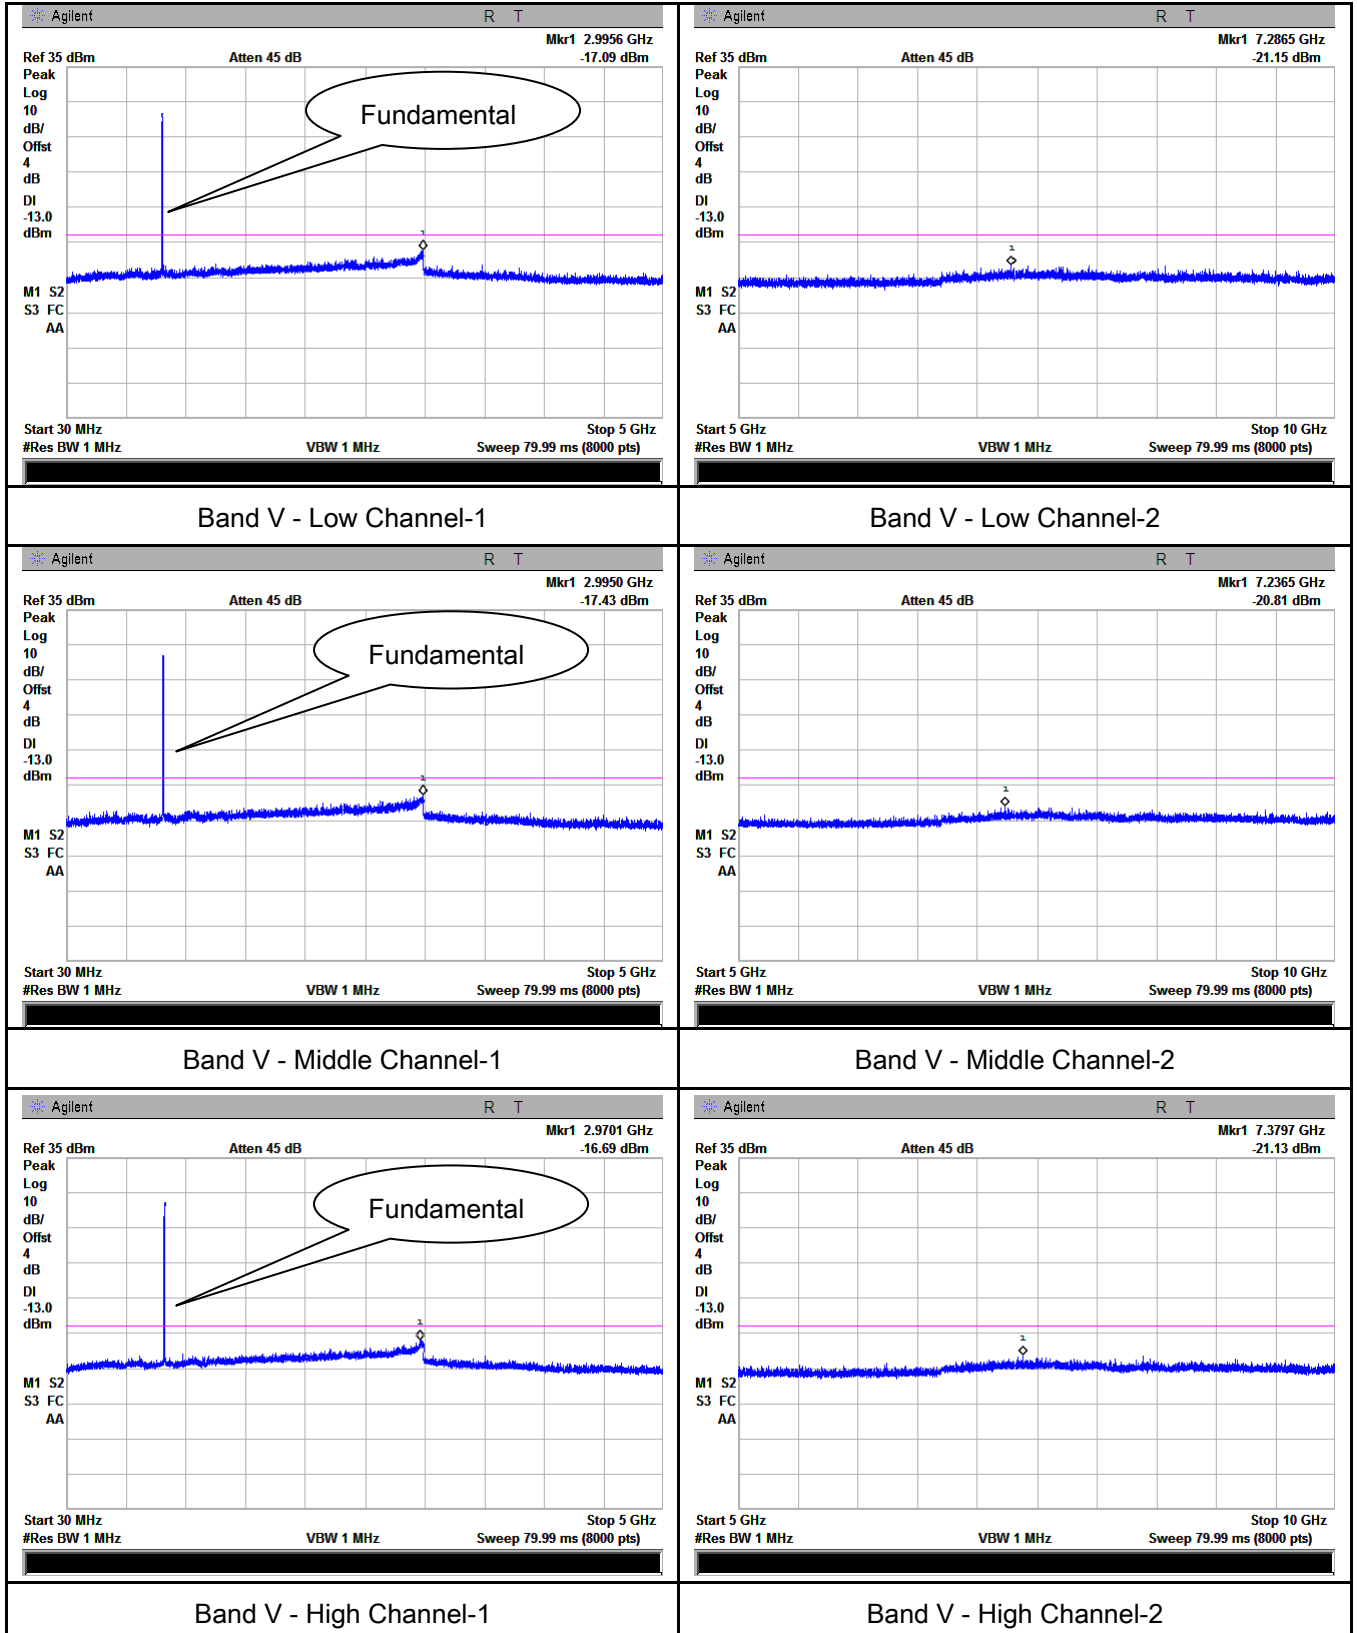


UMTS-FDD Band II (Part 24E)

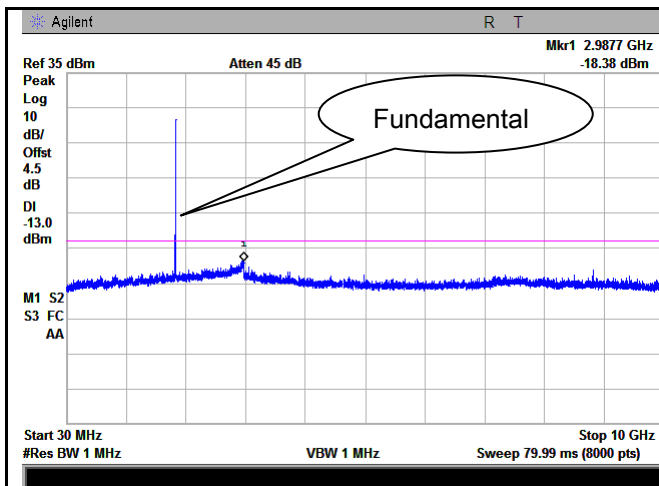


Band II - Low Channel-1

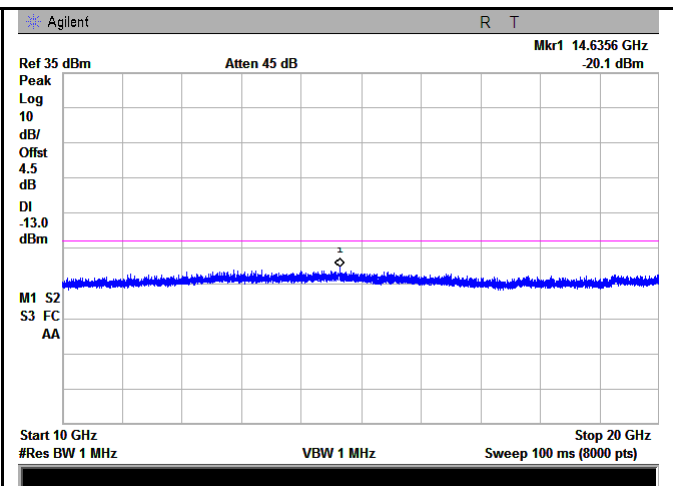


Band II - Low Channel-2

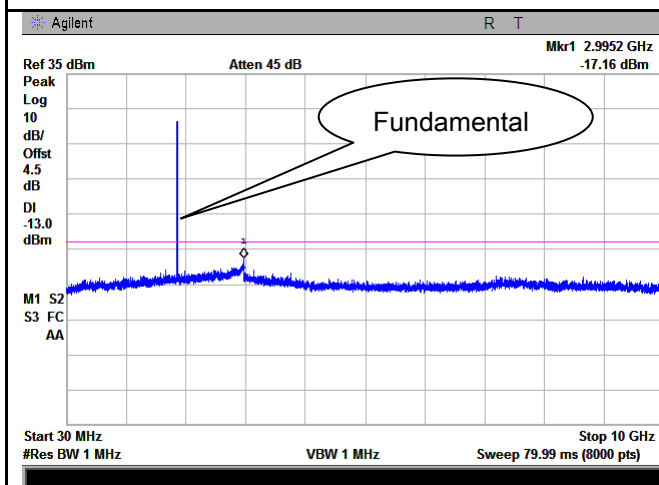


Band II - Middle Channel-1

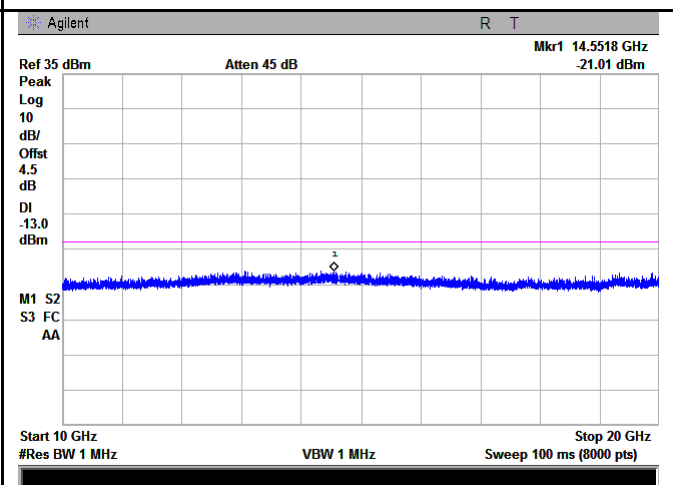

Band II - Middle Channel-2

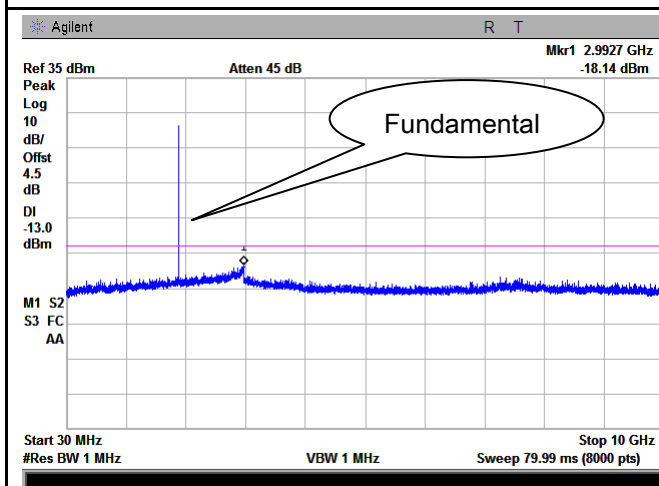



Band II - High Channel-1

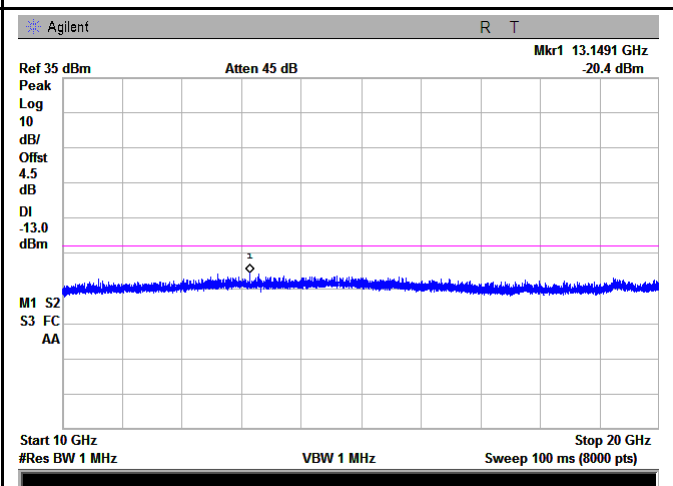

Band II - High Channel-2



HSDPA:

UMTS-FDD Band V (Part 22H)

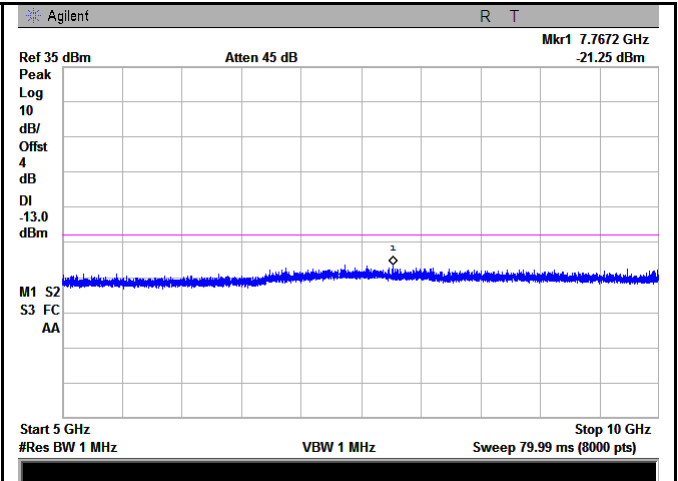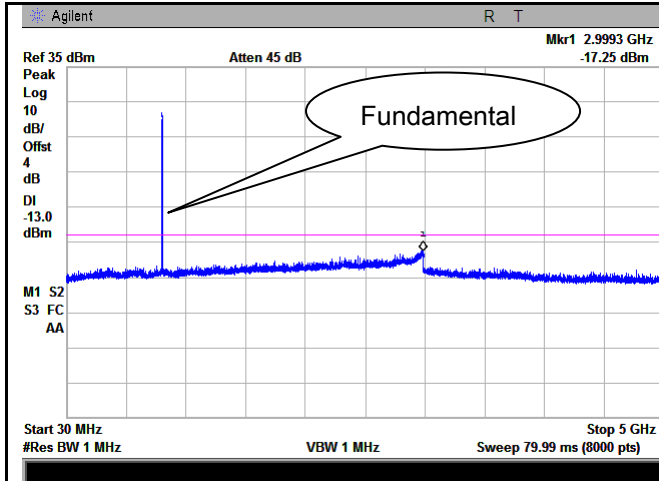



Band V - Low Channel-1

Band V - Low Channel-2

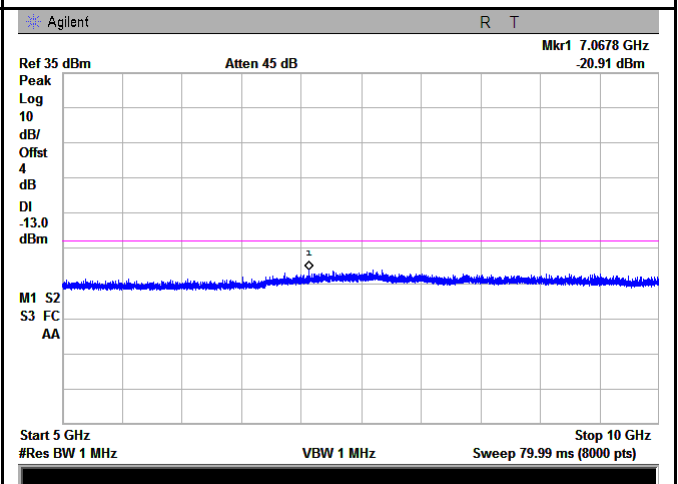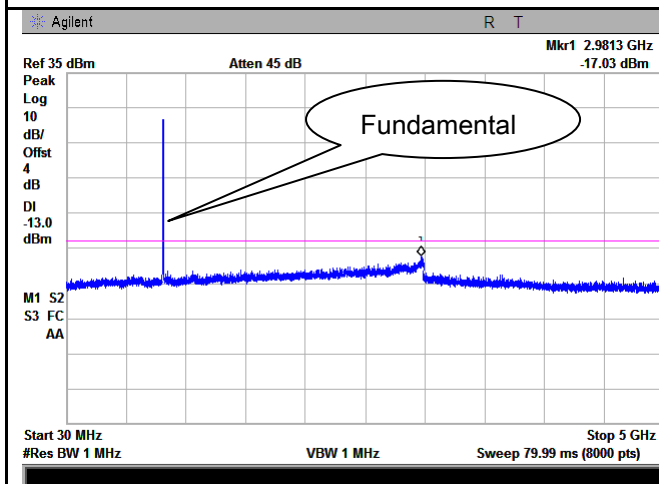

Band V - Middle Channel-1


Band V - Middle Channel-2

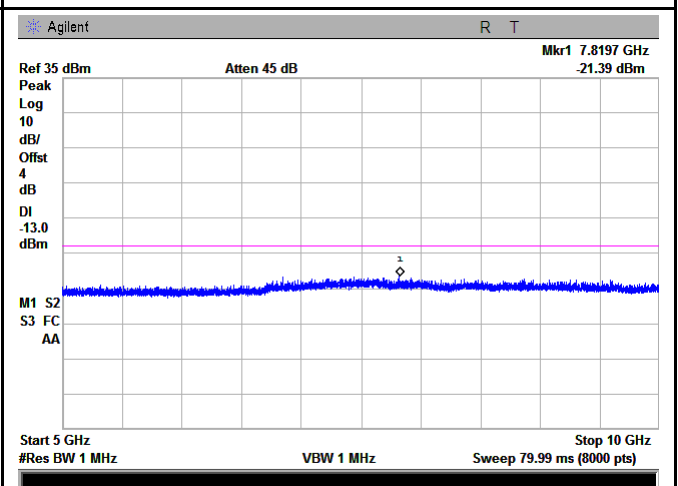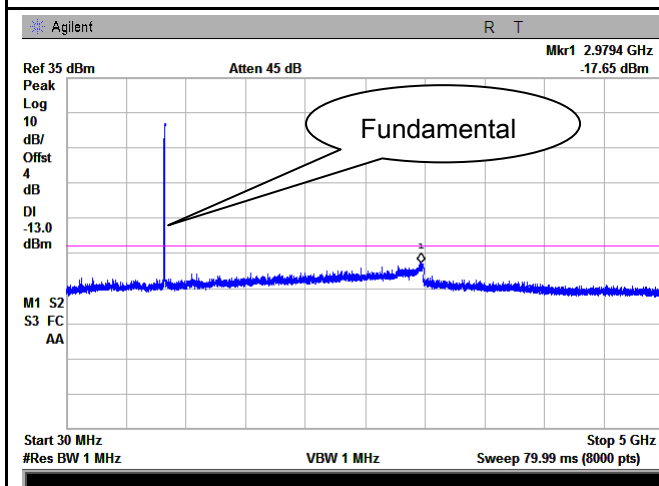


Band V - High Channel-1

Band V - High Channel-2


UMTS-FDD Band II (Part 24E)

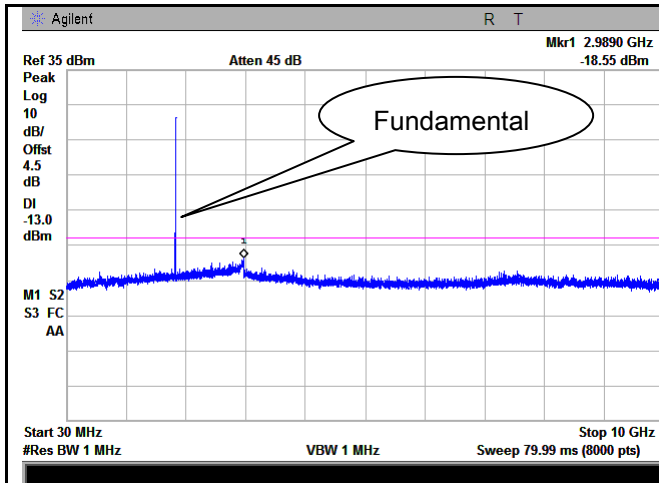


Band II - Low Channel-1

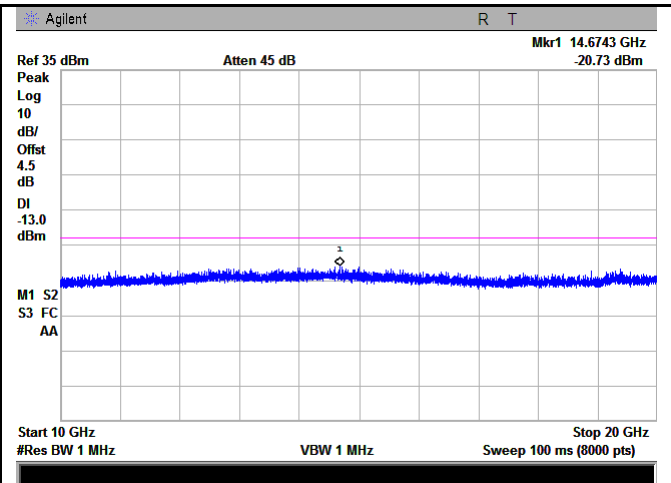


Band II - Low Channel-2

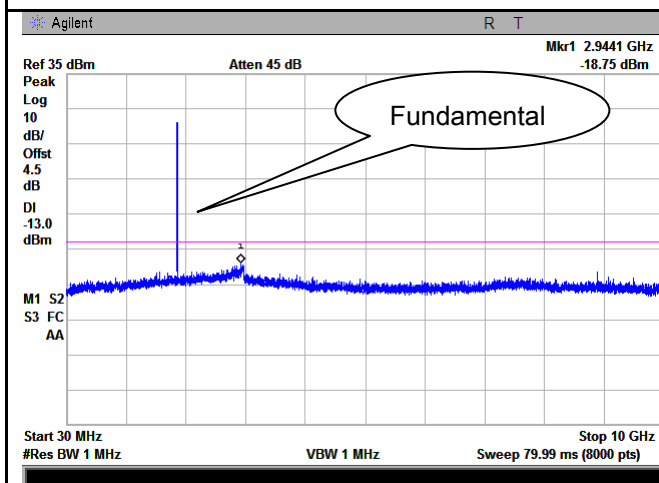


Band II - Middle Channel-1

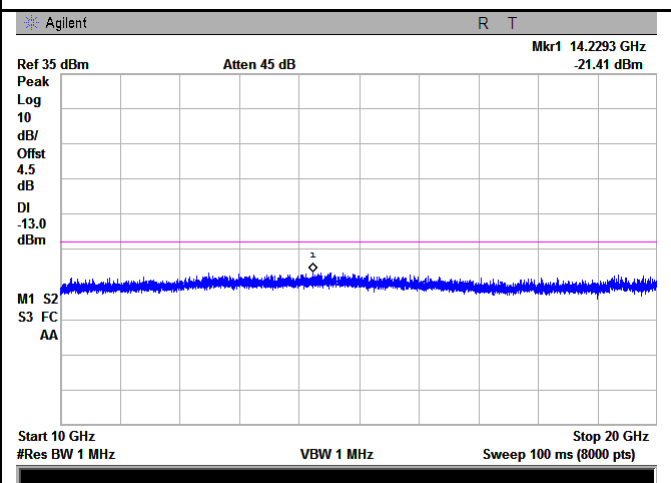

Band II - Middle Channel-2

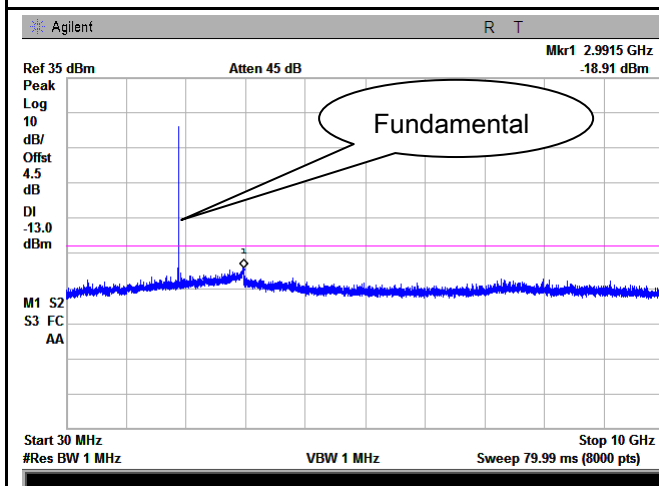


Band II - High Channel-1

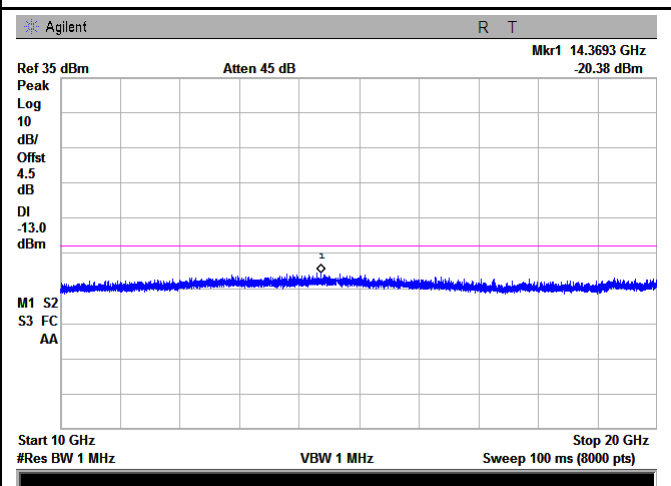


Band II - High Channel-2

HSUPA:


UMTS-FDD Band V (Part 22H)

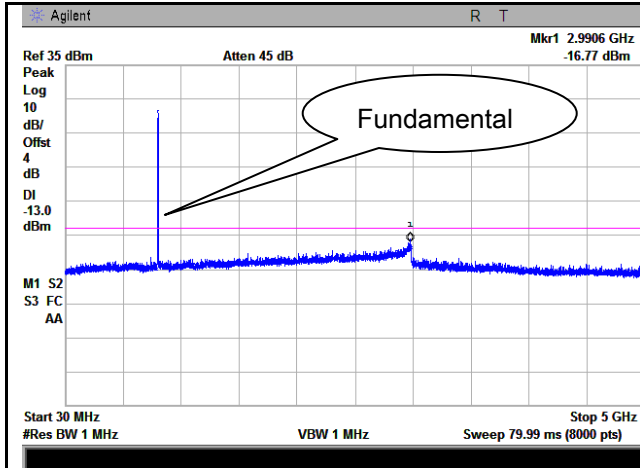


Band V - Low Channel-1

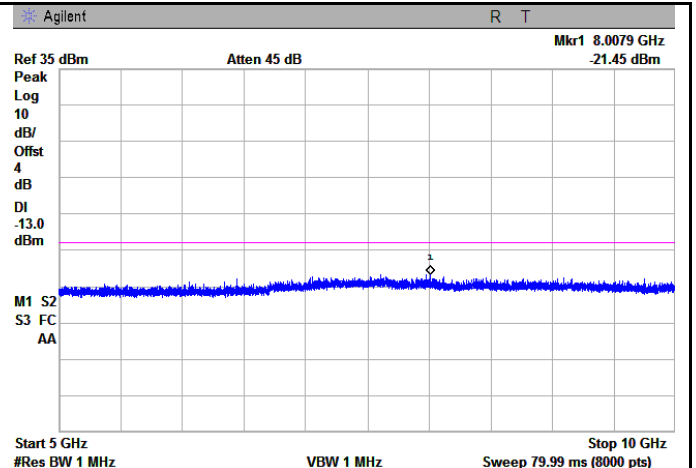


Band V - Low Channel-2

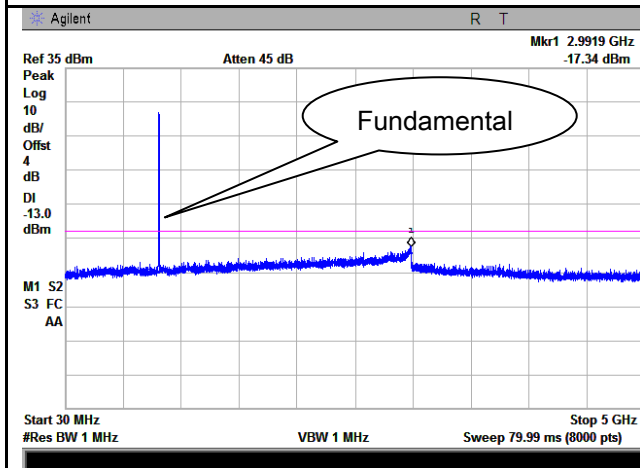


Band V - Middle Channel-1

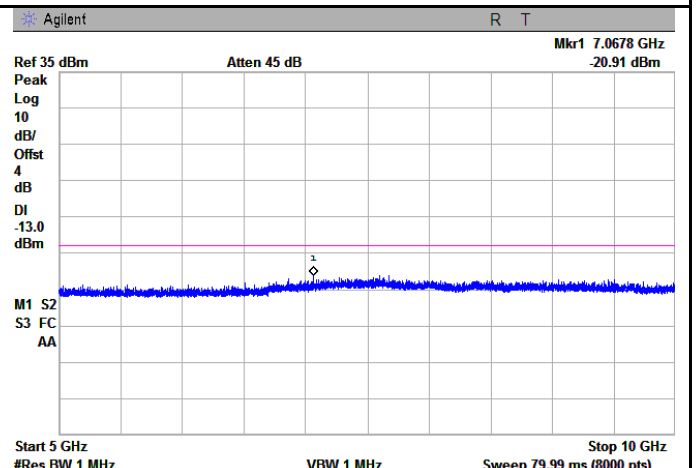

Band V - Middle Channel-2

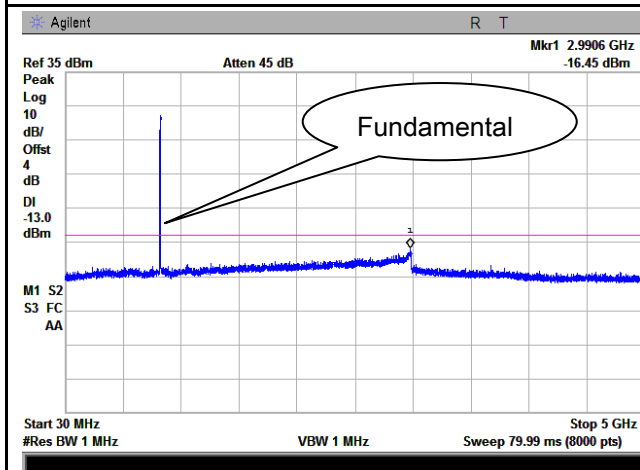


Band V - High Channel-1

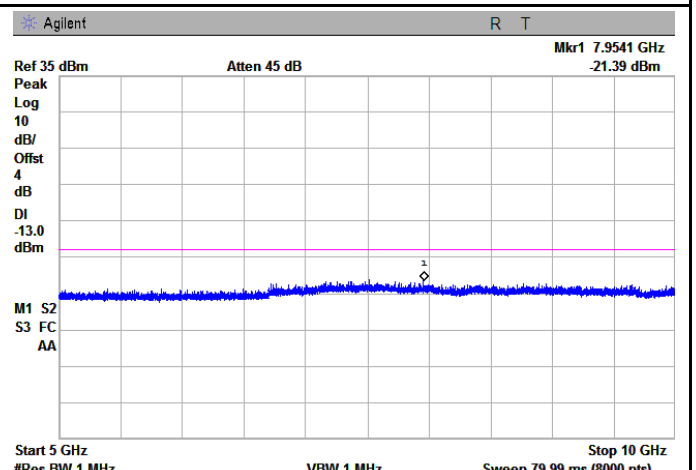


Band V - High Channel-2


UMTS-FDD Band II (Part 24E)

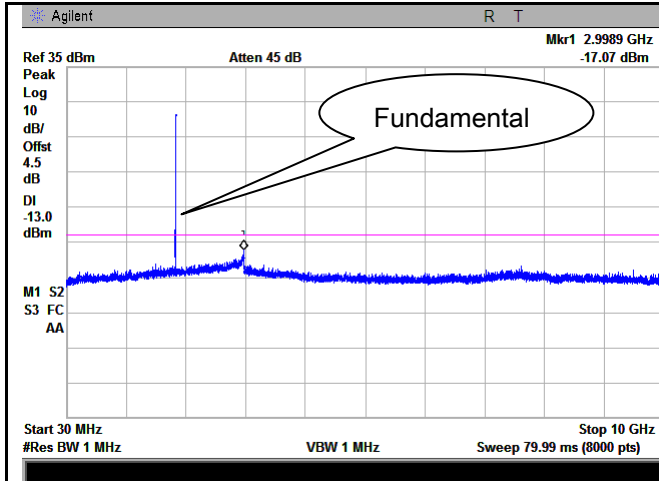


Band II - Low Channel-1

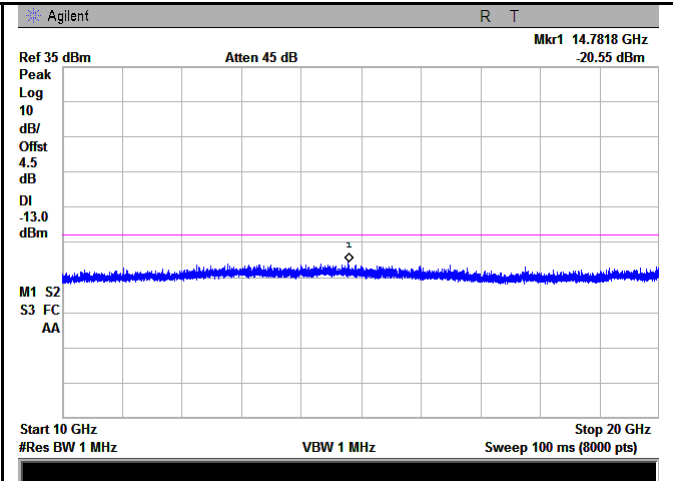


Band II - Low Channel-2

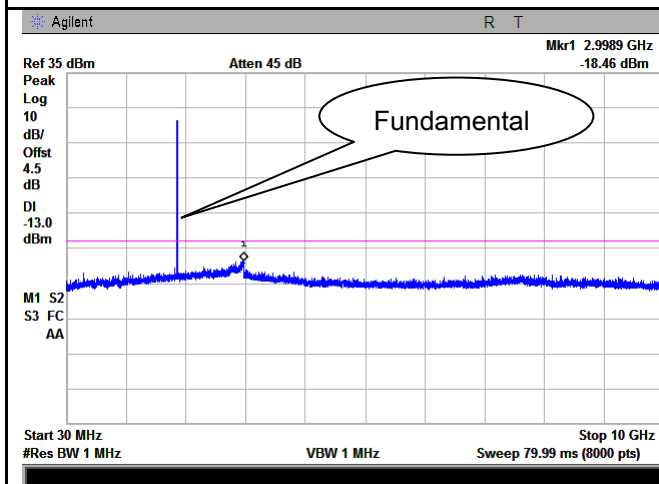


Band II - Middle Channel-1

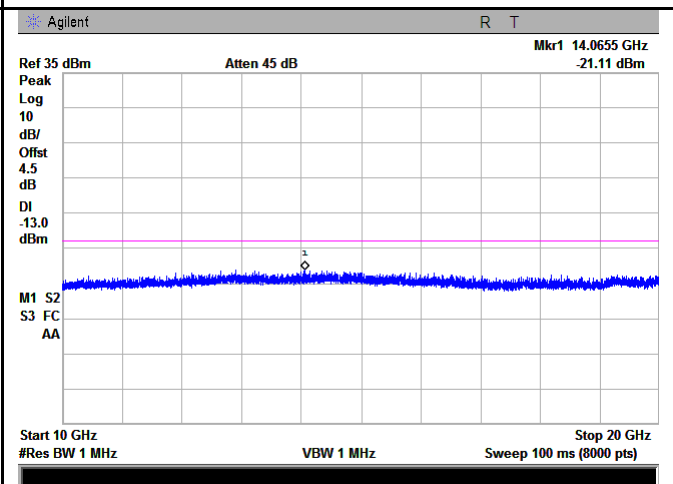

Band II - Middle Channel-2

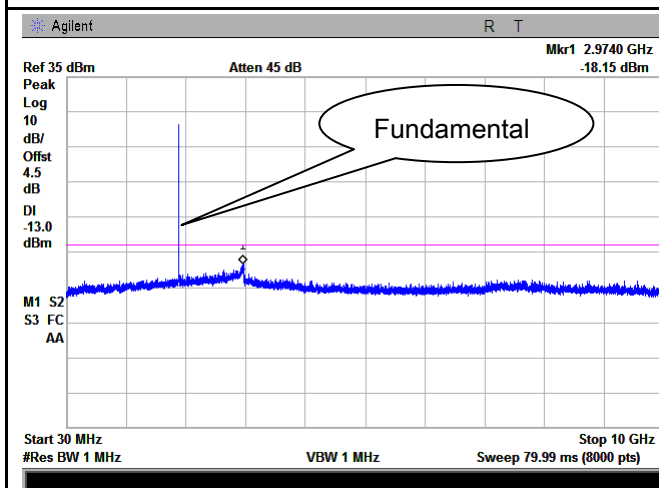

Band II - High Channel-1

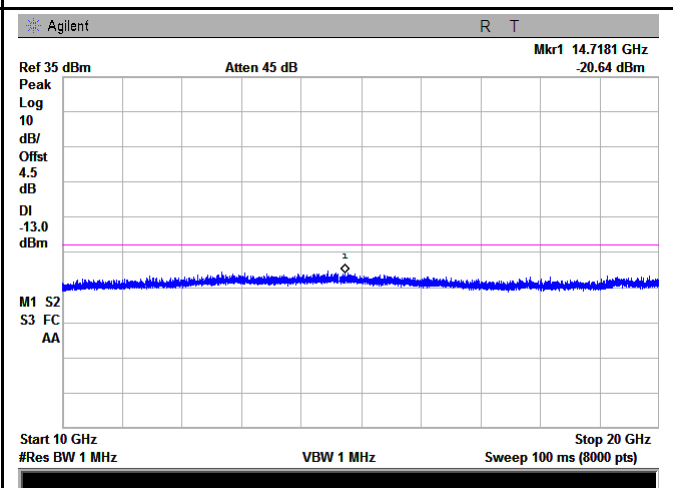


Band II - High Channel-2

6.6 Spurious Radiated Emissions

Temperature	25°C
Relative Humidity	55%
Atmospheric Pressure	1012mbar
Test date :	July 10, 2017
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§2.1053, §22.917 & §24.238	a)	The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.	☒

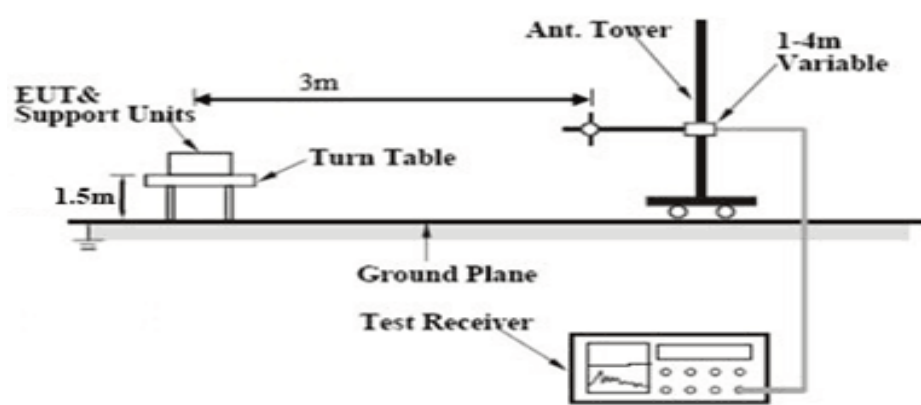Test setup	
------------	--

Test Procedure	- The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable. - The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis. - Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution. Sample Calculation: EUT Field Strength = Raw Amplitude (dBμV/m) – Amplifier Gain (dB) + Antenna Factor (dB) + Cable Loss (dB) + Filter Attenuation (dB, if used)
----------------	---

Remark		
Result	☒ Pass	☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

Cellular Band (Part 22H) result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1648.4	-42.55	V	7.95	0.67	-35.27	-13	-22.27
1648.4	-43.51	H	7.95	0.67	-36.23	-13	-23.23
750.3	-53.07	V	6.4	0.43	-47.1	-13	-34.1
608.2	-52.38	H	6.8	0.37	-45.95	-13	-32.95

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1673.2	-43.47	V	7.95	0.67	-36.19	-13	-23.19
1673.2	-44.03	H	7.95	0.67	-36.75	-13	-23.75
336.8	-52.8	V	6.4	0.26	-46.66	-13	-33.66
645.5	-53.49	H	6.8	0.37	-47.06	-13	-34.06

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1697.6	-44.06	V	7.95	0.68	-36.79	-13	-23.79
1697.6	-42.66	H	7.95	0.68	-35.39	-13	-22.39
125.6	-50.86	V	-0.1	0.16	-51.12	-13	-38.12
486.5	-53.06	H	6	0.29	-47.35	-13	-34.35

Note:

1, The testing has been conformed to $10 \times 848.8 \text{ MHz} = 8,488 \text{ MHz}$

2, All other emissions more than 30 dB below the limit

3, GSM voice, GPRS and EGPRS mode were investigated. The results above show only the worse cases

4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

PCS Band (Part24E) result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3700.4	-48.96	V	10.25	1	-39.71	-13	-26.71
3700.4	-49.51	H	10.25	1	-40.26	-13	-27.26
326.8	-54	V	0.4	0.12	-53.72	-13	-40.72
602.5	-53.09	H	6.8	0.37	-46.66	-13	-33.66

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3760	-48.27	V	10.25	1.01	-39.03	-13	-26.03
3760	-50.37	H	10.25	1.01	-41.13	-13	-28.13
785.6	-53.34	V	6.2	0.44	-47.58	-13	-34.58
605.2	-53.27	H	6.8	0.37	-46.84	-13	-33.84

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3819.6	-48.93	V	10.36	1.02	-39.59	-13	-26.59
3819.6	-48.76	H	10.36	1.02	-39.42	-13	-26.42
58.6	-53.66	V	-1.7	0.11	-55.47	-13	-42.47
599.8	-52	H	6.1	0.37	-46.27	-13	-33.27

Note:

1, The testing has been conformed to $10 \times 1909.8 \text{ MHz} = 19,098 \text{ MHz}$

2, All other emissions more than 30 dB below the limit

3, GSM voice, GPRS and EGPRS mode were investigated. The results above show only the worse cases

4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

UMTS-FDD Band V (Part 22H)

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1652.8	-46.48	V	7.95	0.67	-39.2	-13	-26.20
1652.8	-47.41	H	7.95	0.67	-40.13	-13	-27.13
65.9	-52.13	V	-1.7	0.11	-53.94	-13	-40.94
782.6	-53.86	H	6.1	0.44	-48.2	-13	-35.20

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1670	-46.24	V	7.95	0.67	-38.96	-13	-25.96
1670	-46.89	H	7.95	0.67	-39.61	-13	-26.61
450.9	-52.79	V	6	0.29	-47.08	-13	-34.08
895.6	-53.55	H	6.2	0.44	-47.79	-13	-34.79

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1693.2	-47.96	V	7.95	0.68	-40.69	-13	-27.69
1693.2	-45.75	H	7.95	0.68	-38.48	-13	-25.48
652.3	-53.81	V	6.1	0.39	-48.1	-13	-35.1
598.3	-53.01	H	6.1	0.37	-47.28	-13	-34.28

Note:

1, The testing has been conformed to $10 \times 846.6 \text{ MHz} = 8,466 \text{ MHz}$

2, All other emissions more than 30 dB below the limit

3, RMC, HSUPA and HSDPA mode were investigated. The results above show only the worse cases

4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

UMTS-FDD Band II (Part 24E)

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3704.8	-48.17	V	10.25	1	-38.92	-13	-25.92
3704.8	-50.22	H	10.25	1	-40.97	-13	-27.97
787.6	-53.21	V	6.4	0.43	-47.24	-13	-34.24
605	-52.17	H	6.1	0.37	-46.44	-13	-33.44

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3760	-49.97	V	10.25	1.01	-40.73	-13	-27.73
3760	-50.87	H	10.25	1.01	-41.63	-13	-28.63
658.6	-54.2	V	6.1	0.39	-48.49	-13	-35.49
606.8	-53.66	H	6.1	0.37	-47.93	-13	-34.93

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3815.2	-48.57	V	10.36	1.02	-39.23	-13	-26.23
3815.2	-50.45	H	10.36	1.02	-41.11	-13	-28.11
89.5	-54.26	V	0.4	0.12	-53.98	-13	-40.98
475.6	-52.36	H	6	0.29	-46.65	-13	-33.65

Note:

1, The testing has been conformed to $10 \times 1907.6 \text{ MHz} = 19,076 \text{ MHz}$

2, All other emissions more than 30 dB below the limit


3, RMC, HSUPA and HSDPA mode were investigated. The results above show only the worse cases

4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case

6.7 Band Edge

Temperature	25°C
Relative Humidity	55%
Atmospheric Pressure	1012mbar
Test date :	July 10, 2017
Tested By :	Loren Luo

Requirement(s):

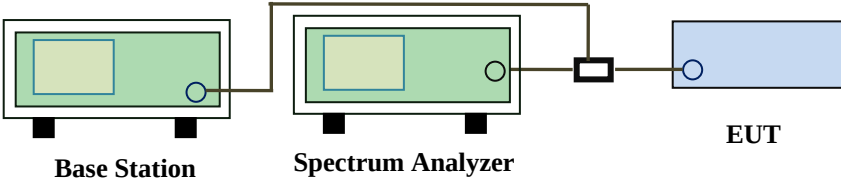Spec	Item	Requirement	Applicable
§22.917(a) §24.238(a)	a)	The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.	☒
Test setup	 Base Station Spectrum Analyzer EUT		
Procedure	- The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The Band Edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

GSM Voice:

Cellular Band (Part 22H) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.9875	-16.01	-13
849.020	-15.00	-13

PCS Band (Part24E) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.978	-15.38	-13
1910.003	-14.52	-13

GPRS:

Cellular Band (Part 22H) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.998	-14.81	-13
849.020	-15.53	-13

PCS Band (Part24E) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.950	-15.84	-13
1910.020	-15.84	-13

EGPRS (MSC5):

Cellular Band (Part 22H) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.9975	-15.21	-13
849.0175	-15.43	-13

PCS Band (Part24E) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.998	-17.08	-13
1910.005	-14.97	-13

RMC:

UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.050	-21.43	-13
849.850	-28.38	-13

UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.98	-21.75	-13
1910.05	-23.07	-13

HSDPA:

UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.025	-21.23	-13
849.400	-27.67	-13

UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.975	-22.24	-13
1910.025	-23.11	-13

HSUPA:

UMTS-FDD Band V (Part 22H)


Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.025	-21.31	-13
849.025	-27.72	-13

UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.975	-22.02	-13
1910.025	-23.53	-13


GSM Voice:

Test Plots

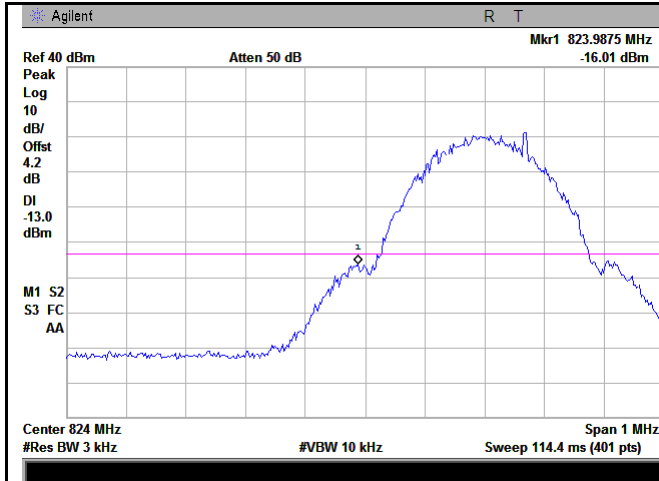


Cellular Band - Low Channel

Note: Offset=Cable loss (4.0) + 10log
(3.16/3)=4.0+0.2=4.2dB

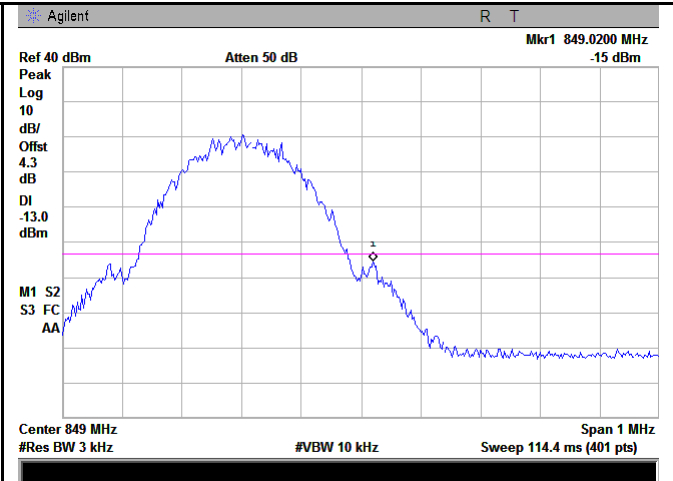


Cellular Band - High Channel

Note: Offset=Cable loss (4.0) + 10log
(3.20/3)=4.0+0.3=4.3dB

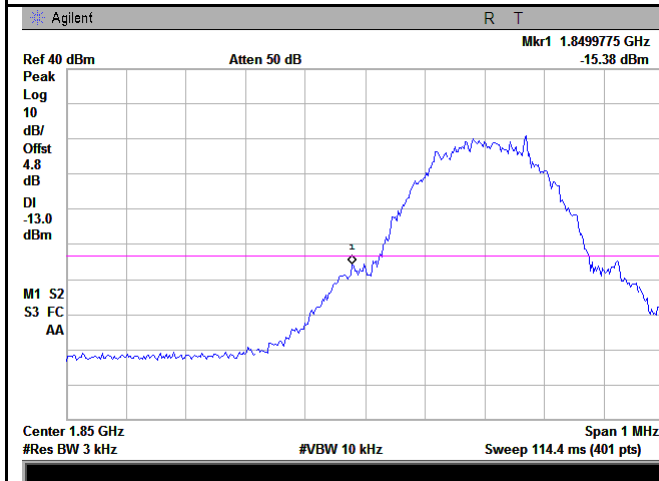

PCS Band - Low Channel

Note: Offset=Cable loss (4.0) + 10log
(3.23/3)=4.5+0.3=4.8dB

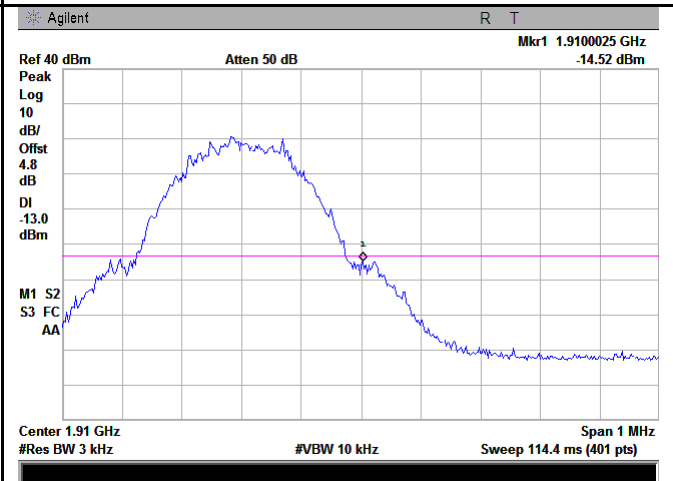


PCS Band - High Channel

Note: Offset=Cable loss (4.0) + 10log
(3.19/3)=4.5+0.3=4.8dB


GPRS:

Test Plots

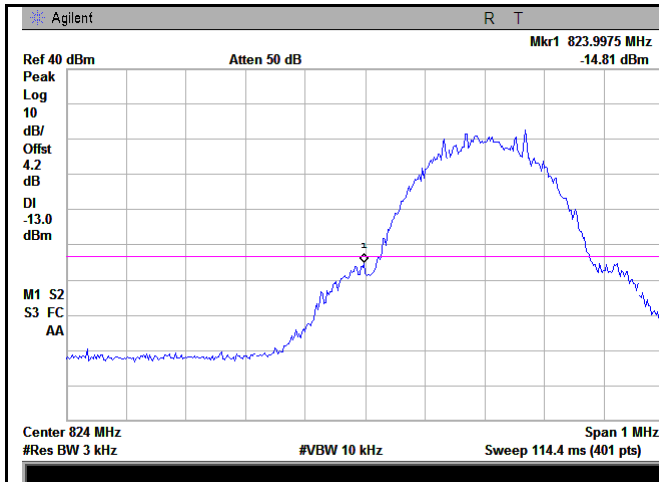


Cellular Band - Low Channel

Note: Offset=Cable loss (4.0) + 10log
(3.16/3)=4.0+0.2=4.2dB

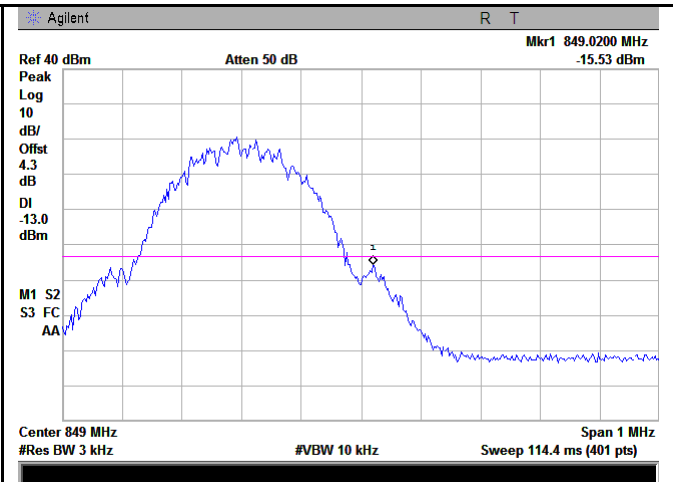


Cellular Band - High Channel

Note: Offset=Cable loss (4.0) + 10log
(3.23/3)=4.0+0.3=4.3dB

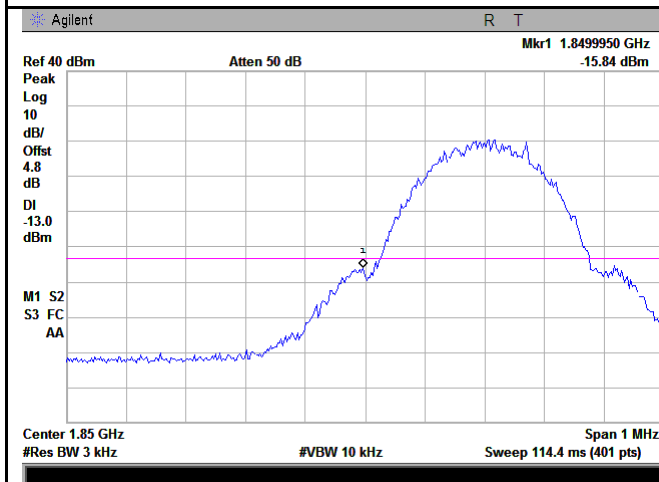

PCS Band - Low Channel

Note: Offset=Cable loss (4.5) + 10log
(3.22/3)=4.5+0.3=4.8dB

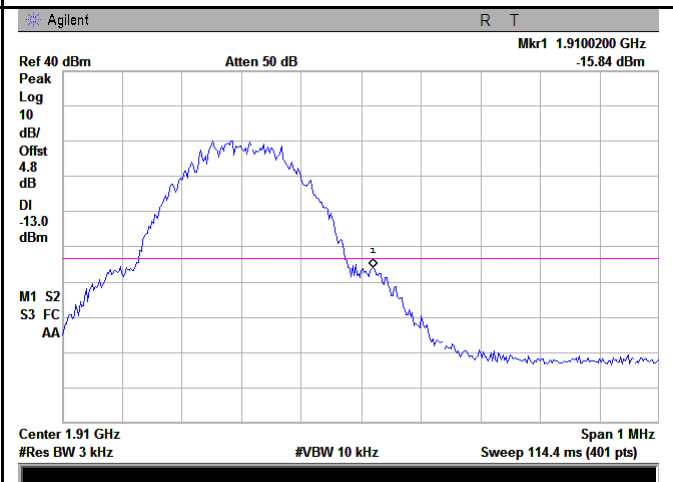


PCS Band - High Channel

Note: Offset=Cable loss (4.5) + 10log
(3.21/3)=4.5+0.3=4.8dB


EGPRS (MSC5):

Test Plots

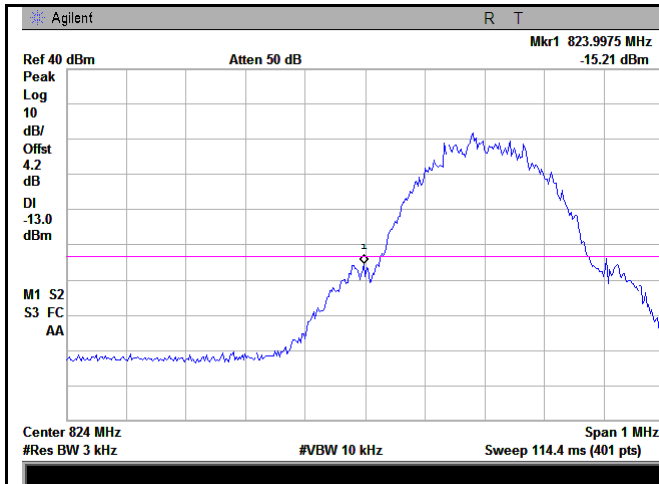


Cellular Band - Low Channel

Note: Offset=Cable loss (4.0) + 10log
(3.17/3)=4.0+0.2=4.2dB

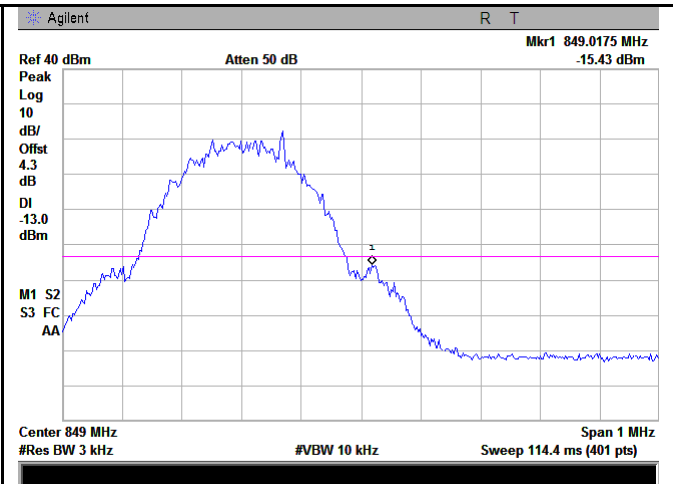


Cellular Band - High Channel

Note: Offset=Cable loss (4.0) + 10log
(3.21/3)=4.0+0.3=4.3dB

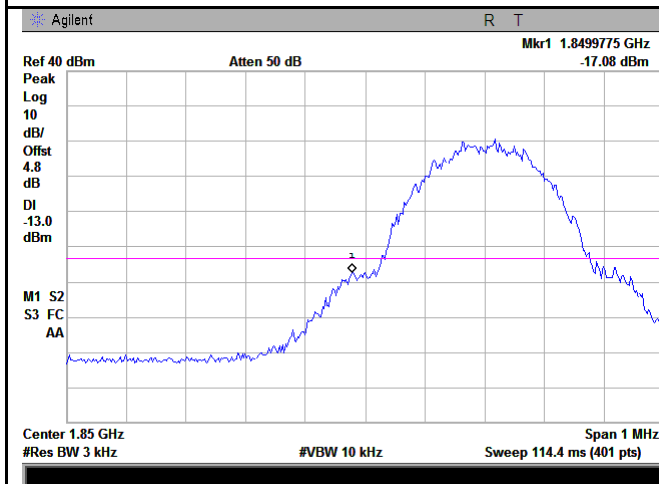

PCS Band - Low Channel


Note: Offset=Cable loss (4.5) + 10log
(3.19/3)=4.5+0.3=4.8dB

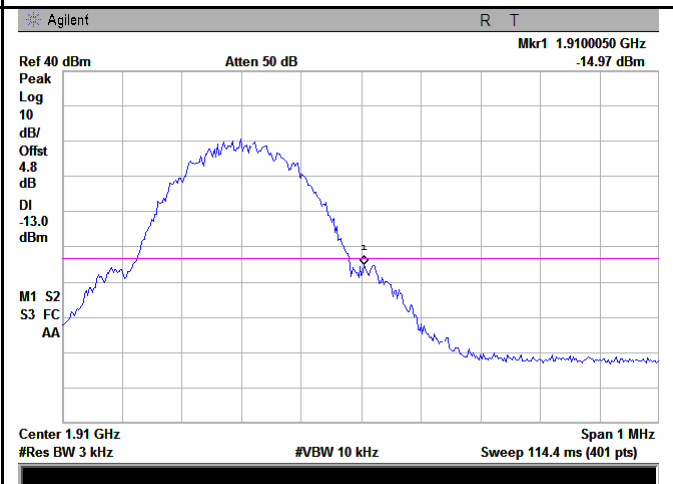

PCS Band - High Channel


Note: Offset=Cable loss (4.5) + 10log
(3.19/3)=4.5+0.3=4.8dB

RMC:

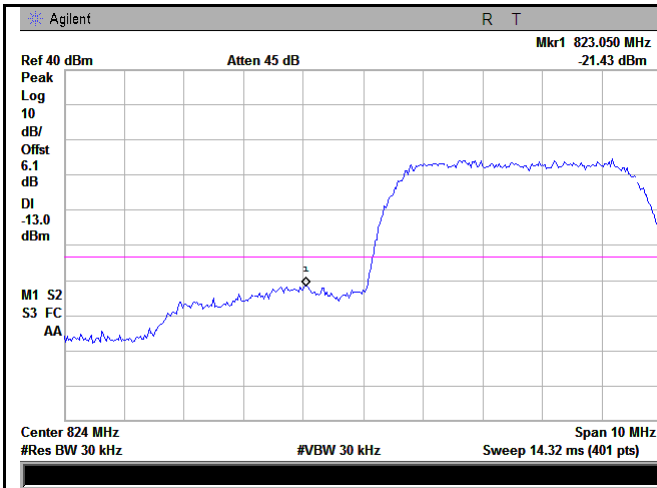


UMTS-FDD Band V - Low Channel

Note: Offset=Cable loss (4.0) + 10log
(48.74/30)=4.0+2.1=6.1 dB

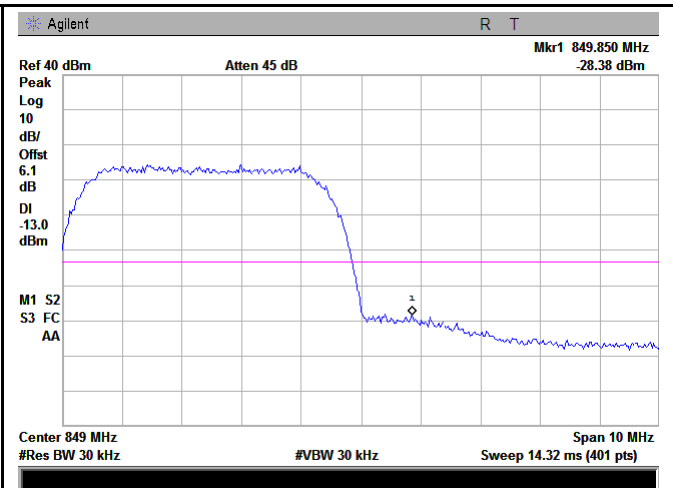


UMTS-FDD Band V - High Channel

Note: Offset=Cable loss (4.0) + 10log
(49.00/30)=4.0+2.1=6.1dB

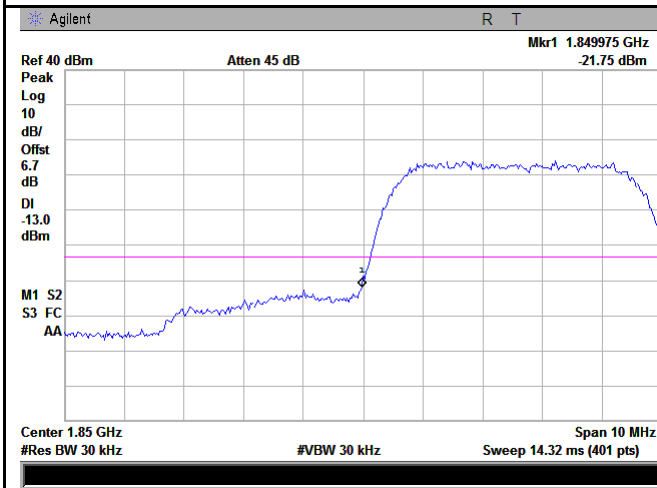

UMTS-FDD Band II - Low Channel


Note: Offset=Cable loss (4.5) + 10log
(49.28/30)=4.5+2.2=6.7 dB

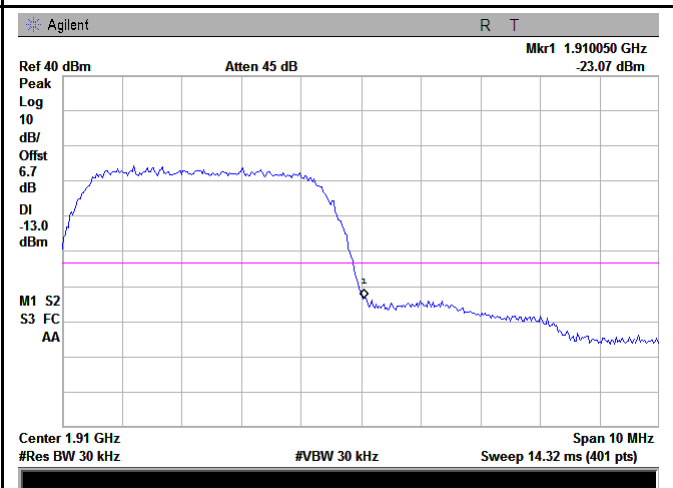

UMTS-FDD Band II - High Channel


Note: Offset=Cable loss (4.5) + 10log
(49.31/30)=4.5+2.2=6.7 dB

HSDPA:

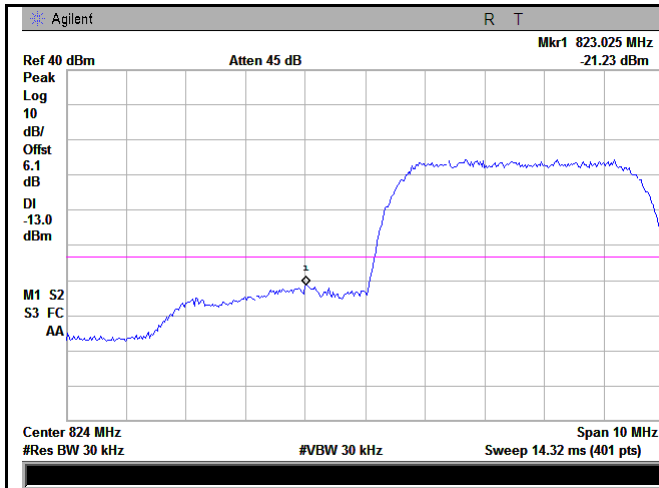


UMTS-FDD Band V - Low Channel

Note: Offset=Cable loss (4.0) + 10log
(48.73/30)=4.0+2.1=6.1dB

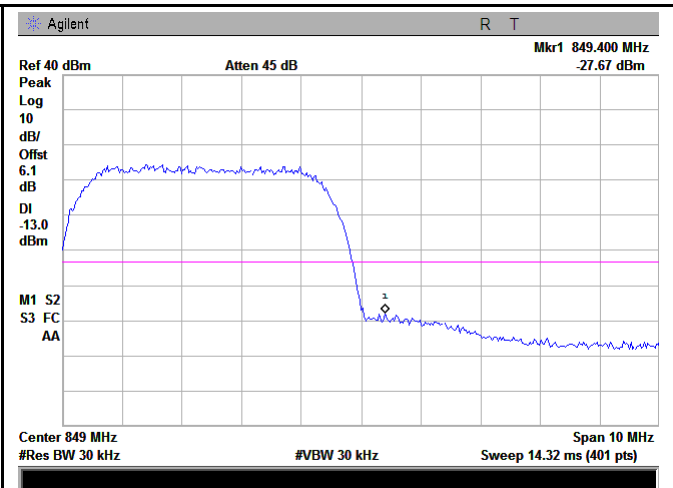


UMTS-FDD Band V - High Channel

Note: Offset=Cable loss (4.0) + 10log
(48.90/30)=4.0+2.1=6.1 dB

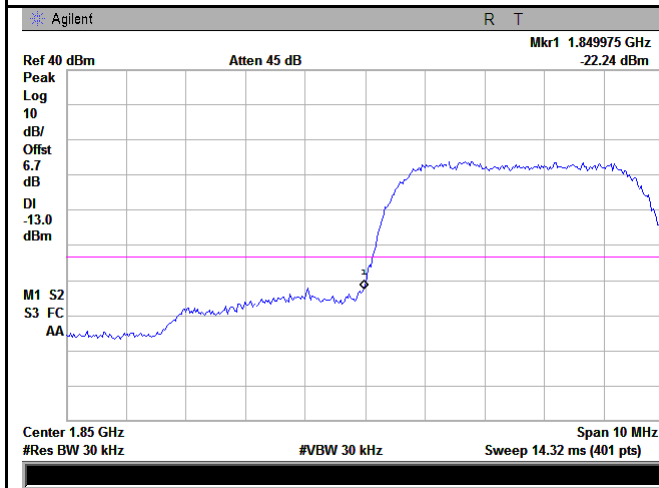

UMTS-FDD Band II - Low Channel


Note: Offset=Cable loss (4.5) + 10log
(49.25/30)=4.5+2.2=6.7dB

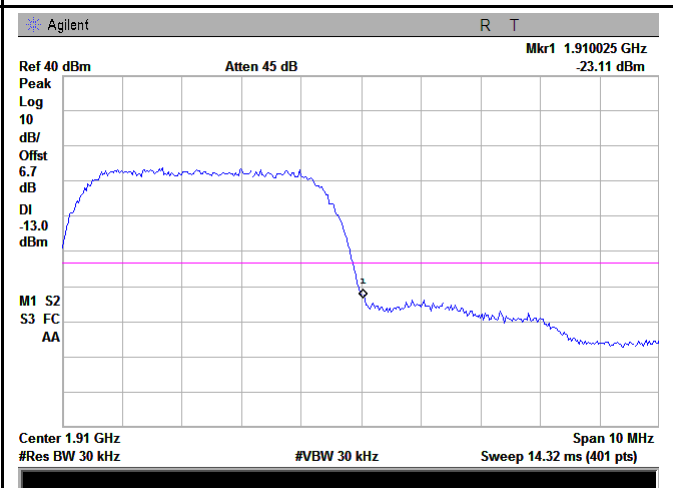

UMTS-FDD Band II - High Channel


Note: Offset=Cable loss (4.5) + 10log
(49.10/30)=4.5+2.2=6.7 dB

HSUPA:

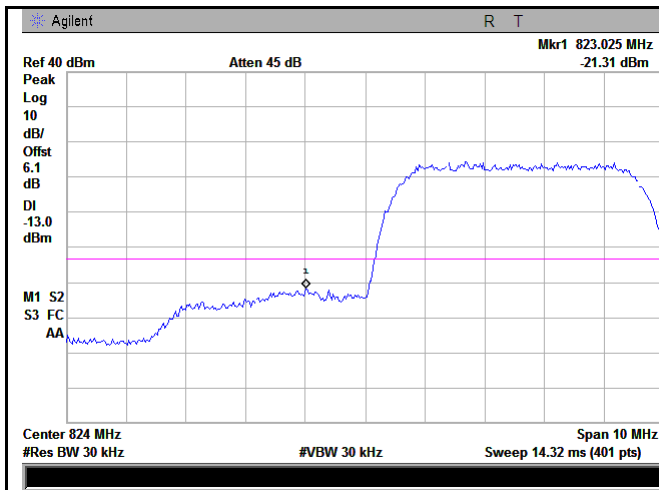


UMTS-FDD Band V - Low Channel

Note: Offset=Cable loss (4.0) + 10log
(48.62/30)=4.0+2.1=6.1 dB

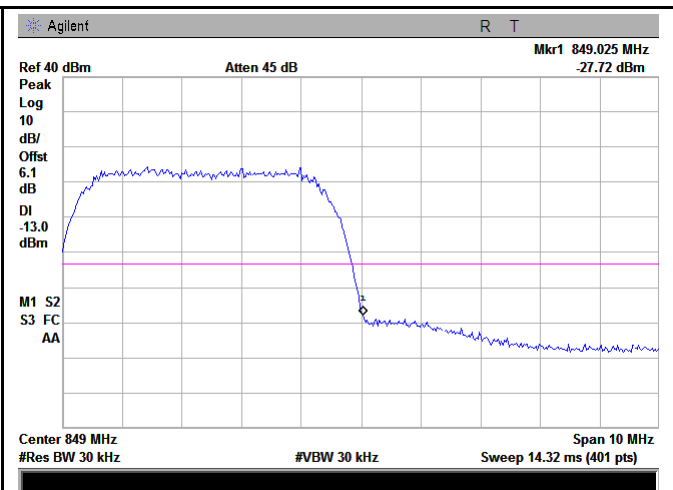


UMTS-FDD Band V - High Channel

Note: Offset=Cable loss (4.0) + 10log
(48.96/30)=4.0+2.1=6.1 dB

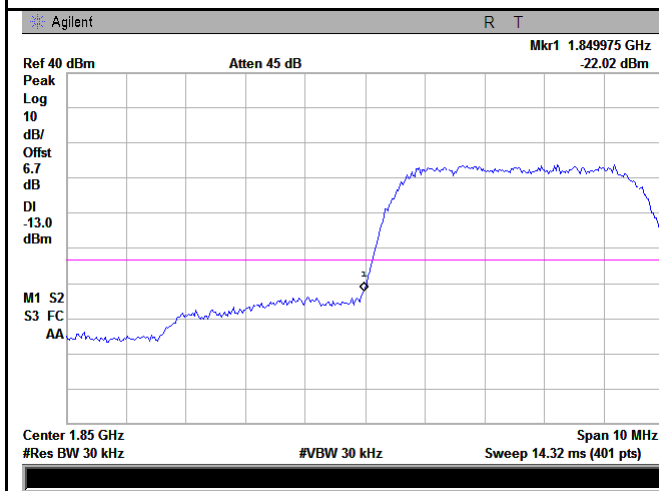

UMTS-FDD Band II - Low Channel

Note: Offset=Cable loss (4.5) + 10log
(49.12/30)=4.5+2.2=6.7 dB

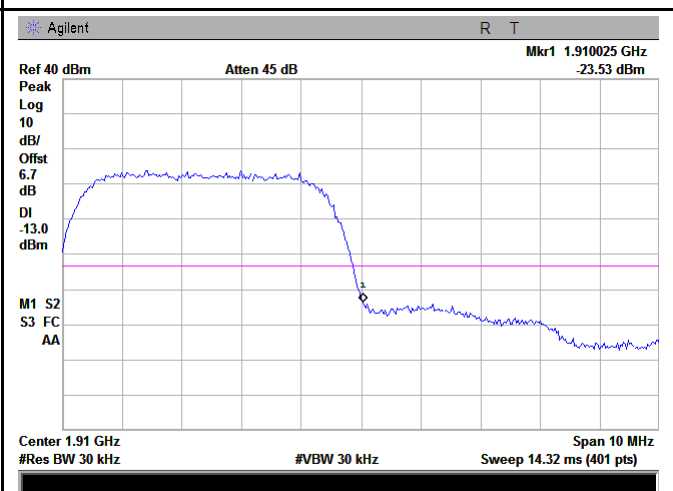


UMTS-FDD Band II - High Channel

Note: Offset=Cable loss (4.5) + 10log
(49.14/30)=4.5+2.2=6.7 dB

6.8 Frequency Stability

Temperature	25°C
Relative Humidity	55%
Atmospheric Pressure	1012mbar
Test date :	July 10, 2017
Tested By :	Loren Luo

Requirement(s):

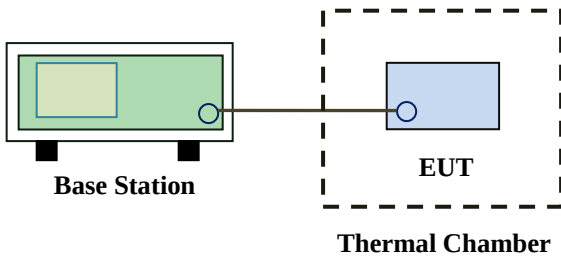Spec	Item	Requirement	Applicable																																
§2.1055, §22.355 & §24.235	a)	According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below: Frequency Tolerance for Transmitters in the Public Mobile Services <table border="1"> <thead> <tr> <th>Frequency Range (MHz)</th><th>Base, fixed (ppm)</th><th>Mobile ≥ 3 watts (ppm)</th><th>Mobile ≤ 3 watts (ppm)</th></tr> </thead> <tbody> <tr> <td>25 to 50</td><td>20.0</td><td>20.0</td><td>50.0</td></tr> <tr> <td>50 to 450</td><td>5.0</td><td>5.0</td><td>50.0</td></tr> <tr> <td>450 to 512</td><td>2.5</td><td>5.0</td><td>5.0</td></tr> <tr> <td>821 to 896</td><td>1.5</td><td>2.5</td><td>2.5</td></tr> <tr> <td>928 to 929</td><td>5.0</td><td>N/A</td><td>N/A</td></tr> <tr> <td>929 to 960</td><td>1.5</td><td>N/A</td><td>N/A</td></tr> <tr> <td>2110 to 2220</td><td>10.0</td><td>N/A</td><td>N/A</td></tr> </tbody> </table> According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized frequency block.	Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≥ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)	25 to 50	20.0	20.0	50.0	50 to 450	5.0	5.0	50.0	450 to 512	2.5	5.0	5.0	821 to 896	1.5	2.5	2.5	928 to 929	5.0	N/A	N/A	929 to 960	1.5	N/A	N/A	2110 to 2220	10.0	N/A	N/A	
Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≥ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)																																
25 to 50	20.0	20.0	50.0																																
50 to 450	5.0	5.0	50.0																																
450 to 512	2.5	5.0	5.0																																
821 to 896	1.5	2.5	2.5																																
928 to 929	5.0	N/A	N/A																																
929 to 960	1.5	N/A	N/A																																
2110 to 2220	10.0	N/A	N/A																																
Test setup	 The diagram illustrates the test setup. On the left, a green rectangular box represents the 'Base Station'. A horizontal line connects it to a blue rectangular box labeled 'EUT' (Equipment Under Test). The 'EUT' is enclosed within a dashed-line rectangular box labeled 'Thermal Chamber'.																																		

Procedure	A communication link was established between EUT and base station. The frequency error was monitored and measured by base station under variation of ambient temperature and variation of primary supply voltage. Limit: The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

GSM Voice:

Cellular Band (Part 22H) result

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.85	20	0.0239	2.5
0		15	0.0179	2.5
10		14	0.0167	2.5
20		14	0.0167	2.5
30		17	0.0203	2.5
40		14	0.0167	2.5
50		20	0.0239	2.5
55		18	0.0215	2.5
25	4.2	21	0.0251	2.5
	3.6	16	0.0191	2.5

PCS Band (Part 24E) result

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.85	14	0.0074	2.5
0		13	0.0069	2.5
10		15	0.0080	2.5
20		13	0.0069	2.5
30		16	0.0085	2.5
40		15	0.0080	2.5
50		15	0.0080	2.5
55		16	0.0085	2.5
25	4.2	15	0.0080	2.5
	3.6	19	0.0101	2.5

RMC:

UMTS-FDD Band V (Part 22H)

Middle Channel, $f_0 = 835$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.85	14	0.0168	2.5
0		12	0.0144	2.5
10		18	0.0216	2.5
20		13	0.0156	2.5
30		15	0.0180	2.5
40		12	0.0144	2.5
50		20	0.0240	2.5
55		15	0.0180	2.5
25	4.2	16	0.0192	2.5
	3.6	12	0.0144	2.5

UMTS-FDD Band II (Part 24E)

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.85	20	0.0106	2.5
0		16	0.0085	2.5
10		14	0.0074	2.5
20		15	0.0080	2.5
30		15	0.0080	2.5
40		17	0.0090	2.5
50		19	0.0101	2.5
55		18	0.0096	2.5
25	4.2	18	0.0096	2.5
	3.6	20	0.0106	2.5

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
RF Conducted Test					
Agilent ESA-E SERIES SPECTRUM ANALYZER	E4407B	MY45108319	09/15/2016	09/14/2017	☒
Power Splitter	1#	1#	08/31/2016	08/30/2017	☒
Universal Radio Communication Tester	CMU200	121393	09/24/2016	09/23/2017	☒
Temperature/Humidity Chamber	UHL-270	001	10/08/2016	10/07/2017	☒
DC Power Supply	E3640A	MY40004013	09/16/2016	09/15/2017	☒
RF Power Sensor	Dare RPR3006C/P/W	AY554013	09/16/2016	09/15/2017	☒
Radiated Emissions					
EMI test receiver	ESL6	100262	09/16/2016	09/15/2017	☒
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/31/2016	08/30/2017	☒
Horn Antenna	BBHA9170	3145226D1	09/28/2016	09/27/2017	☒
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/23/2017	03/22/2018	☒
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/20/2016	09/19/2017	☒
Bilog Antenna (30MHz~2GHz)	JB1	A112017	09/20/2016	09/19/2017	☒
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71259	09/23/2016	09/22/2017	☒
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/23/2016	09/22/2017	☒
SYNTHESIZED SIGNAL GENERATOR	8665B	3744A01293	09/16/2016	09/15/2017	☒
Power Amplifier	SMC150D	R1553-0313	03/08/2017	03/07/2018	☒
Power Amplifier	S41-25D	R1553-0314	05/26/2017	05/25/2018	☒

Tunable Notch Filter	3NF-800/1000-S	AA4	08/31/2016	08/30/2017	☒
Tunable Notch Filter	3NF-1000/2000-S	AM 4	08/31/2016	08/30/2017	☒

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

Whole Package View



Adapter - Label View



EUT - Front View




EUT - Rear View




EUT - Top View




EUT - Bottom View

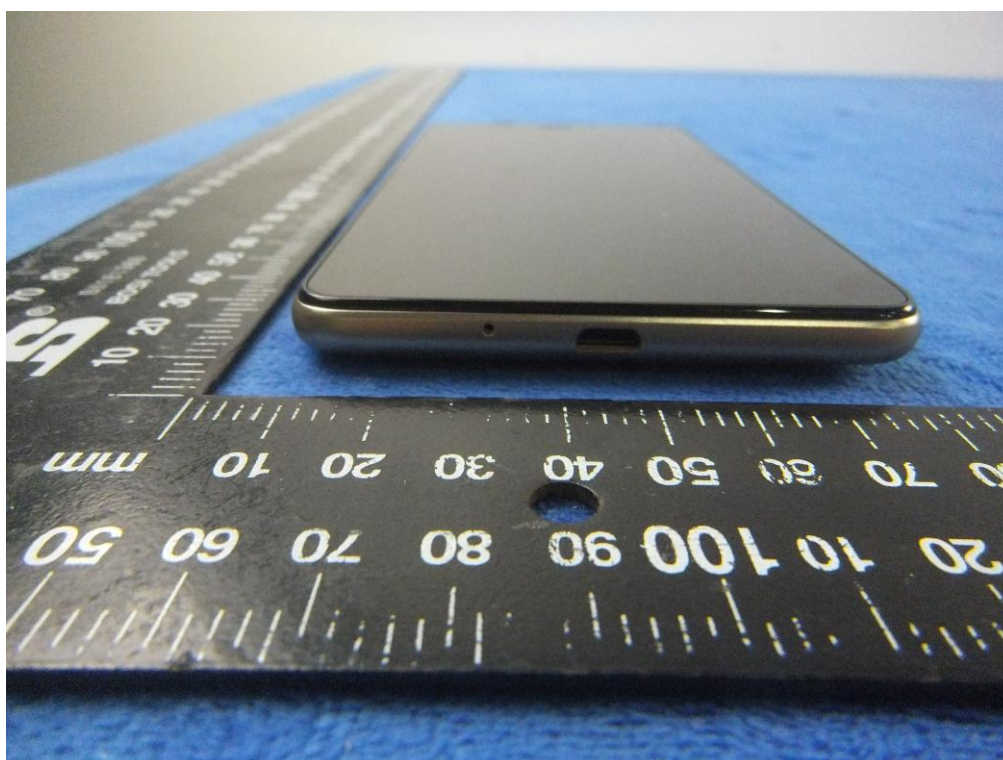

EUT - Left View

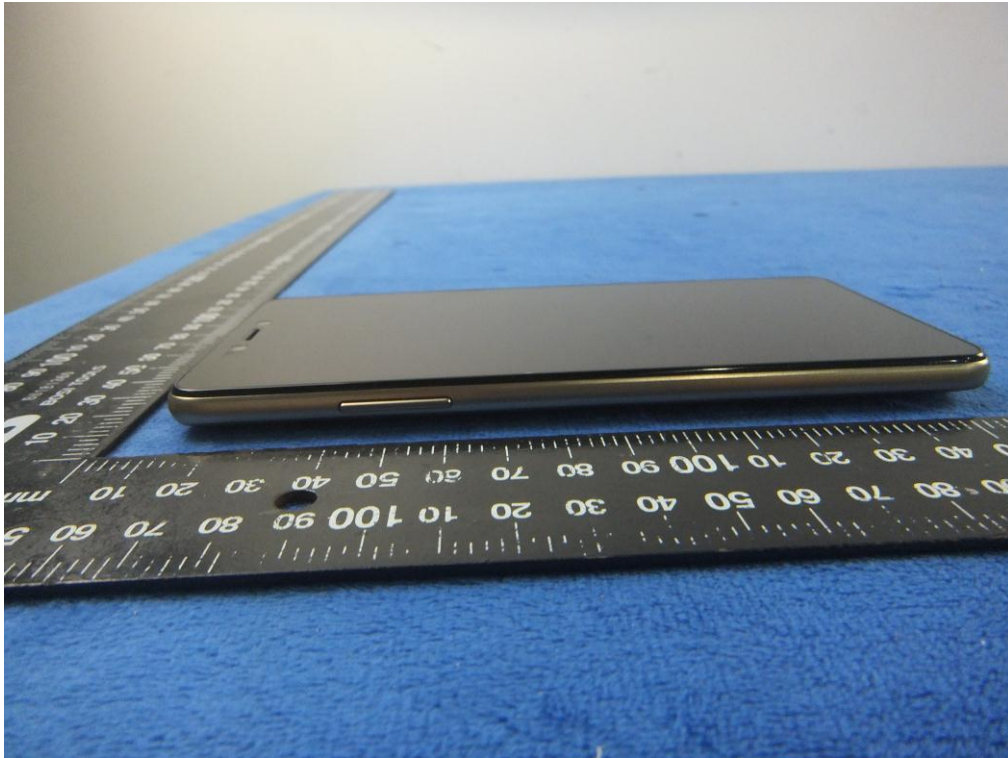

EUT - Right View

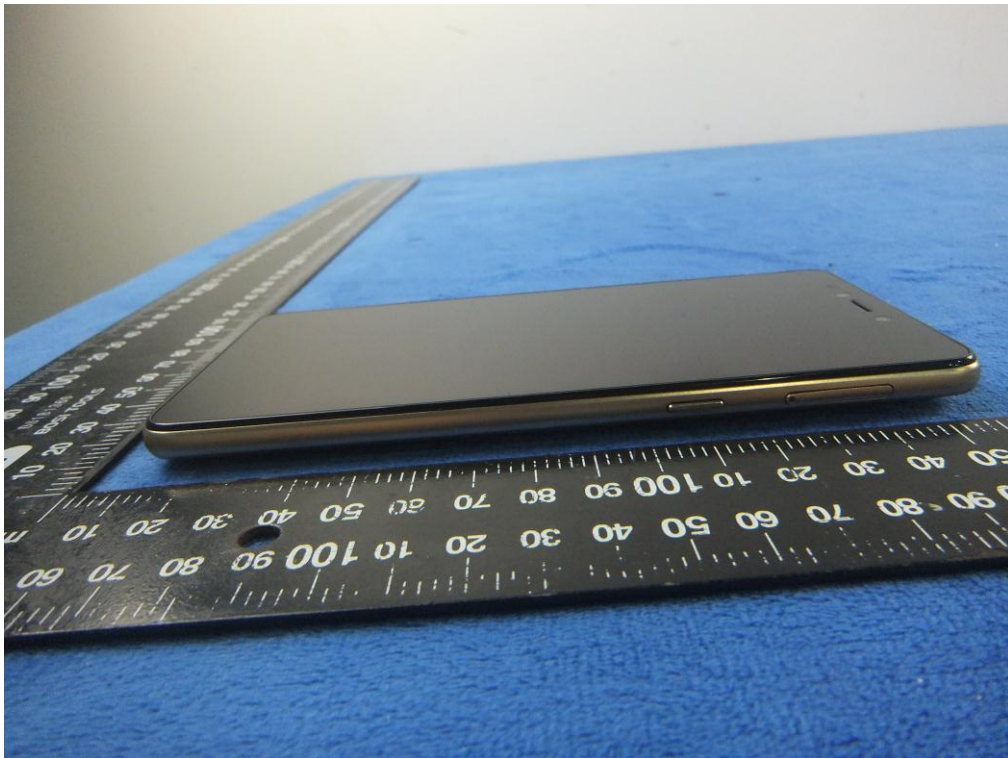

Test Report	17070522-FCC-R1
Page	78 of 90

Annex B.ii. Photograph: EUT Internal Photo

Cover Off - Top View 1



Cover Off - Top View 2




Battery - Front View




Battery - Rear View




Mainboard with Shielding - Front View

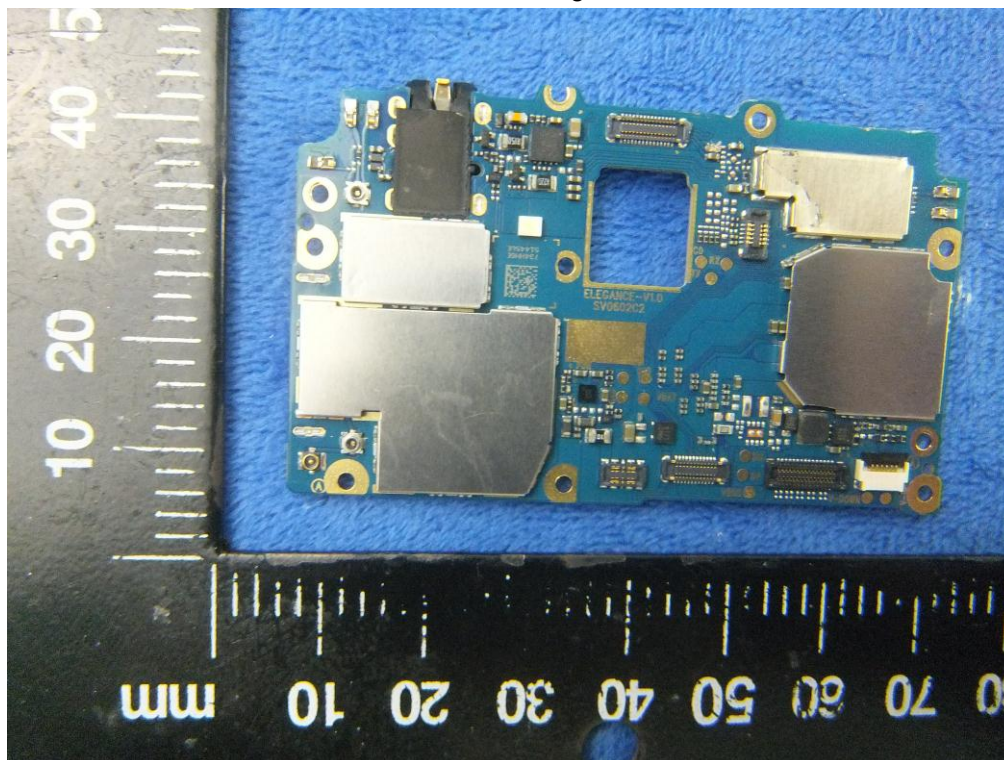


Mainboard without Shielding - Front View

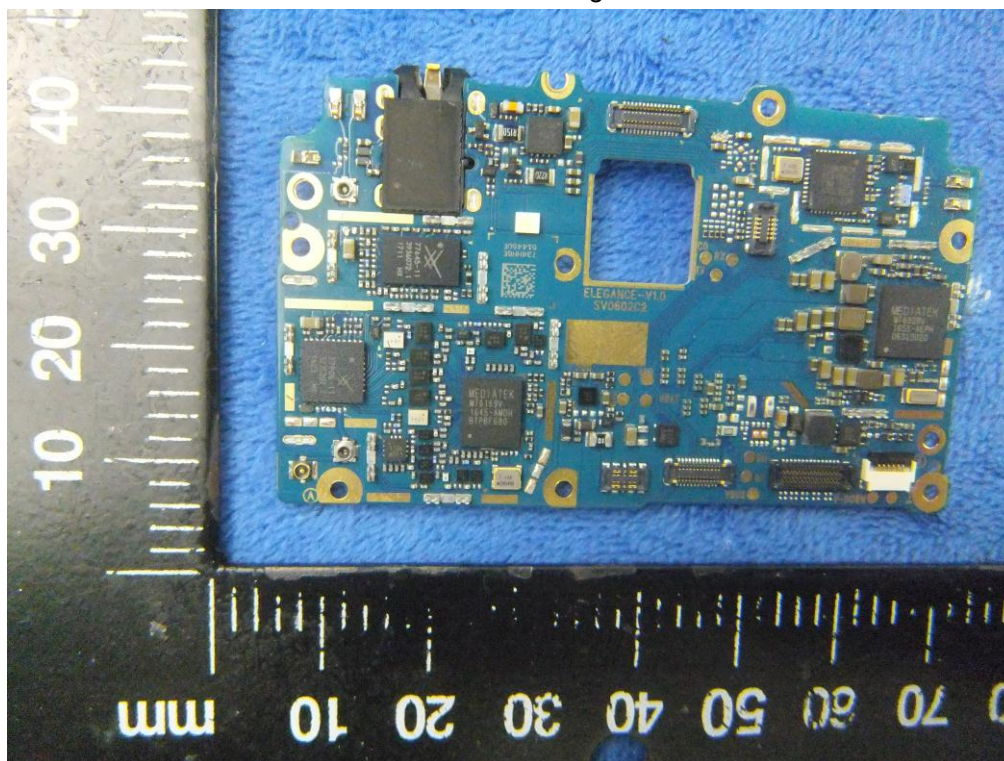

Mainboard with Shielding – Rear View

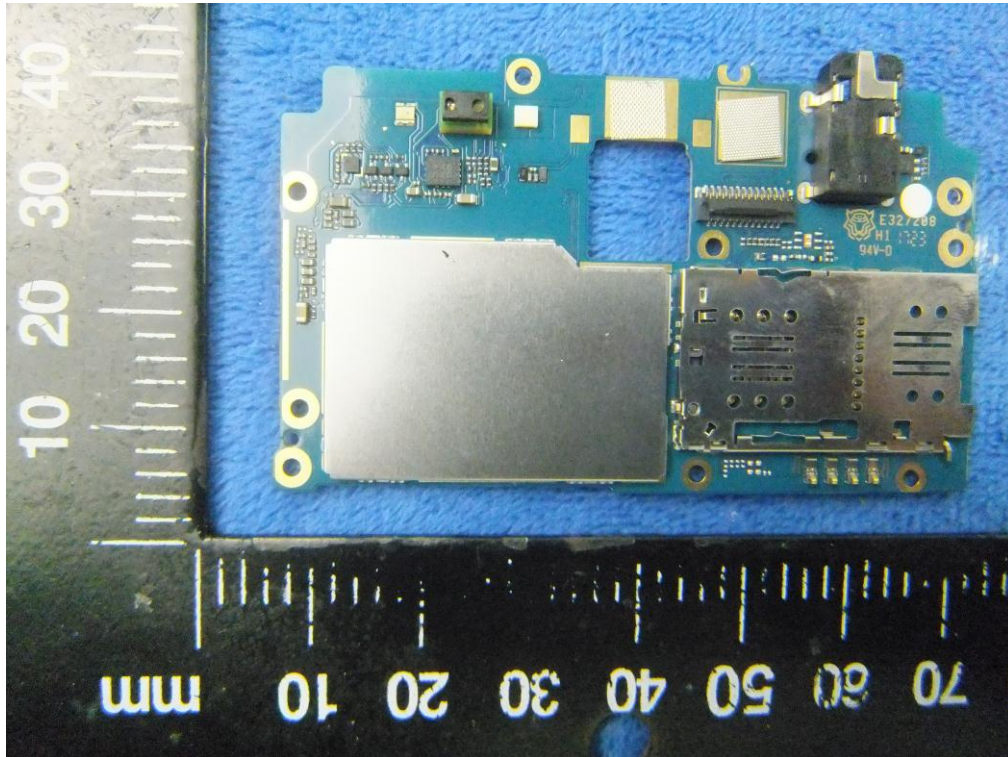


Mainboard without Shielding – Rear View

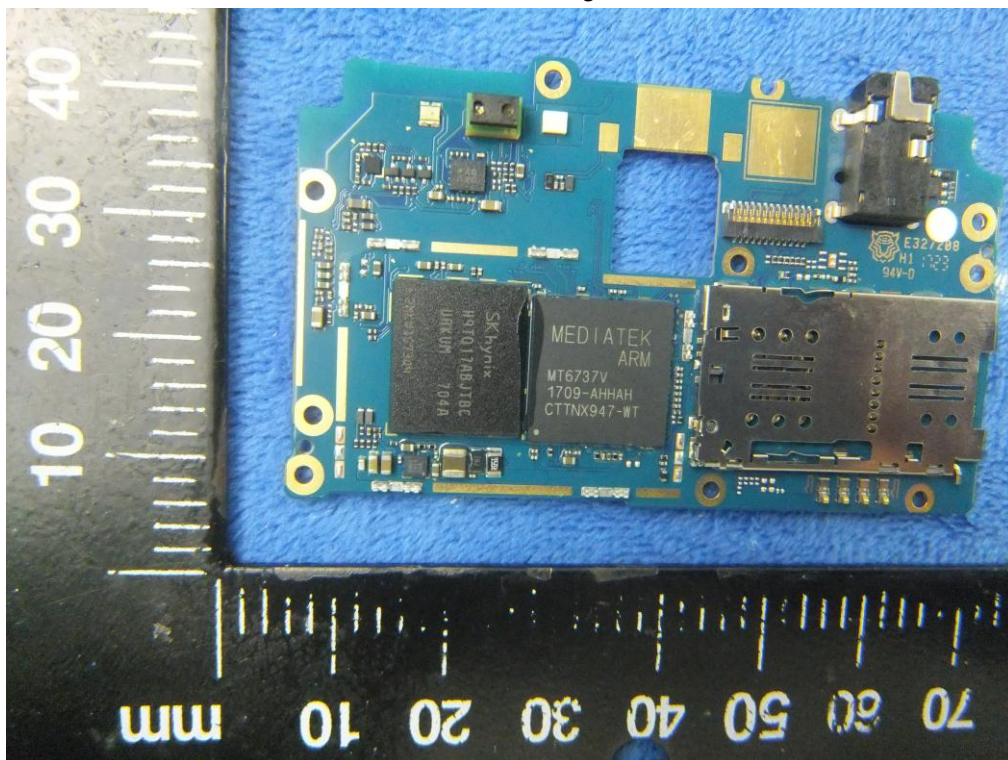

LCD – Front View



LCD – Rear View

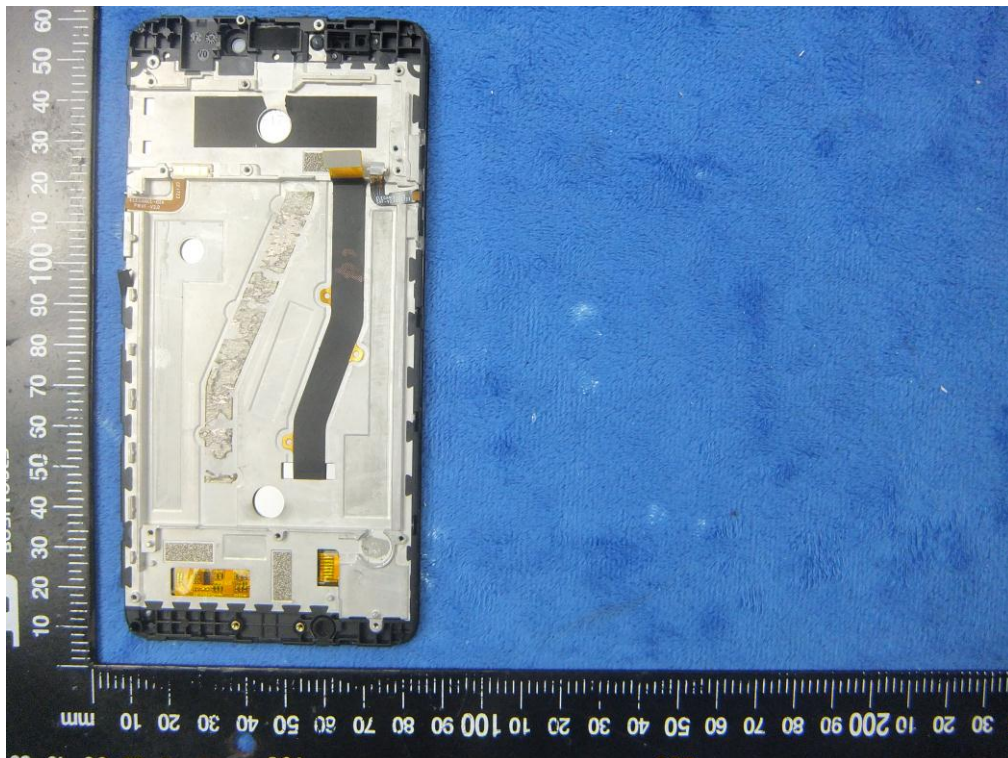

GSM/PCS/UMTS-FDD Antenna View




WIFI/BT/BLE - Antenna View




LTE - Antenna View



Annex B.iii. Photograph: Test Setup Photo

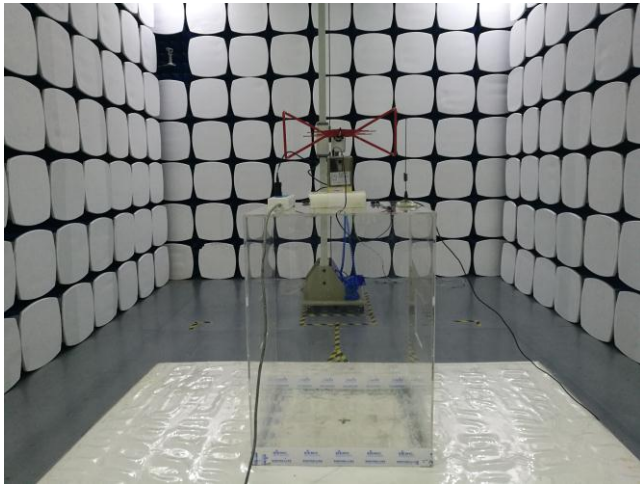

Radiated Spurious Emissions Test Setup Below 1GHz

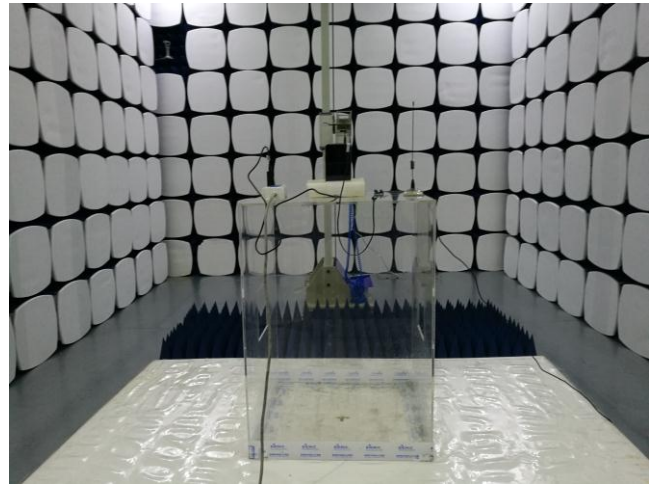


Radiated Spurious Emissions Test Setup Above
1GHz

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for Radiated Emissions

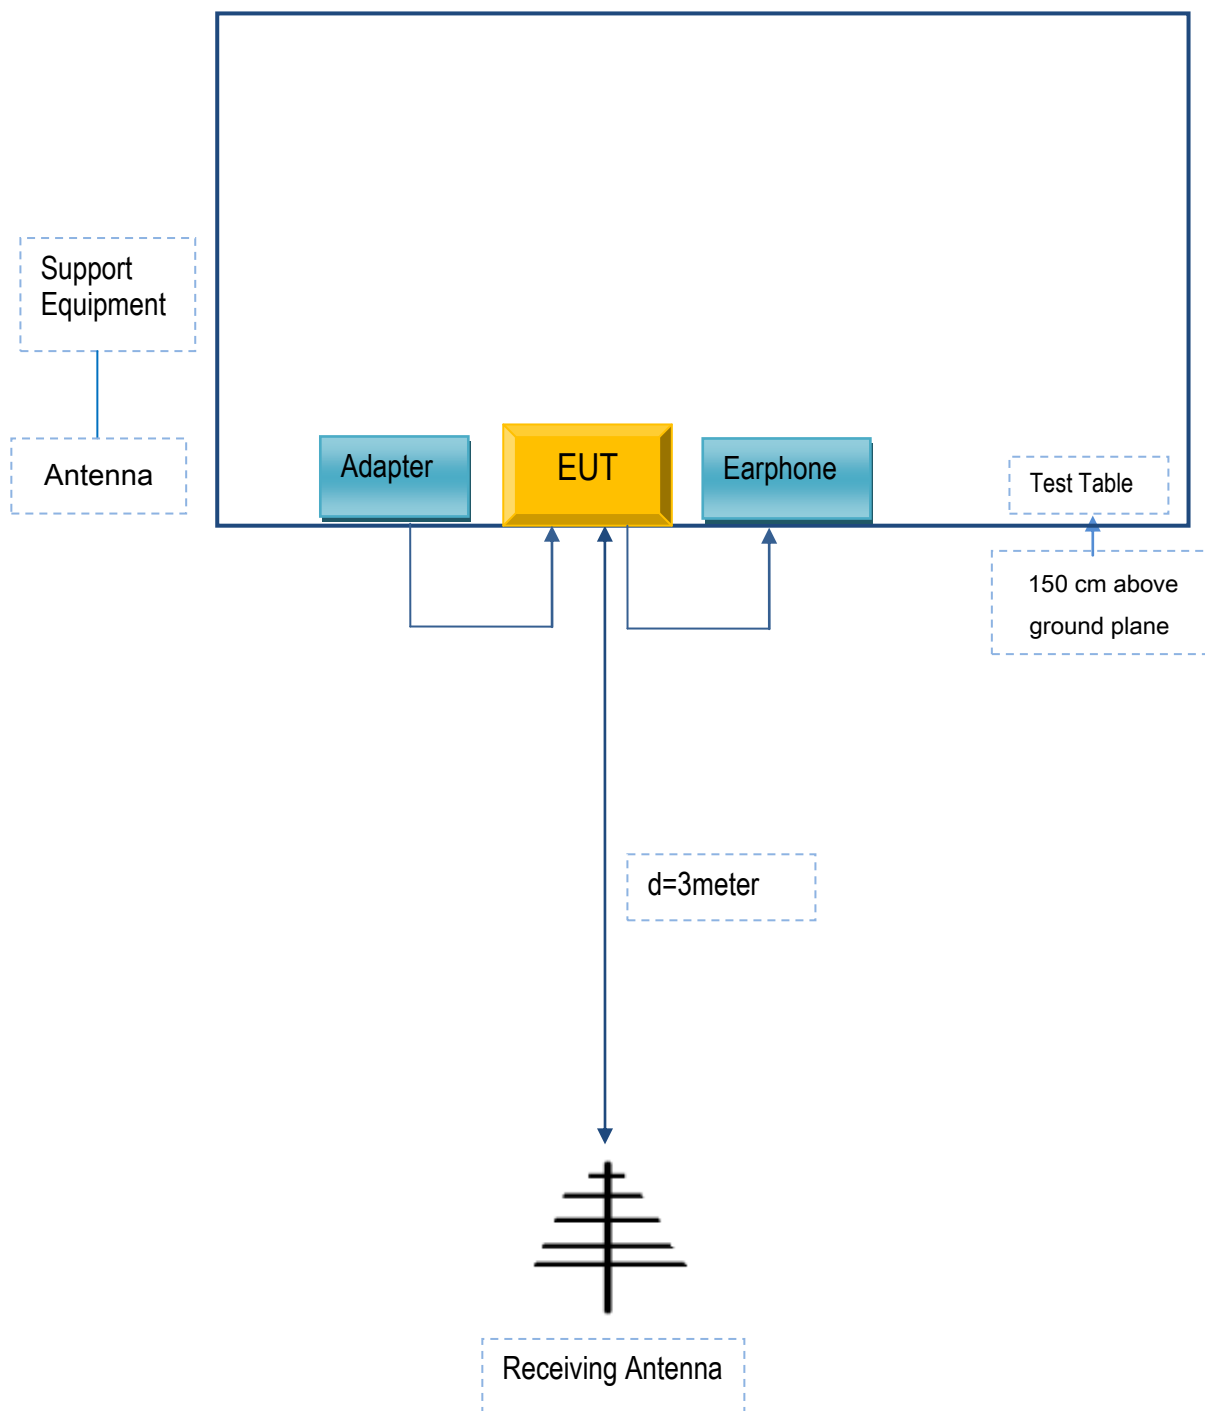

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
MFOURTEL MEXICO S.A. DE C.V.	Adapter	A8-501000	N/A
MFOURTEL MEXICO S.A. DE C.V.	Earphone	M4 SS4453-R	N/A

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	N/A

Annex C.ii. EUT OPERATING CONKITIONS

N/A

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment

Annex E. DECLARATION OF SIMILARITY

N/A