


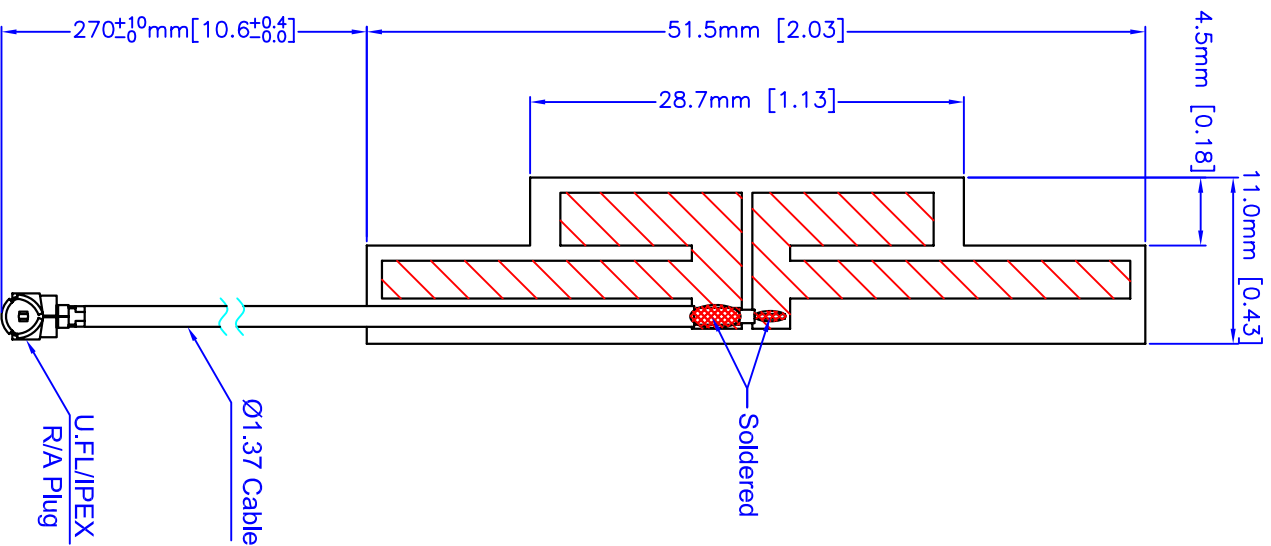

Electrical Properties:

Frequency Range:	2.4/5.x GHz
Impedance:	50Ω nominal
Gain:	*2 dBi
VSWR:	≤2:1
Radiation:	Omni
Polarization:	Vertical

*Gain measured under Customer's Housing.

Mechanical Properties:

Whip:	FR4
Connector:	U.FL/PEX Plug, Connector Brass with gold plating
Cable:	Ø1.37 mm
Weight:	1.5g (est.)
Operation Temp.:	-20°C to +65°C
Storage Temp.:	-30°C to +75°C

NOTE:

1. Antennas TPCB04653L and TPCB04653R are custom-made and are required to be ordered in pairs only.
2. This is a RoHS compliant product.

TITLE	2.4/5.x GHz Multi-Band PCB Mount Antenna	Rev. Date	SHEET
UNIT	mm[In.]	03/28/08	1 of 1
SCALE	DWG. NO.	TPCB04653R	
none			

NEARSON