



TESTING LABORATORY
CERTIFICATE NUMBER: 3297.02



FCC PART 15, SUBPART C
ISEDC RSS-247, ISSUE 2, FEBRUARY 2017

TEST REPORT

For

GoPro, Inc.

3000 Clearview Way,
San Mateo, CA 94402, USA

**FCC ID: CNFSPCH1
IC: 10193A-SPCH1**

Report Type: Original Report	Product Type: Wireless Video Camera
Prepared By: <u>Chin Ming Lui</u> 	
Report Number: <u>R1704261-247 (BT)</u>	
Report Date: <u>2017-06-28</u>	
Reviewed By: <u>Jin Yang</u>  Reviewed By: <u>RF Engineer</u> Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732-9164	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*” (a)(2)

TABLE OF CONTENTS

1 General Description.....	5
1.1 Product Description for Equipment Under Test (EUT)	5
1.2 Objective.....	5
1.3 Related Submittal(s)/Grant(s)	5
1.4 Test Methodology	5
1.5 Measurement Uncertainty	5
1.6 Test Facility Registrations	6
1.7 Test Facility Accreditations	6
2 System Test Configuration.....	9
2.1 Justification.....	9
2.2 EUT Exercise Software.....	9
2.3 Duty Cycle Correction Factor	9
2.4 Equipment Modifications.....	11
2.5 Local Support Equipment	11
2.6 Support Equipment	11
2.7 Interface Ports and Cabling.....	11
3 Summary of Test Results	12
4 FCC §15.203 & ISEDC RSS-Gen §8.3 - Antenna Requirements	13
4.1 Applicable Standards	13
4.2 Antenna Description	13
5 FCC §2.1093, §15.247(i) & ISEDC RSS-102 - RF Exposure.....	14
5.1 Applicable Standards	14
5.2 Test Results	14
6 FCC §15.207 & ISEDC RSS-Gen §8.8 - AC Line Conducted Emissions.....	15
6.1 Applicable Standards	15
6.2 Test Setup	15
6.3 Test Procedure	15
6.4 Corrected Amplitude and Margin Calculation	16
6.5 Test Setup Block Diagram	16
6.6 Test Equipment List and Details	17
6.7 Test Environmental Conditions	17
6.8 Summary of Test Results	17
6.9 Conducted Emissions Test Plots and Data.....	18
7 FCC §15.209, §15.247(d) & ISEDC RSS-247 §5.5, RSS-Gen §8.9, §8.10 - Spurious Radiated Emissions.....	20
7.1 Applicable Standards	20
7.2 Test Setup	22
7.3 Test Procedure	22
7.4 Corrected Amplitude and Margin Calculation	22
7.5 Test Equipment List and Details	23
7.6 Test Environmental Conditions	23
7.7 Summary of Test Results	24
7.8 Radiated Emissions Test Results	25
8 FCC §15.247(a) (1) & ISEDC RSS-247 §5.1, RSS-Gen §6.6 - Emission Bandwidth.....	32
8.1 Applicable Standards	32
8.2 Measurement Procedure.....	32
8.3 Test Equipment List and Details	32
8.4 Test Environmental Conditions	32
8.5 Test Results.....	33
9 FCC §15.247(b) (1) & ISEDC RSS-247 §5.4 - Output Power	37

9.1	Applicable Standards	37
9.2	Measurement Procedure.....	37
9.3	Test Equipment List and Details.....	37
9.4	Test Environmental Conditions	37
9.5	Test Results.....	38
10	FCC §15.247(d) & ISED C RSS-247 §5.5 - 100 kHz Bandwidth of Band Edges.....	42
10.1	Applicable Standards	42
10.2	Measurement Procedure.....	42
10.3	Test Equipment List and Details.....	42
10.4	Test Environmental Conditions	43
10.5	Test Results.....	43
11	FCC §15.247(a) (1) (iii) & ISED C RSS-247 §5.1 (4) - Dwell Time	45
11.1	Applicable Standards	45
11.2	Measurement Procedure.....	45
11.3	Test Equipment List and Details.....	46
11.4	Test Environmental Conditions	46
11.5	Test Results.....	47
12	FCC §15.247(a)(1)(iii) & ISED C RSS-247 §5.1(4) - Number of Hopping Channels.....	66
12.1	Applicable Standards	66
12.2	Test Procedure	66
12.3	Test Equipment List and Details.....	66
12.4	Test Environmental Conditions	66
12.5	Test Results.....	67
13	FCC §15.247(a) (1) & ISED C RSS-247 §5.1(2) - Hopping Channel Separation	70
13.1	Applicable Standards	70
13.2	Test Procedure	70
13.3	Test Equipment List and Details.....	70
13.4	Test Environmental Conditions	70
13.5	Test Results.....	71
14	FCC §15.247(d) & ISED C RSS-247 §5.5 - Spurious Emissions at Antenna Terminals	75
14.1	Applicable Standards	75
14.2	Test Procedure	75
14.3	Test Equipment List and Details.....	75
14.4	Test Environmental Conditions	76
14.5	Test Results.....	76
15	Annex A (Informative) - A2LA Electrical Testing Certificate.....	81

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R1704261-247 (BT)	Original Report	2017-06-28

1 General Description

1.1 Product Description for Equipment Under Test (EUT)

This test and measurement report was prepared on behalf of *GoPro, Inc.*, and their product model: *SPCH1*, FCC ID: CNFSPCH1, IC: 10193A-SPCH1 or the “EUT” as referred to in this report. It is a Wireless video camera.

1.2 Objective

This report is prepared on behalf of *GoPro, Inc.*, in accordance with Part 2, Subpart J, and Part 15, Subparts B and C of the Federal Communication Commission’s rules and ISED RSS-247 Issue 2, February 2017.

The objective is to determine compliance with FCC Part 15.247 and ISED RSS-247 rules for Output Power, Antenna Requirements, 20 dB Bandwidth, 100 kHz Bandwidth of Band Edges Measurement, Conducted and Radiated Spurious Emissions, Number of Hopping Channels, Dwell Time, and Hopping Channel Separation.

1.3 Related Submittal(s)/Grant(s)

FCC Part 15, Subpart C, Equipment DTS with FCC ID: CNFSPCH1
FCC Part 15, Subpart E, Equipment NII with FCC ID: CNFSPCH1

1.4 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

1.5 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Parameter	Measurement uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.57 dB
Power Spectral Density, conducted	±1.48dB
Unwanted Emissions, conducted	±1.57dB
All emissions, radiated	±4.0 dB
AC power line Conducted Emission	±2.0 dB
Temperature	±2 ° C
Humidity	±5 %
DC and low frequency voltages	±1.0 %
Time	±2 %
Duty Cycle	±3 %

1.6 Test Facility Registrations

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Industry Canada under Registration Numbers: 3062A-1, 3062A-2, and 3062A-3.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0027.

1.7 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

A- An independent, 3rd-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2005 by A2LA (Test Laboratory Accreditation Certificate Number 3279.02), in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2005 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report..

BACL's ISO/IEC 17025:2005 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio, RF Exposure, Safety and wireline Telecommunications test methods applicable to a wide range of product categories. These product categories include Central Office Telecommunications Equipment [including NEBS - Network Equipment Building Systems], Unlicensed and Licensed Wireless and RF devices, Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment; Industrial and Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, and Energy Efficient Lighting.

B- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3279.03) to certify

- For the USA (Federal Communications Commission):

- 1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
- 2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
- 3- All Telephone Terminal Equipment within FCC Scope C.

- For the Canada (Industry Canada):

- 1 All Scope 1-Licence-Exempt Radio Frequency Devices;
- 2 All Scope 2-Licensed Personal Mobile Radio Services;
- 3 All Scope 3-Licensed General Mobile and Fixed Radio Services;
- 4 All Scope 4-Licensed Maritime and Aviation Radio Services;
- 5 All Scope 5-Licensed Fixed Microwave Radio Services
- 6 All Broadcasting Technical Standards (BETS) in the Category I Equipment Standards List.

- For Singapore (Info-Communications Development Authority (IDA)):

- 1 All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2

2. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2

- For the Hong Kong Special Administrative Region:

- 1 All Radio Equipment, per KHCA 10XX-series Specifications;
- 2 All GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications;
- 3 All Fixed Network Equipment, per HKCA 20XX-series Specifications.

- For Japan:

- 1 MIC Telecommunication Business Law (Terminal Equipment):
 - All Scope A1 - Terminal Equipment for the Purpose of Calls;
 - All Scope A2 - Other Terminal Equipment
- 2 Radio Law (Radio Equipment):
 - All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
 - All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
 - All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

C- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3279.01) to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:

- 1 Electronics and Office Equipment:
 - for Telephony (ver. 3.0)
 - for Audio/Video (ver. 3.0)
 - for Battery Charging Systems (ver. 1.1)
 - for Set-top Boxes and Cable Boxes (ver. 4.1)
 - for Televisions (ver. 6.1)
 - for Computers (ver. 6.0)
 - for Displays (ver. 6.0)
 - for Imaging Equipment (ver. 2.0)
 - for Computer Servers (ver. 2.0)
- 2 Commercial Food Service Equipment
 - for Commercial Dishwashers (ver. 2.0)
 - for Commercial Ice Machines (ver. 2.0)
 - for Commercial Ovens (ver. 2.1)
 - for Commercial Refrigerators and Freezers
- 3 Lighting Products
 - For Decorative Light Strings (ver. 1.5)
 - For Luminaires (including sub-components) and Lamps (ver. 1.2)
 - For Compact Fluorescent Lamps (CFLs) (ver. 4.3)
 - For Integral LED Lamps (ver. 1.4)
- 4 Heating, Ventilation, and AC Products
 - for Residential Ceiling Fans (ver. 3.0)
 - for Residential Ventilating Fans (ver. 3.2)
- 5 Other
 - For Water Coolers (ver. 3.0)

D- A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:

- Australia: ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I;

- Canada: (Industry Canada - ISED) Foreign Certification Body – FCB – APEC Tel MRA -Phase I and Phase II;
- Chinese Taipei (Republic of China – Taiwan):
 - o BSMI (Bureau of Standards, Metrology and Inspection) APEC Tel MRA -Phase I;
 - o NCC (National Communications Commission) APEC Tel MRA -Phase I;
- European Union:
 - o EMC Directive 2004/108/EC US-EU EMC and Telecom MRA CAB
 - o Radio and Teleterminal Equipment (Rand TTE) Directive 1995/5/EC US -EU EMC and Telecom MRA CAB
- Hong Kong Special Administrative Region: (Office of the Telecommunications Authority – OFTA) APEC Tel MRA -Phase I and Phase II
- Israel – US-Israel MRA Phase I
- Republic of Korea (Ministry of Communications - Radio Research Laboratory) APEC Tel MRA -Phase I
- Singapore: (Infocomm Development Authority - IDA) APEC Tel MRA -Phase I and Phase II;
- Japan: VCCI - Voluntary Control Council for Interference US-Japan Telecom Treaty VCCI Side Letter-
- USA:
 - o ENERGY STAR Recognized Test Laboratory – US EPA
 - o Telecommunications Certification Body (TCB) – US FCC;
- Vietnam: APEC Tel MRA -Phase I;

2 System Test Configuration

2.1 Justification

The EUT was configured for testing in accordance to ANSI C63.10-2013

The worst-case data rates are determined by measuring the peak power across all data rates.

2.2 EUT Exercise Software

The test firmware used was QRCT provided by *GoPro, Inc.*, the software is comply with the standard requirements being tested against.

Modulation	Frequency (MHz)	Power Setting
GFSK DQPSK	2402	9
	2441	9
	2480	9
	2402	9
8PSK	2441	9
	2480	9
	2402	9
GFSK	2441	9
	2480	9
	2402	9

2.3 Duty Cycle Correction Factor

According to ANSI C63.10-2013 section 7.5:

Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 s (100 ms). In cases where the pulse train exceeds 0.1 s, the measured field strength shall be determined during a 0.1 s interval. The following procedure is an example of how the average value may be determined. The average field strength may be found by measuring the peak pulse amplitude (in log equivalent units) and determining the duty cycle correction factor (in dB) associated with the pulse modulation as shown in following equation:

$$\delta(\text{dB}) = 20\log(\Delta)$$

where

δ is the duty cycle correction factor (dB)


Δ is the duty cycle (dimensionless)

Radio Mode	On Time (μs)	Period (μs)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
GFSK	2875	3750	76.67	-2.31
$\pi/4$ -DQPSK	2883	3750	76.88	-2.28
8DPSK	2875	3750	76.67	-2.31


Duty Cycle = On Time (ms)/ Period (ms)

Please refer to the following plots.


GFSK Mode

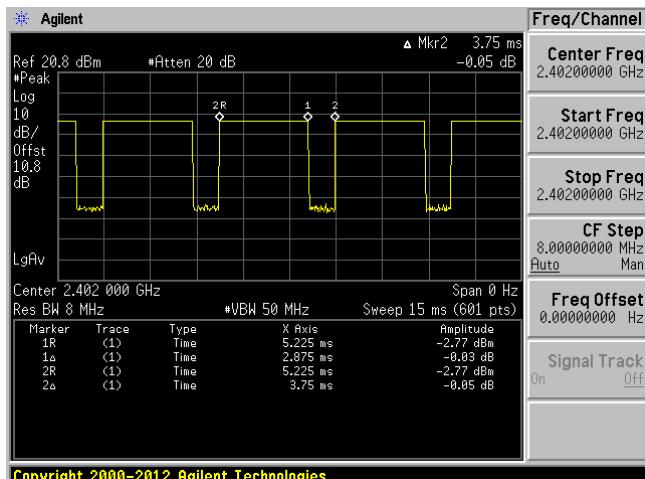

$\pi/4$ -DQPSK Mode

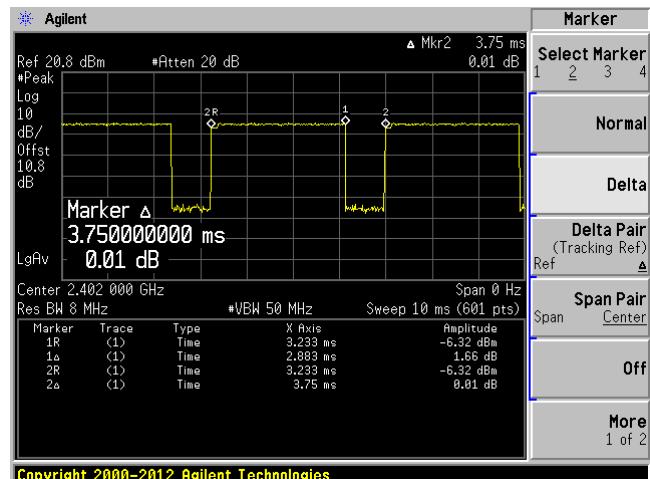

8DPSK Mode

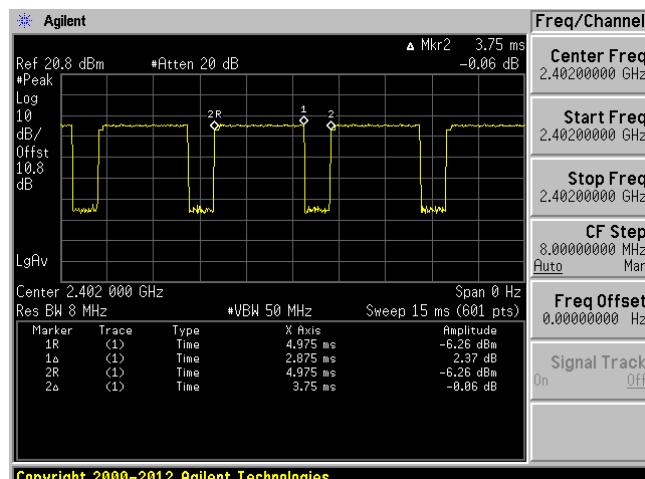

2.4 Equipment Modifications

A hole was cut on the side of the EUT to allow for RF cable connection to the power spectrum analyzer

2.5 Local Support Equipment

Manufacturer	Description	Model
Dell	Laptop	Latitude E7450
Dell	Laptop	Latitude E6410

2.6 Support Equipment

There was no support equipment included, or intended for use with EUT during these tests.

2.7 Interface Ports and Cabling

Cable Description	Length (m)	To	From
USB Cable	< 1 m	Laptop	EUT
RF Cable	< 1 m	EUT	PSA

3 Summary of Test Results

Results reported relate only to the product tested.

FCC and ISEDC Rules	Description of Test	Results
FCC §15.203 ISEDC RSS-Gen §8.3	Antenna Requirement	Compliant
FCC §15.207 ISEDC RSS-Gen §8.8	AC Line Conducted Emissions	Compliant
FCC §2.1093, §15.247(i) ISEDC RSS-102	RF Exposure	Compliant ¹
FCC §2.1051, §15.247 (d) ISEDC RSS-247 §5.5	Spurious Emissions at Antenna Port	Compliant
FCC §2.1053, §15.205, §15.209, §15.247(d) ISEDC RSS-247 §5.5 ISEDC RSS-Gen §8.9, §8.10	Radiated Spurious Emissions	Compliant
FCC §15.247(a)(1) ISEDC RSS-247 §5.1 (1)	20 dB and 99% Emission Bandwidth	Compliant
FCC §15.247(b)(1) ISEDC RSS-247 §5.1(2)	Maximum Peak Output Power	Compliant
FCC §15.247(d) ISEDC RSS-247 §5.5	100 kHz Bandwidth of Frequency Band Edge	Compliant
FCC §15.247(a)(1)(iii) ISEDC RSS-247 §5.1(4)	Number of Hopping Channels	Compliant
FCC §15.247(a)(1) ISEDC RSS-247 §5.1 (2)	Hopping Channel Separation	Compliant
FCC §15.247(a)(1)(iii) ISEDC RSS-247 §5.1 (4)	Dwell Time	Compliant

Note¹: RF exposure analysis is covered in a separate report. Please refers to R1704261-SAR

4 FCC §15.203 & ISEDC RSS-Gen §8.3 - Antenna Requirements

4.1 Applicable Standards

According to FCC §15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC §15.247 (b) (4), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to ISEDC RSS-Gen §8.3: Transmitter Antenna

The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the license-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna.

License-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power (e.i.r.p.) limits specified in the applicable standard (RSS) for the license-exempt apparatus.

Testing shall be performed using the highest gain antenna of each combination of license-exempt transmitter and antenna type, with the transmitter output power set at the maximum level. When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.

User manuals for transmitters equipped with detachable antennas shall also contain the following notice in a conspicuous location:

This radio transmitter (identify the device by certification number) has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types approved for use with the transmitter, indicating the maximum permissible antenna gain (in dBi).

4.2 Antenna Description

The antennas used by the EUT are permanent attached antennas.

Antenna usage	Frequency Range (MHz)	Maximum Antenna Gain (dBi)
Wi-Fi/Bluetooth	2400-2500	-1.0
Wi-Fi	5180-5720	4.5
Wi-Fi	5745-5825	3.0

5 FCC §2.1093, §15.247(i) & ISEDC RSS-102 - RF Exposure

5.1 Applicable Standards

FCC §2.1093, §15.247(i) and ISEDC RSS-102

5.2 Test Results

Please refer to the SAR Report: R1704261- SAR.

6 FCC §15.207 & ISEDC RSS-Gen §8.8 - AC Line Conducted Emissions

6.1 Applicable Standards

As per FCC §15.207 and ISEDC RSS-Gen §8.8 Conducted limits:

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 2}
0.5-5	56	46
5-30	60	50

Note 1: Decreases with the logarithm of the frequency.

Note 2: A linear average detector is required

6.2 Test Setup

The measurement was performed at shield room, using the setup per ANSI C63.10-2013 measurement procedure. The specification used was FCC §15.207 and ISEDC RSS-Gen §8.8 limits.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The AC/DC power adapter of the EUT was connected with LISN-1 which provided 120 V / 60 Hz AC power.

6.3 Test Procedure

During the conducted emissions test, the power cord of the EUT host system was connected to the mains outlet of the LISN-1 and the power cords of support equipment were connected to LISN-2.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data were recorded in the peak detection mode, quasi-peak, and average detection mode. Quasi-Peak readings are distinguished with a “QP.” Average readings are distinguished with an “Ave”.

6.4 Corrected Amplitude and Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Cable Loss (CL), the Attenuator Factor (Atten) to indicated Amplitude (Ai) reading. The basic equation is as follows:


$$CA = Ai + CL + Atten$$

For example, a corrected amplitude of 46.2 dBuV = Indicated Reading (32.5 dBuV) + Cable Loss (3.7 dB) + Attenuator (10 dB)

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

6.5 Test Setup Block Diagram

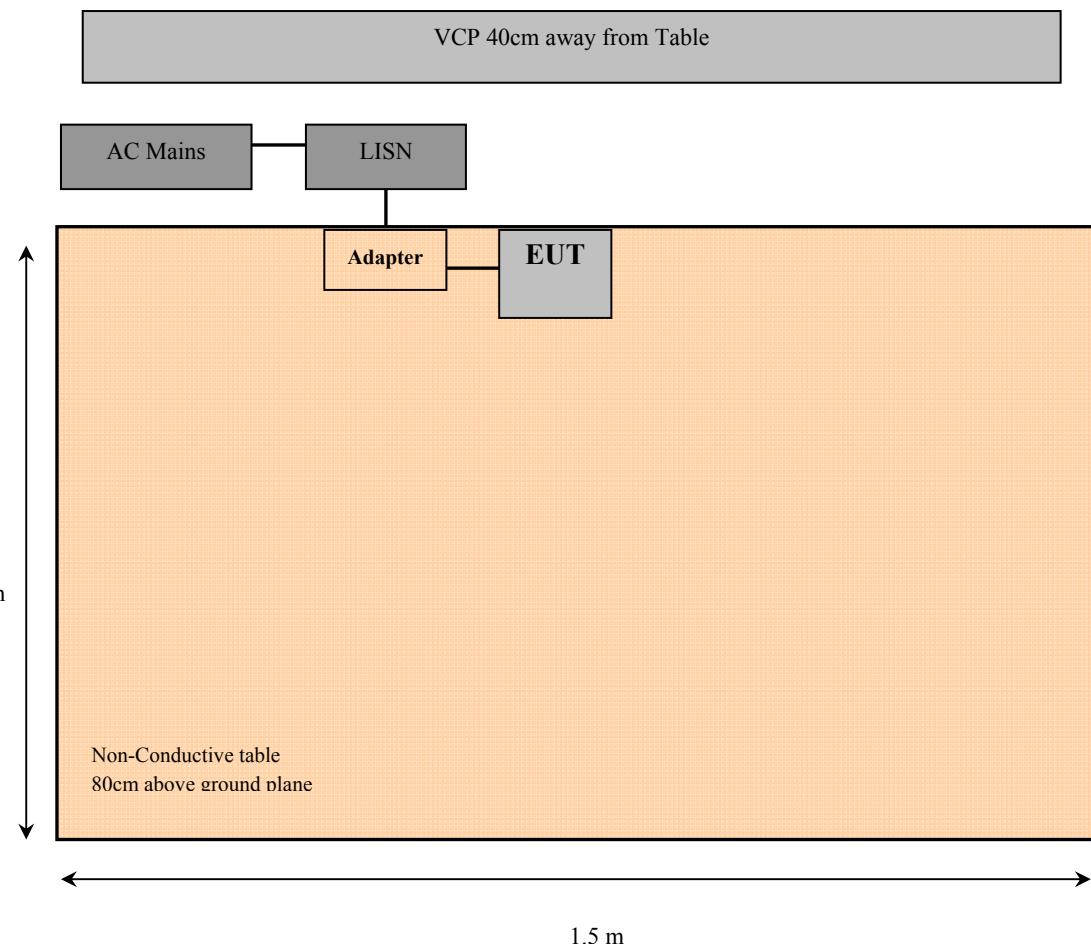

6.6 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde and Schwarz	Receiver, EMI Test	ESCI 1166.5950K03	100338	2016-02-04	2 years
Rohde and Schwarz	Impulse Limiter	ESH3-Z2	101964	2016-07-22	1 year
Keysight Technologies	RF Limiter	11867A	MY42242931	2017-01-12	1 year
Solar Electronics Company	High Pass Filter	Type 7930-100	7930150204	2017-03-13	1 year
Suirong	30 ft conductive emission cable	LMR 400	-	N/R	N/A
FCC	LISN	FCC-LISN-50-25-2-10-CISPR16	160129	2017-04-24	1 year
Vasona	Test software	V6.0 build 11	10400213	N/R	N/R

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

6.7 Test Environmental Conditions

Temperature:	22 °C
Relative Humidity:	43 %
ATM Pressure:	101.8 kPa

The testing was performed by Jose Martinez on 2017-05-24 in the outside emission test site.


6.8 Summary of Test Results

According to the recorded data in following table, the EUT complied with the FCC 15C and ISEDC RSS-Gen standard's conducted emissions limits, with the margin reading of:

Connection: AC/DC adapter connected to 120 V/60 Hz, AC			
Margin (dB)	Frequency (MHz)	Conductor Mode (Line/Neutral)	Range (MHz)
-11.53	0.50067	Line	0.15-30

6.9 Conducted Emissions Test Plots and Data


120 V, 60 Hz – Line

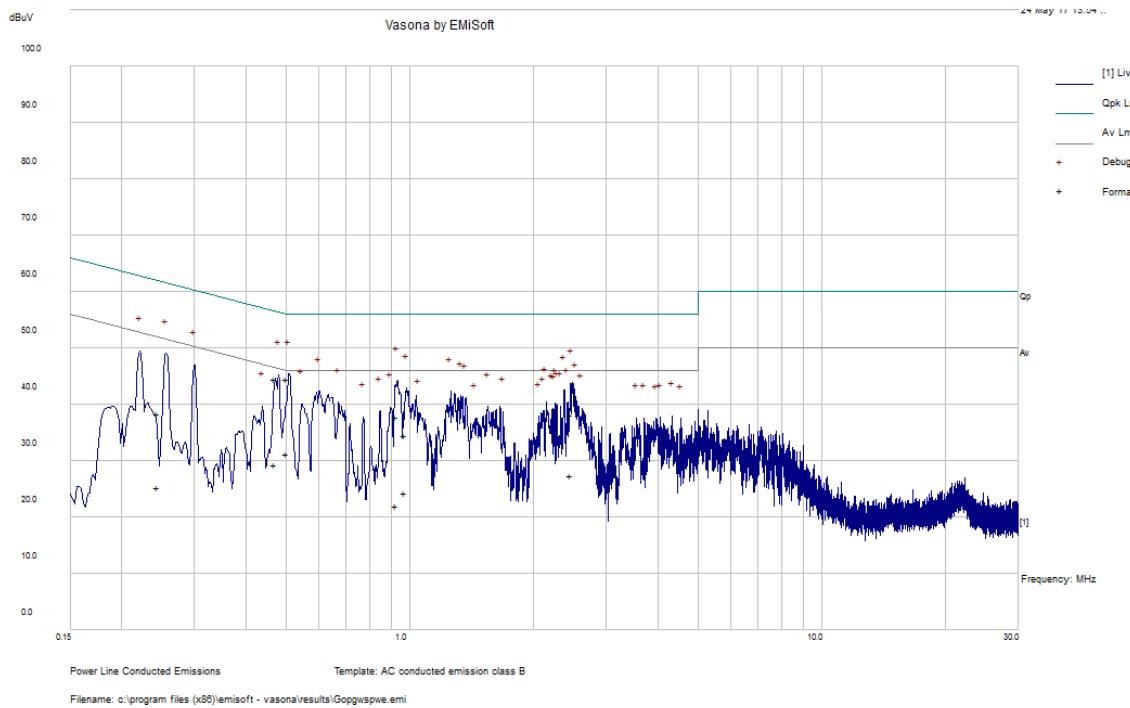

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.50067	44.47	Line	56	-11.53	QP
0.470294	44.54	Line	56.51	-11.97	QP
0.924708	37.91	Line	56	-18.09	QP
2.460733	38.12	Line	56	-17.88	QP
0.243896	38.35	Line	61.96	-23.62	QP
0.971321	34.5	Line	56	-21.5	QP

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.50067	31.26	Line	46	-14.74	Ave.
0.470294	29.36	Line	46.51	-17.15	Ave.
0.924708	22.05	Line	46	-23.95	Ave.
2.460733	27.44	Line	46	-18.56	Ave.
0.243896	25.4	Line	51.96	-26.56	Ave.
0.971321	24.33	Line	46	-21.67	Ave.

120 V, 60 Hz – Neutral

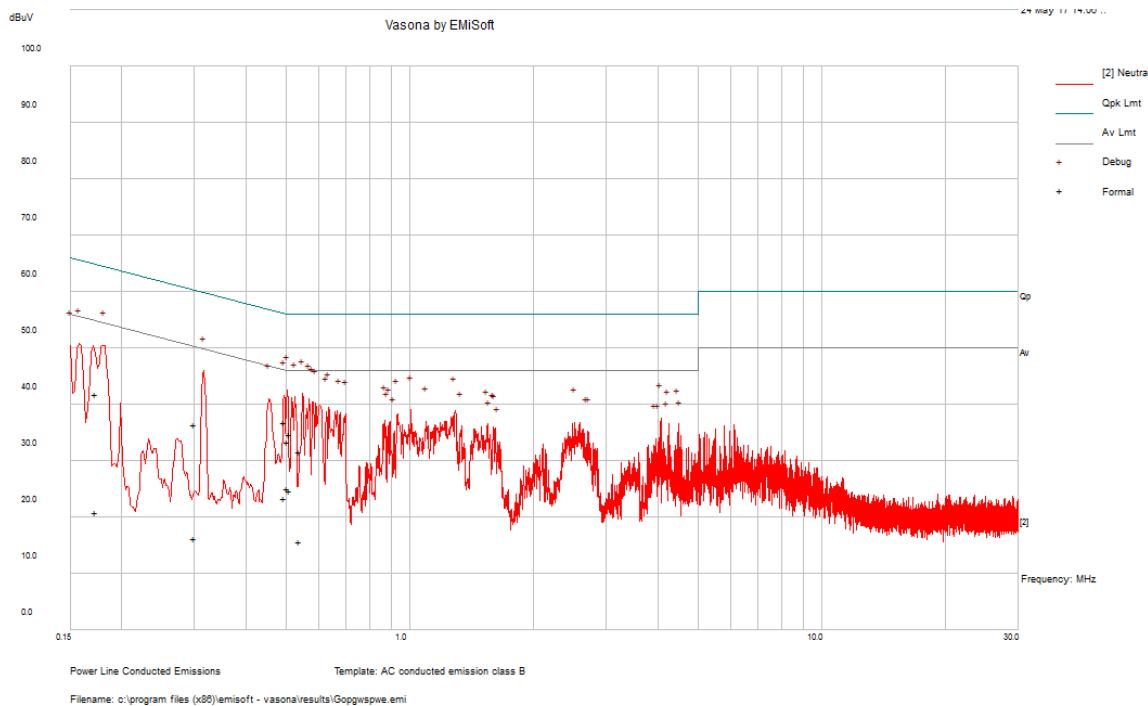

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.504751	33.48	Neutral	56	-22.52	QP
0.300784	36.38	Neutral	60.22	-23.84	QP
0.172858	41.88	Neutral	64.82	-22.94	QP
0.539407	31.73	Neutral	56	-24.27	QP
0.49744	36.9	Neutral	56.04	-19.14	QP
0.511549	34.82	Neutral	56	-21.18	QP

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.504751	25.23	Neutral	46	-20.77	Ave.
0.300784	16.22	Neutral	50.22	-34.01	Ave.
0.172858	21	Neutral	54.82	-33.82	Ave.
0.539407	15.69	Neutral	46	-30.31	Ave.
0.49744	23.47	Neutral	46.04	-22.57	Ave.
0.511549	24.7	Neutral	46	-21.3	Ave.

7 FCC §15.209, §15.247(d) & ISEDC RSS-247 §5.5, RSS-Gen §8.9, §8.10 - Spurious Radiated Emissions

7.1 Applicable Standards

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As Per FCC §15.205(a) and RSS-Gen except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3.332 – 3.339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3.3458 – 3.358	23.6 – 24.0
12.29 – 12.293	240 – 285	3.600 – 4.400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz.

However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

As per ISED RSS-Gen 8.9,

Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table 4 or Table 5 below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

Table 4 – General Field Strength Limits for Licence-Exempt Transmitters at Frequencies Above 30 MHz

Frequency (MHz)	Field Strength (μv/m at 3 metres)
30-88	100
88-216	150
216-960	200
Above 960*	500

* Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.

Note: Transmitting devices are not permitted in restricted frequency bands unless stated otherwise in the specific RSS.

As per ISED RSS-247 §5.5, in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

7.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.10-2013. The specification used was the FCC 15 Subpart C and ISEDC RSS-247 limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

7.3 Test Procedure

For the radiated emissions test, the EUT host, and all support equipment power cords was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT was set 3 meter away from the testing antenna, which was varied from 1-4 meter, and the EUT was placed on a turntable, which was 0.8 meter and 1.5 meter above the ground plane for below and above 1000 MHz measurements, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

The spectrum analyzer or receiver is set as:

Below 1000 MHz:

$$\text{RBW} = 100 \text{ kHz} / \text{VBW} = 300 \text{ kHz} / \text{Sweep} = \text{Auto}$$

Above 1000 MHz:

- (1) Peak: $\text{RBW} = 1\text{MHz} / \text{VBW} = 1\text{MHz} / \text{Sweep} = \text{Auto}$
- (2) Average: $\text{RBW} = 1\text{MHz} / \text{VBW} = 10\text{Hz} / \text{Sweep} = \text{Auto}$

7.4 Corrected Amplitude and Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$\text{CA} = \text{Ai} + \text{AF} + \text{CL} + \text{Atten} - \text{Ga}$$

For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

7.5 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde and Schwarz	Receiver, EMI Test	ESCI 1166.5950K03	100338	2016-02-04	2 years
Agilent	Analyzer, Spectrum	E4440A	US44300386	2016-06-10	1 year
Sunol Sciences	System Controller	SC99V	011003-1	N/R	N/A
Sunol Sciences	Antenna, Biconi-Log	JB1	A013105-3	2015-07-11	2 years
EMCO	Antenna, Horn	3115	9511-4627	2016-01-28	2 years
Agilent	Amplifier, Pre	8447D	2944A06639	2016-06-28	1 year
IW	AOBOR Hi frequency Co AX Cable	DC 1531	KPS-1501A3960KPS	2016-08-05	1 year
-	SMA cable	-	C0002	Each time ¹	N/A
-	N-Type Cable	-	C00012	Each time ¹	N/A
-	N-Type Cable	-	C00014	Each time ¹	N/A
Agilent	Pre-Amplifier	8449B	3008A01978	2016-10-06	1 year
Sunol Sciences	Antenna, Horn	DRH-118	A052704	2017-03-27	2 years
A.R.A.	Antenna, Horn	DRG-118/A	1132	2015-09-21	2 years
Vasona	Test software	V6.0 build 11	10400213	N/R	N/R

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: **BACL** attests that all calibrations have been performed per the A2LA requirements, traceable to NIST.

7.6 Test Environmental Conditions

Temperature:	23 °C
Relative Humidity:	42 %
ATM Pressure:	102.7 kPa

The testing was performed by Vincent Licata on from 2017-05-31 to 2017-06-05 in 5m chamber 3.

7.7 Summary of Test Results


According to the data hereinafter, the EUT complied with FCC Title 47, Part 15C and ISED RSS-247 standard's radiated emissions limits, and had the worst margin of:

Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Mode, Channel
-2.479	2483.5	Horizontal	GFSK, High Channel

Please refer to the following table and plots for specific test result details.

7.8 Radiated Emissions Test Results

1) 30 MHz – 1 GHz Worst Case, Measured at 3 meters

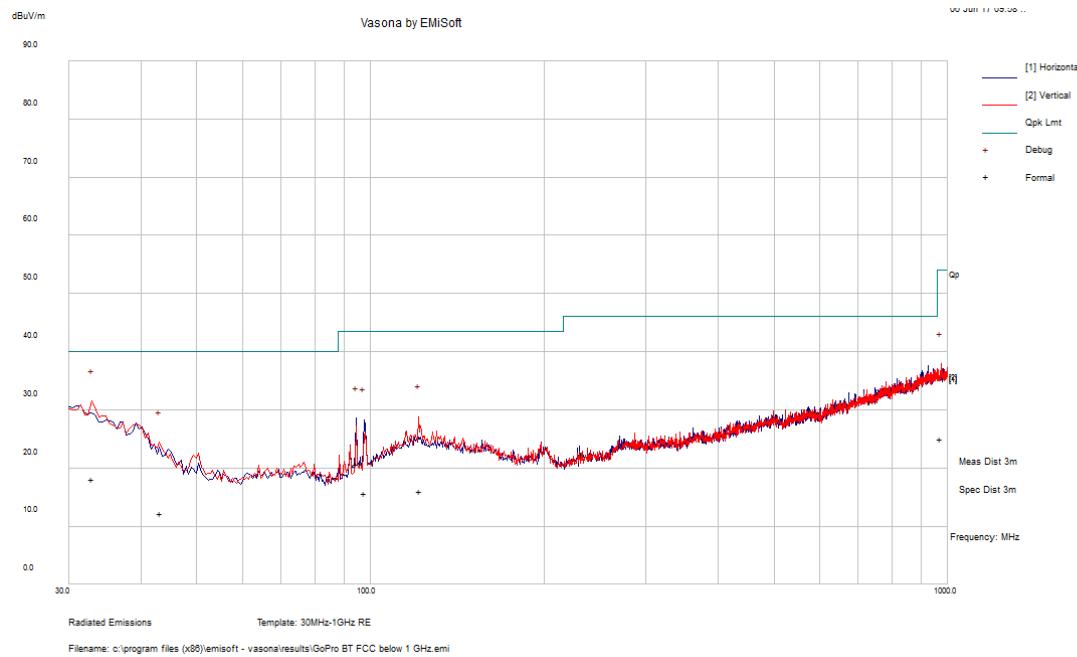

Frequency (MHz)	Corrected Amplitude (dB μ V/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dB μ V/m)	Margin (dB)	Comment
32.95975	18.15	109	V	109	246	-21.85	QP
121.5898	15.99	210	V	210	278	-27.51	QP
94.508	20.71	140	H	140	349	-22.79	QP
97.6535	15.71	182	H	182	76	-27.79	QP
43.26975	12.18	118	V	118	189	-27.82	QP
973.0053	25.01	284	V	284	197	-28.99	QP

2) 1–25 GHz Measured at 3 meters

GFSK mode

Frequency (MHz)	S.A. Reading (dB μ V)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dB μ V/m)	FCC/ISEDC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dB μ V/m)	Margin (dB)	
Low Channel 2402 MHz (power setting: 9)											
2402	67.67	67	100	V	29.02	6.29	0	102.98	-	-	Peak
2402	71.36	67	140	H	29.02	6.29	0	106.67	-	-	Peak
2402	67.46	67	100	V	29.02	6.29	0	102.77	-	-	Ave
2402	71.25	67	120	H	29.02	6.29	0	106.56	-	-	Ave
2390	27.39	186	100	V	29.02	6.29	0	62.7	74	-11.3	Peak
2390	27.4	250	100	H	29.02	6.29	0	62.71	74	-11.29	Peak
2390	15.07	186	100	V	29.02	6.29	0	50.38	54	-3.62	Ave
2390	15.05	250	115	H	29.02	6.29	0	50.36	54	-3.64	Ave
4804	48.12	0	100	V	32.472	9.296	38.56	51.328	74	-22.672	Peak
4804	51.23	73	140	H	32.472	9.296	38.56	54.438	74	-19.562	Peak
4804	38.01	116	100	V	32.472	9.296	38.56	41.218	54	-12.782	Ave
4804	45.24	73	140	H	32.472	9.296	38.56	48.448	54	-5.552	Ave
7206	47.13	0	150	H	36.692	13.47	37.94	59.352	74	-14.648	Peak
7206	35.28	0	150	H	36.692	13.47	37.94	47.502	54	-6.498	Ave
9608	46.89	0	100	H	37.771	14.471	38.17	60.962	74	-13.038	Peak
9608	35.70	0	100	H	37.771	14.471	38.17	49.772	54	-4.228	Ave
Middle Channel 2441 MHz (power setting: 9)											
2441	67.22	357	210	V	29.042	6.29	0	102.552	-	-	Peak
2441	71.46	68	180	H	29.042	6.29	0	106.792	-	-	Peak
2441	66.86	357	210	V	29.042	6.29	0	102.192	-	-	Ave
2441	71.03	68	180	H	29.042	6.29	0	106.362	-	-	Ave
4882	47.93	175	180	V	32.638	9.712	39.32	50.96	74	-23.04	Peak
4882	50.69	84	120	H	32.638	9.712	39.32	53.72	74	-20.28	Peak
4882	38.01	175	100	V	32.638	9.712	39.32	41.04	54	-12.96	Ave
4882	44.94	84	120	H	32.638	9.712	39.32	47.97	54	-6.03	Ave
7323	47.21	0	140	H	37.148	13.538	37.94	59.956	74	-14.044	Peak
7323	35.26	0	140	H	37.148	13.538	37.94	48.006	54	-.994	Ave
9764	46.91	0	160	H	37.923	14.185	38.17	60.848	74	-13.152	Peak
9764	35.59	0	160	H	37.923	14.185	38.17	49.528	54	-4.472	Ave

High Channel 2480 MHz (power setting: 9)											
2480	67.86	50	260	V	29.413	6.348	0	103.621	-	-	Peak
2480	71.49	68	200	H	29.413	6.348	0	107.251	-	-	Peak
2480	67.61	50	260	V	29.413	6.348	0	103.371	-	-	Ave
2480	71.01	68	200	H	29.413	6.348	0	106.771	-	-	Ave
2483.5	27.57	0	190	V	29.413	6.348	0	63.331	74	-10.669	Peak
2483.5	27.67	0	100	H	29.413	6.348	0	63.431	74	-10.569	Peak
2483.5	15.69	0	190	V	29.413	6.348	0	51.451	54	-2.549	Ave
2483.5	15.76	0	100	H	29.413	6.348	0	51.521	54	-2.479	Ave
4960	47.86	120	100	V	32.985	9.712	38.54	52.017	74	-21.983	Peak
4960	50.22	73	130	H	32.985	9.712	38.54	54.377	74	-19.623	Peak
4960	37.42	120	100	V	32.985	9.712	38.54	41.577	54	-12.423	Ave
4960	44.52	73	130	H	32.985	9.712	38.54	48.677	54	-5.323	Ave
7440	46.28	0	100	V	37.139	12.16	37.87	57.709	74	-16.291	Peak
7440	46.89	0	100	H	37.139	12.16	37.87	58.319	74	-15.681	Peak
7440	34.84	0	100	V	37.139	12.16	37.87	46.269	54	-7.731	Ave
7440	34.98	0	100	H	37.139	12.16	37.87	46.409	54	-7.591	Ave
9920	46.30	252	100	H	37.985	13.766	38.21	59.841	74	-14.159	Peak
9920	35.22	252	100	H	37.985	13.766	38.21	48.761	54	-5.239	Ave

$\pi/4$ -DQPSK mode

Frequency (MHz)	S.A. Reading (dB μ V)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dB μ V/m)	FCC/ISEDC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dB μ V/m)	Margin (dB)	
Low Channel 2402 MHz (power setting: 9)											
2402	68.3	52	270	V	29.02	6.29	0	103.61	-	-	Peak
2402	69.83	68	150	H	29.02	6.29	0	105.14	-	-	Peak
2402	65.47	52	270	V	29.02	6.29	0	100.78	-	-	Ave
2402	66.96	68	150	H	29.02	6.29	0	102.27	-	-	Ave
2390	27.7	0	100	V	29.02	6.29	0	63.01	74	-10.99	Peak
2390	27.75	220	100	H	29.02	6.29	0	63.06	74	-10.94	Peak
2390	15.35	0	100	V	29.02	6.29	0	50.66	54	-3.34	Ave
2390	15.43	220	100	H	29.02	6.29	0	50.74	54	-3.26	Ave
4804	47.54	180	100	V	32.472	9.296	38.56	50.748	74	-23.252	Peak
4804	49.64	69	180	H	32.472	9.296	38.56	52.848	74	-21.152	Peak
4804	36.38	180	100	V	32.472	9.296	38.56	39.588	54	-14.412	Ave
4804	40.58	69	180	H	32.472	9.296	38.56	43.788	54	-10.212	Ave
7206	46.38	50	100	H	36.692	13.47	37.94	58.602	74	-15.398	Peak
7206	35.29	50	100	H	36.692	13.47	37.94	47.512	54	-6.488	Ave
9608	47.65	74	180	H	37.771	14.471	38.17	61.722	74	-12.278	Peak
9608	35.28	74	180	H	37.771	14.471	38.17	49.352	54	-4.648	Ave
Middle Channel 2441 MHz (power setting: 9)											
2441	66.21	354	260	V	29.042	6.29	0	101.542	-	-	Peak
2441	69.7	68	200	H	29.042	6.29	0	105.032	-	-	Peak
2441	63.14	354	260	V	29.042	6.29	0	98.472	-	-	Ave
2441	66.62	68	200	H	29.042	6.29	0	101.952	-	-	Ave
4882	47.31	182	100	V	32.638	9.712	39.32	50.34	74	-23.66	Peak
4882	48.85	70	150	H	32.638	9.712	39.32	51.88	74	-22.12	Peak
4882	35.32	182	100	V	32.638	9.712	39.32	38.35	54	-15.65	Ave
4882	39.67	70	150	H	32.638	9.712	39.32	42.7	54	-11.3	Ave
7323	47.49	347	100	H	37.148	13.538	37.94	60.236	74	-13.764	Peak
7323	34.68	347	100	H	37.148	13.538	37.94	47.426	54	-6.574	Ave
9764	47.65	0	100	H	37.923	14.185	38.17	61.588	74	-12.412	Peak
9764	35.19	0	100	H	37.923	14.185	38.17	49.128	54	-4.872	Ave

High Channel 2480 MHz (power setting: 9)												
2480	65.45	354	240	V	29.413	6.348	0	101.211	-	-	Peak	
2480	69.3	68	180	H	29.413	6.348	0	105.061	-	-	Peak	
2480	62.33	354	240	V	29.413	6.348	0	98.091	-	-	Ave	
2480	66.2	68	180	H	29.413	6.348	0	101.961	-	-	Ave	
2483.5	28.1	0	100	V	29.413	6.348	0	63.861	74	-10.139	Peak	
2483.5	28.87	282	100	H	29.413	6.348	0	64.631	74	-9.369	Peak	
2483.5	15.24	0	100	V	29.413	6.348	0	51.001	54	-2.999	Ave	
2483.5	15.32	282	100	H	29.413	6.348	0	51.081	54	-2.919	Ave	
4960	47.85	179	100	V	32.985	9.712	38.54	52.007	74	-21.993	Peak	
4960	49.39	84	130	H	32.985	9.712	38.54	53.547	74	-20.453	Peak	
4960	36.24	179	100	V	32.985	9.712	38.54	40.397	54	-13.603	Ave	
4960	40.48	84	130	H	32.985	9.712	38.54	44.637	54	-9.363	Ave	
7440	47.08	103	100	H	37.139	12.16	37.87	58.509	74	-15.491	Peak	
7440	34.82	103	100	H	37.139	12.16	37.87	46.249	54	-7.751	Ave	
9920	46.89	32	100	H	37.985	13.766	38.21	60.431	74	-13.569	Peak	
9920	34.96	32	100	H	37.985	13.766	38.21	48.501	54	-5.499	Ave	

8DPSK mode

Frequency (MHz)	S.A. Reading (dB μ V)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dB μ V/m)	FCC/ISEDC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dB μ V/m)	Margin (dB)	
Low Channel 2402 MHz (power setting: 9)											
2402	67.97	75	300	V	29.02	6.29	0	103.28	-	-	Peak
2402	69.92	68	165	H	29.02	6.29	0	105.23	-	-	Peak
2402	64.57	75	300	V	29.02	6.29	0	99.88	-	-	Ave
2402	66.52	68	165	H	29.02	6.29	0	101.83	-	-	Ave
2390	27.84	75	100	V	29.02	6.29	0	63.15	74	-10.85	Peak
2390	27.97	68	100	H	29.02	6.29	0	63.28	74	-10.72	Peak
2390	14.98	75	100	V	29.02	6.29	0	50.29	54	-3.71	Ave
2390	15.06	68	100	H	29.02	6.29	0	50.37	54	-3.63	Ave
4804	47.37	198	210	V	32.472	9.296	38.56	50.578	74	-23.422	Peak
4804	48.78	84	130	H	32.472	9.296	38.56	51.988	74	-22.012	Peak
4804	36.20	198	210	V	32.472	9.296	38.56	39.408	54	-14.592	Ave
4804	40.20	84	130	H	32.472	9.296	38.56	43.408	54	-10.592	Ave
7206	46.82	0	100	H	36.692	13.47	37.94	59.042	74	-14.958	Peak
7206	34.84	0	100	H	36.692	13.47	37.94	47.062	54	-6.938	Ave
9608	47.45	120	100	H	37.771	14.471	38.17	61.522	74	-12.478	Peak
9608	35.21	120	100	H	37.771	14.471	38.17	49.282	54	-4.718	Ave
Middle Channel 2441 MHz (power setting: 9)											
2441	67.81	75	140	V	29.042	6.29	0	103.142	-	-	Peak
2441	69.84	68	165	H	29.042	6.29	0	105.172	-	-	Peak
2441	64.36	75	140	V	29.042	6.29	0	99.692	-	-	Ave
2441	66.39	68	165	H	29.042	6.29	0	101.722	-	-	Ave
4882	47.25	178	100	V	32.638	9.712	39.32	50.28	74	-23.72	Peak
4882	48.62	84	140	H	32.638	9.712	39.32	51.65	74	-22.35	Peak
4882	35.38	178	100	V	32.638	9.712	39.32	38.41	54	-15.59	Ave
4882	39.70	84	140	H	32.638	9.712	39.32	42.73	54	-11.27	Ave
7323	46.71	34	100	H	37.148	13.538	37.94	59.456	74	-14.544	Peak
7323	34.74	34	100	H	37.148	13.538	37.94	47.486	54	-6.514	Ave
9764	47.51	182	100	H	37.923	14.185	38.17	61.448	74	-12.552	Peak
9764	35.24	182	100	H	37.923	14.185	38.17	49.178	54	-4.822	Ave

High Channel 2441 MHz (power setting: 9)												
2480	67.59	75	130	V	29.413	6.348	0	103.351	-	-	Peak	
2480	69.6	68	160	H	29.413	6.348	0	105.361	-	-	Peak	
2480	64.28	75	130	V	29.413	6.348	0	100.041	-	-	Ave	
2480	65.96	68	160	H	29.413	6.348	0	101.721	-	-	Ave	
2483.5	27.18	0	100	V	29.413	6.348	0	62.941	74	-11.059	Peak	
2483.5	27.25	199	100	H	29.413	6.348	0	63.011	74	-10.989	Peak	
2483.5	15.3	0	100	V	29.413	6.348	0	51.061	54	-2.939	Ave	
2483.5	15.37	199	100	H	29.413	6.348	0	51.131	54	-2.869	Ave	
4960	47.82	178	100	V	32.985	9.712	38.54	51.977	74	-22.023	Peak	
4960	49.72	84	145	H	32.985	9.712	38.54	53.877	74	-20.123	Peak	
4960	36.10	178	100	V	32.985	9.712	38.54	40.257	54	-13.743	Ave	
4960	40.47	84	145	H	32.985	9.712	38.54	44.627	54	-9.373	Ave	
7440	46.38	260	100	H	37.139	12.16	37.87	57.809	74	-16.191	Peak	
7440	34.40	260	100	H	37.139	12.16	37.87	45.829	54	-8.171	Ave	
9920	46.94	245	100	H	37.985	13.766	38.21	60.481	74	-13.519	Peak	
9920	34.71	245	100	H	37.985	13.766	38.21	48.251	54	-5.749	Ave	

Note: duty cycle factor was taken into account.

8 FCC §15.247(a) (1) & ISEDC RSS-247 §5.1, RSS-Gen §6.6 - Emission Bandwidth

8.1 Applicable Standards

According to FCC §15.247(a) (1) and ISEDC RSS-247 §5.1: the maximum 20 dB bandwidth of the hopping channel shall be presented.

8.2 Measurement Procedure

Span = approximately 2 to 5 times the 99% occupied bandwidth, centered on a hopping channel

RBW = 1% to 5 % of the 99% occupied bandwidth

VBW = 3RBW

Sweep = auto

Detector function = peak

Trace = max hold

8.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4446A	MY48250238	2017-02-24	1 year
-	RF cable	-	-	Each time ¹	N/A
-	10 dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

8.4 Test Environmental Conditions

Temperature:	22°C
Relative Humidity:	42 %
ATM Pressure:	102.6 KPa

The testing was performed by Chin Ming Lui and Vincent Licata on 2017-05-16 in RF site.

8.5 Test Results

Channel	Frequency (MHz)	99% OBW (kHz)	20 dB OBW (kHz)
GFSK			
Low	2402	876.34	924.64
Middle	2441	878.80	921.22
High	2480	882.64	923.19
$\pi/4$ -DQPSK			
Low	2402	1170.3	1222
Middle	2441	1173.6	1222
High	2480	1172.2	1222
8DPSK			
Low	2402	1189.1	1258
Middle	2441	1176.6	1251
High	2480	1182.6	1250

Please refer to the following plots for detailed test results.

GFSK


Low Channel 2402 MHz



Middle Channel 2441 MHz




High Channel 2480 MHz

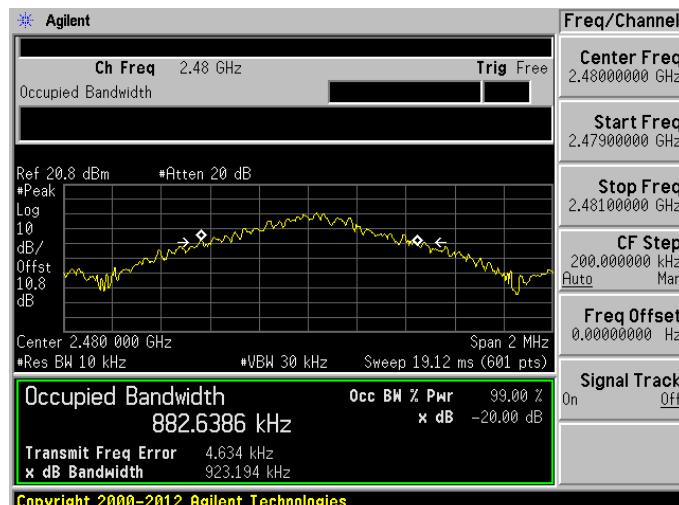


$\pi/4$ -DQPSK


Low Channel 2402 MHz

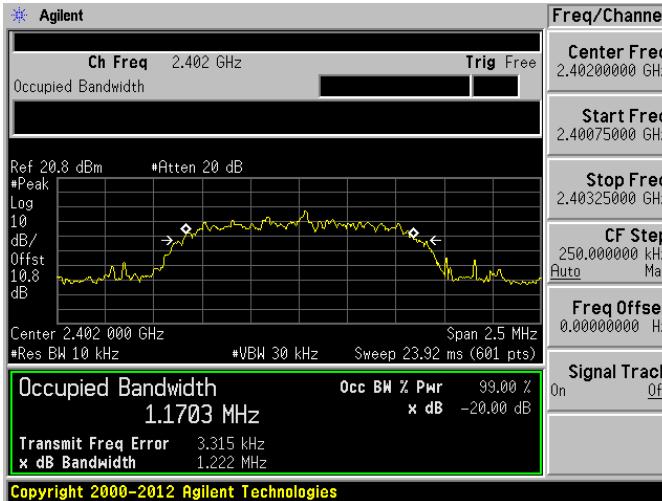

Middle Channel 2441 MHz

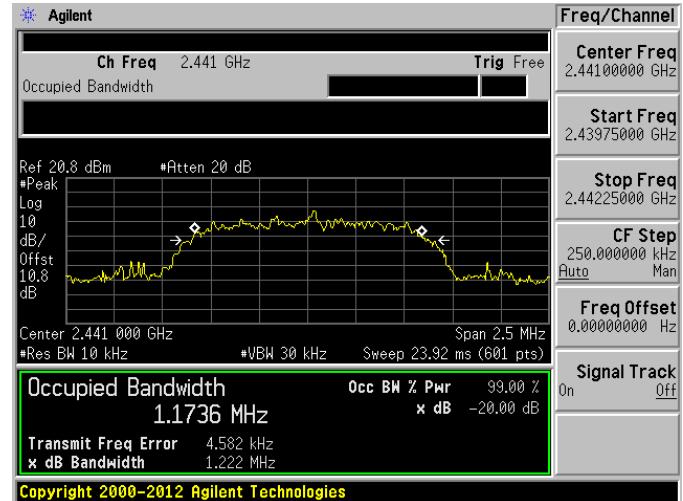



High Channel 2480 MHz

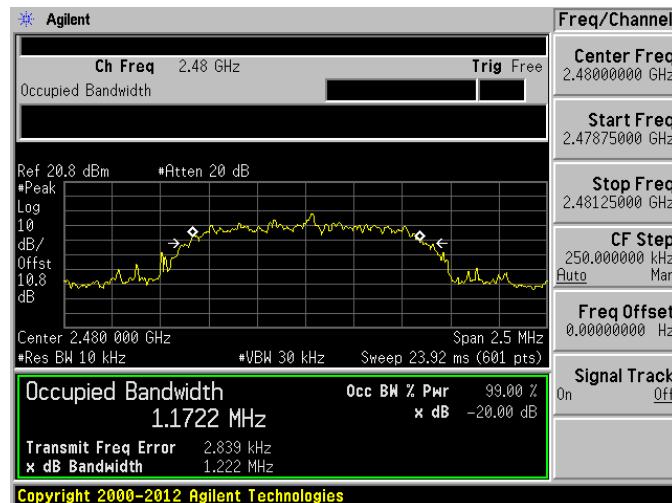


8DPSK

Low Channel 2402 MHz

Middle Channel 2441 MHz

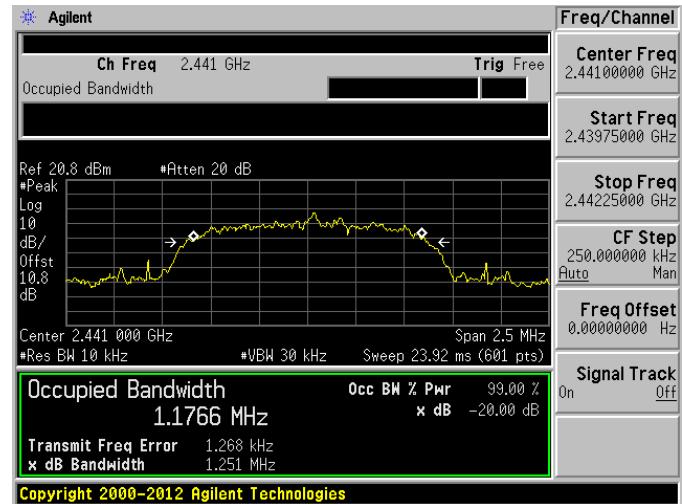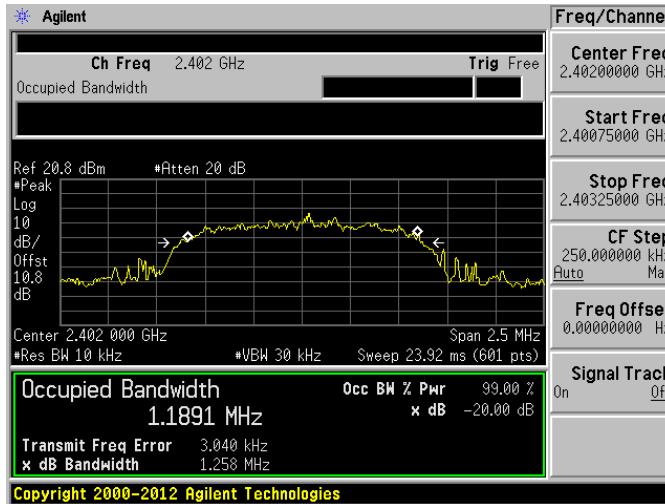

High Channel 2480 MHz

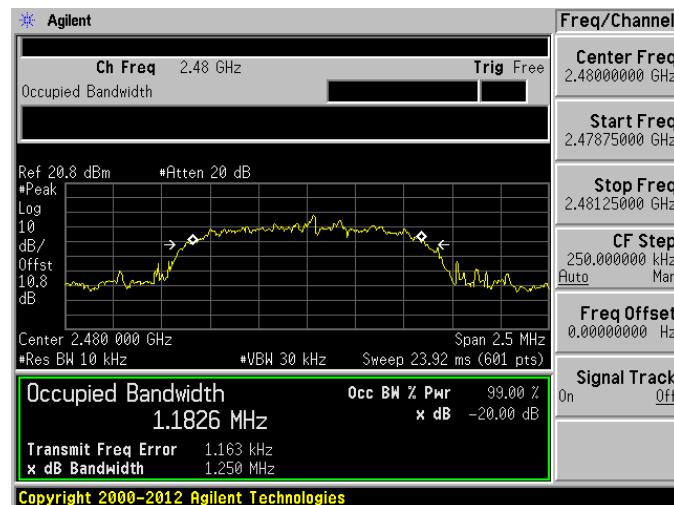

9 FCC §15.247(b) (1) & ISEDC RSS-247 §5.4 - Output Power

9.1 Applicable Standards

According to FCC §15.247(b) (1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

According to RSS-247 §5.4: For frequency hopping systems operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W and the e.i.r.p. shall not exceed 0.5 W if the hopset uses less than 75 hopping channels.

9.2 Measurement Procedure

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 RBW > the 20 dB bandwidth of the emission being measured

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

9.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4446A	MY48250238	2017-02-24	1 year
-	RF cable	-	-	Each time ¹	N/A
-	10dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

9.4 Test Environmental Conditions

Temperature:	23 °C
Relative Humidity:	42 %
ATM Pressure:	102.9 KPa

The testing was performed by Chin Ming Lui and Vincent Licata on 2017-06-08 in RF site.


9.5 Test Results

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)
GFSK			
Low	2402	10.86	30
Middle	2441	10.89	30
High	2480	10.69	30
$\Pi/4$ -DQPSK			
Low	2402	9.82	30
Middle	2441	9.89	30
High	2480	9.72	30
8DPSK			
Low	2402	10.24	30
Middle	2441	10.3	30
High	2480	10.09	30


Please refer to the following plots for detailed test results.

GFSK


Low Channel 2402 MHz

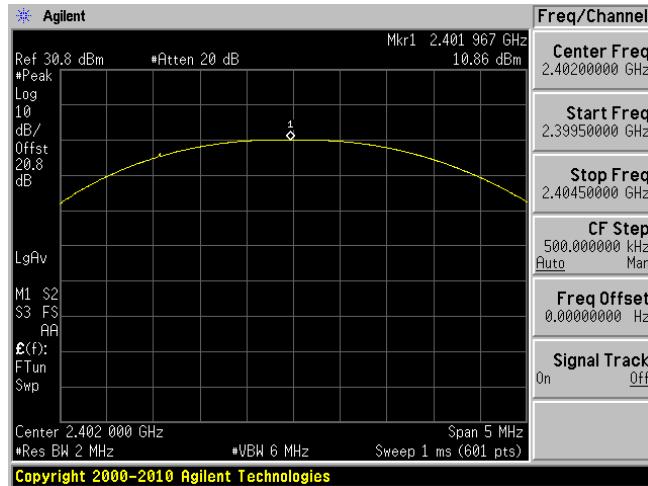

Middle Channel 2441 MHz

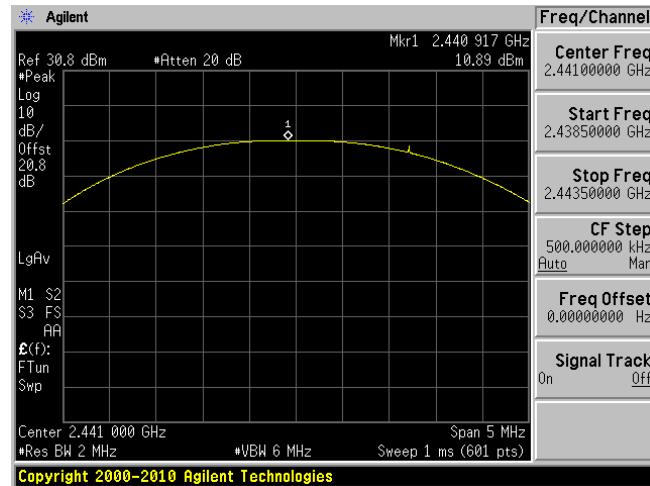


High Channel 2480 MHz

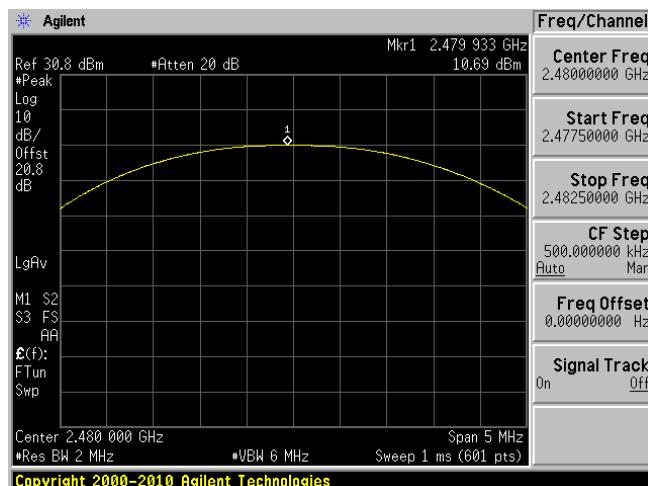


$\pi/4$ -DQPSK


Low Channel 2402 MHz

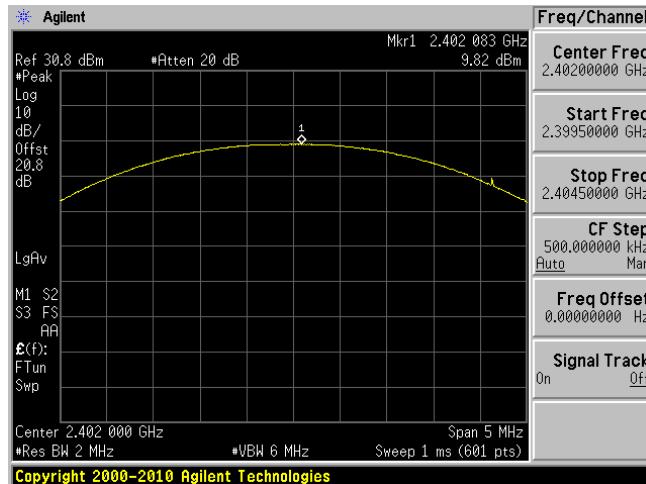

Middle Channel 2441 MHz

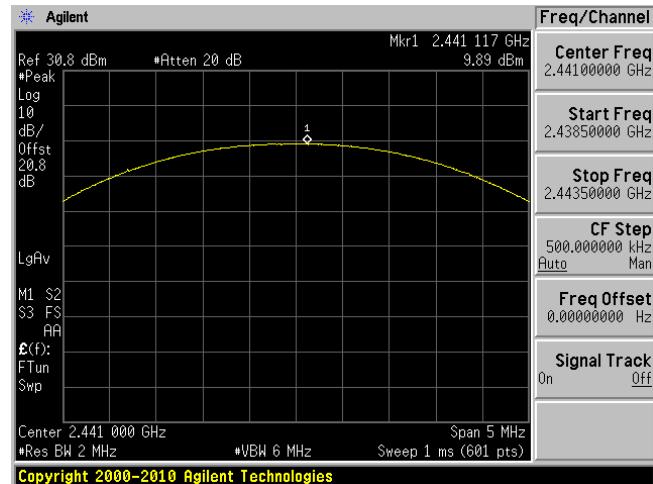


High Channel 2480 MHz

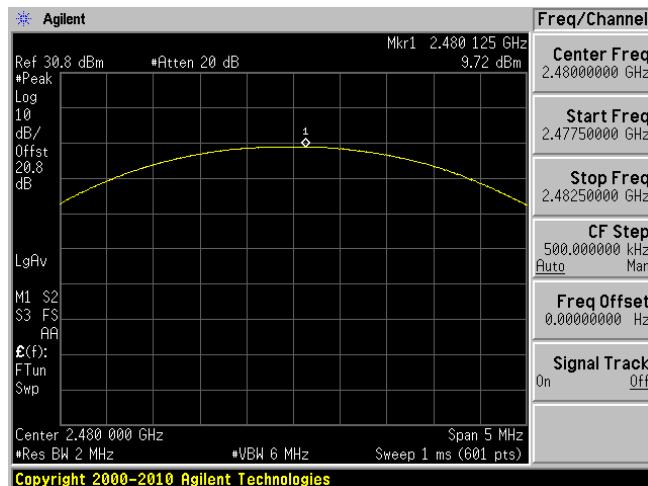


8DPSK


Low Channel 2402 MHz

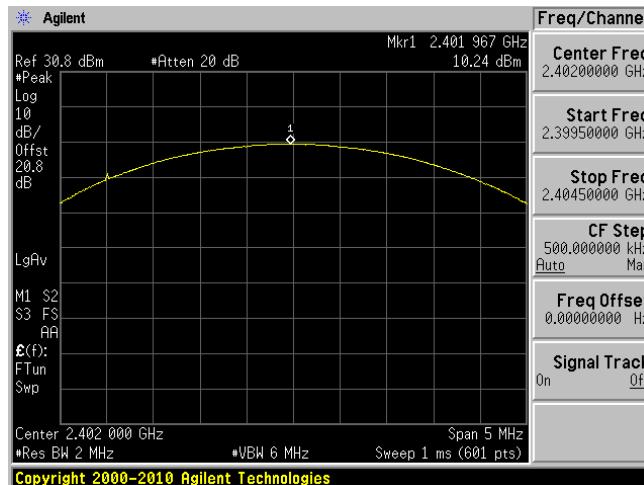

Middle Channel 2441 MHz

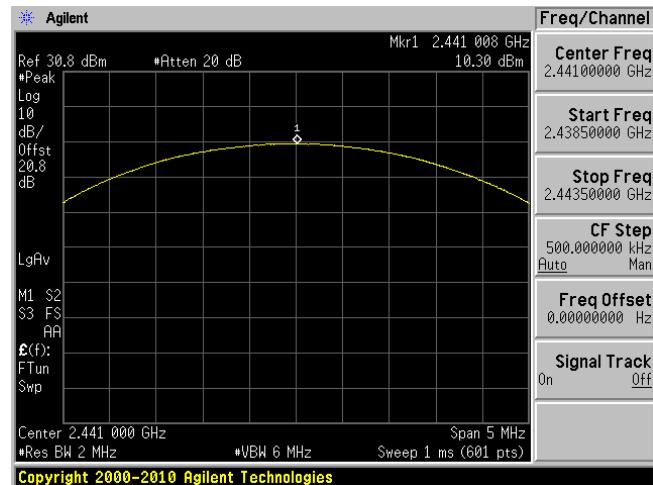

High Channel 2480 MHz

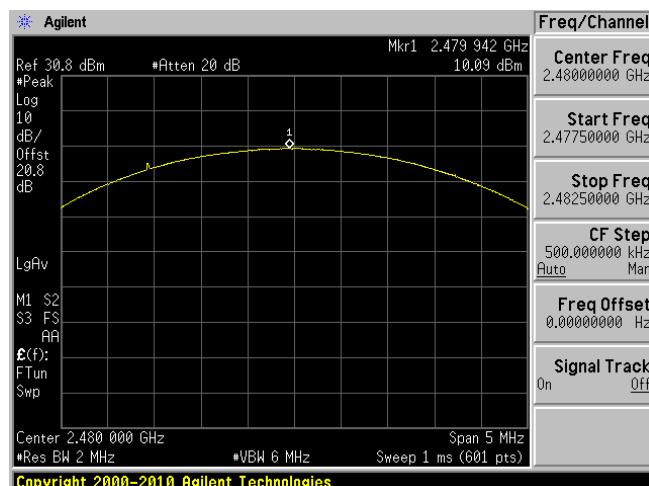

10 FCC §15.247(d) & ISEDC RSS-247 §5.5 - 100 kHz Bandwidth of Band Edges

10.1 Applicable Standards

According to FCC §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emissions limits specified in §15.209(a) see §15.205(c).

According to ISEDC RSS-247 §5.5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

10.2 Measurement Procedure

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation

RBW = 100 kHz

VBW = 300 kHz

Sweep = coupled

Detector function = peak

Trace = max hold

10.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4440A	US45303156	2017-02-24	1 year
-	U. FL to SMA pigtail	-	-	Each time ¹	N/A
-	10 dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

10.4 Test Environmental Conditions


Temperature:	22 °C
Relative Humidity:	42 %
ATM Pressure:	102.6 KPa

The testing was performed by Chin Ming Lui on 2017-05-16 in RF site.


10.5 Test Results

GFSK

Low Channel 2402 MHz

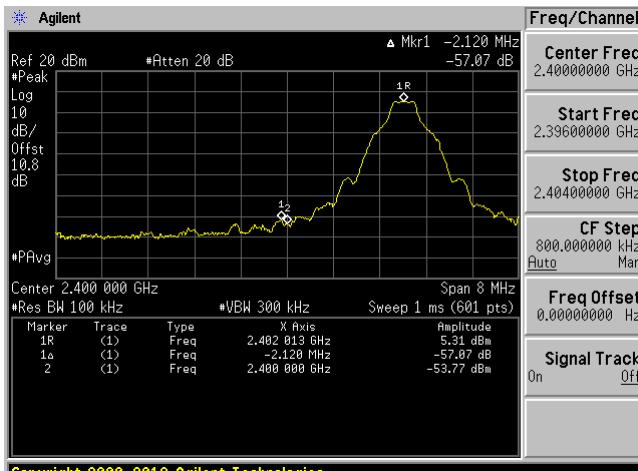


High Channel 2480 MHz

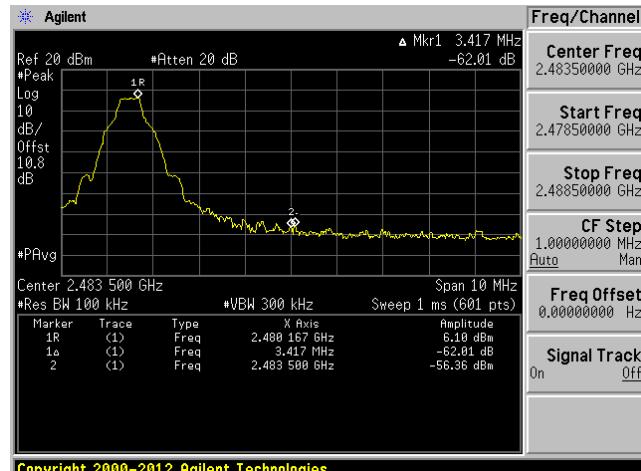


$\pi/4$ -DQPSK


Low Channel 2402 MHz

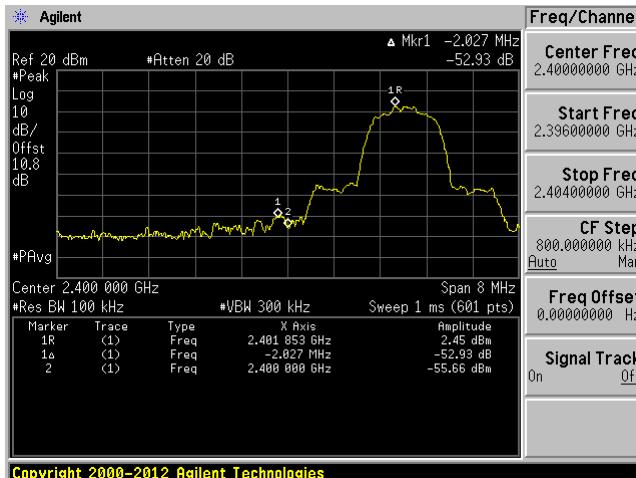


High Channel 2480 MHz

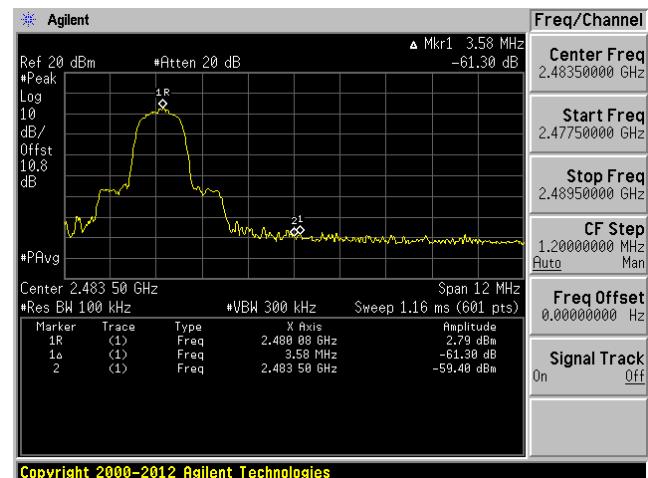**8DPSK**

Low Channel 2402 MHz

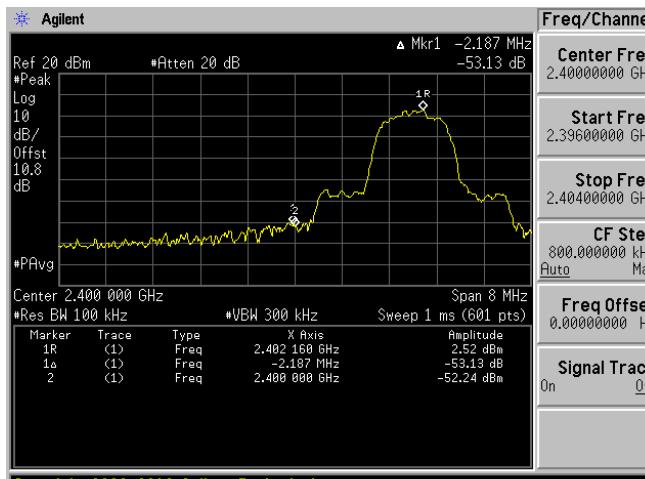

High Channel 2480 MHz

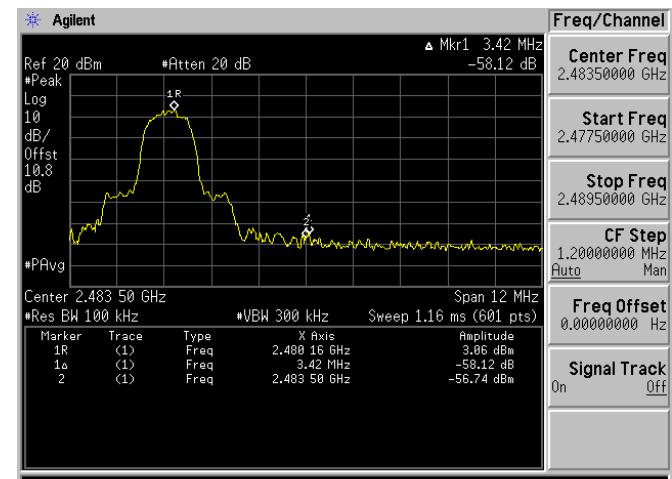

11 FCC §15.247(a) (1) (iii) & ISEDC RSS-247 §5.1 (4) - Dwell Time

11.1 Applicable Standards

According to FCC §15.247(a) (1) (iii) and RSS-247 §5.1(4), Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Measurement Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel

RBW \leq channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

(Number of hops in the period specified in the requirements) =
(number of hops on spectrum analyzer) x (period specified in the requirements / analyzer sweep time)

The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation.

11.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4440A	US45303156	2017-02-24	1 year
-	RF cable	-	-	Each time ¹	N/A
-	10 dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

11.4 Test Environmental Conditions

Temperature:	22 °C
Relative Humidity:	42 %
ATM Pressure:	102.5 KPa

The testing was performed by Chin Ming Lui on 2017-05-11 in RF site.


11.5 Test Results

Channel	Pulse Width (ms)	Number of Hops in the Period Specified in the Requirements	Average Time of Occupancy (s)	Limit (sec)	Results
GFSK,DH1					
Low	0.3883	320	0.1243	0.4	compliant
Middle	0.3883	310	0.1204	0.4	compliant
High	0.38	320	0.1216	0.4	compliant
GFSK,DH3					
Low	1.6	170	0.272	0.4	compliant
Middle	1.65	170	0.2805	0.4	compliant
High	1.65	160	0.264	0.4	compliant
GFSK,DH5					
Low	2.9	110	0.319	0.4	compliant
Middle	2.9	130	0.377	0.4	compliant
High	2.75	110	0.3025	0.4	compliant
Π/4-DQPSK,DH1					
Low	0.3917	320	0.1253	0.4	compliant
Middle	0.375	320	0.120	0.4	compliant
High	0.375	320	0.120	0.4	compliant
Π/4-DQPSK,DH3					
Low	1.633	180	0.2939	0.4	compliant
Middle	1.633	140	0.2286	0.4	compliant
High	1.633	140	0.2286	0.4	compliant
Π/4-DQPSK,DH5					
Low	2.767	110	0.3044	0.4	compliant
Middle	2.8	90	0.252	0.4	compliant
High	2.8	110	0.308	0.4	compliant
8DPSK,DH1					
Low	0.375	310	0.1163	0.4	compliant
Middle	0.3667	310	0.1137	0.4	compliant
High	0.3667	310	0.1137	0.4	compliant
8DPSK,DH3					
Low	1.6	160	0.256	0.4	compliant
Middle	1.633	170	0.2827	0.4	compliant
High	1.617	180	0.2911	0.4	compliant
8DPSK,DH5					
Low	2.8	120	0.336	0.4	compliant
Middle	2.8	110	0.308	0.4	compliant
High	2.75	120	0.33	0.4	compliant


Please refer to the following plots for detailed test results.

GFSK, DH1 Pulse Width


Low Channel 2402 MHz

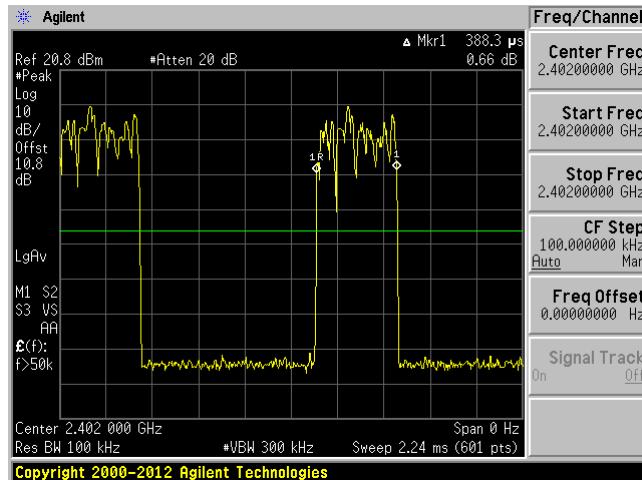

Middle Channel 2441 MHz

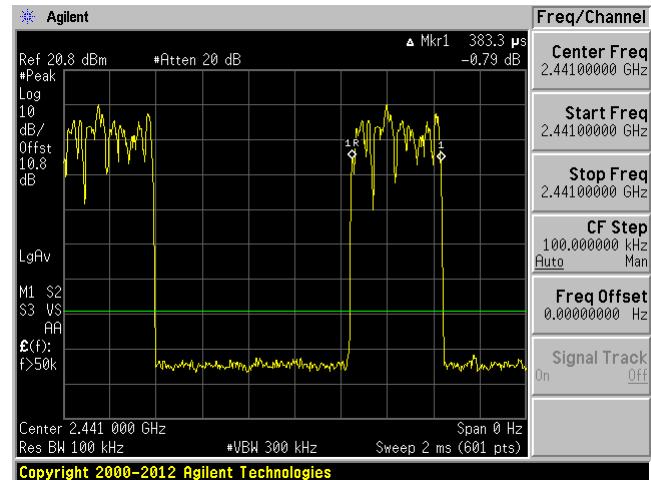


High Channel 2480 MHz

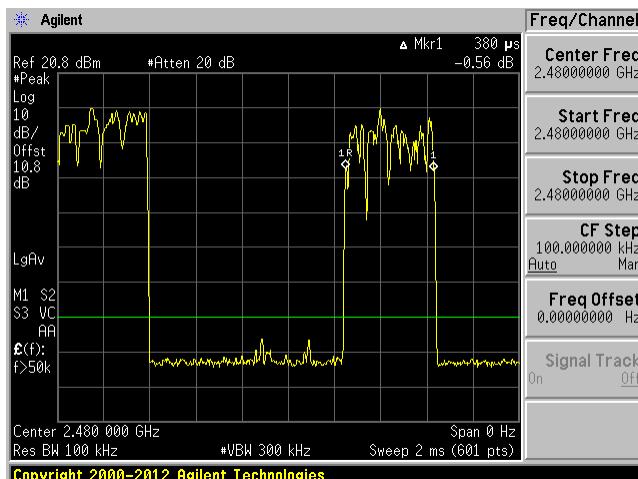


GFSK, DH1 Number of Pulses within a Specified Time


Low Channel 2402 MHz

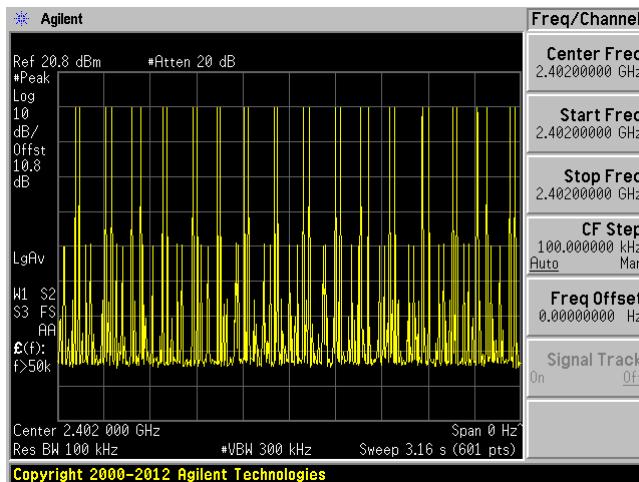

Middle Channel 2441 MHz

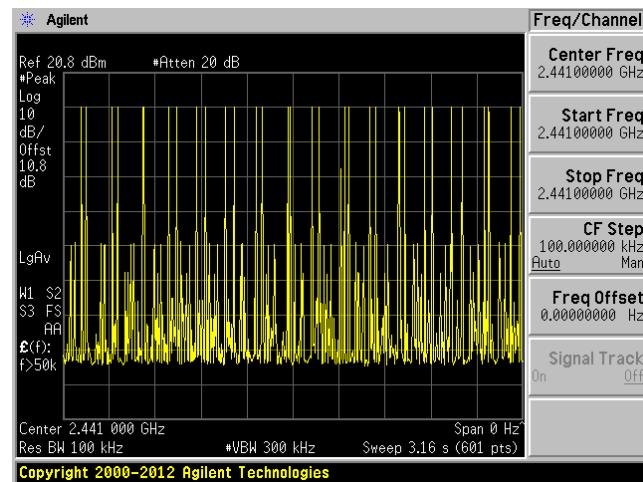


High Channel 2480 MHz

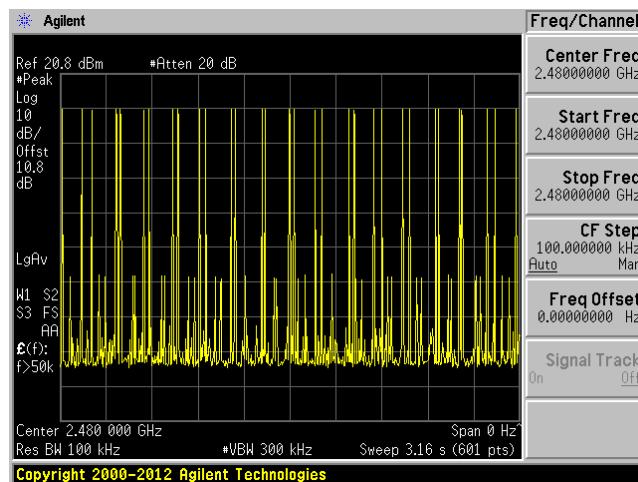


GFSK, DH3 Pulse Width


Low Channel 2402 MHz

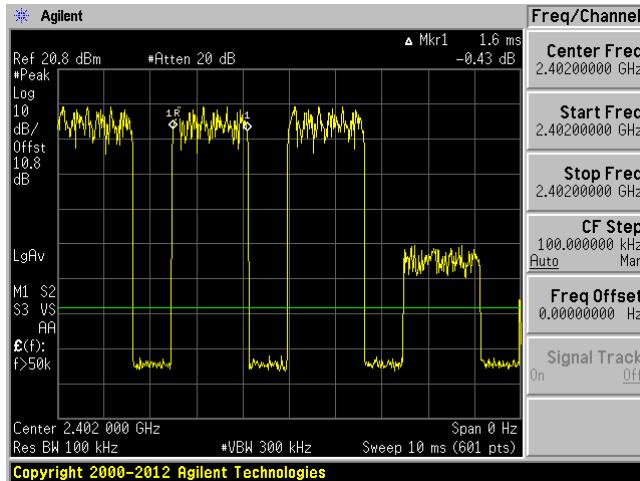

Middle Channel 2441 MHz

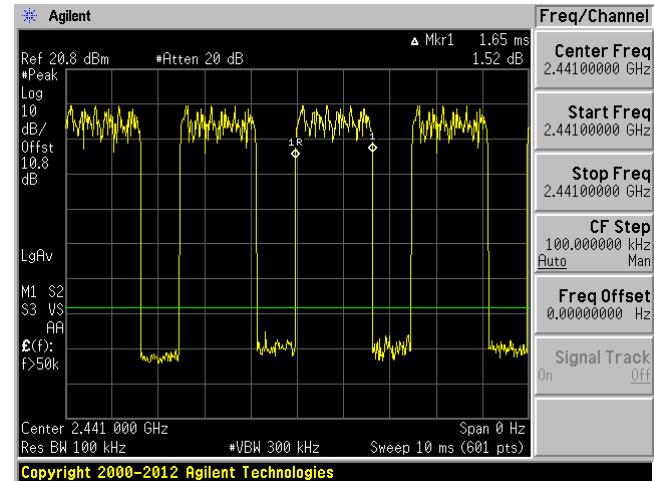


High Channel 2480 MHz

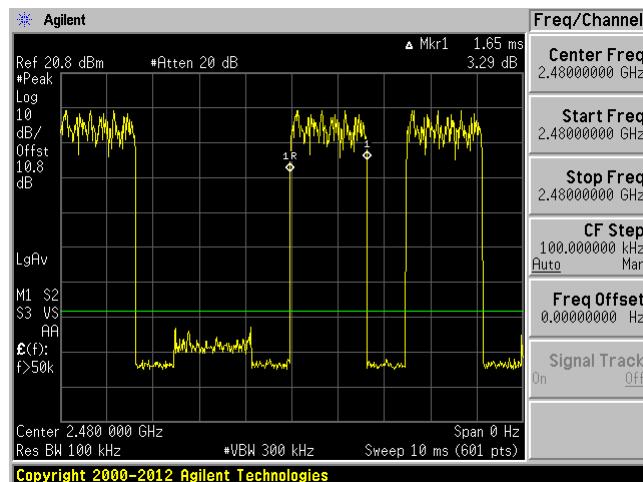


GFSK, DH3 Number of Pulses within a Specified Time


Low Channel 2402 MHz

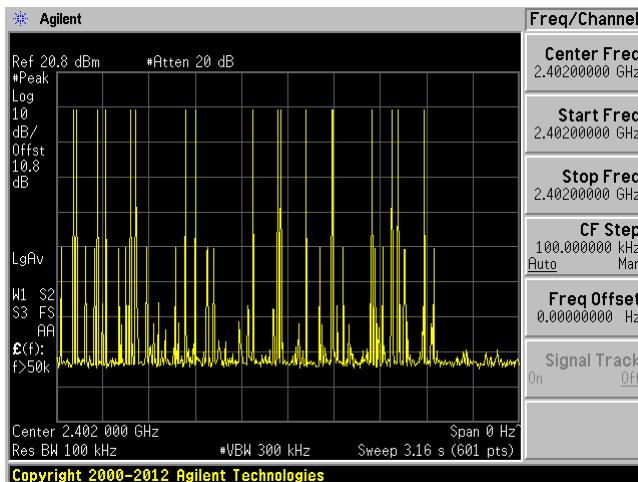

Middle Channel 2441 MHz

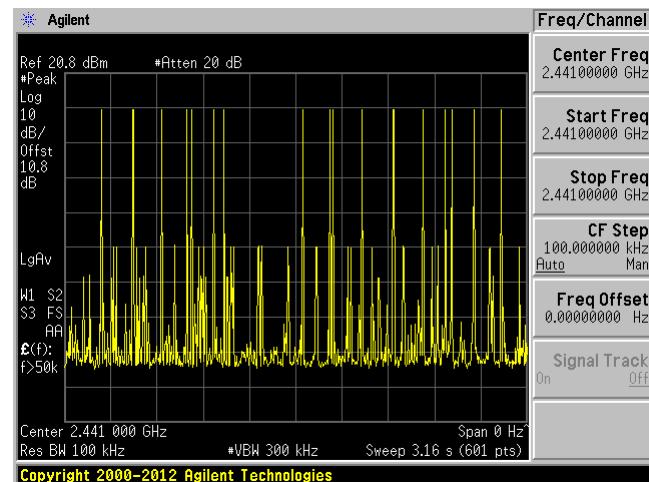


High Channel 2480 MHz

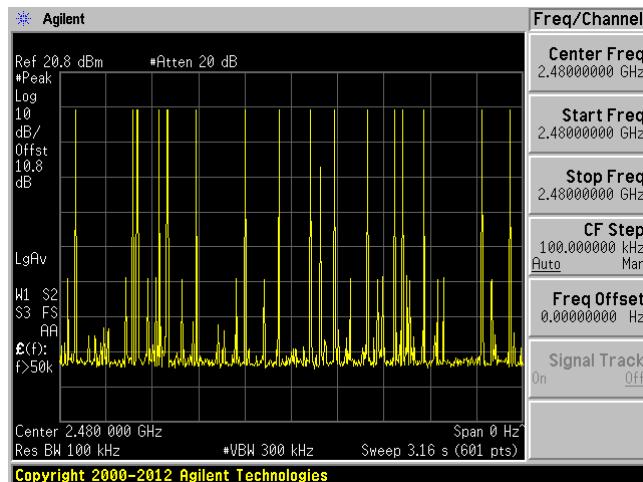


GFSK, DH5 Pulse Width


Low Channel 2402 MHz

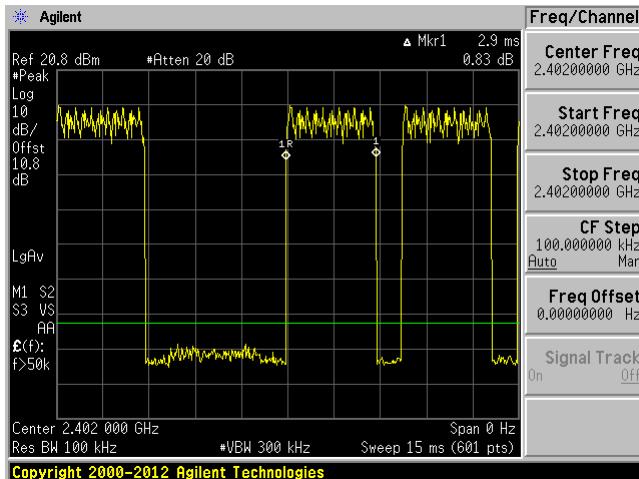

Middle Channel 2441 MHz

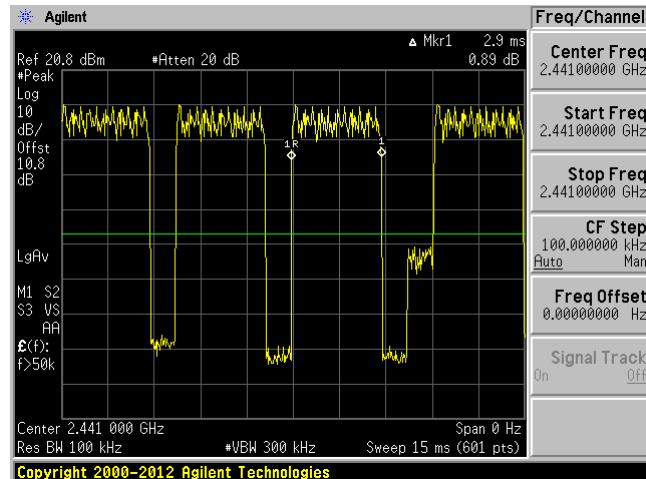


High Channel 2480 MHz

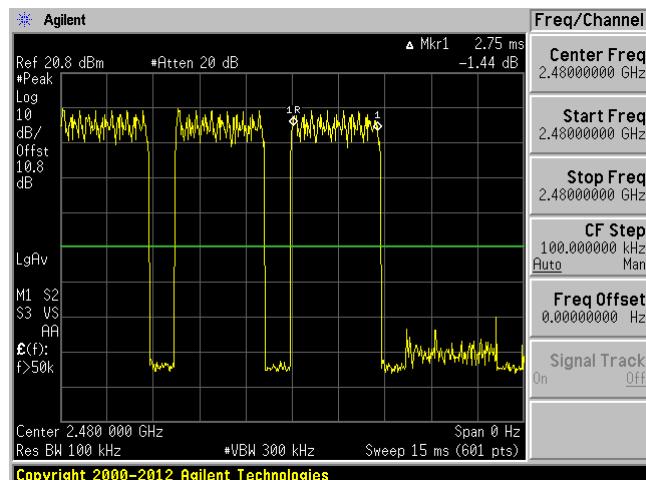


GFSK, DH5 Number of Pulses within a Specified Time


Low Channel 2402 MHz

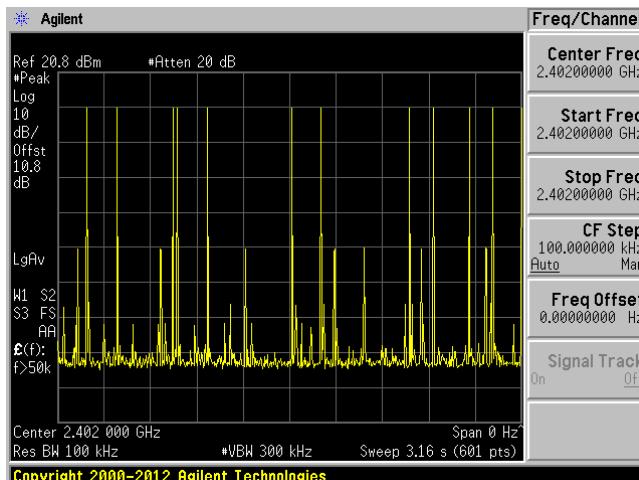

Middle Channel 2441 MHz

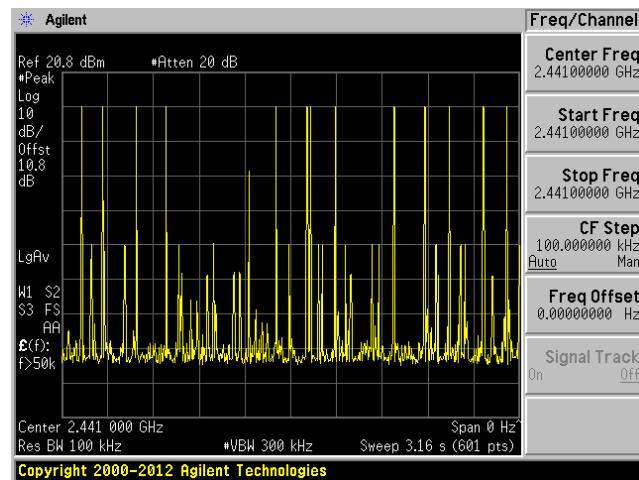


High Channel 2480 MHz

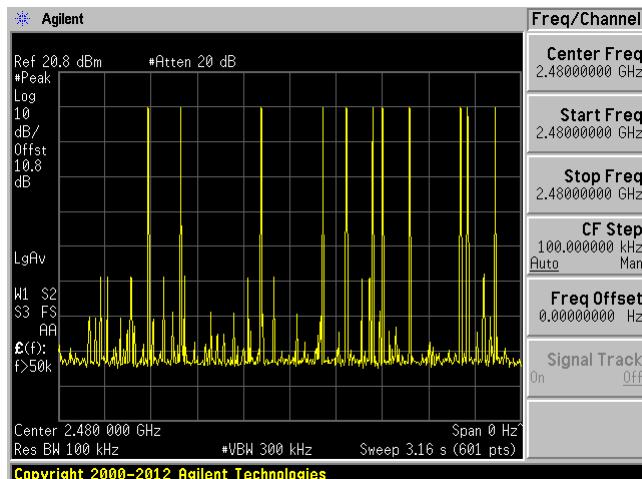


Π/4-DQPSK, DH1 Pulse Width


Low Channel 2402 MHz

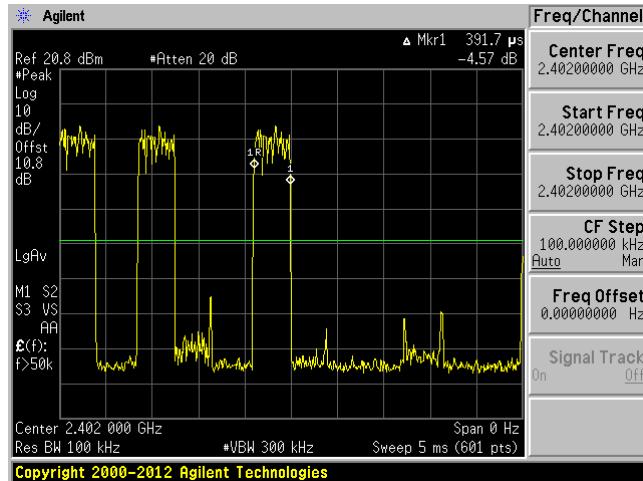

Middle Channel 2441 MHz

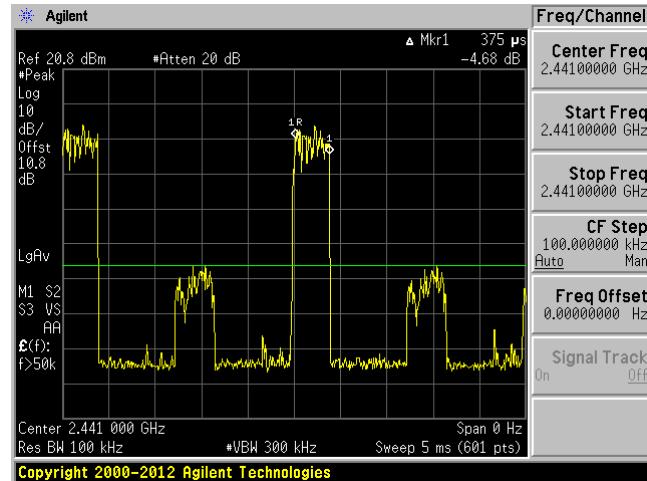


High Channel 2480 MHz

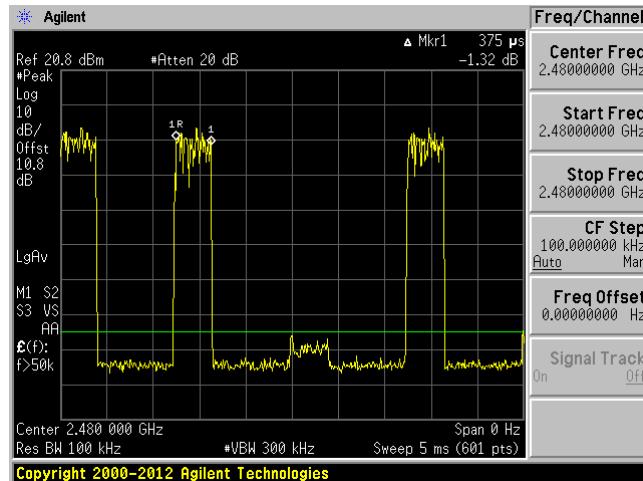


II/4-DQPSK, DH1 Number of Pulses within a Specified Time


Low Channel 2402 MHz

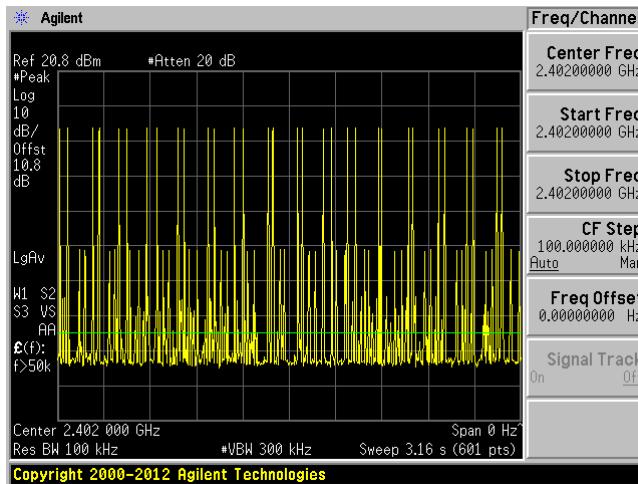

Middle Channel 2441 MHz

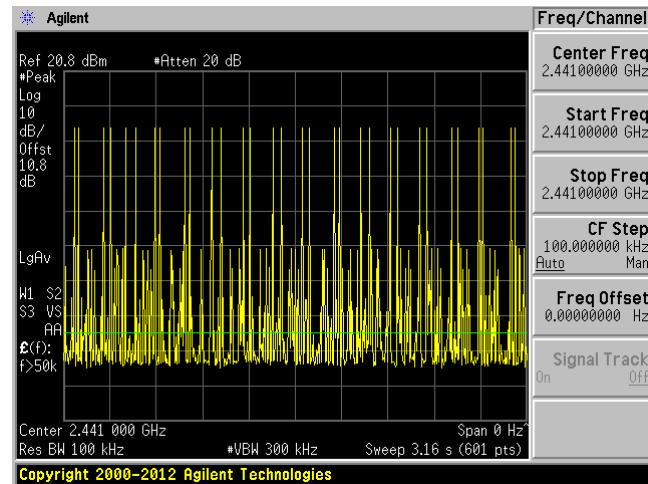



High Channel 2480 MHz

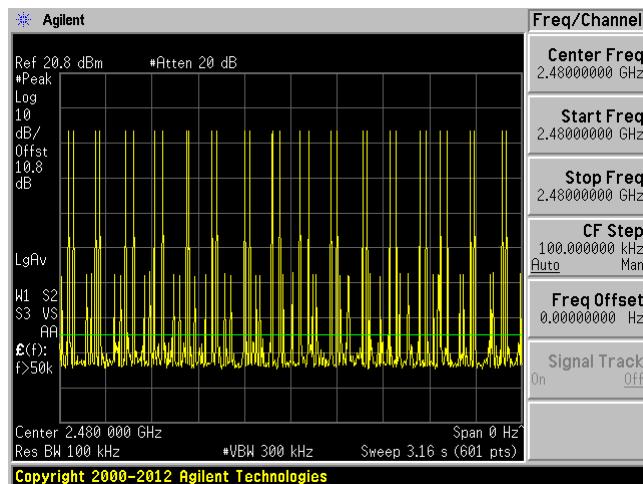


π/4-DQPSK, DH3 Pulse Width

Low Channel 2402 MHz

Middle Channel 2441 MHz

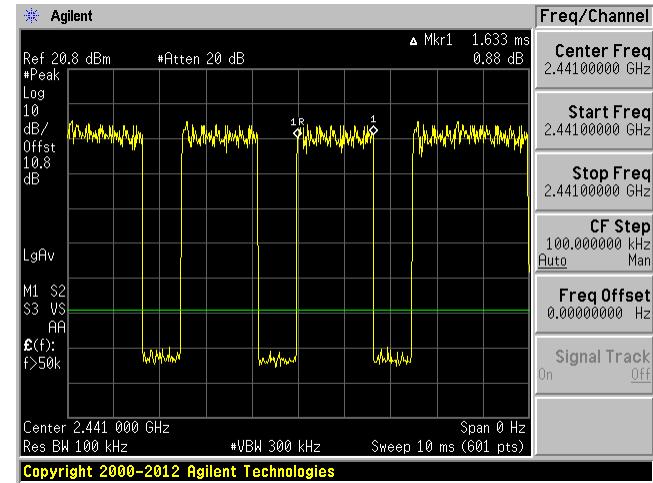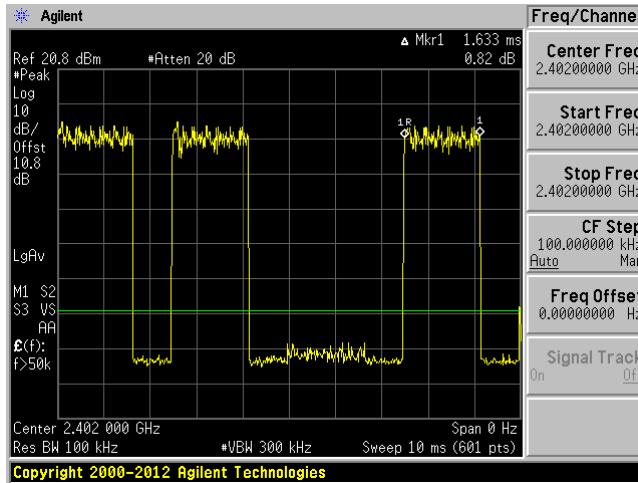


High Channel 2480 MHz

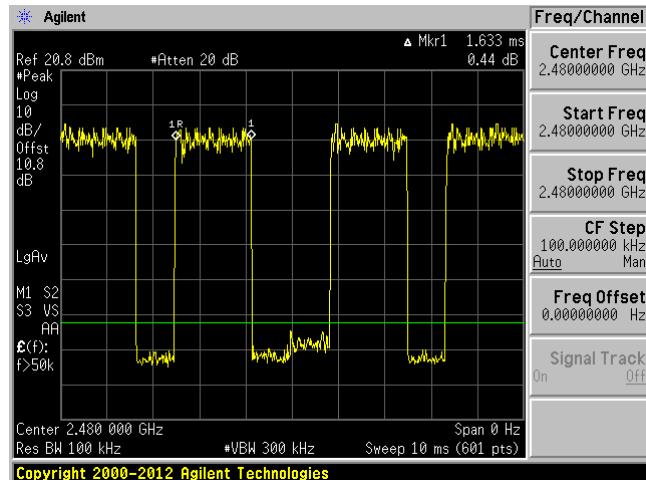


II/4-DQPSK, DH3 Number of Pulses within a Specified Time


Low Channel 2402 MHz

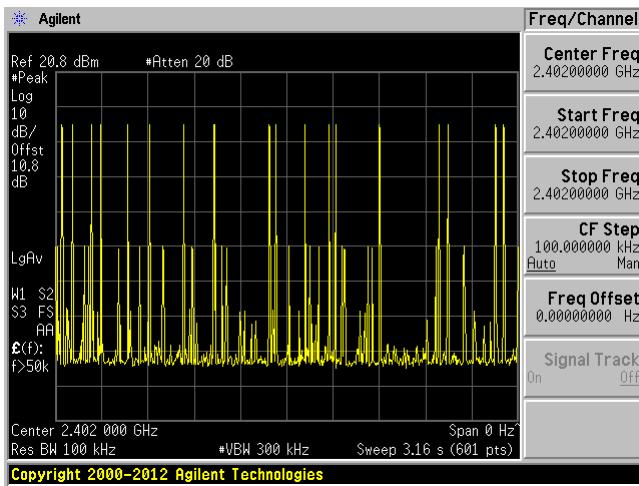

Middle Channel 2441 MHz

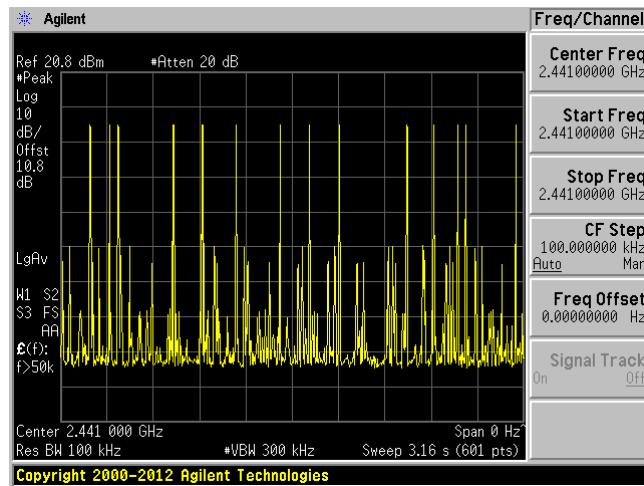


High Channel 2480 MHz

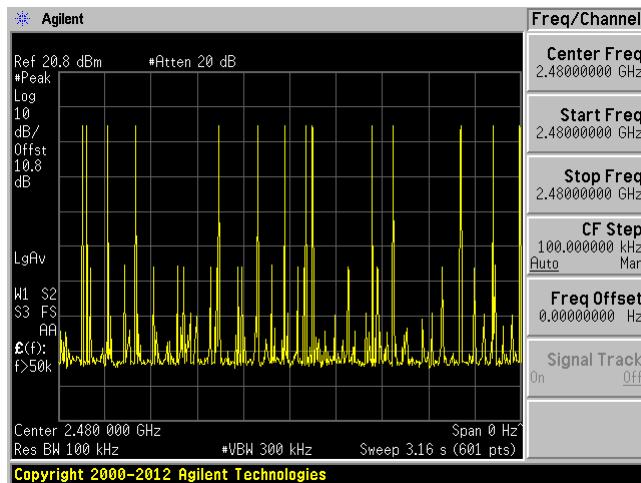


II/4-DQPSK, DH5 Pulse Width


Low Channel 2402 MHz

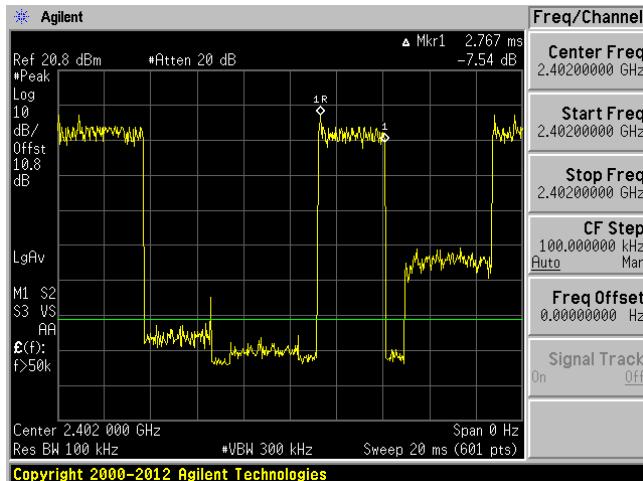

Middle Channel 2441 MHz

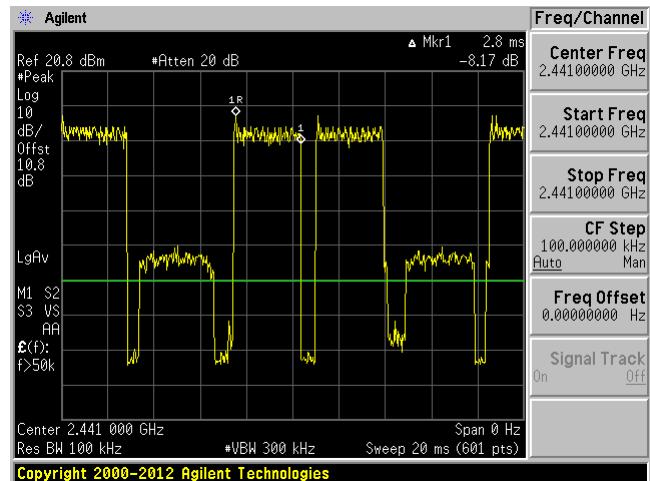


High Channel 2480 MHz

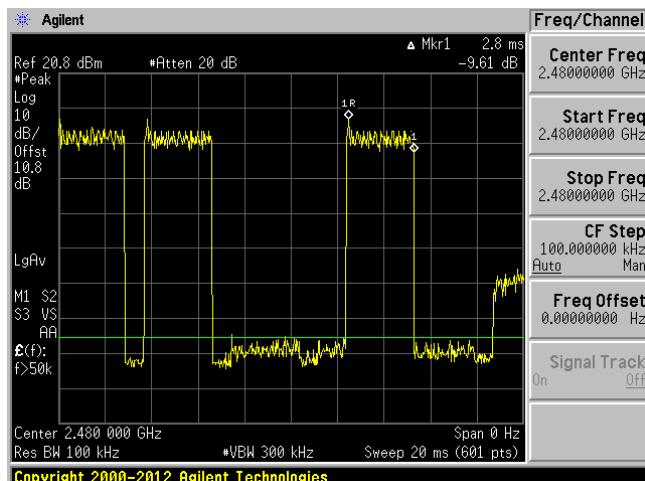


II/4-DQPSK, DH5 Number of Pulses within a Specified Time


Low Channel 2402 MHz

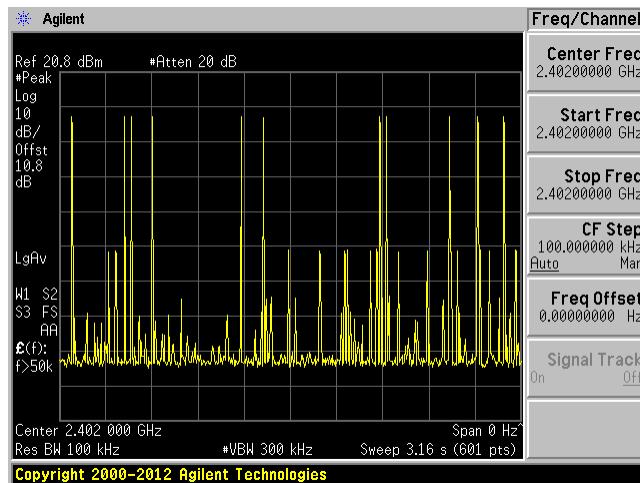

Middle Channel 2441 MHz

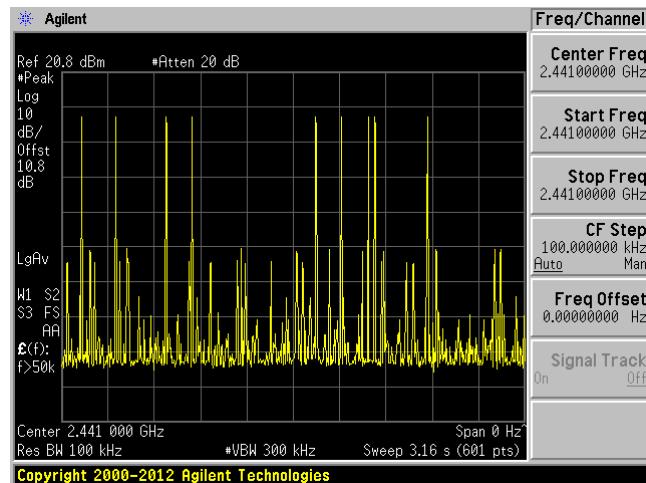


High Channel 2480 MHz

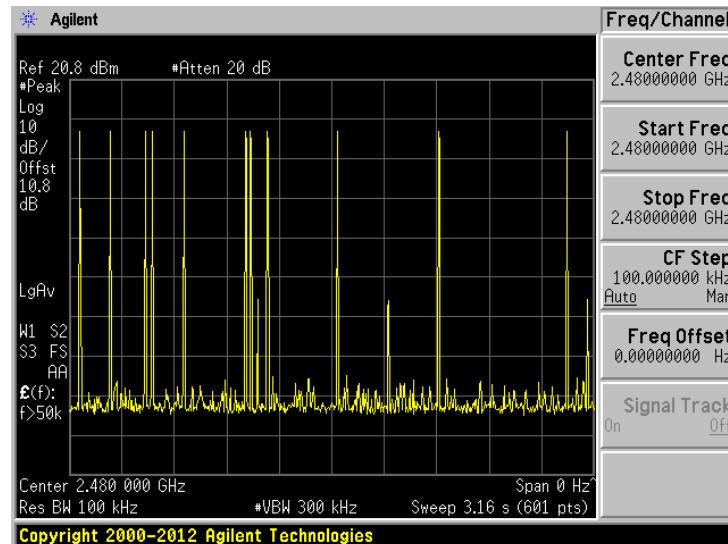


8DPSK, DH1 Pulse Width


Low Channel 2402 MHz

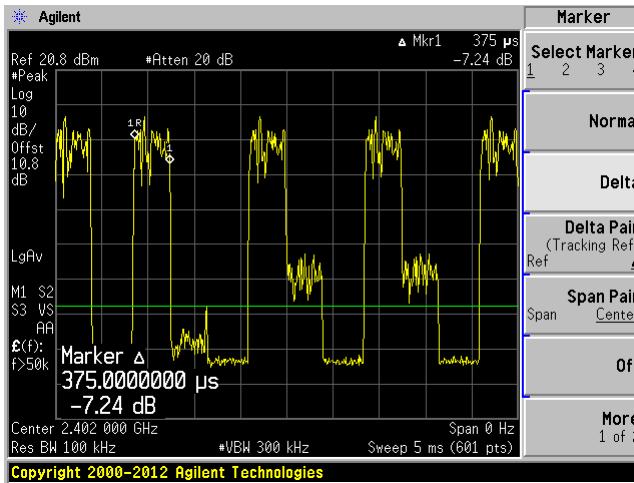

Middle Channel 2441 MHz

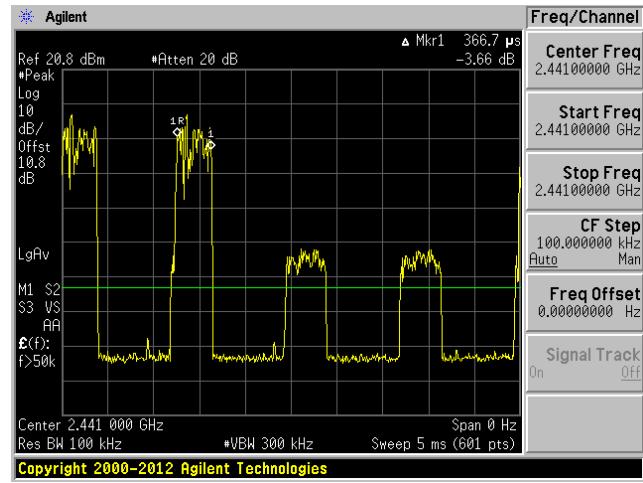


High Channel 2480 MHz

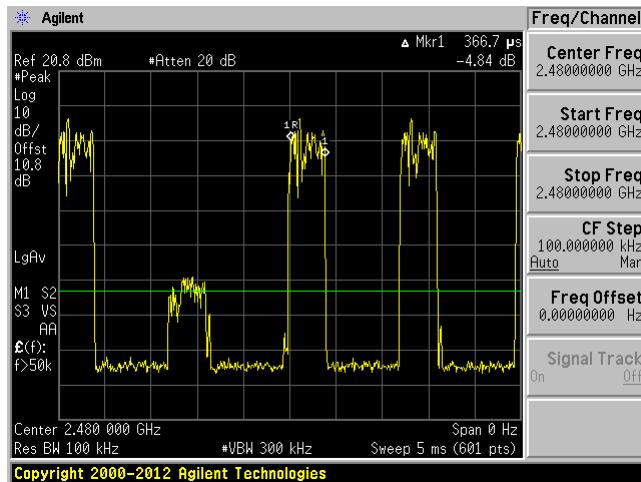


8DPSK, DH1 Number of Pulses within a Specified Time


Low Channel 2402 MHz

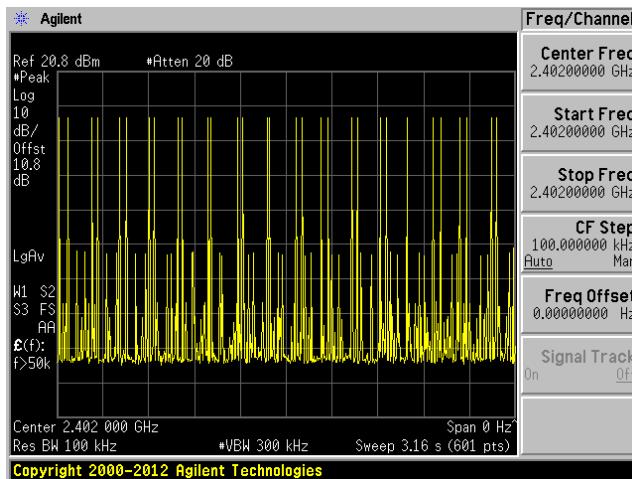

Middle Channel 2441 MHz

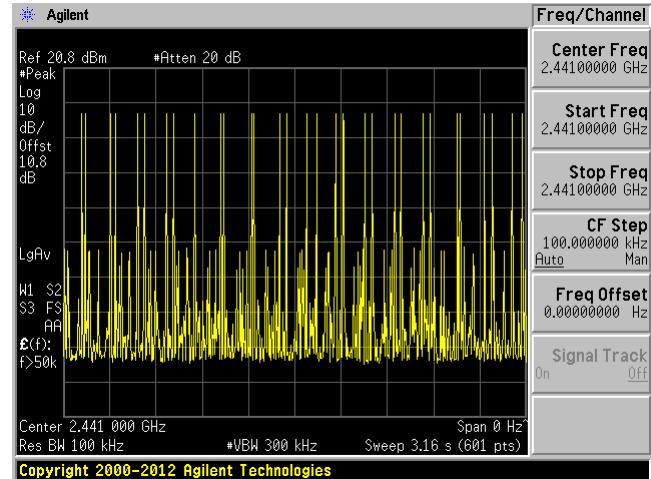


High Channel 2480 MHz

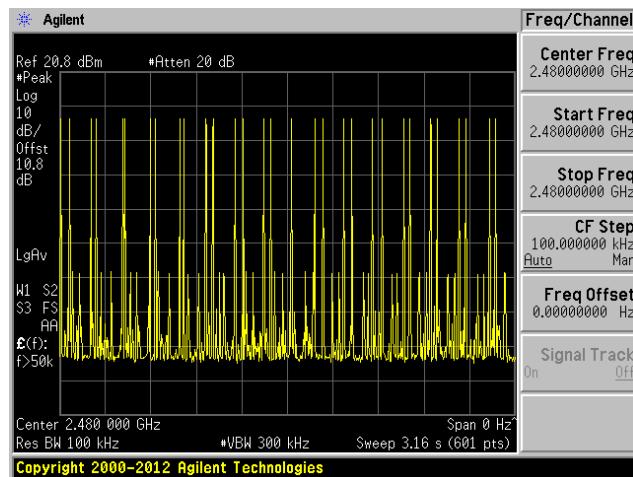


8DPSK, DH3 Pulse Width


Low Channel 2402 MHz

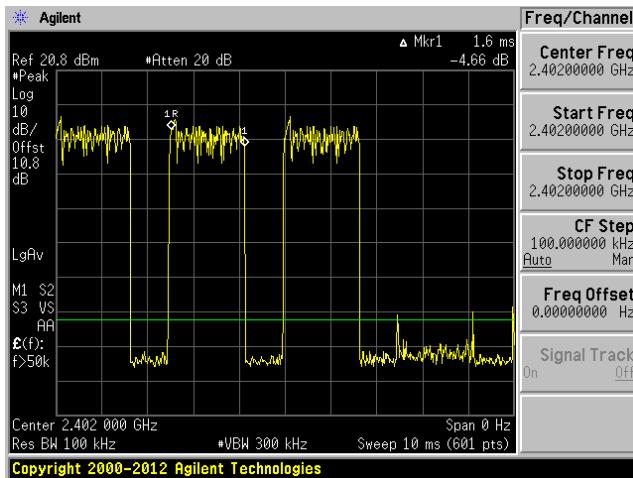

Middle Channel 2441 MHz

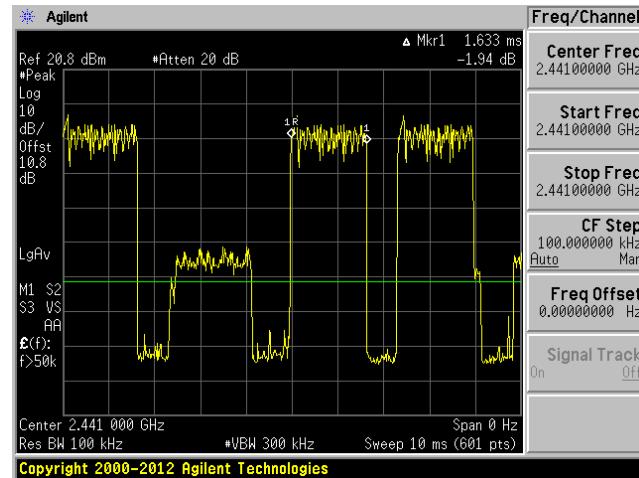


High Channel 2480 MHz

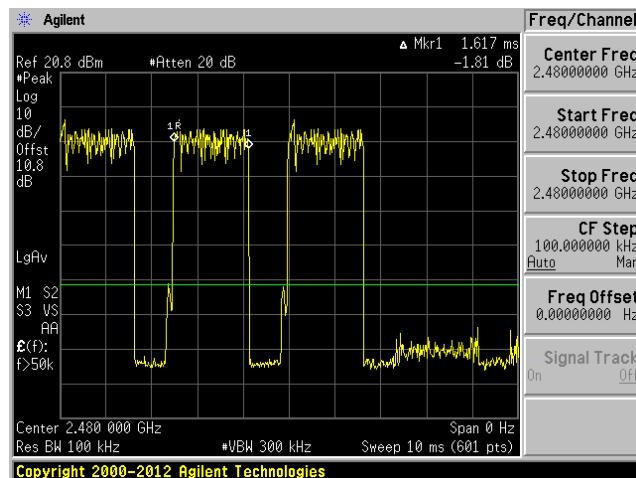


8DPSK, DH3 Number of Pulses within a Specified Time


Low Channel 2402 MHz

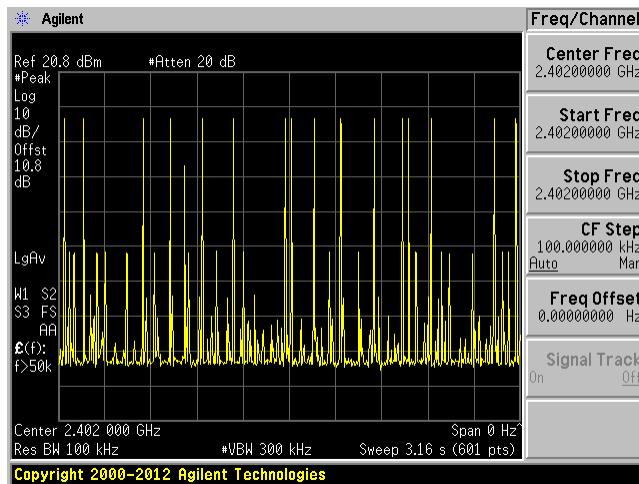

Middle Channel 2441 MHz

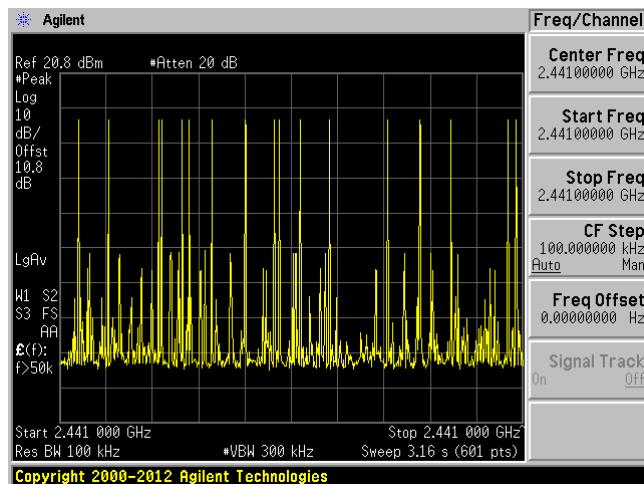


High Channel 2480 MHz

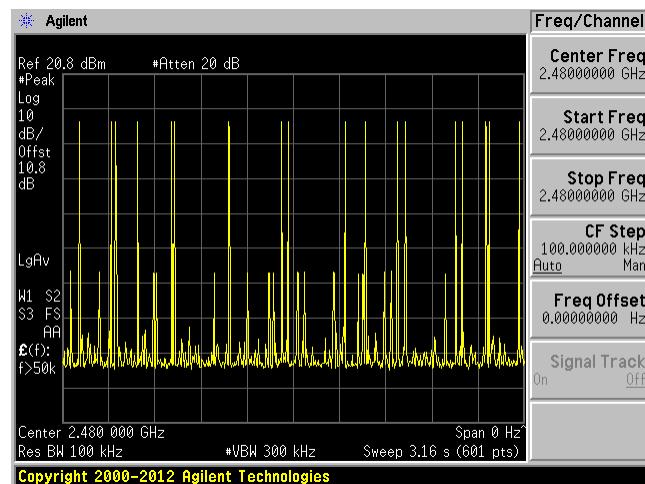


8DPSK, DH5 Pulse Width


Low Channel 2402 MHz

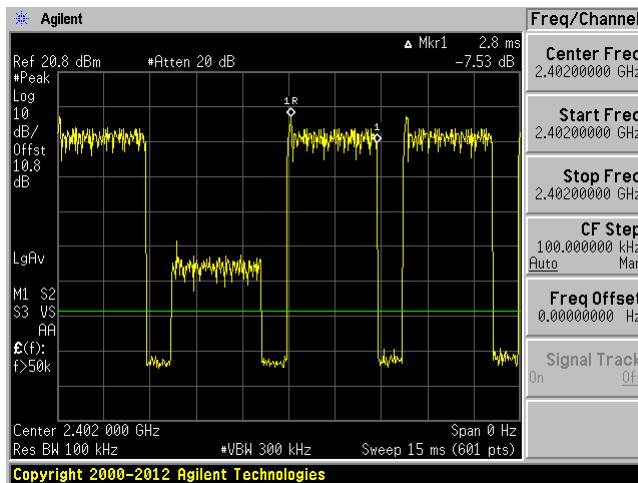

Middle Channel 2441 MHz

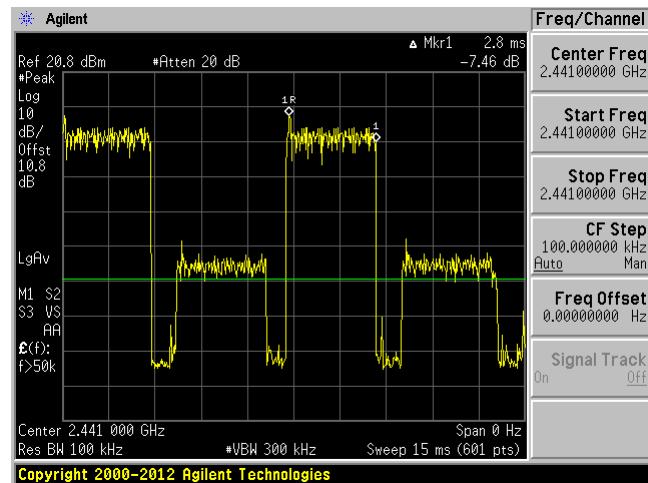


High Channel 2480 MHz

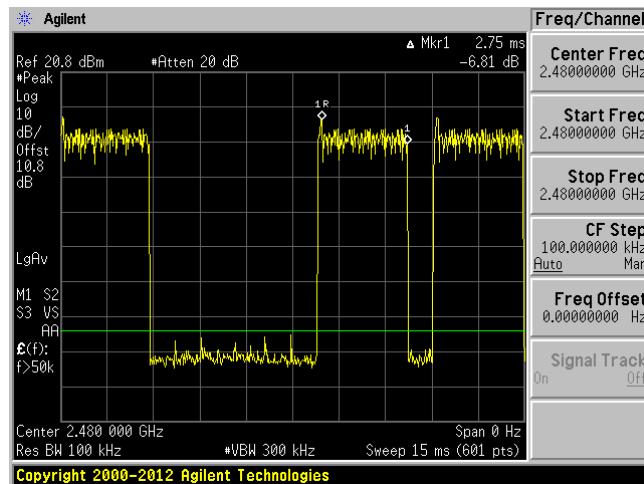


8DPSK, DH5 Number of Pulses within a Specified Time


Low Channel 2402 MHz

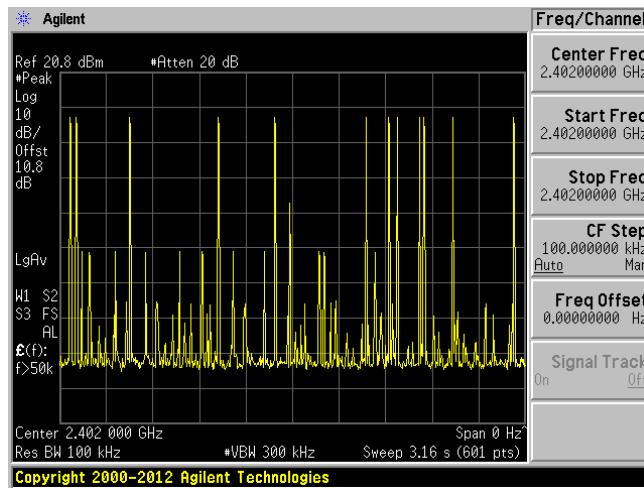

Middle Channel 2441 MHz

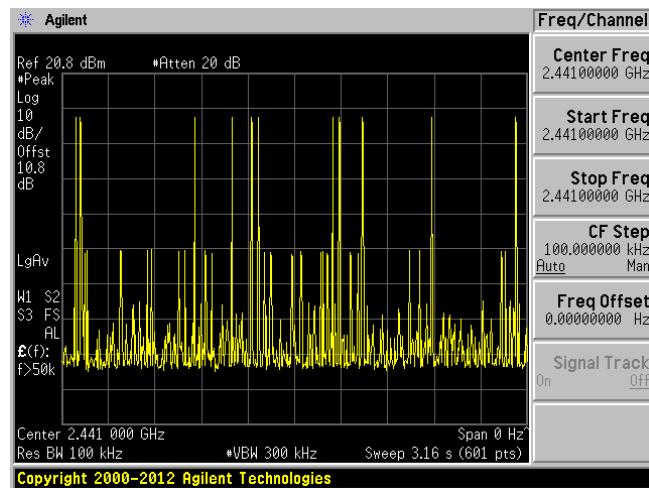

High Channel 2480 MHz

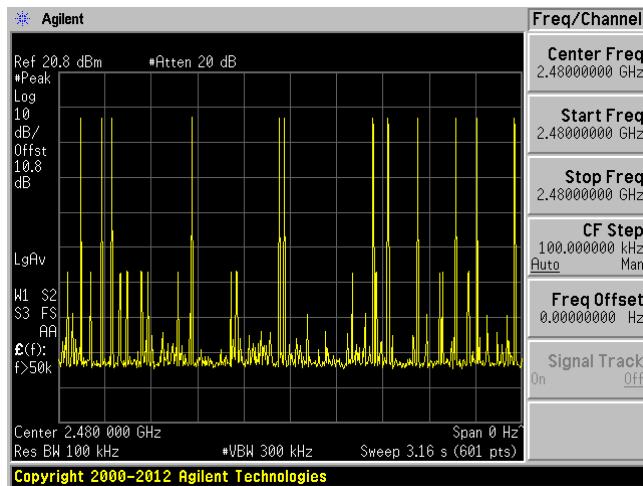

12 FCC §15.247(a)(1)(iii) & ISEDC RSS-247 §5.1(4) - Number of Hopping Channels

12.1 Applicable Standards

According to FCC §15.247(a) (1) (iii) and RSS-247 §5.1(4): Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

12.2 Test Procedure

Span = the frequency band of operation

RBW < 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

12.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4440A	US45303156	2017-02-24	1 year
-	RF cable	-	-	Each time ¹	N/A
-	10 dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

12.4 Test Environmental Conditions

Temperature:	23 °C
Relative Humidity:	42 %
ATM Pressure:	102.5 KPa


The testing was performed by Chin Ming Lui and Vincent Licata on 2017-05-10 in RF site.

12.5 Test Results


Total 79 channels; please refer to the plots hereinafter.

GFSK

39 Channels between 2400 to 2441 MHz

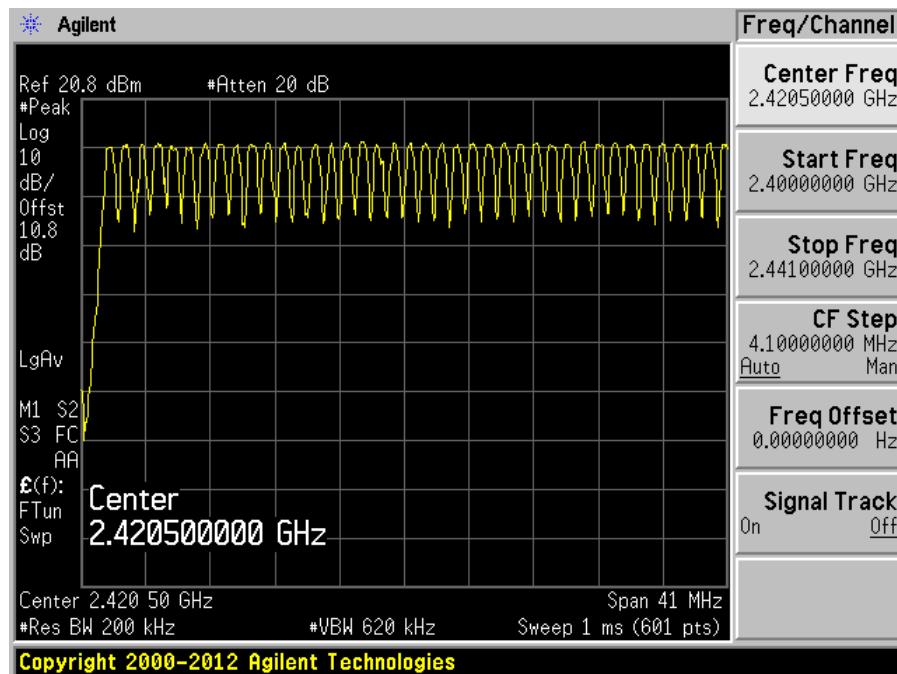


40 Channels between 2441 to 2483.5 MHz

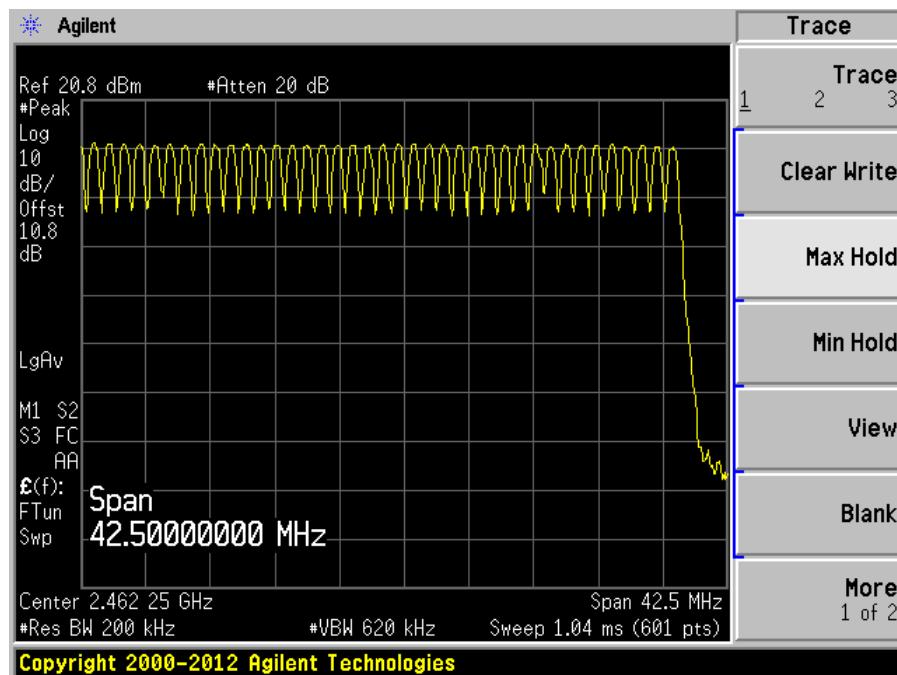


$\pi/4$ -DQPSK

39 Channels between 2400 to 2441 MHz

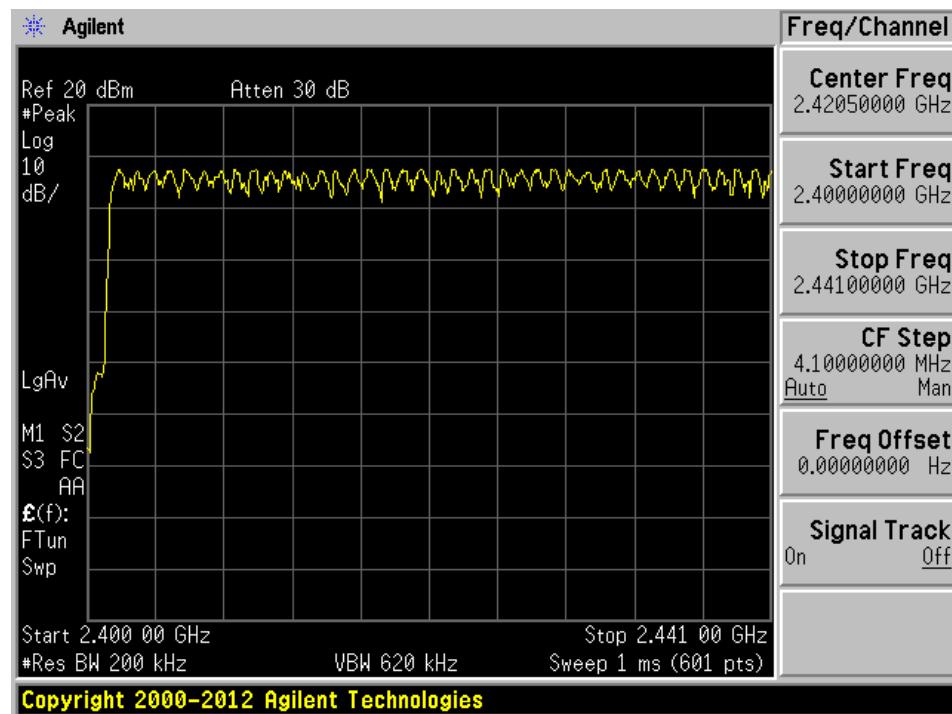


40 Channels between 2441 to 2483.5 MHz

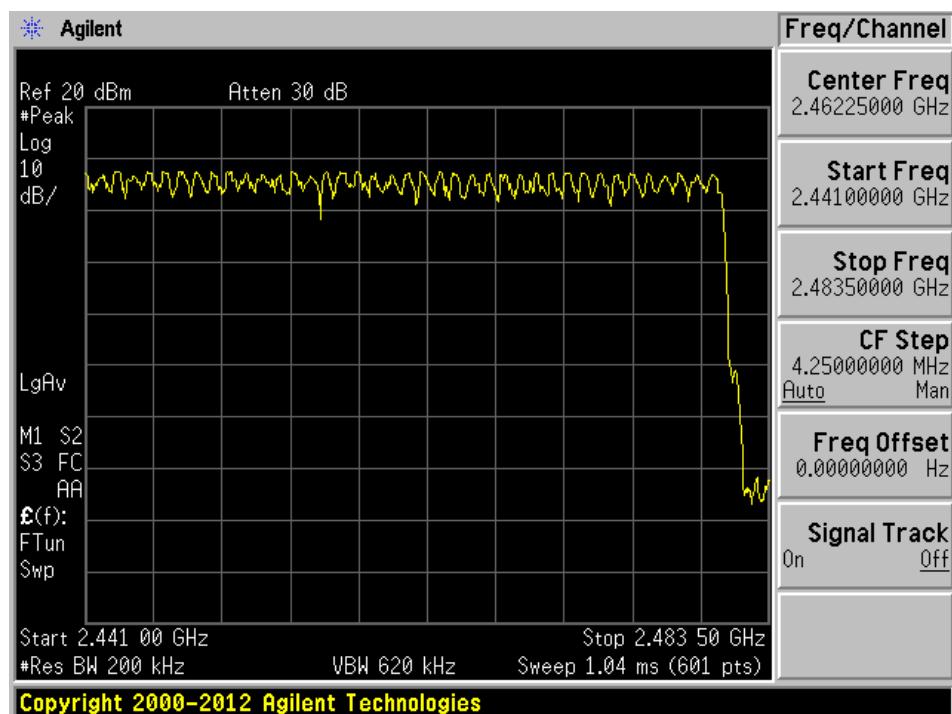


8DPSK

39 Channels between 2400 to 2441 MHz

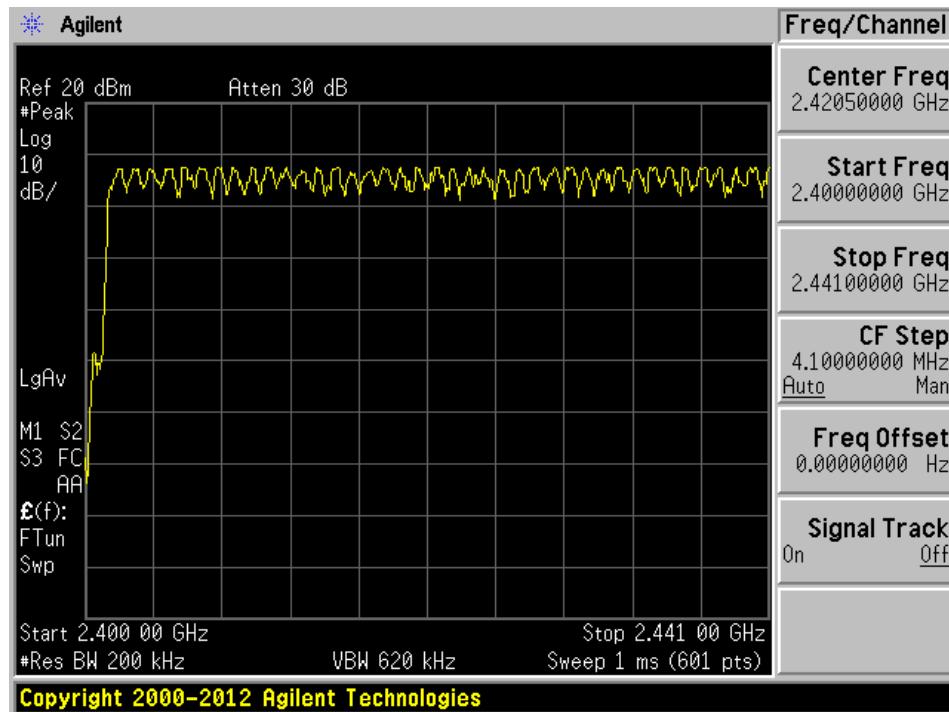

40 Channels between 2441 to 2483.5 MHz

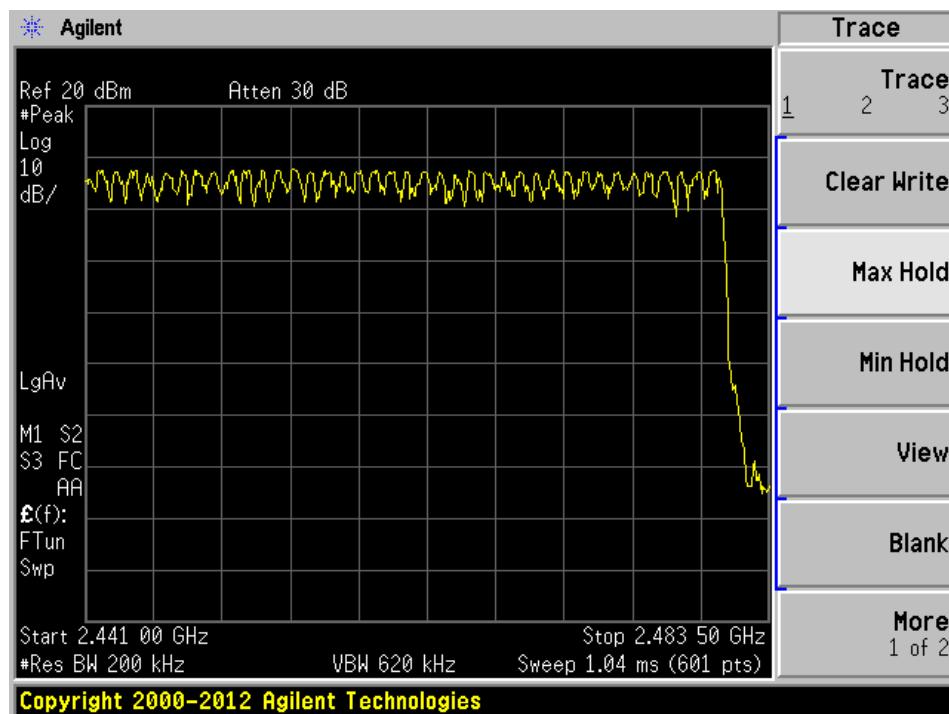

13 FCC §15.247(a) (1) & ISEDC RSS-247 §5.1(2) - Hopping Channel Separation

13.1 Applicable Standards

According to FCC §15.247(a) (1) and RSS-247 §5.1(2): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

13.2 Test Procedure

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) \approx 30% of the channel spacing, adjust as necessary to best identify the center of each individual channel

Video (or Average) Bandwidth (VBW) \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

13.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4440A	US45303156	2017-02-24	1 year
-	RF cable	-	-	Each time ¹	N/A
-	10dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

13.4 Test Environmental Conditions

Temperature:	23 °C
Relative Humidity:	42 %
ATM Pressure:	102.5 KPa

The testing was performed by Chin Ming Lui and Vincent Licata on 2017-05-10 in RF site.


13.5 Test Results

Channel	Frequency (MHz)	Channel Separation (kHz)	Limit > 2/3 20 dB OBW (kHz)
GFSK			
Low	2402	967	616.43
Middle	2441	1016.2	614.15
High	2480	1000	615.46
π/4-DQPSK			
Low	2402	1021.7	814.67
Middle	2441	993.5	814.67
High	2480	1181.6	814.67
8DPSK			
Low	2402	950	838.67
Middle	2441	992.3	834
High	2480	975	833.33


Please refer to following plots.

GFSK


Low Channel 2402 MHz

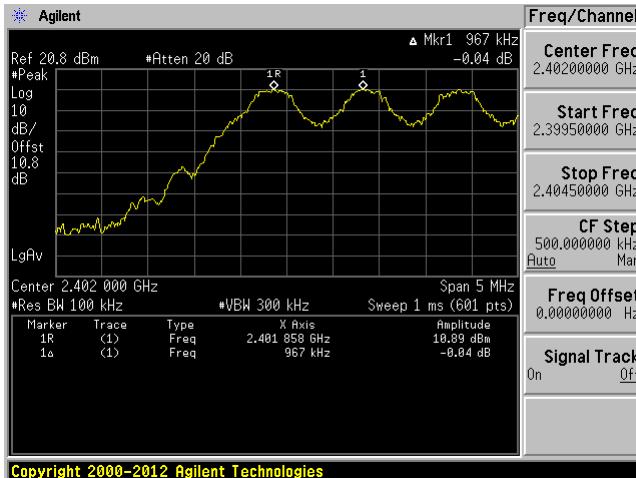

Middle Channel 2441 MHz

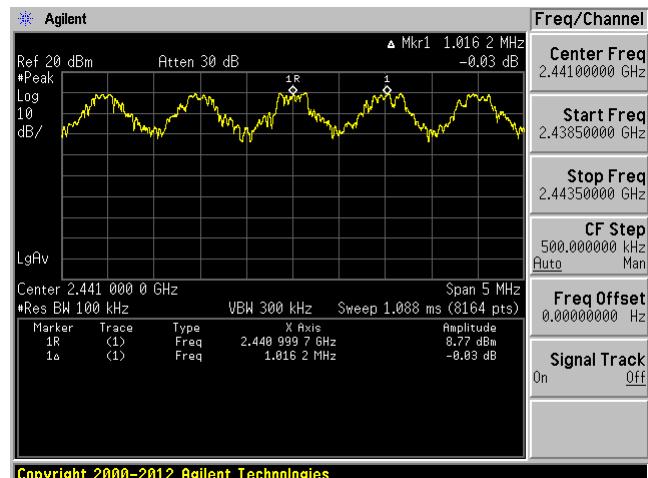


High Channel 2480 MHz

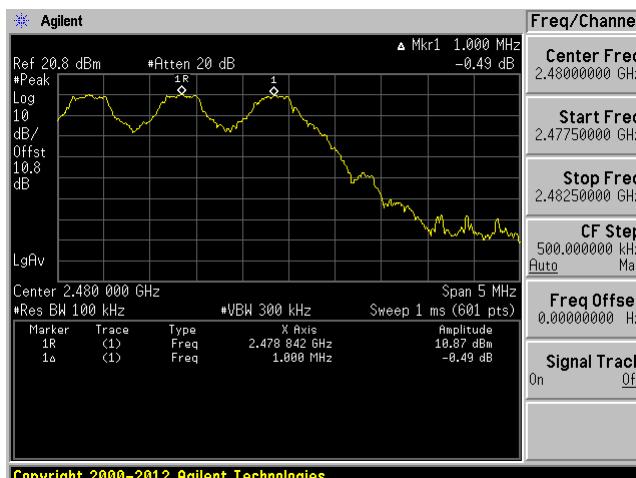


$\pi/4$ -DQPSK


Low Channel 2402 MHz

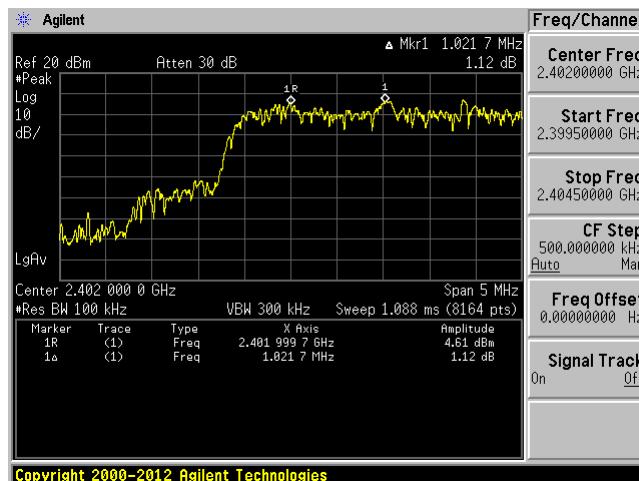

Middle Channel 2441 MHz

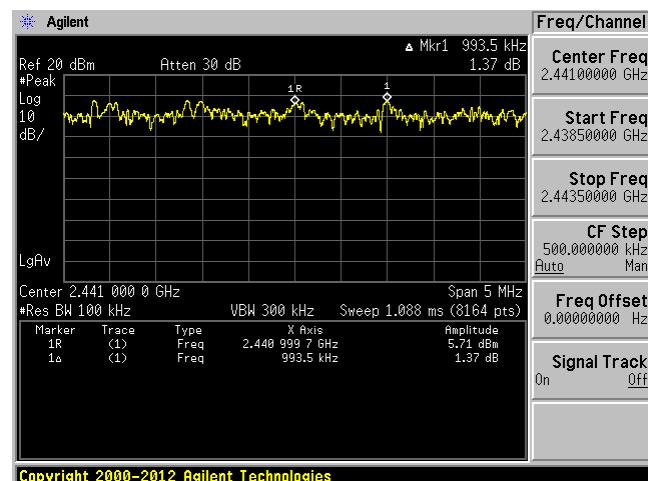


High Channel 2480 MHz

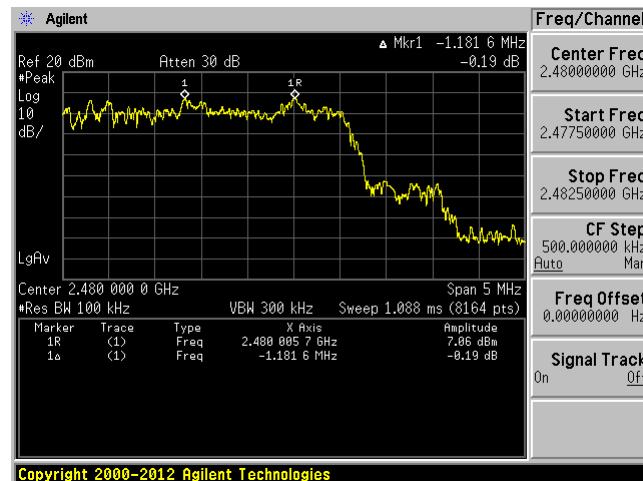


8DPSK

Low Channel 2402 MHz

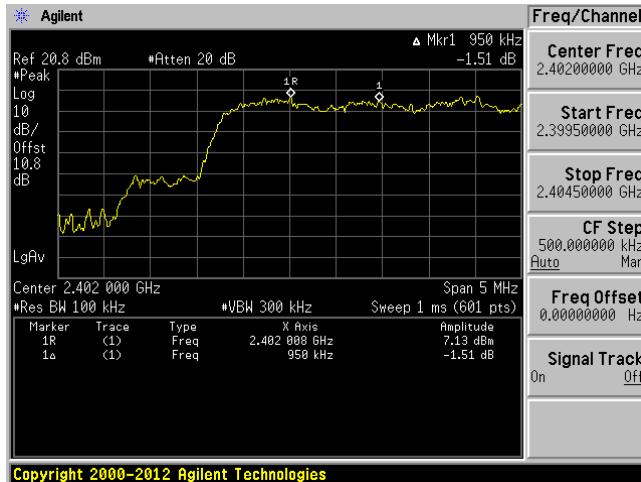

Middle Channel 2441 MHz

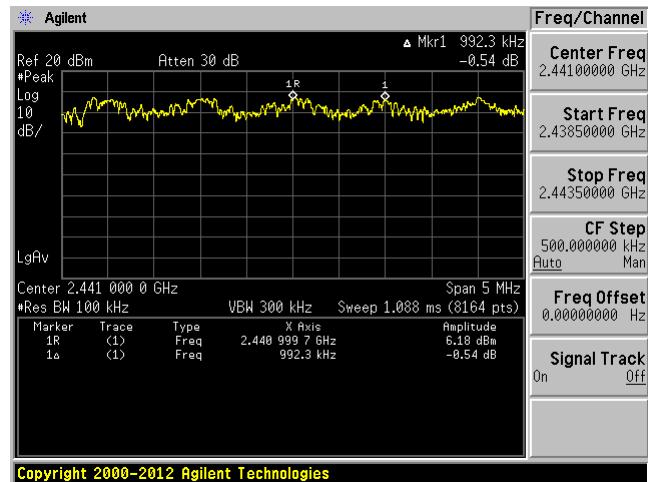

High Channel 2480 MHz



14 FCC §15.247(d) & ISEDC RSS-247 §5.5 - Spurious Emissions at Antenna Terminals

14.1 Applicable Standards

For FCC §15.247(d) in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

As per ISEDC RSS-247 §5.5, in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

14.2 Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

14.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4440A	US45303156	2017-02-24	1 year
-	RF cable	-	-	Each time ¹	N/A
-	10dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

14.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.5 KPa


The testing was performed by Chin Ming Lui and Vincent Licata on 2017-05-10 in RF site.

14.5 Test Results

Please refer to following plots.

GFSK


Low Channel 30 MHz – 3 GHz

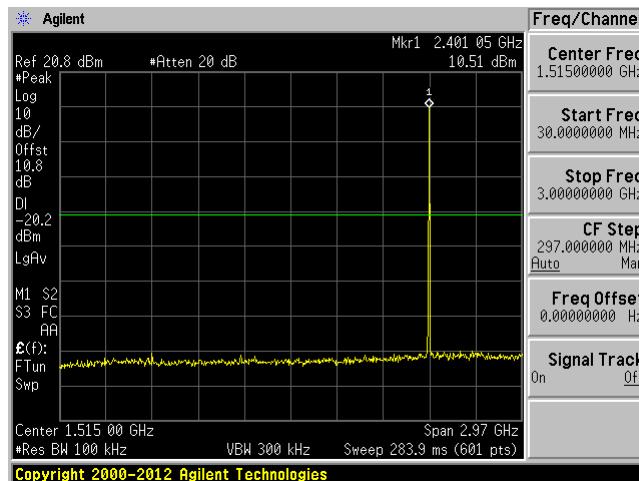


Low Channel 3 GHz – 26 GHz




Middle Channel 30 MHz – 3 GHz

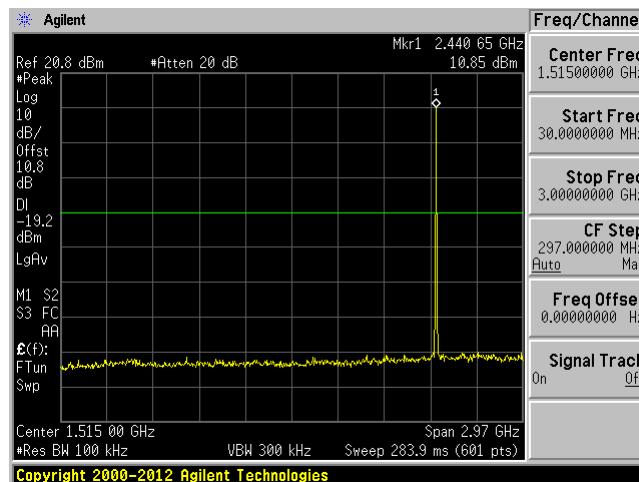


Middle Channel 3 GHz – 26 GHz

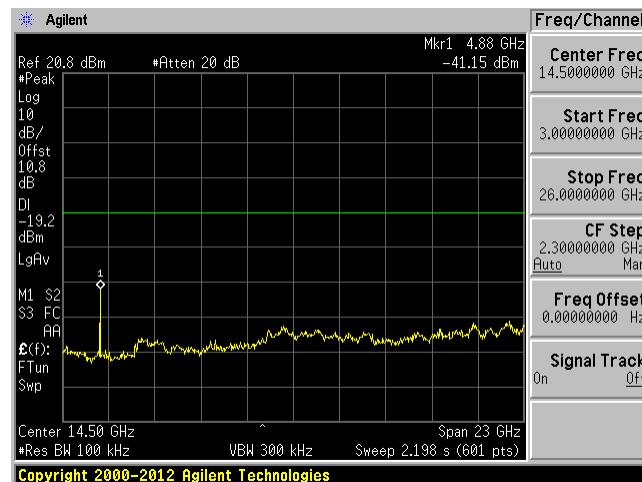


High Channel 30 MHz – 3 GHz

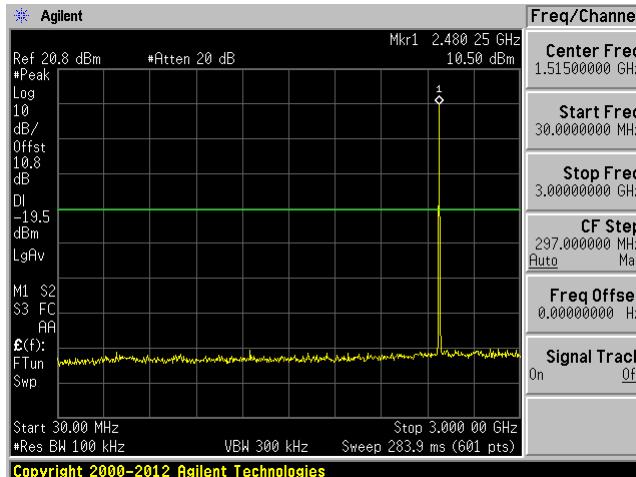

High Channel 3 GHz – 26 GHz

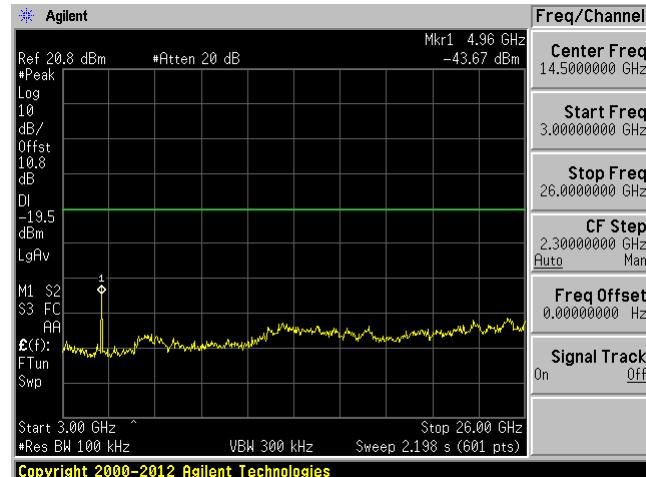 $\pi/4$ -DQPSK


Low Channel 30 MHz – 3 GHz

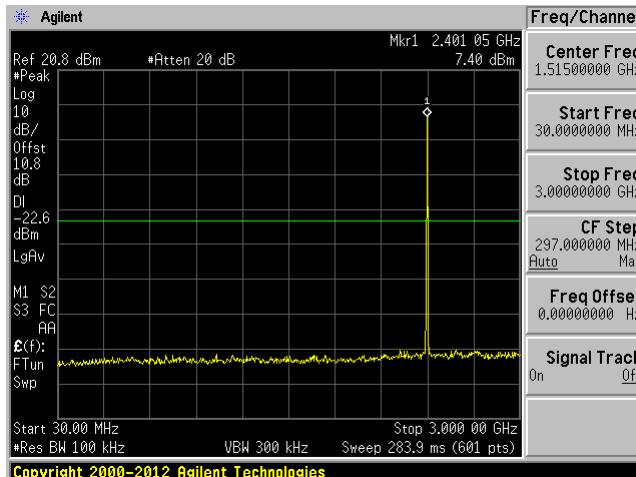


Low Channel 3 GHz – 26 GHz




Middle Channel 30 MHz – 3 GHz

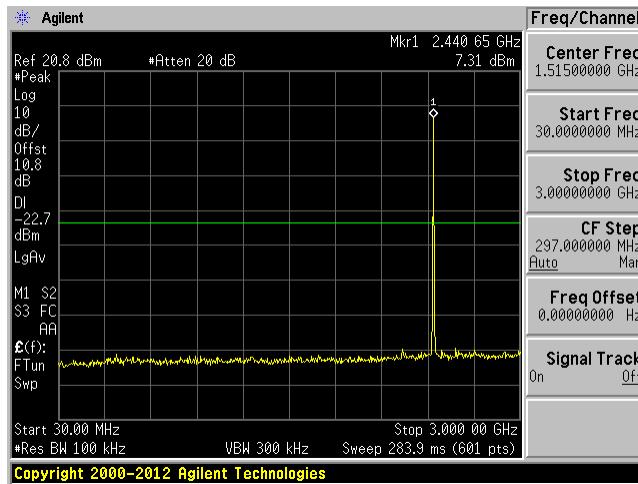


Middle Channel 3 GHz – 26 GHz

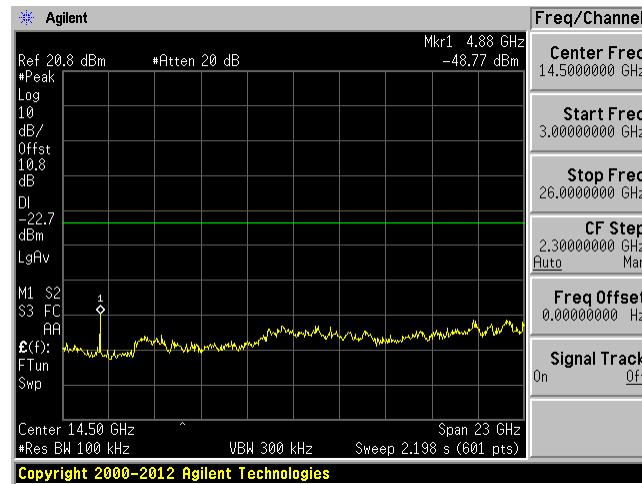

High Channel 30 MHz – 3 GHz

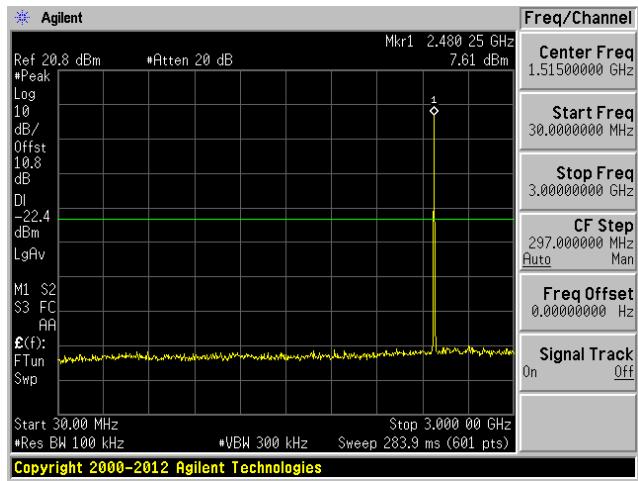


High Channel 3 GHz – 26 GHz

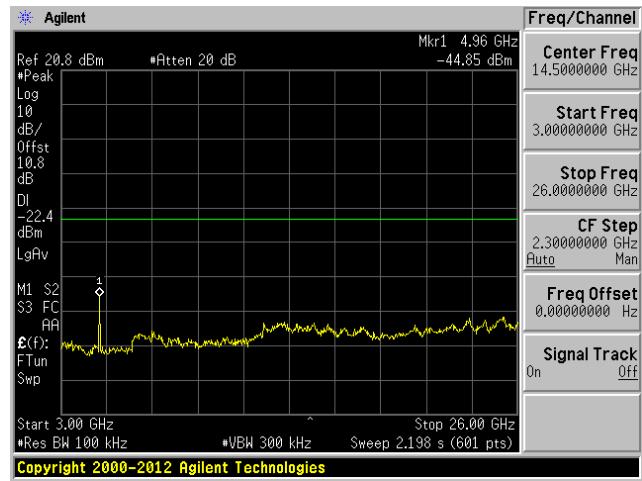


8DPSK


Low Channel 30 MHz – 3 GHz

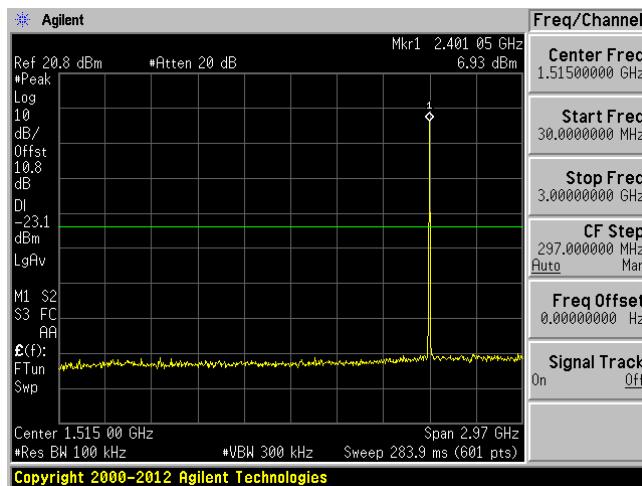


Low Channel 3 GHz – 26 GHz

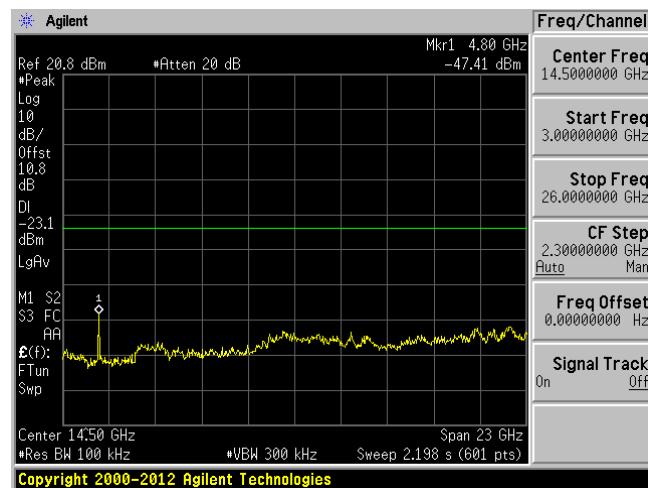


Middle Channel 30 MHz – 3 GHz

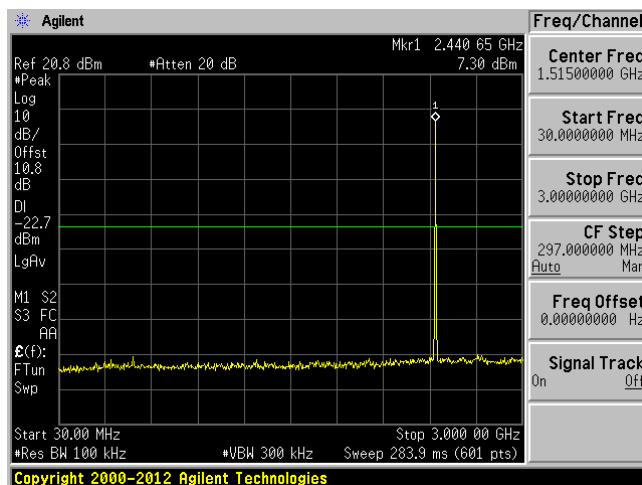


Middle Channel 3 GHz – 26 GHz

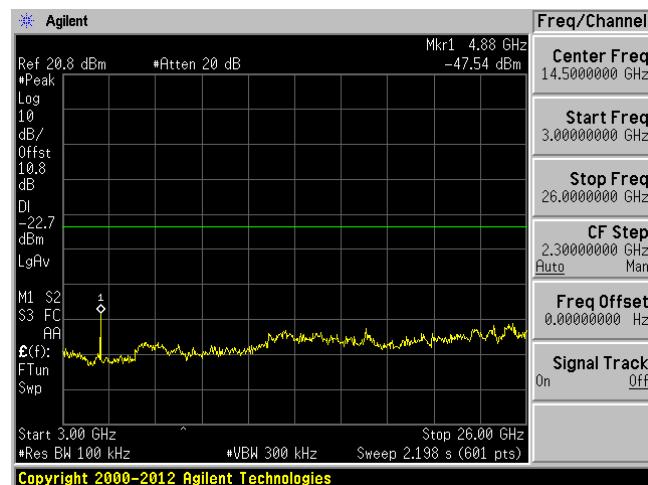

High Channel 30 MHz – 3 GHz

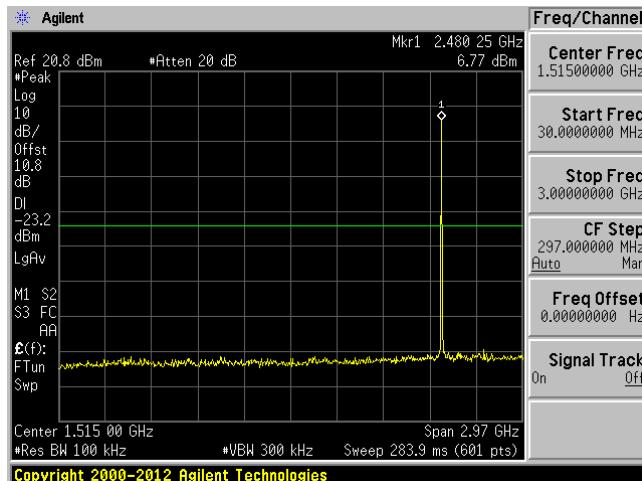

High Channel 3 GHz – 26 GHz

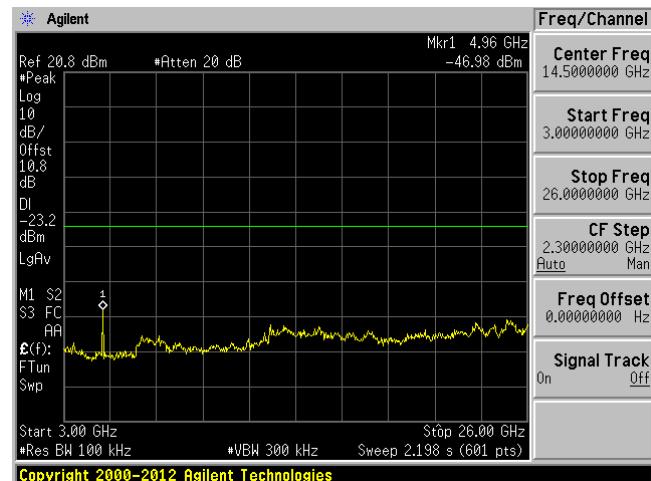

15 Annex A (Informative) - A2LA Electrical Testing Certificate



Accredited Laboratory

A2LA has accredited

BAY AREA COMPLIANCE LABORATORIES CORP.

Sunnyvale, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. This laboratory also meets the requirements of A2LA R222 - Specific Requirements - EPA ENERGY STAR Accreditation Program. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Presented this 30th day of August 2016.

A handwritten signature in blue ink, appearing to read 'Jim R. Bent'.

Senior Director of Quality & Communications
For the Accreditation Council
Certificate Number 3297.02
Valid to September 30, 2018



For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

----- END OF REPORT -----