

Experimental Analysis SAR Report

Subject: **Specific Absorption Rate (SAR) Hand and Body Report**

Product: PP2080

Model: HPQ-PP2080

Client: Hewlett Packard Compaq


Applicant: Intel Corporation
2300 Corporate Center Drive
Thousand Oaks, CA 91320


Manufacturer: Hewlett Packard Compaq


Project #: ITLB-WM3B2100-MPCI Card-3995

Prepared by: APREL Laboratories
51 Spectrum Way
Nepean, Ontario
K2R 1E6



Approved by  Date: 17-04-03
Stuart Nicol
Director Product Development, Dosimetric R&D

Submitted by  Date: April 17, 2003
Jay Sarkar
Technical Director of Standards & Certification

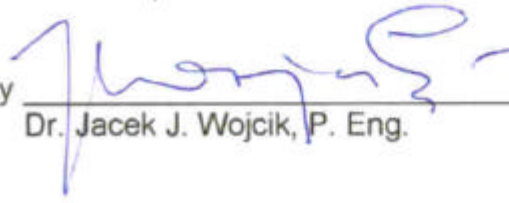Released by  Date: April 17/03
Dr. Jacek J. Wojcik, P. Eng.



Applicant: Intel Corporation
 Manufacturer: Hewlett Packard Compaq
 FCC ID: CNTPP2080
 Equipment: Intel Mini PCI Type 3B 802.11b Wireless LAN Adapter model WM3B2100 inside the Hewlett Packard Compaq (HPQ) laptop series PP2080
 Model: BCL31001005
 Serial Number: 12300148
 Received Status: Production Unit Pre-release
 Standard: FCC 96-326, Guidelines for Evaluating the Environmental Effects of Radio-Frequency Radiation

ENGINEERING SUMMARY

This report contains the results of the engineering evaluation performed on the Intel Mini PCI Type 3B 802.11b Wireless LAN Adapter model WM3B2100 located inside the Hewlett Packard Compaq (HPQ) laptop series PP2080. The analysis was carried out in accordance with the requirements of FCC 96-326, "Guidelines for Evaluating the Environmental Effects of Radio-Frequency Radiation" in accordance with Supplement C and, using methodologies contained within IEEE P-1528. The Intel Mini PCI Type 3B 802.11b Wireless LAN Adapter model WM3B2100 located inside the Hewlett Packard Compaq (HPQ) laptop series PP2080 was evaluated for compliance to the RF exposure requirements contained in section 2 "Applicable Documents". The Intel Mini PCI Type 3B 802.11b Wireless LAN Adapter model WM3B2100 while located inside the Hewlett Packard Compaq (HPQ) laptop series PP2080 was assessed for SAR at the **maximum power level set** at 17.8dBm while operating with the **duty cycle set at 100%** .

The Intel Mini PCI Type 3B 802.11b Wireless LAN Adapter model WM3B2100 is located inside Hewlett Packard Compaq (HPQ) laptop series PP2080 and utilizes a Mini PCI type B form factor. The Intel Mini PCI Type 3B 802.11b Wireless LAN Adapter model WM3B2100 located inside the Hewlett Packard Compaq (HPQ) laptop series PP2080 has been assessed for body, bystander, and direct contact SAR.

Intel provided APREL laboratories with one pre-production model of the Hewlett Packard Compaq (HPQ) laptop series PP2080. The HPQ-PP2080 laptop incorporates a diverse triple band PCB IFA antenna as supplied by Wistron Ne Web Corporation. The Tx (main) antenna is housed internally within the laptop chassis and is located near or around the top **Bottom Left Hand Side** of the laptop near the **Palm Rest Area**, below the keyboard on the main body of the laptop.



For the purpose of the SAR analysis executed and subsequent report the Intel Mini PCI Type 3B 802.11b Wireless LAN Adapter model WM3B2100 located inside the Hewlett Packard Compaq (HPQ) laptop series PP2080 will not be labeled as the DUI (Device Under Investigation). The DUI is the HPQ laptop series number PP2080.

The Intel Mini PCI Type 3B 802.11b Wireless LAN Adapter model WM3B2100 located inside the Hewlett Packard Compaq (HPQ) laptop series PP2080 was evaluated for both body exposure and direct contact SAR (extremities) at low (ch#1), middle (ch#6) and high (ch#11) for the frequency range of 2412MHz to 2462MHz. Tests were executed at zero mm separation distance, for both direct contact SAR (extremities) and, body analysis.

The conservative 10g average for direct contact SAR for the DUI was found to be **1.09 W/kg for the peak RF output power of the low channel (ch#1, f=2412MHz)** at the keyboard up position of DUI. For body SAR analysis the conservative 1 g SAR was found to be **0.93 W/kg for the peak RF output power of the Mid channel (ch#06, f=2437MHz)** at the left hand side while the DUI was in a vertical position.

Evaluation data and graphs are presented in this report. All analysis conducted and documented in this report were performed while the Intel Mini PCI Type 3B 802.11b Wireless LAN Adapter model WM3B2100 was located inside the Hewlett Packard Compaq (HPQ) laptop series PP2080.

For the purpose of the SAR assessment the AC power source was used, and the conservative SAR position and frequency for each of the Test Case Scenarios was reassessed using the battery supply. It was found that the conservative SAR presented in this report was measured while using the AC supply.

Based on the measured results and on how the Intel Mini PCI Type 3B 802.11b Wireless LAN Adapter model WM3B2100 while located inside the Hewlett Packard Compaq (HPQ) laptop series PP2080 will be marketed and used, it is certified that the DUI meets the requirements as set forth in the specifications, for the RF exposure environment contained within this report.

The results presented in this report relate only to the sample evaluated.



TABLE OF CONTENTS

ENGINEERING SUMMARY	2
1. Introduction.....	5
2. Applicable Documents.....	5
3. Test Case Scenarios	6
4. Test Equipment	9
5. SET Up	10
6. Test Results	17
6.1. TRANSMITTER CHARACTERISTICS	17
6.2. SAR MEASUREMENTS	18
6.3. DIRECT CONTACT SAR.....	19
6.4. BODY EXPOSURE	20
7. Conclusions.....	22
Appendix A: Graphic Plots FROM SAR Measurements	24
Appendix B: Pictures of the evaluation setup	49
Appendix C: Validation Scan	56
Appendix D: Uncertainty Budget.....	59
Appendix E: Probe Calibration Certificate	60
Appendix F: Dipole Calibration Certificate	71



1. INTRODUCTION

Tests were conducted to determine the Specific Absorption Rate (SAR) for a sample Intel Mini PCI Type 3B 802.11b Wireless LAN Adapter model WM3B2100 located inside the Hewlett Packard Compaq (HPQ) laptop series PP2080 while operating with a Wistron Ne-Web antenna. These tests were conducted at APREL Laboratories facility located at 51 Spectrum Way, Nepean, Ontario, Canada.

2. APPLICABLE DOCUMENTS

The following documents are applicable to the evaluation performed:

- 1) FCC 96-326, Guidelines for Evaluating the Environmental Effects of Radio-Frequency Radiation
- 2) ANSI/IEEE C95.1-1999, IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.
- 3) ANSI/IEEE C95.3-1992, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave.
- 4) OET Bulletin 65 (Edition 97-01) Supplement C (Edition 01-01), “Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields”.
- 5) IEEE P-1528 Draft “Recommended Practice for Determining the Peak Spatial Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communication Devices: Experimental Techniques.”



3. Test Case Scenarios

Intel provided APREL Laboratories with a sample Hewlett Packard Compaq (HPQ) laptop series PP2080 which acts as the host for the Intel Mini PCI Type 3B 802.11b Wireless LAN Adapter model WM3B2100 for the purpose of the SAR evaluation. The evaluations performed on the Intel Mini PCI Type 3B 802.11b Wireless LAN Adapter model WM3B2100 while located inside the Hewlett Packard Compaq (HPQ) laptop series PP2080 were to establish the conservative SAR value for both 1 and 10g averages while the Mini PCI card was transmitting at the set power below the saturation point.

The DUI (device under test) is the Hewlett Packard Compaq (HPQ) laptop series PP2080 that uses the Intel Mini PCI Type 3B 802.11b Wireless LAN Adapter model WM3B2100.

Device Tested Keyboard Up



HPQ With Wistron Ne-Web Antenna

Device Tested Keyboard Down



HPQ With Wistron Ne-Web Antenna



Device Tested Left Hand Side Vertical



HPQ with Wistron Ne-Web Antenna



4. TEST EQUIPMENT

- APREL Triangular Dosimetric Probe Model E-010, s/n 163
- ALIDX-500 Dosimetric SAR Measurement System
- APREL flat Phantom F1, Part # P-V-G8 (overall shell thickness 2mm)
- APREL 2.45GHz Dipole
- APREL RF Amplifier
- Hewlett Packard Signal Generator Asset
- Gigatronics Power Meter
- Gigatronics Power Sensor (peak detection mode)
- Hewlett Packard Dual Directional Coupler

Table 2: Instrumentation

Instrument	Calibration Due	Asset Number/Serial Number
E-010 Probe	May 2003	163
ALIDX-500	March 2004	N/A
APREL Flat Phantom	N/A	APL-001
APREL UniPhantom	N/A	APL-085
APREL 2450MHz Dipole	CBT	N/A
APREL RF Amplifier	CBT	301467
HP-Signal Generator	September 2003	301468
Gigatronics Power Meter	September 2003	301393
Gigatronics Power Sensor	April 2004	301394
HP Directional Coupler	October 2003	100251



5. SET UP

5.1 ALIDX-500 Measurement System

The image below shows the laboratory along with the ALIDX-500 Measurement system.



The ALIDX-500 Dosimetric SAR Measurement System was developed jointly with APREL Laboratories and IDX Robotics for use within wireless development and the compliance environment. The system consists of a six axis articulated arm, and controller for precise probe positioning (0.05 mm repeatability). Custom software has been developed to enable communications between the robot controller software and the host operating system.

An amplifier is located on the articulated arm, which is isolated from the custom designed end effector and robot arm. The end effector provides the mechanical touch detection functionality and probe connection interface. The amplifier is functionally validated within the manufacturers site and calibrated at NCL Calibration Laboratories. A Data Acquisition Card (DAC) is used to collect the signal as detected by the isotropic e-field probe. The DAC manufacturer calibrates the DAC to NIST standards. A formal validation is executed using all mechanical and electronic components to prove conformity of the measurement platform as a whole.

The ALIDX-500 has been designed to measure devices within the compliance environment to meet all recognized standards. The system also conforms to standards, which are currently being developed by the scientific and manufacturing community.

The course scan resolution is defined by the operator and reflects the requirements of the standard to which the device is being tested. Precise measurements are made within the predefined course scan area and the values are logged.

The user predefines the sample rate for which the measurements are made so as to ensure that the full duty-cycle of a pulse modulation device is covered during the sample. The following algorithm is an example of the function used by the system for linearization of the output for the probe.

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

The APREL E-Field probe is evaluated to establish the diode compression point.

A complex algorithm is then used to calculate the values within the measured points down to a resolution of 1mm. The data from this process is then used to provide the co-ordinates from which the cube scan is created for the determination of the 1 g and 10 g averages.



Cube scan averaging consists of a number of complex algorithms, which are used to calculate the one, and ten gram averages. The basis for the cube scan process is centered on the location where the maximum measured SAR value was found. When a secondary peak value is found which is within 60% of the initial peak value, the system will report this back to the operator who can then assess the need for further analysis of both the peak values prior to the one and ten-gram cube scan averaging process. The algorithm consists of 3D cubic Spline, and Lagrange extrapolation to the surface, which form the matrix for calculating the measurement output for the one and ten gram average values. The resolution for the physical scan integral is user defined with a final calculated resolution down to 1mm.

In-depth analysis for the differential of the physical scanning resolution for the cube scan analysis has been carried out, to identify the optimum setting for the probe positioning steps, and this has been determined at 8mm increments on the X, & Y planes. The reduction of the physical step increment increased the time taken for analysis but did not provide a better uncertainty or return on measured values.

Prior to the measurement process the operator can insert the parameters for which the physical measurements are made, defining the X, Y, and Z probe movement integrals. For the FCC compliance process both OET 65 "Supplement C" and the IEEE draft standard "P-1528" were used to define the measurement parameters used during the assessment of the device.

The final output from the system provides data for the area scan measurements, physical and splined (1mm resolution) cube scan with physical and calculated values (1mm resolution).

The overall uncertainty for the methodology and algorithms the ALIDX500 used during the SAR calculation was evaluated using the data from IEEE P-1528 f3 algorithm:

$$f_3(x, y, z) = A \frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2} \cdot \left(e^{-\frac{2z}{a}} + \frac{a^2}{2(a + 2z)^2} \right)$$

The probe used during the measurement process has been assessed to provide values for diode compression. These values are calculated during the probe calibration exercise and are used in the mathematical calculations for the assessment of SAR.



5.2 Validation

A full system validation was run prior to the SAR testing. The methodology used for the system validation was taken from IEEE P-1528 section 7 (where applicable). Further details of the tissue used during the system validation are provided in section 6.3 Simulated Tissue. The results from the system validation are provided in Appendix C Validation Results.

The image below shows the setup used for the system validation.




NOTE:

The full analysis of the Device as tested was completed within a 24hr period.

5.3 Body & Bystander Analysis

Measurements were made on each of the Test Case Scenarios using the APREL Universal Phantom, on the low, mid, and high channels. Each Test Case Scenario was assessed for keyboard up, keyboard down, and vertical. The separation distance used was 0mm for the conservative SAR assessment. The results from this exercise are presented in section 6 test results.

The image below shows part of the setup used for body measurements.

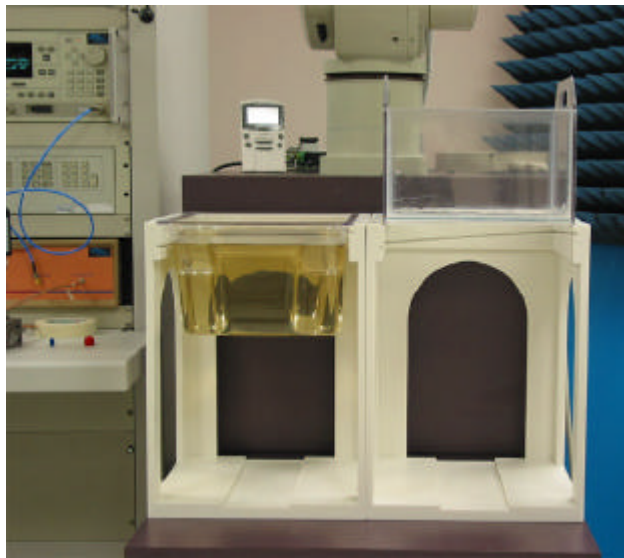

5.4 Simulated Tissue

The recipes used to make the simulated tissue were as presented in OET Supplement C.

The density used to determine SAR from the measurements was the recommended 1.0 kg/m^3 found in Appendix C of "Supplement C OET Bulletin 65, Edition 01-01".

Dielectric parameters of the simulated tissue material were determined using an Anritsu 37347A Vector Network Analyzer, and the APREL Dielectric Probe.

For the system validation the tissue was calibrated at 2450 MHz.

Table 3: Properties for Tissue used in Validation executed 21st March 03

BODY Tissue	APREL	Target Value	D (%)
Dielectric constant, ϵ_r	50.4	52.7	4
Conductivity, σ [S/m]	2.03	1.95	4
Tissue Conversion Factor,	5.6	-	-
Tissue Temperature (°C)	22.0	-	-
Ambient Temperature (°C)	23.5	-	-

Table 4: Tissue Calibration Instrumentation

Instrument	Calibration Due	Asset Number/Serial Number
Anritsu VNA	CBT	301382
APREL Dielectric Probe	CBT	-



5.5 Methodology

1. The test methodology utilized in the analysis of the Test Case Scenarios complies with the requirements of FCC 96-326 and ANSI/IEEE C95.3-1992.
2. The E-field is measured with a small isotropic probe (output voltage proportional to E^2).

$$SAR = \frac{\sigma |E|^2}{\rho}$$

3. The probe is moved precisely from one point to the next using the robot (10 mm increments for wide area scanning and 8 mm increments for zoom scanning in the X, Y directions) and (5.0 mm increments for the final depth profile measurement in the Z direction).
4. The probe travels in the homogeneous liquid simulating human tissue (body).

Section 5.4 contains information about the properties of the simulated tissue used for these measurements.

5. The liquid is contained in a manikin simulating a portion of the human body with an overall shell thickness of 2 mm.
6. The DUI is positioned with the surface under investigation against the phantom with no separation distance for an initial conservative analysis.
7. All tests were performed with the highest power available from the sample DUI under transmit conditions.

More detailed descriptions of the test method are given in Section 6 where appropriate.



6. TEST RESULTS

6.1. TRANSMITTER CHARACTERISTICS

The Intel Pro/Wireless 2100 WLAN Mini-PCI Type 3B Adapter was integrated by Intel. The Intel Pro/Wireless 2100 WLAN Mini-PCI Type 3B Adapter was then set to transmit, using the software, which was supplied by Intel, with a 100% duty cycle (modulated mode). During the SAR measurement process a spectrum analyzer was setup to measure the radiated power.

The Intel Mini PCI Type 3B 802.11b Wireless LAN Adapter model WM3B2100 located inside the Hewlett Packard Compaq (HPQ) laptop series PP2080 has been developed to operate with both the AC and, battery cell in the laptop. The DUI was analyzed and conducted power measurements were made on the Tx output port for the DUI using both battery and AC supply. The power measurement exercise showed that **no measurable difference could be made** when comparing battery and AC power modes.

The DUI then had a further assessment executed while transmitting using the AC supply over a period of 40 minutes. During this period conducted power measurements were made to assess any measurable drift. Table six contains the results from this exercise.

Note

The power measurements taken were conducted and measured using a power meter, and broadband power sensor (peak detection mode).

Table 5: Conducted power measurement before and after the scanning

Type of Exposure	Scan Type Equivalent	Power Readings (dBm)		DP _{TX} (dB)
		Initial	After 40 Minutes	
Direct Contact Exposure	Area	17.8	17.8	0
	Fine/Zoom	17.8	17.8	0
Body Exposure	Area	17.8	17.8	0
	Fine/Zoom	17.8	17.8	0



6.2. SAR MEASUREMENTS

- 1) RF exposure is expressed as Specific Absorption Rate (SAR). SAR is calculated from the E-field, measured in a grid of test points. SAR is expressed as RF power per kilogram of mass, averaged in 10 grams of tissue for the extremities and 1 gram of tissue elsewhere. The equation below is a representation of how SAR can theoretically equate.

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

- 2) The DUI was put into test mode for the SAR measurements via test software supplied by the manufacturer running on the host platform. This control software set the DUI channel and operating TX mode/frequency.
- 3) Table 6, provides the details in tabular form of the full measurement analysis (Test Case Scenarios), which was performed on the DUI. Appendix A provides contour plots of the SAR measurements super imposed on the DUI.
- 4) Area/Zoom scans were performed for the low, middle and high channels of the DUI. These scans were repeated for the keyboard up, keyboard down, and vertical, positions of the DUI. The DUI was operating with maximum output power and a duty cycle of 100%. The DUI was placed up against the phantom during the test process. The phantom shell thickness is 2 mm overall.



6.3. DIRECT CONTACT SAR

All subsequent testing for the direct contact SAR was performed on three channels (low: 2412MHz, middle: 2437MHz, high: 2462MHz) at all three positions. The results are presented in table 6.

- 1) The device had an initial area scan executed to establish the location of the maximum peak SAR. A calculated resolution of 1 mm was used to determine the location for the peak SAR.
- 2) The device was then explored on a refined 32 mm grid (Cube, Zoom Scan) in three dimensions (X, Y & Z) measuring at 8 mm integrals X & Y and 5 mm integrals in the Z plane so as to create a physical measured point matrix. The system then runs a series of complex algorithms, which completes the matrix of calculated and measured values equivalent to a 1 mm resolution in the X, & Y planes.
- 3) The software runs a series of Lagrange functions to provide the data for the Z plane, which is inserted into the matrix.
- 4) To complete the calculated matrix (1 mm resolution) a fourth-order polynomial extrapolation is used to compute the surface values and the 1 and 10-gram averages are then calculated.
- 5) Where two (or more) peaks with similar values are measured the location of the peaks is recorded. A refined grid is then created to assess each peak location individually, and the maximum value from the assessment is used to record conservative SAR for this report.
- 6) The highest conservative SAR value averaged over 10 grams for the direct contact exposure analysis (**Keyboard Up Position**) was found to be 1.09 W/kg at the low channel 2412MHz (Table 6).



6.4. BODY EXPOSURE

All subsequent testing for body exposure SAR was performed on three channels (low: 2412MHz, middle: 2437MHz, high: 2462MHz) at all three positions. The results are presented in table 6.

- 1) The device had an initial area scan executed to establish the location of the maximum peak SAR. A calculated resolution of 1mm was used to determine the location for the peak SAR.
- 2) The device was then explored on a refined 32 mm grid (Cube, Fine Scan) in three dimensions (X, Y & Z) measuring at 8 mm integrals X & Y and 5 mm integrals in the Z plane so as to create a physical measured point matrix. The system then runs a series of complex algorithms, which completes the matrix of calculated and measured values equivalent to a 1 mm resolution in the X, & Y planes.
- 3) The software runs a series of Lagrange functions to provide the data for the Z plane, which is inserted into the matrix.
- 4) To complete the calculated matrix (1mm resolution) a fourth order polynomial is used to extrapolate the surface values and the 1 and 10-gram averages are then calculated.
- 5) Where two (or more) peaks with similar values are measured the location of the peaks is recorded. A refined grid is then created to assess each peak location individually, and the maximum value from the assessment is used to record conservative SAR for this report.
- 6) The highest conservative SAR value averaged over 1 gram for body exposure analysis was found to be 0.93 W/kg at the mid channel 2437MHz (Table 7) for the DUI located at the **keyboard Down** position.



Table 6:
Test results
1 g and 10 g SAR values for the HPQ PP2080

Assessment Type	Position Separation mm	Channel	Channel Number	Frequency MHz	1g SAR W/kg	10g SAR W/kg
Direct	Vertical LHS (0)	Low	1	2412	-	0.46
Direct	Vertical LHS (0)	Mid	6	2437	-	0.49
Direct	Vertical LHS(0)	High	11	2462	-	0.43
Body	Vertical LHS (0)	Low	1	2412	0.85	-
Body	Vertical LHS (0)	Mid	6	2437	0.93	-
Body	Vertical LHS(0)	High	11	2462	0.90	-
Direct	Keyboard Up(0)	Low	1	2412	-	1.09
Direct	Keyboard Up(0)	Mid	6	2437	-	1.01
Direct	Keyboard Up(0)	High	11	2462	-	1.03
Direct	Keyboard Down(0)	Low	1	2412	-	0.26
Direct	Keyboard Down(0)	Mid	6	2437	-	0.24
Direct	Keyboard Down(0)	High	11	2462	-	0.25
Body	Keyboard Down(0)	Low	1	2412	0.30	-
Body	Keyboard Down(0)	Mid	6	2437	0.29	-
Body	Keyboard Down(0)	High	11	2462	0.28	-

All Tests Executed 31st March 03



7. CONCLUSIONS

The maximum Specific Absorption Rate (SAR) averaged over 10 grams, was found to be while the device was in the **Keyboard Up position**, where the conservative SAR was measured on the **low channel 2412MHz at 1.09 W/kg** (direct contact SAR for the exposed extremities – hands, wrists, feet and ankles). The overall margin of uncertainty for this measurement is **±17.8%** (Appendix D).

SAR Limit Direct Contact	Conservative Measured SAR
4.0 W/kg 10 gram Average	1.09 W/kg 10 gram Average

The maximum Specific Absorption Rate (SAR) averaged over 1 gram, was found to be while the device was at the **LHS Vertical** position, where the conservative SAR was measured on the **Mid channel 2437MHz at 0.93 W/kg** (Body SAR). The overall margin of uncertainty for this measurement is **±18.1%** (Appendix D).

SAR Limit Body	Conservative Measured SAR
1.6 W/kg 1 gram Average	0.93 W/kg 1 gram Average

Considering the above, this unit as tested, and as it will be marketed and used, is found to be compliant with the FCC 96-326 requirement.



Tested by: _____

[Handwritten signature]

Date: 31st March, 2003



Appendix A

TEST GRAPHIC PLOTS



GRAPH 1

Direct contact SAR (10g)
Keyboard Up
Distance 0 mm
Low Channel
Frequency: 2412 MHz
Duty Cycle 1



Date	Dielectric Constant ϵ_r	Conductivity σ [S/m]	Probe Con/F	Tissue Temp ($^{\circ}\text{C}$)	10g SAR (W/kg)	Power Drift
31/03/03	50.4	2.03	5.6	21	1.09	0



SAR DATA REPORT

SAR DATA REPORT BSL SCAN07

START : 31-MAR-03 04:14:16 PM
END : 31-MAR-03 04:21:32 PM
CODE VERSION : 4.12
ROBOT VERSION: 0.00

PRODUCT DATA:

TYPE : COMPAQ LAPTOP
FREQUENCY : 2412 MHZ
ANTENNA TYPE : PCB IFA
ANTENNA POSN. : INTERNAL

MEASUREMENT DATA:

PHANTOM NAME : DELL-PHANTOM
PHANTOM TYPE : UNIPHANTOM
TISSUE TYPE : MUSCLE
TISSUE DIELECTRIC : 50.400
TISSUE CONDUCTIVITY : 2.030
TISSUE DENSITY : 1.000
CREST FACTOR : 1.000
ROBOT NAME : CRS

PROBE DATA:

PROBE NAME : 163
PROBE TYPE : E FLD TRIANGLE
FREQUENCY : 2450 MHZ
TISSUE TYPE : MUSCLE
CALIBRATED DIELECTRIC : 50.400
CALIBRATED CONDUCTIVITY : 2.030
PROBE OFFSET : 2.500 MM
CONVERSION FACTOR : 5.600
DIODE COMPRESSION PT : 76.0 MV
PROBE SENSITIVITY : 0.580 0.580 0.580 MV/(MW/CM^2)
AMPLIFIER GAINS : 20.00 20.00 20.00
CHAN. OFFSET (MV) : -3.97 -42.57 -4.79

SAMPLE:

RATE: 6000 SAMPLES/SEC
COUNT: 1000 SAMPLES
NIDAQ GAIN: 5
SCAN TIME: 166.7 MSEC



COMMENTS:

FRONT UP

AREA SCAN - MAX LOCAL SAR VALUE AT X=4.0 Y=-21.0 = 2.21 W/KG


ZOOM SCAN - MAX LOCAL SAR VALUE AT X=4.0 Y=-22.0 Z=0.0 = 5.79 W/KG

MAX 1G SAR AT X=4.0 Y=-22.0 Z=0.0 = 2.59 W/KG

MAX 10G SAR AT X=4.0 Y=-25.0 Z=0.0 = 1.09 W/KG

Z AXIS SCAN DIRECT CONTACT SAR 10G KEYBOARD UP

SAR - Z Axis
at Hotspot x:4.0 y:-22.0

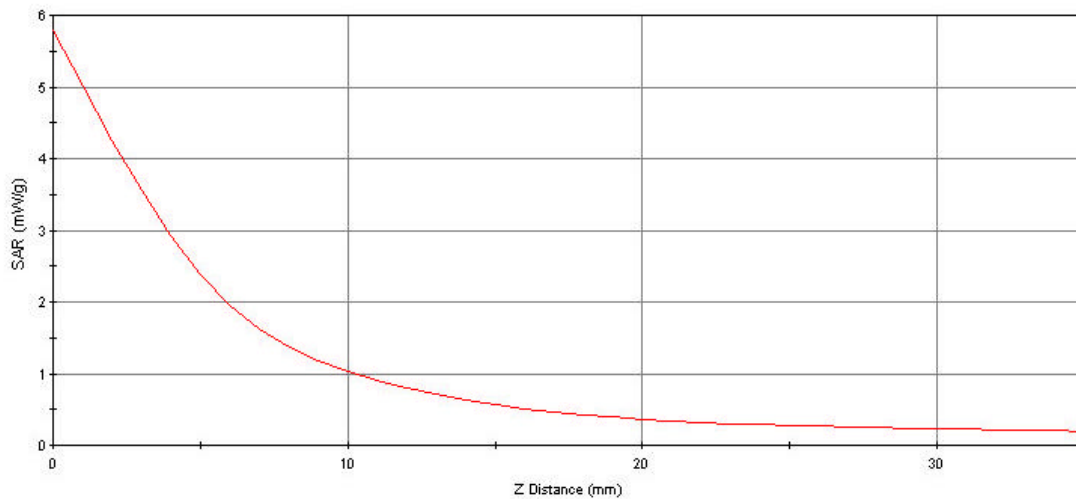

GRAPH 2

Direct Contact SAR (10g)
Keyboard Up
Distance 0 mm
Mid Channel
Frequency: 2437 MHz
Duty Cycle 1



Date	Dielectric Constant ϵ_r	Conductivity σ [S/m]	Probe Con/F	Tissue Temp ($^{\circ}\text{C}$)	10g SAR (W/kg)	Power Drift
31/03/03	50.4	2.03	5.6	21	1.01	0



GRAPH 3


Direct Contact SAR (10g)
Keyboard Up
Distance 0 mm
High Channel
Frequency: 2462 MHz
Duty Cycle 1



Date	Dielectric Constant ϵ_r	Conductivity σ [S/m]	Probe Con/F	Tissue Temp (°C)	10g SAR (W/kg)	Power Drift
31/03/03	50.4	2.03	5.6	21	1.03	0

GRAPH 4

Body SAR (1g)
LHS Vertical
Distance 0 mm
Mid Channel
Frequency: 2437 MHz
Duty Cycle 1

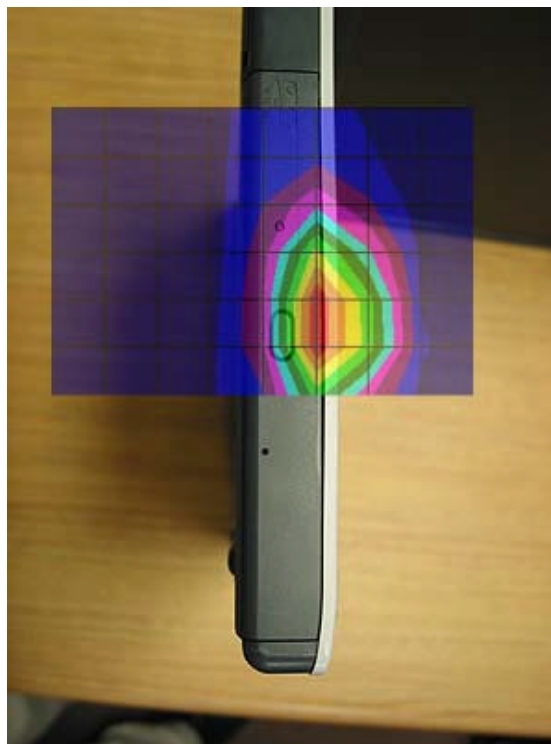

Date	Dielectric Constant ϵ_r	Conductivity σ [S/m]	Probe Con/F	Tissue Temp ($^{\circ}\text{C}$)	1g SAR (W/kg)	Power Drift
31/03/03	50.4	2.03	5.6	21	0.93	0



SAR Data Report

SAR DATA REPORT BSL SCAN05

START : 31-MAR-03 12:39:40 PM
END : 31-MAR-03 12:45:35 PM
CODE VERSION : 4.12
ROBOT VERSION: 0.00

PRODUCT DATA:

TYPE : COMPAQ LAPTOP
FREQUENCY : 2437 MHZ
ANTENNA TYPE : PCB IFA
ANTENNA POSN. : INTERNAL

MEASUREMENT DATA:

PHANTOM NAME : DELL-3
PHANTOM TYPE : UNIPHANTOM
TISSUE TYPE : MUSCLE
TISSUE DIELECTRIC : 50.400
TISSUE CONDUCTIVITY : 2.030
TISSUE DENSITY : 1.000
CREST FACTOR : 1.000
ROBOT NAME : CRS

PROBE DATA:

PROBE NAME : 163
PROBE TYPE : E FLD TRIANGLE
FREQUENCY : 2450 MHZ
TISSUE TYPE : MUSCLE
CALIBRATED DIELECTRIC : 50.400
CALIBRATED CONDUCTIVITY : 2.030
PROBE OFFSET : 2.500 MM
CONVERSION FACTOR : 5.600
DIODE COMPRESSION PT : 76.0 MV
PROBE SENSITIVITY : 0.580 0.580 0.580 MV/(MW/CM^2)
AMPLIFIER GAINS : 20.00 20.00 20.00
CHAN. OFFSET (MV) : -3.97 -42.57 -4.79

SAMPLE:

RATE: 6000 SAMPLES/SEC
COUNT: 1000 SAMPLES
NIDAQ GAIN: 5
SCAN TIME: 166.7 MSEC



COMMENTS:

LEFT UP

AREA SCAN - MAX LOCAL SAR VALUE AT X=24.0 Y=-24.0 = 0.78 W/KG

ZOOM SCAN - MAX LOCAL SAR VALUE AT X=24.0 Y=-29.0 Z=0.0 = 1.97 W/KG


MAX 1G SAR AT X=24.0 Y=-25.0 Z=0.0 = 0.93 W/KG

MAX 10G SAR AT X=22.0 Y=-20.0 Z=0.0 = 0.49 W/KG




Z AXIS SCAN BODY SAR 1G LHS VERTICAL 1

SAR - Z Axis
at Hotspot x:24.0 y:-29.0

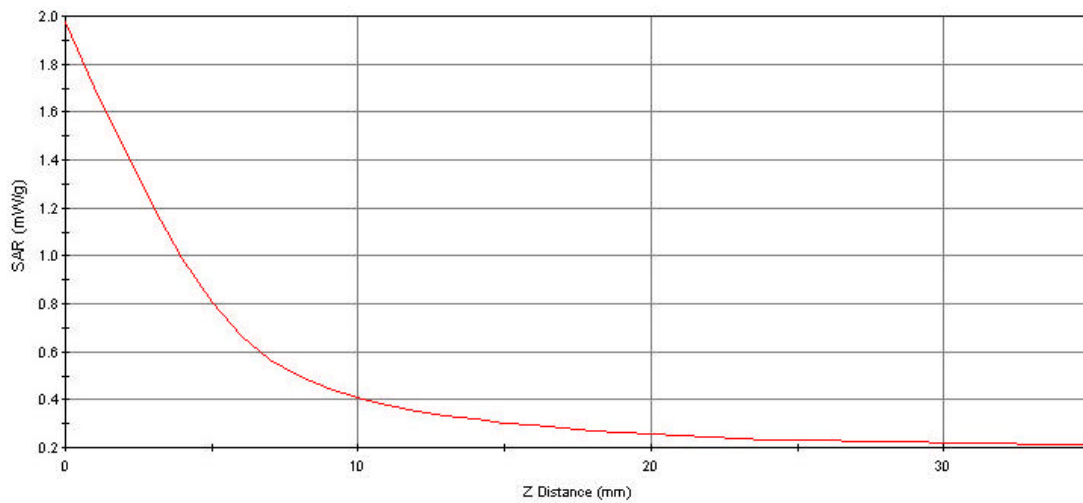

GRAPH 5

Body SAR (1g)
Keyboard Up 1
Distance 0 mm
Low Channel
Frequency: 2412 MHz
Duty Cycle 1

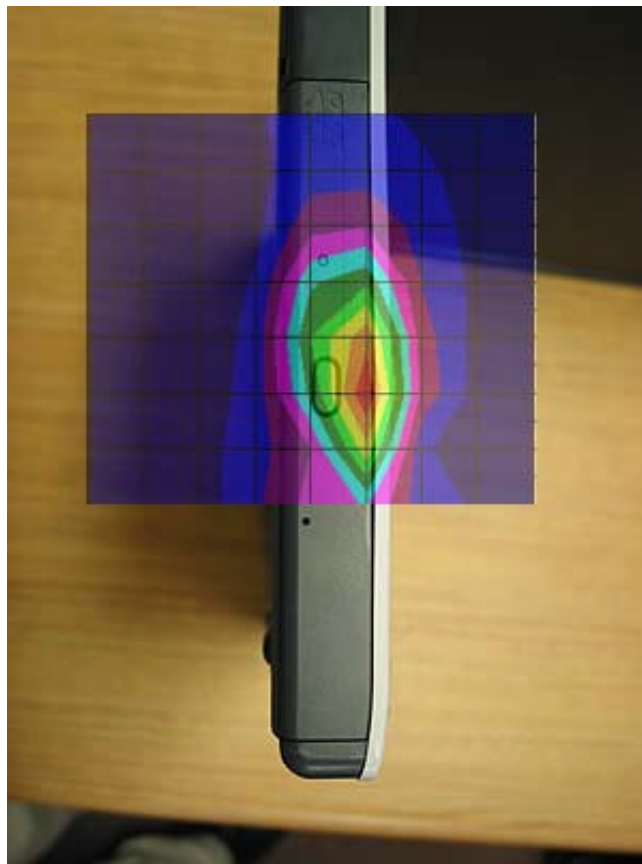


Date	Dielectric Constant ϵ_r	Conductivity σ [S/m]	Probe Con/F	Tissue Temp ($^{\circ}\text{C}$)	1g SAR (W/kg)	Power Drift
31/03/03	50.4	2.03	5.6	21	0.85	0



Graph 6


Body SAR (1g)
LHS Vertical
Distance 0 mm
High Channel
Frequency: 2462 MHz
Duty Cycle 1

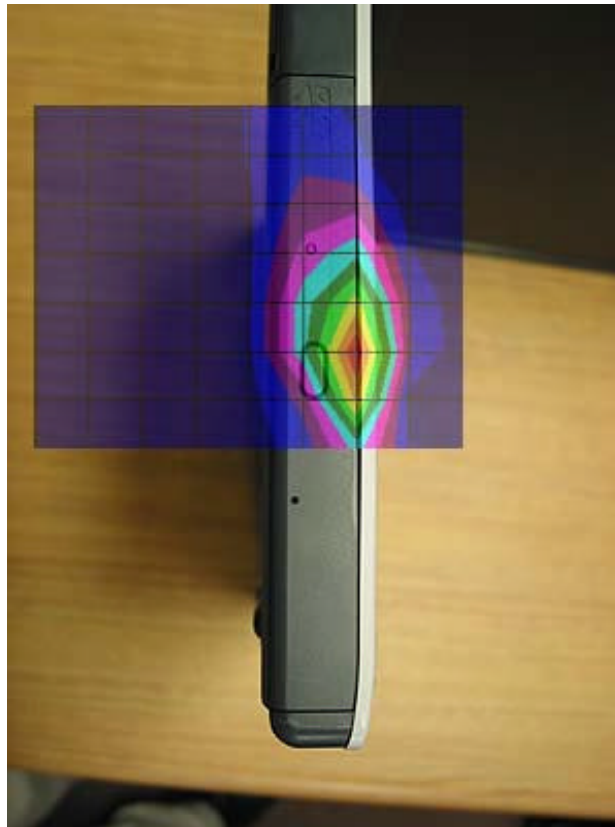

Date	Dielectric Constant ϵ_r	Conductivity σ [S/m]	Probe Con/F	Tissue Temp ($^{\circ}\text{C}$)	1g SAR (W/kg)	Power Drift
31/03/03	50.4	2.03	5.6	21	0.90	0

GRAPH 7

Direct Contact SAR (10g)
LHS Vertical
Distance 0 mm
Mid Channel
Frequency: 2437 MHz
Duty Cycle 1

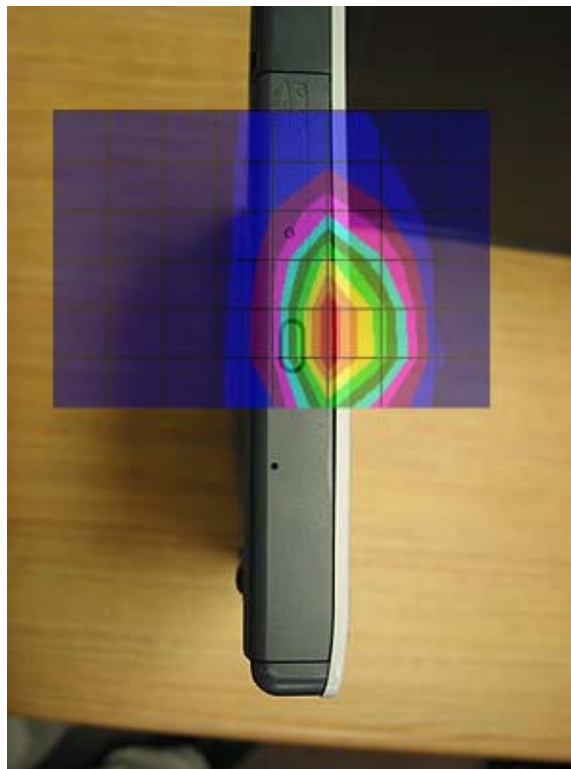

Date	Dielectric Constant ϵ_r	Conductivity σ [S/m]	Probe Con/F	Tissue Temp (°C)	10g SAR (W/kg)	Power Drift
31/03/03	50.4	2.03	5.6	21	0.49	0



SAR Data Report

SAR DATA REPORT BSL SCAN05

START : 31-MAR-03 12:39:40 PM
END : 31-MAR-03 12:45:35 PM
CODE VERSION : 4.12
ROBOT VERSION: 0.00

PRODUCT DATA:

TYPE : COMPAQ LAPTOP
FREQUENCY : 2437 MHZ
ANTENNA TYPE : PCB IFA
ANTENNA POSN. : INTERNAL

MEASUREMENT DATA:

PHANTOM NAME : DELL-3
PHANTOM TYPE : UNIPHANTOM
TISSUE TYPE : MUSCLE
TISSUE DIELECTRIC : 50.400
TISSUE CONDUCTIVITY : 2.030
TISSUE DENSITY : 1.000
CREST FACTOR : 1.000
ROBOT NAME : CRS

PROBE DATA:

PROBE NAME : 163
PROBE TYPE : E FLD TRIANGLE
FREQUENCY : 2450 MHZ
TISSUE TYPE : MUSCLE
CALIBRATED DIELECTRIC : 50.400
CALIBRATED CONDUCTIVITY : 2.030
PROBE OFFSET : 2.500 MM
CONVERSION FACTOR : 5.600
DIODE COMPRESSION PT : 76.0 MV
PROBE SENSITIVITY : 0.580 0.580 0.580 MV/(MW/CM^2)
AMPLIFIER GAINS : 20.00 20.00 20.00
CHAN. OFFSET (MV) : -3.97 -42.57 -4.79

SAMPLE:

RATE: 6000 SAMPLES/SEC
COUNT: 1000 SAMPLES
NIDAQ GAIN: 5
SCAN TIME: 166.7 MSEC



COMMENTS:

LEFT UP

AREA SCAN - MAX LOCAL SAR VALUE AT X=24.0 Y=-24.0 = 0.78 W/KG

ZOOM SCAN - MAX LOCAL SAR VALUE AT X=24.0 Y=-29.0 Z=0.0 = 1.97 W/KG


MAX 1G SAR AT X=24.0 Y=-25.0 Z=0.0 = 0.93 W/KG

MAX 10G SAR AT X=22.0 Y=-20.0 Z=0.0 = 0.49 W/KG



Z AXIS SCAN DIRECT CONTACT SAR 10G LHS VERTICAL

SAR - Z Axis
at Hotspot x:24.0 y:-29.0

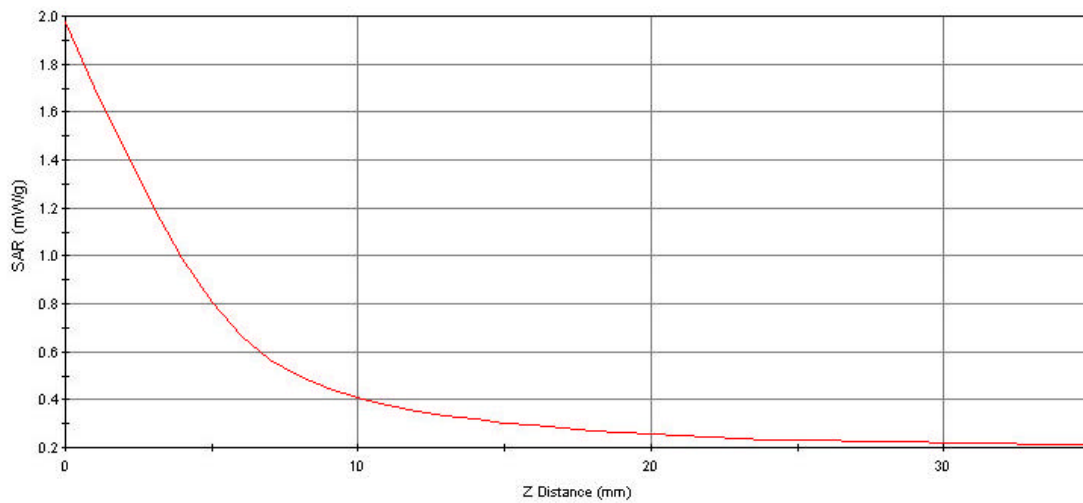

GRAPH 8

Body SAR (1g)
Keyboard Down
Distance 0 mm
Low Channel
Frequency: 2412 MHz
Duty Cycle 1



Date	Dielectric Constant ϵ_r	Conductivity σ [S/m]	Probe Con/F	Tissue Temp ($^{\circ}\text{C}$)	1g SAR (W/kg)	Power Drift
31/03/03	50.4	2.03	5.6	21	0.30	0

SAR Data Report

SAR Data Report BSL scan01-2

Start : 31-Mar-03 10:55:59 am
End : 31-Mar-03 11:13:37 am
Code Version : 4.12
Robot Version: 4.08

Product Data:

Type : Compaq Laptop
Frequency : 2437 MHz
Transmit Pwr : 0.1 W
Antenna Type : PCB IFA
Antenna Posn. : Internal

Measurement Data:

Phantom Name : APREL-Uni
Phantom Type : Uniphantom
Tissue Type : Muscle
Tissue Dielectric : 50.400
Tissue Conductivity : 2.030
Tissue Density : 1.000
Crest Factor : 1.000
Robot Name : CRS

Probe Data:

Probe Name : 163
Probe Type : E Fld Triangle
Frequency : 2450 MHz
Tissue Type : Muscle
Calibrated Dielectric : 50.400
Calibrated Conductivity : 2.030
Probe Offset : 2.500 mm
Conversion Factor : 5.600
Diode Compression Pt : 76.0 mV
Probe Sensitivity : 0.580 0.580 0.580 mV/(mW/cm^2)
Amplifier Gains : 20.00 20.00 20.00
Chan. Offset (mV) : -3.97 -42.57 -4.79

Sample:

Rate: 6000 Samples/Sec
Count: 1000 Samples
NIDAQ Gain: 5
Scan Time: 166.7 msec

Comments:

Back up

Area Scan - Max Local SAR Value at x=21.0 y=76.0 = 0.29 W/kg

Zoom Scan - Max Local SAR Value at x=29.0 y=76.0 z=0.0 = 0.43 W/kg

Max 1g SAR at x=27.0 y=77.0 z=0.0 = 0.30 W/kg

Max 10g SAR at x=24.0 y=76.0 z=0.0 = 0.26 W/kg

Page 40 of 76

51 Spectrum Way
Nepean, Ontario, K2R 1E6
e-mail: info@aprel.com

This report shall not be reproduced, except in full,



ITLB-WM3B2100 -HPQ-MPCI Card-3994

Tel. (613) 820-2730


Fax (613) 820 4161

© APREL 2002

without the express written approval of APREL Laboratories

Z Axis Scan Body SAR 1g Keyboard Down

SAR - Z Axis
at Hotspot x:29.0 y:76.0

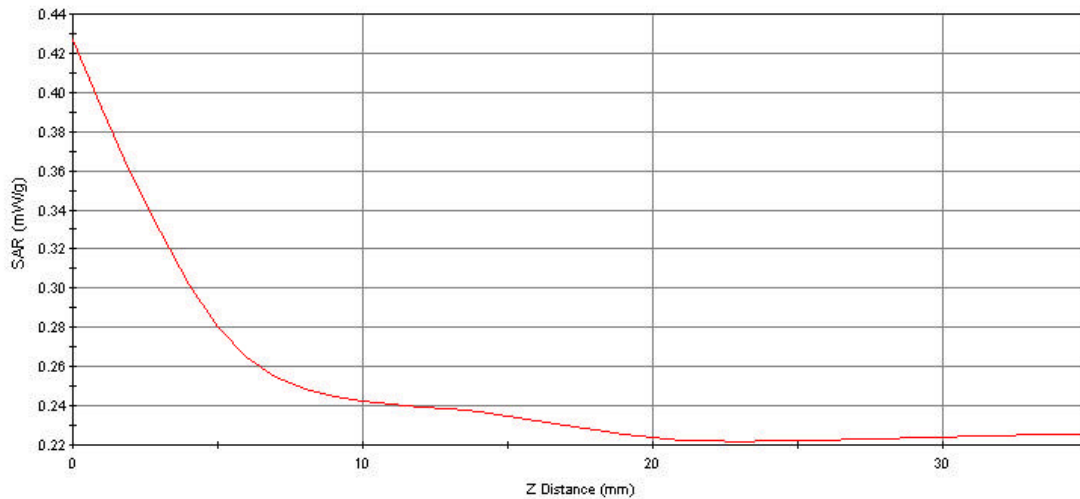

GRAPH 9

Body SAR (1g)
Keyboard Down
Distance 0 mm
Mid Channel
Frequency: 2437 MHz
Duty Cycle 1




Date	Dielectric Constant ϵ_r	Conductivity σ [S/m]	Probe Con/F	Tissue Temp ($^{\circ}\text{C}$)	1g SAR (W/kg)	Power Drift
31/03/03	50.4	2.03	5.6	21	0.29	0



GRAPH 10

Body SAR (1g)
Keyboard Down
Distance 0 mm
High Channel
Frequency: 2462 MHz
Duty Cycle 1

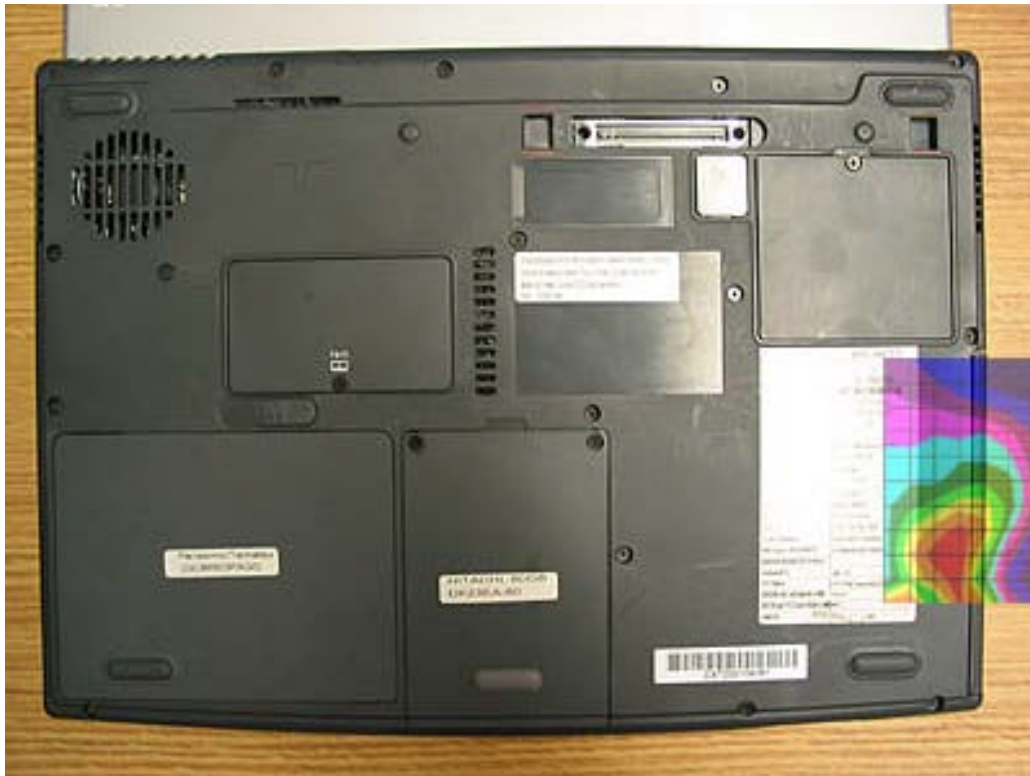

Date	Dielectric Constant ϵ_r	Conductivity σ [S/m]	Probe Con/F	Tissue Temp ($^{\circ}\text{C}$)	1g SAR (W/kg)	Power Drift
31/03/03	50.4	2.03	5.6	21	0.28	0



GRAPH 11

Direct Contact SAR (10g)
Keyboard Down
Distance 0 mm
Low Channel
Frequency: 2412 MHz
Duty Cycle 1



Date	Dielectric Constant ϵ_r	Conductivity σ [S/m]	Probe Con/F	Tissue Temp (°C)	10g SAR (W/kg)	Power Drift
31/03/03	50.4	2.03	5.6	21	0.26	0

SAR Data Report

SAR Data Report BSL scan01-2

Start : 31-Mar-03 10:55:59 am
End : 31-Mar-03 11:13:37 am
Code Version : 4.12
Robot Version: 4.08

Product Data:

Type : Compaq Laptop
Frequency : 2437 MHz
Transmit Pwr : 0.1 W
Antenna Type : PCB IFA
Antenna Posn : Internal

Measurement Data:

Phantom Name : APREL-Uni
Phantom Type : Uniphantom
Tissue Type : Muscle
Tissue Dielectric : 50.400
Tissue Conductivity : 2.030
Tissue Density : 1.000
Crest Factor : 1.000
Robot Name : CRS

Probe Data:

Probe Name : 163
Probe Type : E Fld Triangle
Frequency : 2450 MHz
Tissue Type : Muscle
Calibrated Dielectric : 50.400
Calibrated Conductivity : 2.030
Probe Offset : 2.500 mm
Conversion Factor : 5.600
Diode Compression Pt : 76.0 mV
Probe Sensitivity : 0.580 0.580 0.580 mV/(mW/cm^2)
Amplifier Gains : 20.00 20.00 20.00
Chan. Offset (mV) : -3.97 -42.57 -4.79

Sample:

Rate: 6000 Samples/Sec
Count: 1000 Samples
NIDAQ Gain: 5
Scan Time: 166.7 msec


Comments:

Back up
Area Scan - Max Local SAR Value at x=21.0 y=76.0 = 0.29 W/kg
Zoom Scan - Max Local SAR Value at x=29.0 y=76.0 z=0.0 = 0.43 W/kg
Max 1g SAR at x=27.0 y=77.0 z=0.0 = 0.30 W/kg
Max 10g SAR at x=24.0 y=76.0 z=0.0 = 0.26 W/kg



Z Axis Scan Direct Contact SAR 10g Keyboard Down

SAR - Z Axis
at Hotspot x:29.0 y:76.0

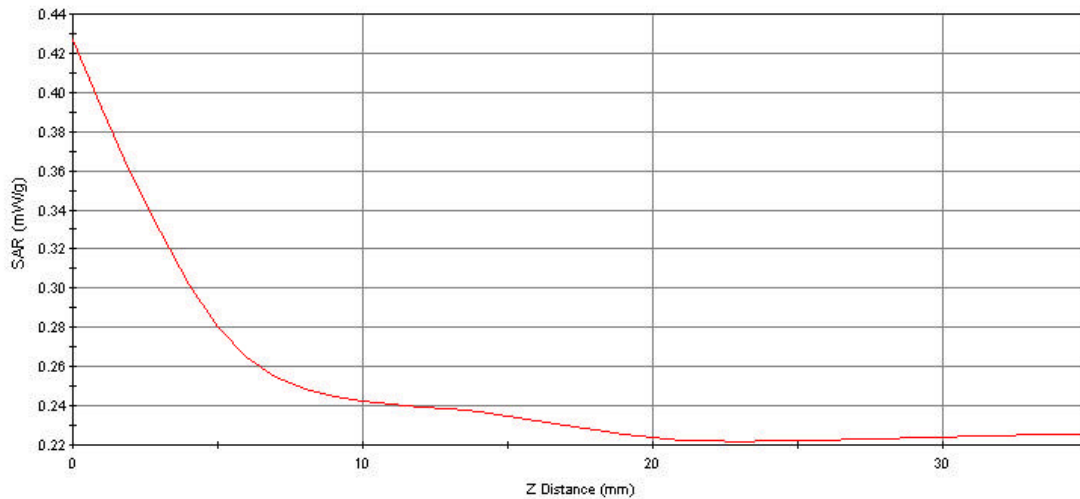


APPENDIX B

SETUP PICTURES




PICTURE 1

Ne-Web Antenna
DUI in Keyboard Up Position

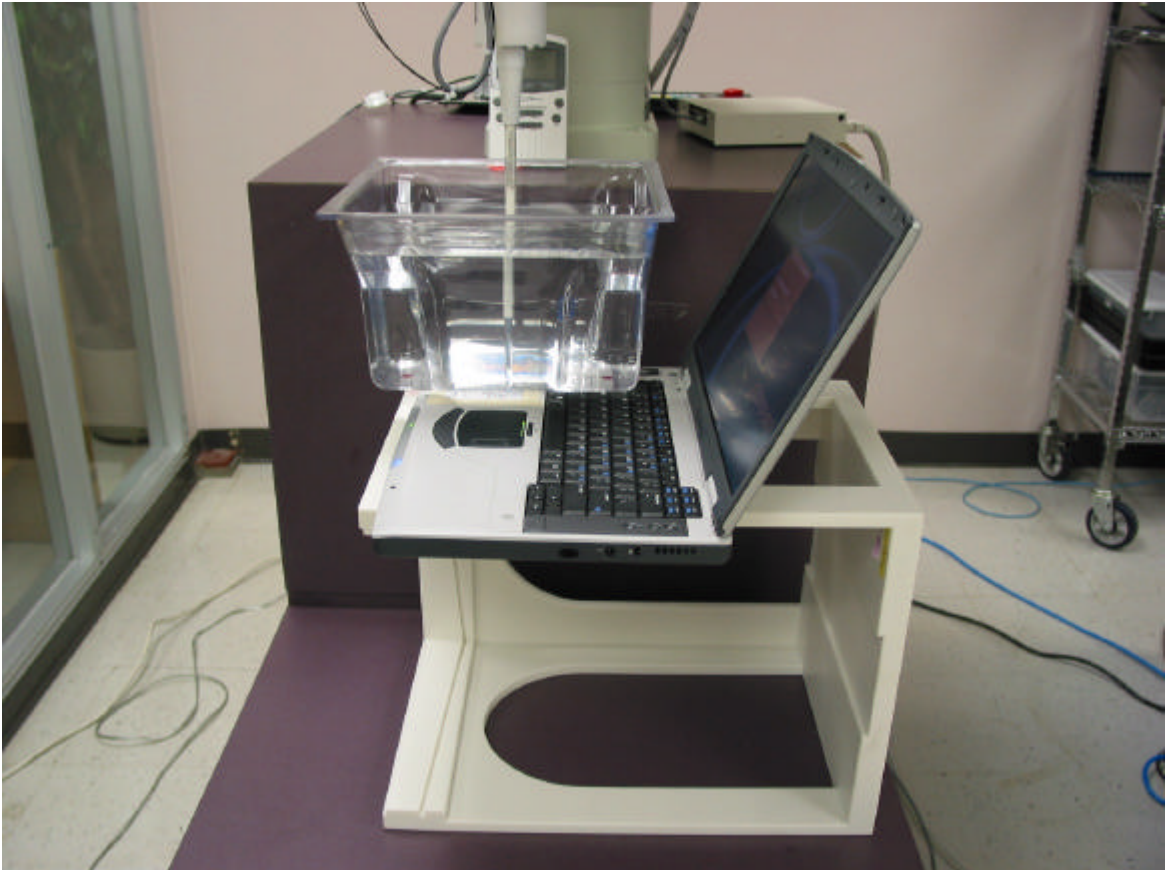

PICTURE 2

Ne-Web Antenna
DUI in Keyboard Up Position

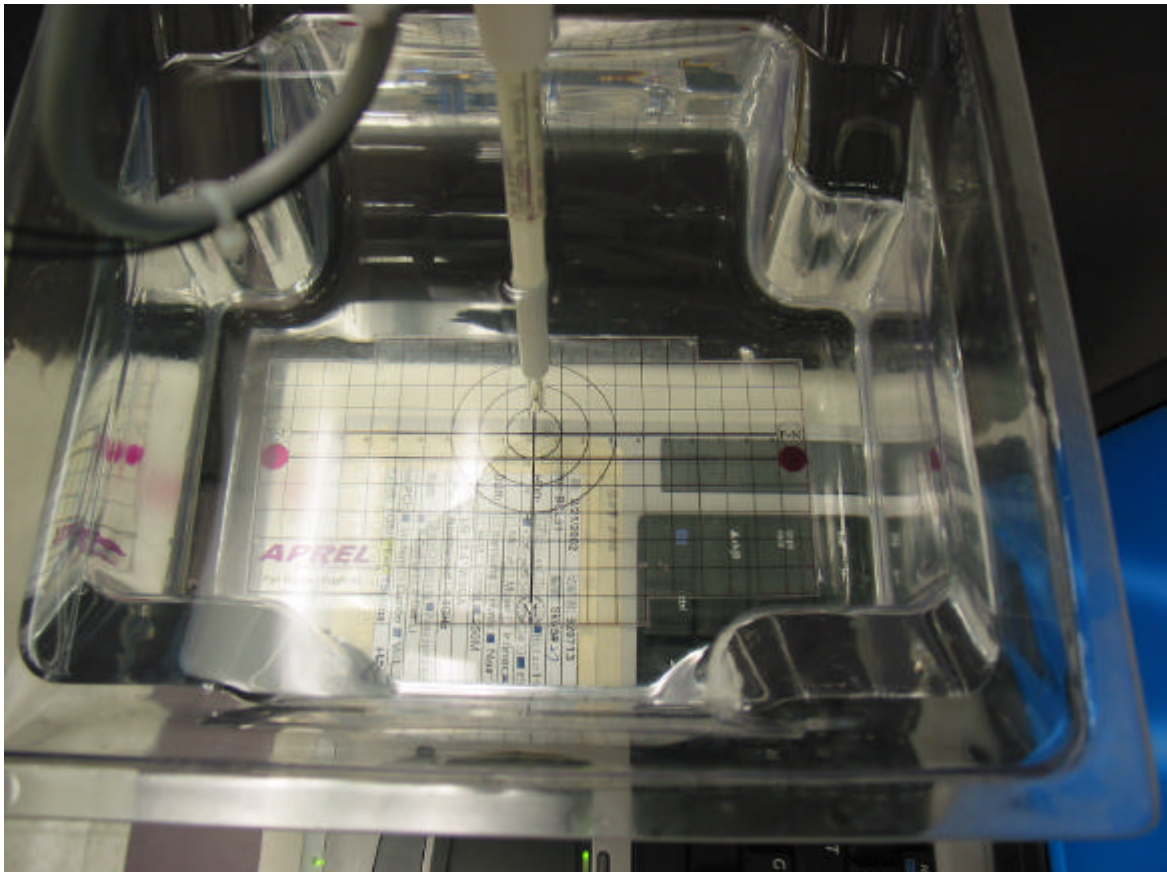


PICTURE 3

Ne-Web Antenna
DUI in Keyboard Up Position



PICTURE 4

Ne-Web Antenna
DUI keyboard Down Position

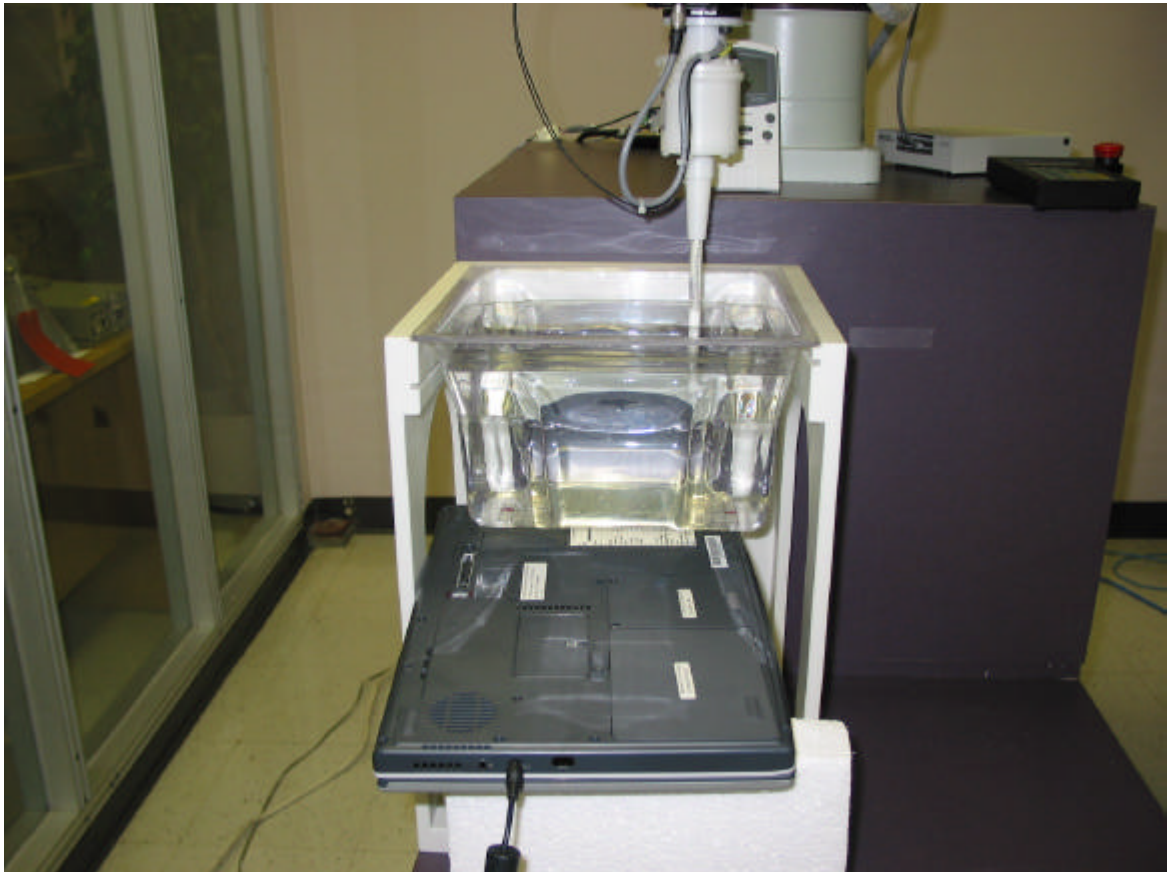

PICTURE 5

Newweb Antenna
DUI LHS Vertical Position




Appendix C

Validation Scan Results



VALIDATION SCAN

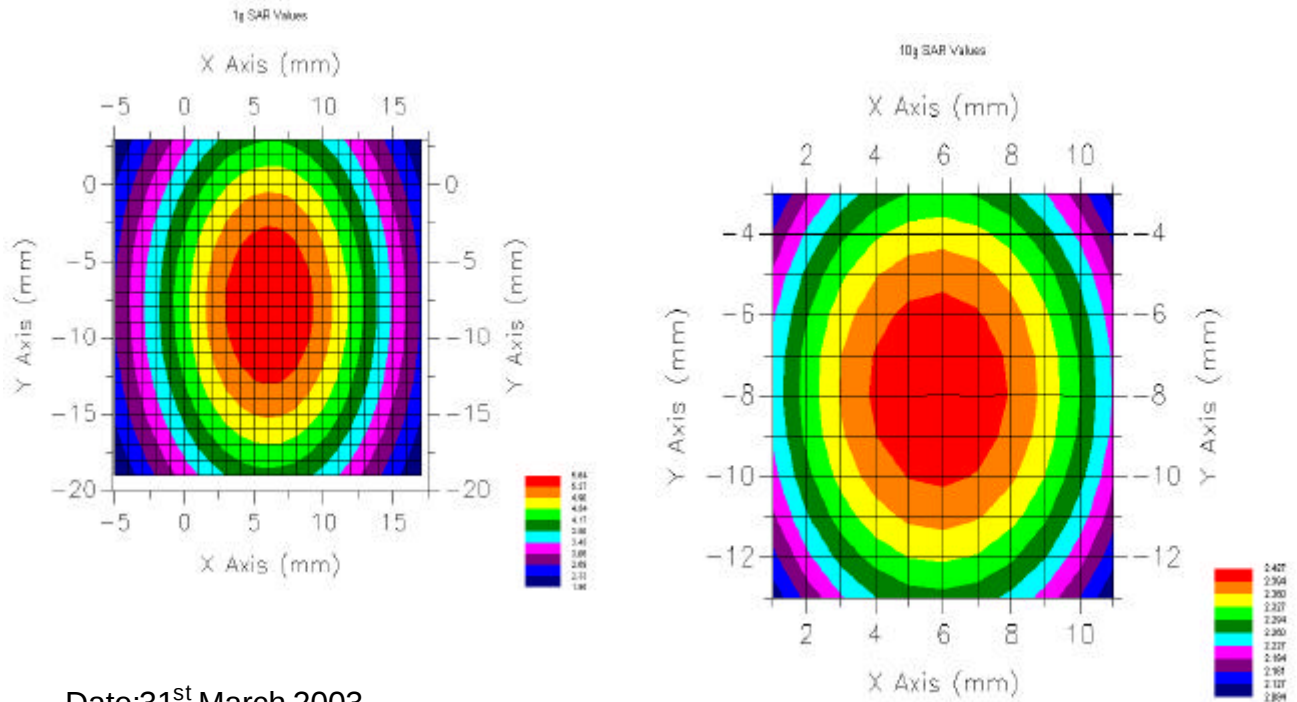

Date: 31st March 2003
 Frequency: 2450 MHz
 Tissue Type: Muscle
 Epsilon: 50.4
 Sigma: 2.03
 Tissue Calibration Date: 31st March 2003
 Conversion Factor: 5.6
 Input Power to Dipole: 0.1 W (Normalized to 1W)
 Duty Cycle: 1
 Distance from Dipole to Tissue: 10 mm
 Tissue Temperature: 21°C
 Tissue Depth: 15 cm

Measured 1 Gram SAR (W/Kg)	Target 1 Gram SAR (W/Kg)	Delta (%)
53.0	52.4	+2.0

Measured 10 Gram SAR (W/Kg)	Target 10 Gram SAR (W/Kg)	Delta (%)
24.3	24.0	+1



Appendix d: Uncertainty Budget

Intel Mini PCI Type 3B 802.11b Wireless LAN Adapter model WM3B2100 located inside the Hewlett Packard Compaq (HPQ) laptop series PP2080

Source of Uncertainty	Description (Annex)	Tolerance Value	Probability Distribution	Divisor	c_i^* (1-g)	c_i^* (10-g)	Standard Uncertainty (1-g)	Standard Uncertainty (10-g)	v_i^2 or v_{eff}
Measurement System									
Probe Calibration	E1.1	3.5	normal	1	1	1	3.5	3.5	
Axial Isotropy	E1.2	3.7	rectangular	3	$(1-cp)^{1/2}$	$(1-cp)1/2$	1.5	1.5	
Hemispherical Isotropy	E1.2	10.9	rectangular	3	cp	cp	4.4	4.4	
Boundary Effect	E1.3	1.0	rectangular	3	1	1	0.6	0.6	
Linearity	E1.4	4.7	rectangular	3	1	1	2.7	2.7	
Detection Limit	E1.5	1.0	rectangular	3	1	1	0.6	0.6	
Readout Electronics	E1.6	1.0	normal	1	1	1	1.0	1.0	
Response Time	E1.7	0.8	rectangular	3	1	1	0.5	0.5	
Integration Time	E1.8	1.7	rectangular	3	1	1	1.0	1.0	
RF Ambient Condition	E5.1	3.0	rectangular	3	1	1	1.7	1.7	
Probe Positioner Mech. Restrictions	E5.2	0.4	rectangular	3	1	1	0.2	0.2	
Probe Positioning with respect to Phantom Shell	E5.3	2.9	rectangular	3	1	1	1.7	1.7	
Extrapolation and Integration	E4.2	3.7	rectangular	3	1	1	2.1	2.1	
Test Sample Positioning	E3.1.3	4.0	normal	1	1	1	4.0	4.0	11
Device Holder Uncertainty	E3.1.2	2.0	normal	1	1	1	2.0	2.0	8
Drift of Output Power	Section 5.6.2	0.0	rectangular	3	1	1	0.0	0.0	
Phantom and Setup									
Phantom Uncertainty (shape and thickness tolerance)	E2.1	3.4	rectangular	3	1	1	2.0	2.0	
Liquid Conductivity (target)	E2.2	4.0	rectangular	3	0.7	0.5	1.6	1.2	
Liquid Conductivity (meas.)	E2.2	2.0	rectangular	3	0.7	0.5	0.8	0.6	
Liquid Permittivity (target)	E2.2	4.0	rectangular	3	0.6	0.5	1.6	1.2	
Liquid Permittivity (meas.)	E2.2	2.0	rectangular	3	0.6	0.5	0.7	0.6	
Combined Uncertainty									
Combined Uncertainty (coverage factor = 2)			RSS				9.1	9.0	
			Normal (k=2)				18.1	17.8	



Appendix E

Probe Calibration Certificate



NCL CALIBRATION LABORATORIES

Calibration File No.: C-P-0265

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the
NCL CALIBRATION LABORATORIES by qualified personnel following recognized
procedures and using transfer standards traceable to NRC/NIST.

Equipment: Miniature Isotropic RF Probe 2.45 GHz

Manufacturer: APREL Laboratories

Model No.: E-010

Serial No.: 163

Calibration Procedure: SSI/DRB-TP-D01-032

Project No: Probe Cal Internal

Calibrated: November 5th 2002
Recalibration required: November 4th 2003
Released on: November 5th 2002

Released By: _____

NCL CALIBRATION LABORATORIES

51 SPECTRUM WAY
NEPEAN, ONTARIO
CANADA K2R 1E6

Division of APREL Lab.
TEL: (613) 820-4988
FAX: (613) 820-4161



INTRODUCTION

This Calibration Report reproduces the results of the calibration performed in line with the SSI/DRB-TP-D01-032 E-Field Probe Calibration Procedure. The results contained within this report are for APREL E-Field Probe E-010 163.

REFERENCES

SSI/DRB-TP-D01-032 E-Field Probe Calibration Procedure

IEEE P1528 *DRAFT* "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques"

SSI-TP-014 Tissue Calibration Procedure

Conditions

Probe 163 is a working released probe.

Ambient Temperature of the Laboratory:	22 °C +/- 0.5 °C
Temperature of the Tissue:	21 °C +/- 0.5 °C



CALIBRATION RESULTS SUMMARY

Probe Type: E-Field Probe E-010

Serial Number: 163

Frequency: 2450 MHz

Sensor Offset: 2.4 mm

Sensor Length: 2.5 mm

Tip Enclosure: Glass*

Tip Diameter: 7 mm

Tip Length: 40 mm

Total Length: 290 mm

*Resistive to recommended tissue recipes per IEEE-P1528

SENSITIVITY IN AIR

Channel X: $0.58 \pm V/(V/m)^2$

Channel Y: $0.58 \pm V/(V/m)^2$

Channel Z: $0.58 \pm V/(V/m)^2$

Diode Compression Point: 76 mV



SENSITIVITY IN BODY TISSUE

Frequency: 2450 MHz

Epsilon: 52.7(+/-5%) **Sigma:** 1.95 S/m (+/-10%)

ConvF

Channel X: 5.6

Channel Y: 5.6

Channel Z: 5.6

Tissue sensitivity values were calculated using a load impedance of 5 M Ω .

Boundary Effect:


Uncertainty resulting from the boundary effect is less than 2% for the distance between the tip of the probe and the tissue boundary, when less than 2.6mm.

Spatial Resolution:



The measured probe tip diameter is 7 mm (+/- 0.01 mm) and therefore meets the requirements of SSI/DRB-TP-D01-032 for spatial resolution.




RECEIVING PATTERN 2450 MHZ (AIR)

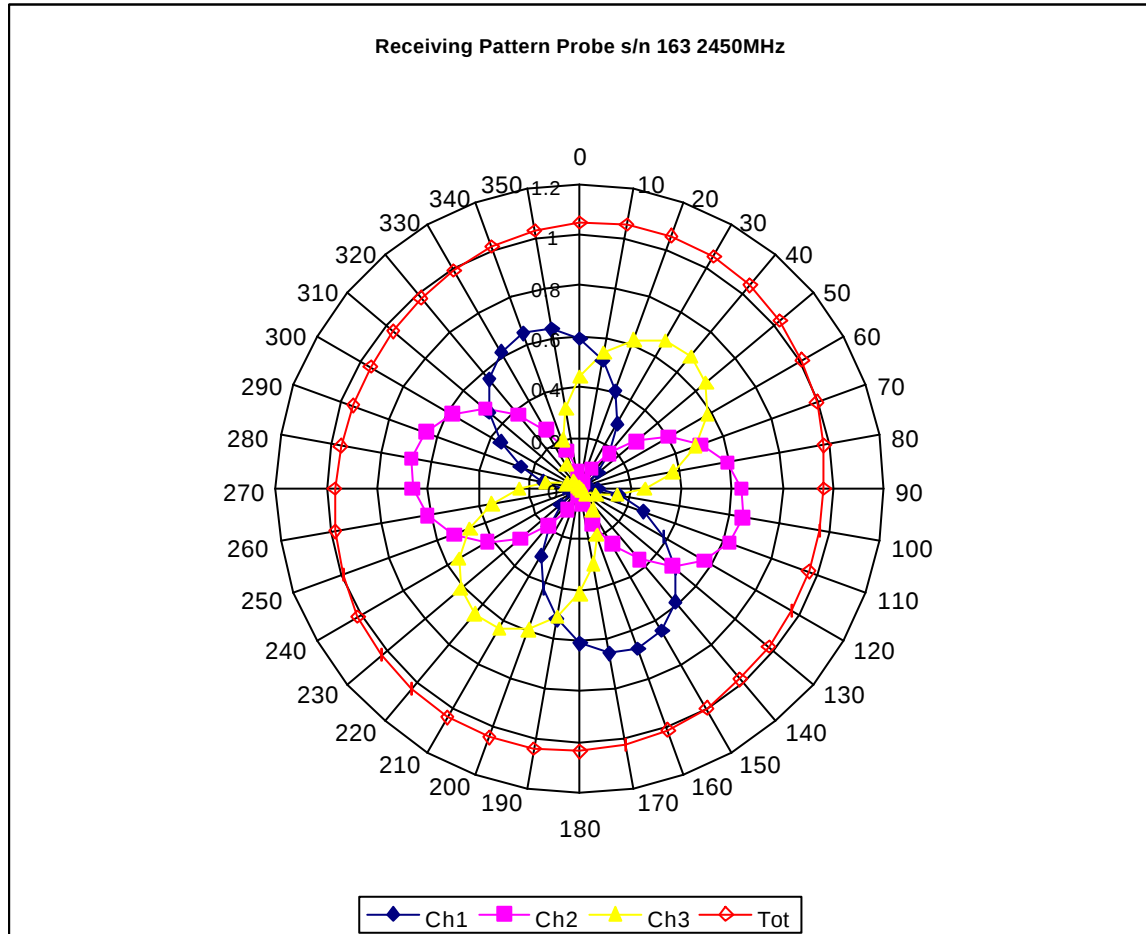

ISOTROPY ERROR 2450 MHZ (AIR)

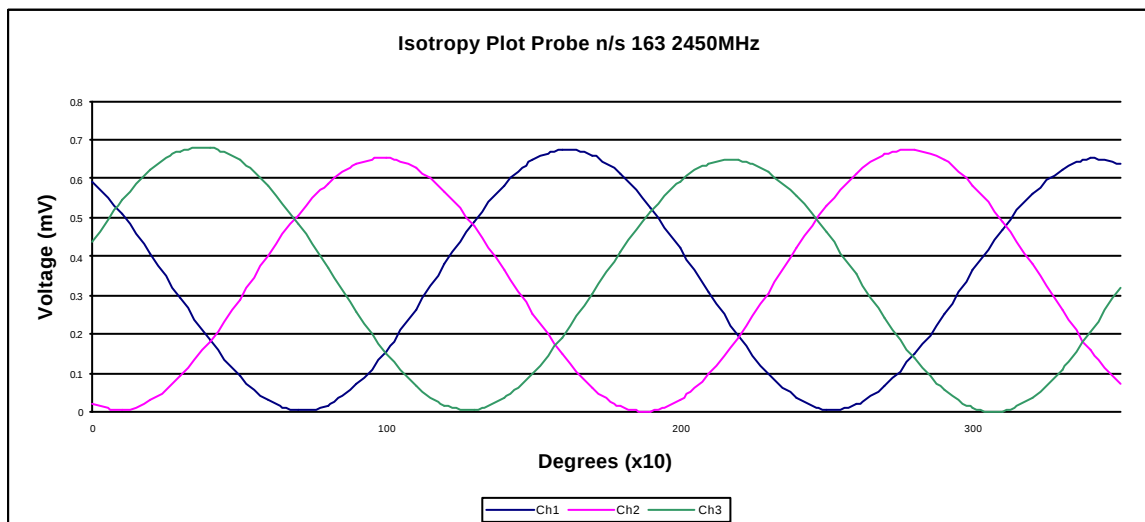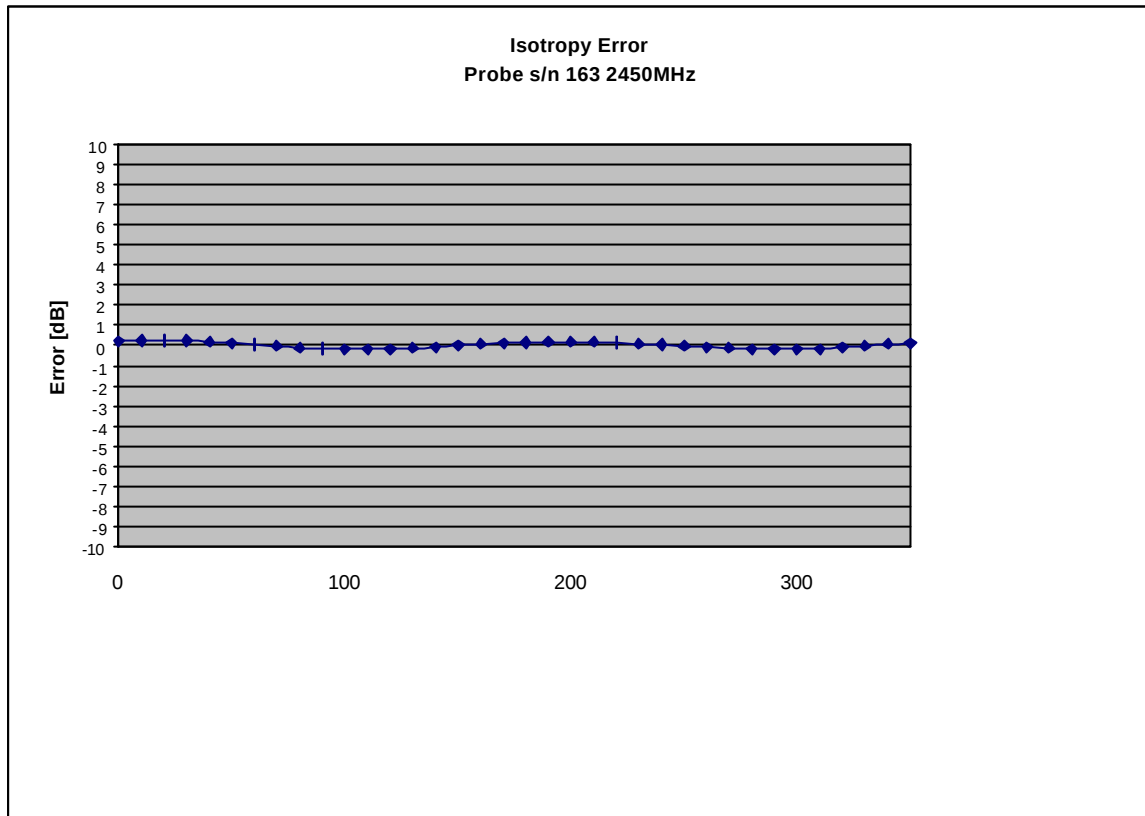


DYNAMIC RANGE

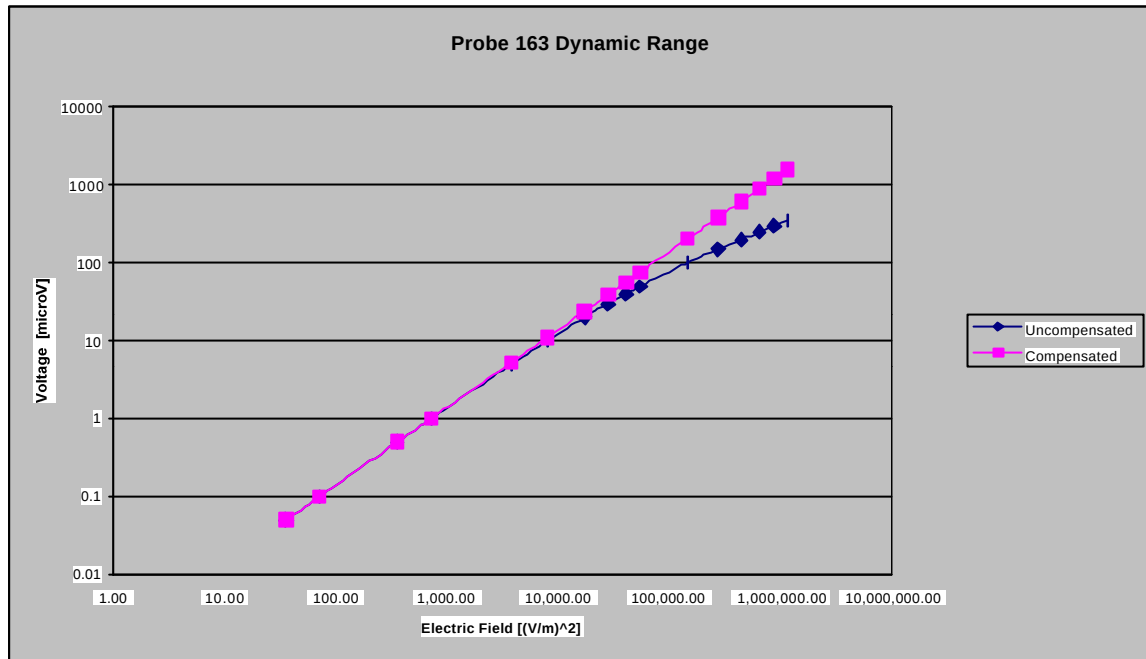

Video Bandwidth

Probe Frequency Characteristics

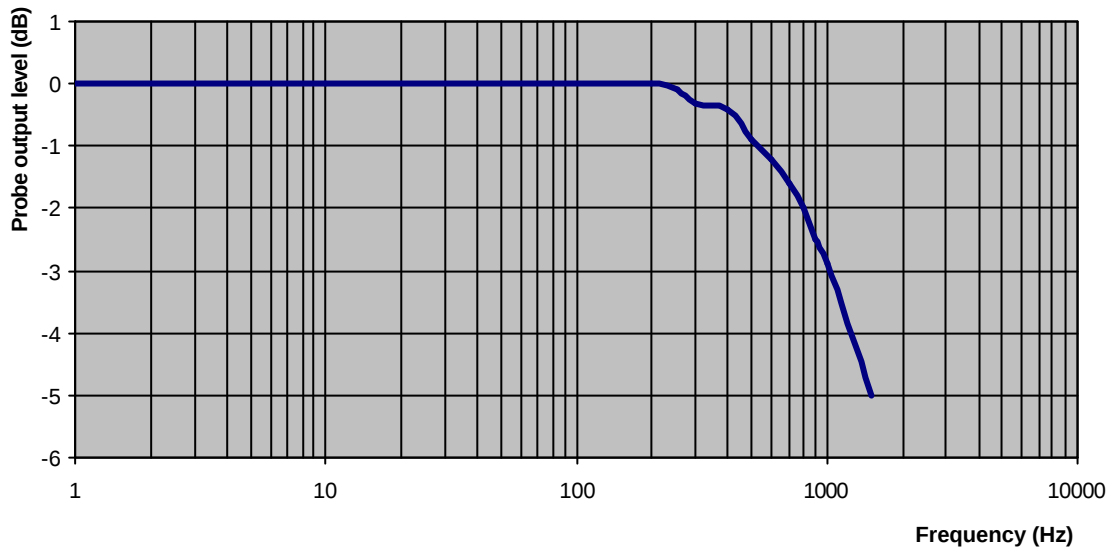

Video Bandwidth at 500 Hz 1 dB
Video Bandwidth at 1.02 KHz: 3 dB



CONVERSION FACTOR UNCERTAINTY ASSESSMENT

Frequency: 2450 MHz

Epsilon: 52.7 (+/-5%) **Sigma:** 1.95 S/m (+/-10%)

ConvF

Channel X: 5.6 7%(K=2)

Channel Y: 5.6 7%(K=2)

Channel Z: 5.6 7%(K=2)

To minimize the uncertainty calculation all tissue sensitivity values were calculated using a load impedance of 5 MΩ.

Boundary Effect:

FOR A DISTANCE OF 2.6MM THE EVALUATED UNCERTAINTY (INCREASE IN THE PROBE SENSITIVITY) IS LESS THAN 2%.



TEST EQUIPMENT

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List May 2002



Appendix F

Dipole Calibration Certificate



NCL CALIBRATION LABORATORIES

Calibration File No: DC-0265
Project Number: Internal

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the
NCL CALIBRATION LABORATORIES by qualified personnel following recognized
procedures and using transfer standards traceable to NRC/NIST.

APREL Validation Dipole

Manufacturer: APREL Laboratories

Part number: D-2450-S-1

Frequency: 2.45 GHz

Serial No: ALCD-10

Customer: APREL

Calibrated: 15 November 2002
Released on: 14 November 2003

Released By: _____

NCL CALIBRATION LABORATORIES

51 SPECTRUM WAY
NEPEAN, ONTARIO
CANADA K2R 1E6

Division of APREL Lab.
TEL: (613) 820-4988
FAX: (613) 820-4161



7. CALIBRATION RESULTS SUMMARY

The following results relate the Calibrated Dipole and should be used as a quick reference for the user.

Mechanical Dimensions


Length: 51.7 mm
Height: 30.8 mm

Electrical Specification

SWR: 1.181U
Return Loss: -21.4 dB
Impedance: 46.175

System Validation Results

Frequency	1 Gram	10 Gram	Peak
2.45 GHz	52.45	22.91	102.91

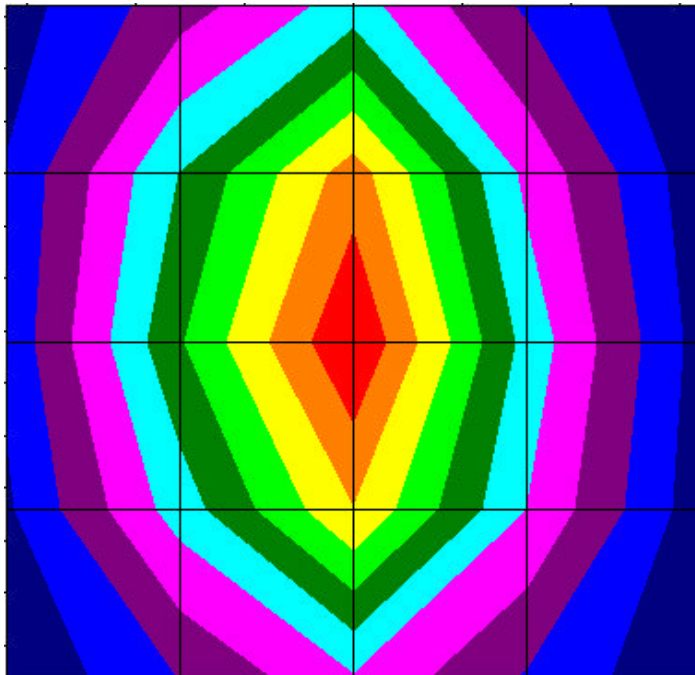

8. INTRODUCTION

This Calibration Report has been produced in line with the SSI Dipole Calibration Procedure SSI-TP-018. The results contained within this report are for Validation Dipole ALCD-10 at 2.45 GHz. The calibration routine consisted of a three-step process. Step 1 was a mechanical verification of the dipole to ensure that it meets the IEEE mechanical specification. Step 2 was an Electrical Calibration for the Validation Dipole, where the SWR, Impedance, and the Return loss were assessed. Step 3 involved a System Validation using the ALIDX-500, along with the APREL Reference E-010 130 MHz to 26 GHz E-Field Probe Serial Number 163.

9. REFERENCES

SSI-TP-018 Dipole Calibration Procedure
SSI-TP-016 Tissue Calibration Procedure
IEEE P-1528 *DRAFT* "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques"

Conditions

Dipole ALCD-10 was a new Dipole taken from stock prior to calibration.

Ambient Temperature of the Laboratory: 24 °C +/- 0.5 °C
Temperature of the Tissue: 20 °C +/- 0.5 °C



10. DIPOLE CALIBRATION RESULTS

Mechanical Verification

IEEE Length	IEEE Height	Measured Length	Measured Height
51.5 mm	30.4 mm	51.7 mm	30.8 mm

Tissue Validation


Head Tissue 2450 MHz	Measured
Dielectric constant, ϵ_r	39.2
Conductivity, σ [S/m]	1.82
Tissue Conversion Factor,	4.61

Electrical Calibration

Test	Result	IEEE Value
S11 R/L	-21.4	-21 dB
SWR	1.181U	-
Impedance	46.175 Ω	

The Following Graphs are the results as displayed on the Vector Network Analyzer.

S11 Parameter Return Loss

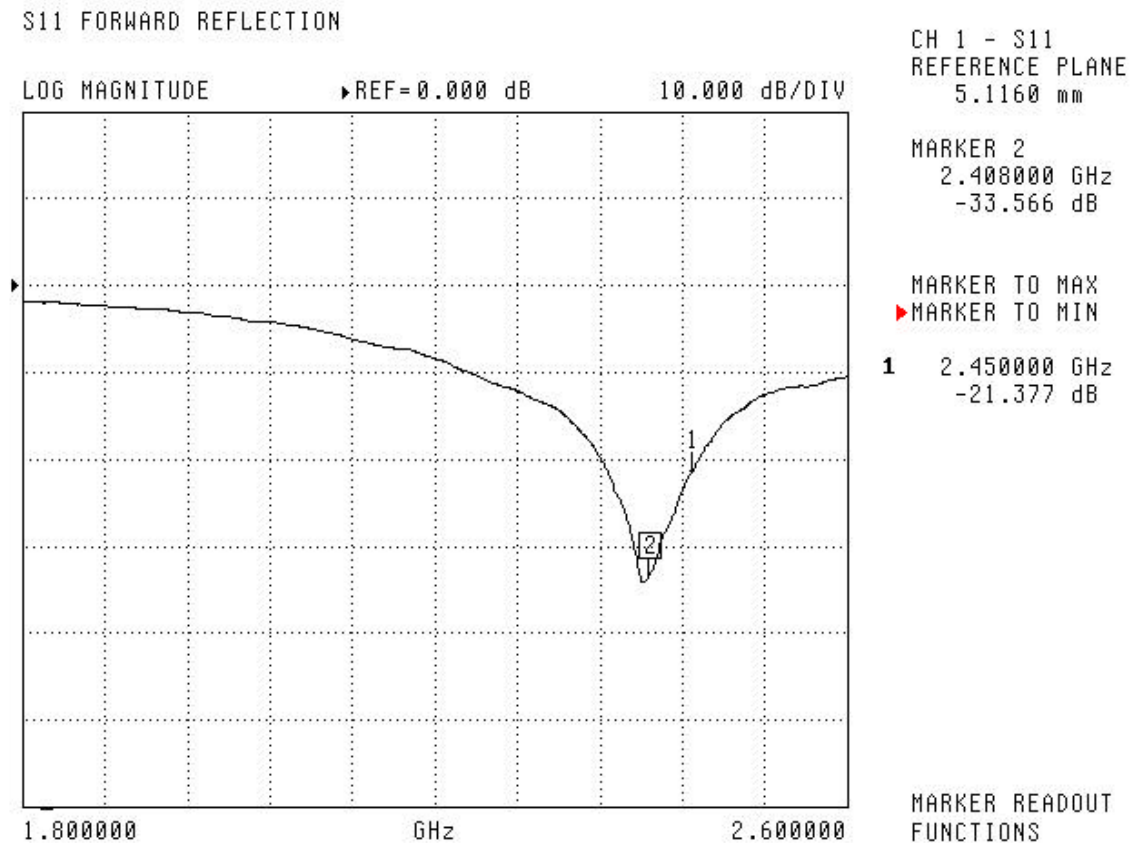

SWR

S11 FORWARD REFLECTION



CH 1 - S11
REFERENCE PLANE
5.1160 mm

MARKER 2
2.411000 GHz
1.049 U

MARKER TO MAX
▶ MARKER TO MIN


1 2.450000 GHz
1.181 U

MARKER READOUT
FUNCTIONS



Smith Chart Dipole Impedance

S11 FORWARD REFLECTION
IMPEDANCE

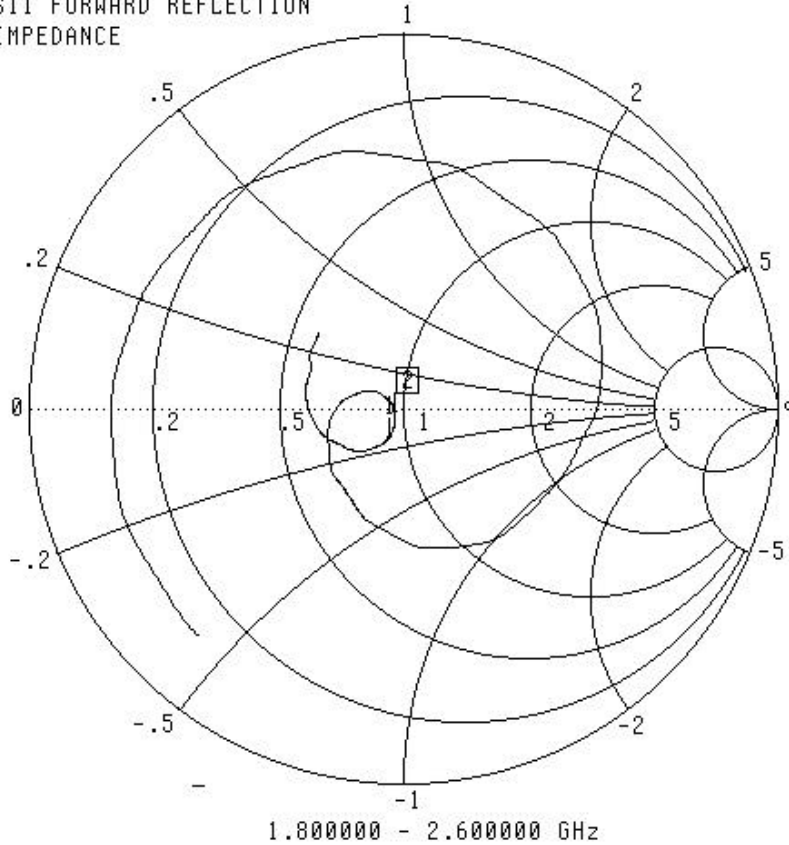

CH 1 - S11
REFERENCE PLANE
5.1160 mm

MARKER 2
2.411000 GHz
48.080 Ω
-1.171 j Ω

MARKER TO MAX
▶ MARKER TO MIN


1 2.450000 GHz
46.175 Ω
-7.199 j Ω

MARKER READOUT
FUNCTIONS

System Validation Results Using the Electrically Calibrated Dipole

Frequency	1 Gram	10 Gram	Peak Above Feed Point
2.45 GHz	52.45	22.91	102.91

The following Graphic Plot is the splined measurement result for the course scan.

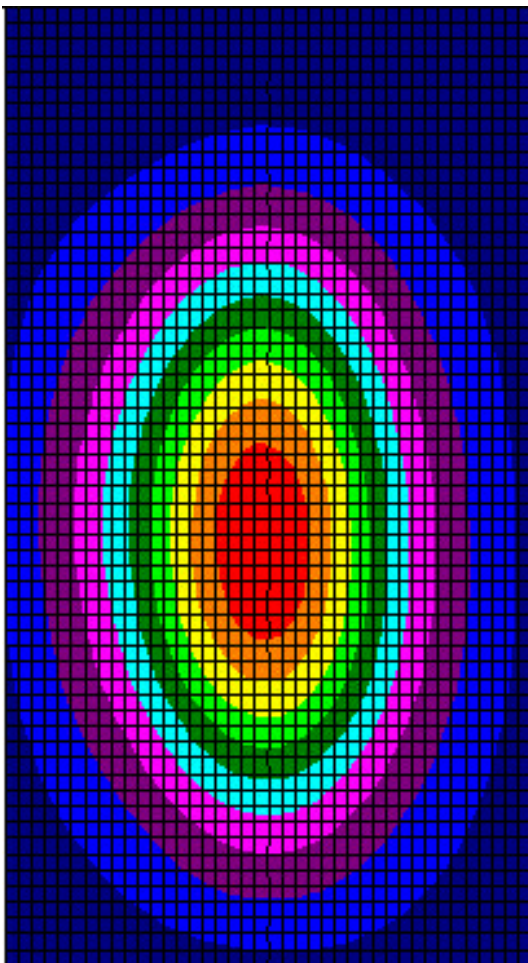

11. TEST EQUIPMENT

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List May 2002

