



AEGIS LABS INC.

APPENDIX B

TEST DATA

*Page 1 of 3 (Appendix B)
Report Number: INTEL-030729F
FCC ID: CNTPP2090*



AEGIS LABS INC.

PEAK POWER SPECTRAL DENSITY

CLIENT:	Hewlett Packard Company	DATE:	08/25/03
EUT:	Notebook Computer	PROJECT NUMBER:	INTEL-030729-02e
MODEL NUMBER:	Series PP2090	TEST ENGINEER:	Rick Candelas
SERIAL NUMBER:	557C40CLL0Q72J	SITE #:	2
CONFIGURATION:	Tested with an Intel 802.11b MiniPCI Type IIIB Wireless Module installed in its mini PCI slot.	TEMPERATURE:	25 C
		HUMIDITY:	65% RH
		TIME:	5:00 PM

Standard:	FCC CFR 47, Part 15.247(d)
Description:	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
Results:	-4.67 dBm @ 2.412 GHz


Peak Power Spectral Density Limits	
Frequency (MHz)	Limit (dBm)
2412-2462	8

Page 2 of 3 (Appendix B)
Report Number: INTEL-030729F
FCC ID: CNTPP2090



AEGIS LABS INC.

Peak Power Spectral Density (Continued)

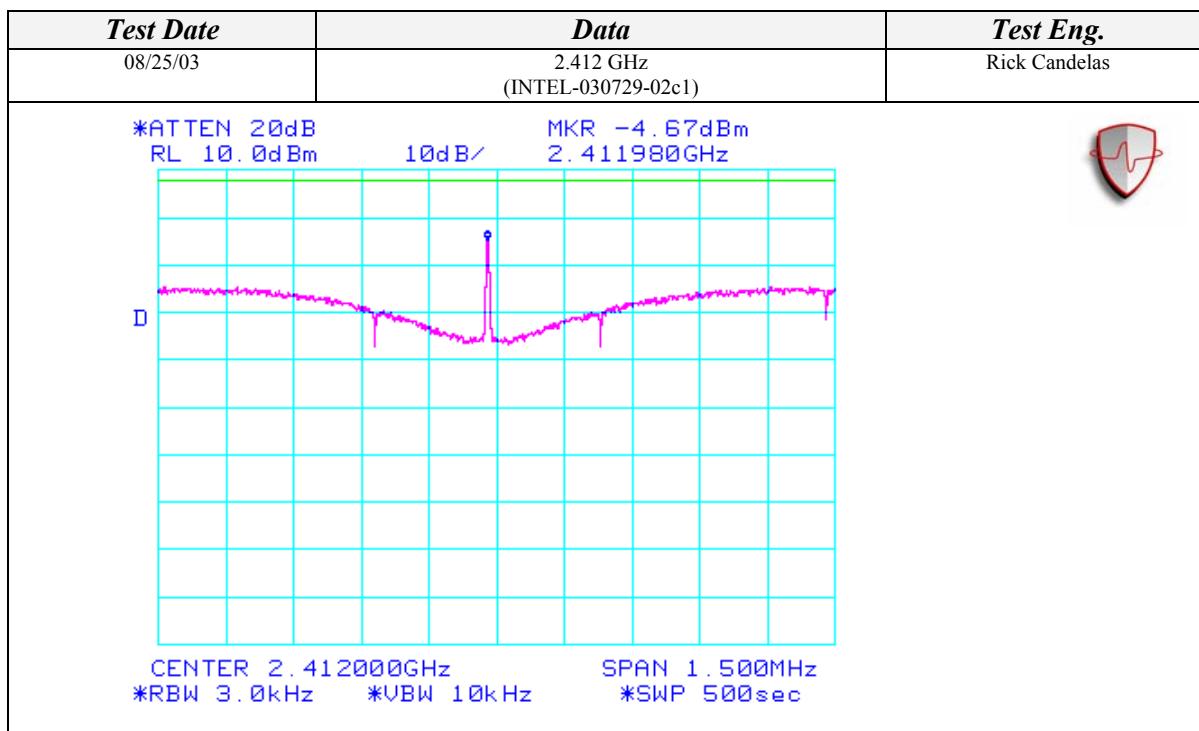

Page 3 of 3 (Appendix B)
Report Number: INTEL-030729F
FCC ID: CNTPP2090