

RF Test Report

Test Report Number SRF-22021042-LC-FCC-IC-RF-CKB

FCC ID CO6-SPCKB
ISED ID 11390A-SPCKB

Applicant SpotterRF, LLC

Applicant Address 720 Timpanogos Parkway, Orem, UT 84097, USA

Product Name Ground Surveillance Radar

Model (s) CK2B

Family Model (s) CK5B, CK10B

Date of Receipt 03/07/2022

Date of Test 03/07/2022 – 03/25/2022

Report Issue Date 04/06/2022

Test Standards 47 CFR Part 15.249
 RSS-210 Issue 10, Dec 2019
 RSS-Gen Issue 5, Feb 2021

Test Result **PASS**



Issued by:

Vista Compliance Laboratories

1261 Puerta Del Sol, San Clemente, CA 92673 USA

www.vista-compliance.com

Devin Tai (Test Engineer)

David Zhang (Technical Manager)

This report is for the exclusive use of the applicant. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. Note that the results contained in this report pertain only to the test samples identified herein, and the results relate only to the items tested and the results that were obtained in the period between the date of initial receipt of samples and the date of issue of the report. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested and the results thereof based upon the information provided to us. The applicant has 60 days from date of issuance of this report to notify us of any material error or omission. Failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by any government agencies. This report is not to be reproduced by any means except in full and in any case not without the written approval of Vista Laboratories.

REVISION HISTORY

Report Number	Version	Description	Issued Date
SRF-22021042-LC-FCC-IC-RF-CKB	01	Initial report	04/06/2022

TABLE OF CONTENTS

1	TEST SUMMARY	4
2	GENERAL INFORMATION.....	5
2.1	Applicant.....	5
2.2	Product information.....	5
2.3	Test standard and method	5
3	MODIFICATION OF EUT / DEVIATIONS FROM STANDARDS.....	6
4	TEST CONFIGURATION AND OPERATION	6
4.1	EUT Test Configuration.....	6
4.2	Supporting Equipment	6
5	UNCERTAINTY OF MEASUREMENT	6
6	TEST RESULTS.....	7
6.1	Antenna Requirement	7
6.2	Conducted Emissions.....	8
6.3	20 dB Bandwidth.....	12
6.4	Occupied Bandwidth (99%).....	15
6.5	Fundamental Field Strength and Radiated Spurious Emission.....	17
7	EUT AND TEST SETUP PHOTOS.....	28
8	TEST INSTRUMENT LIST	29

1 Test Summary

Test Item	Test Requirement	Test Method	Result
Antenna Requirement	47 CFR Part 15.203	N/A	Pass
Conducted Emissions	47 CFR Part 15.207 RSS-Gen, 8.8	ANSI C63.10 (2013)	Pass
20 dB Bandwidth	47CFR Part 15.215	ANSI C63.10 (2013)	Pass
Occupied Bandwidth	47CFR Part 15.249(e) RSS-Gen, 6.7	ANSI C63.10 (2013)	Pass
Fundamental Field Strength and Radiated Spurious Emission	47CFR Part 15.249 RSS-210, annex B.10 (a)	ANSI C63.10 (2013)	Pass

2 General Information

2.1 Applicant

Applicant	SpotterRF, LLC
Applicant address	720 Timpanogos Parkway, Orem, UT 84097, USA
Manufacturer	SpotterRF, LLC
Manufacturer Address	720 Timpanogos Parkway, Orem, UT 84097, USA

2.2 Product information

Product Name	Ground Surveillance Radar
Model Number	CK2B
Family Models	CK5B, CK10B
Serial Number	SP60694
Frequency Band	24.005 – 24.240 GHz
Type of modulation	Continuous Wave
Equipment Class	DXX
Antenna Information	Integral PCB patch antenna, 12 dBi gain
Clock Frequencies	N/A
Input Power	24VDC, 5A
Power Adapter Manufacturer/Model	AC/DC adapter: Phoenix Contract / PS/1AC/24DC/5 PoE Injector: L-COM / BTD-CAT6-P1
Power Adapter SN	0000708582
Hardware version	N/A
Software version	N/A
Simultaneous Transmission	N/A
Additional Info	K1 Mode: 24.005-24.080 GHz K2 Mode: 24.085-24.160 GHz K3 Mode: 24.165-24.240 GHz Manufacturer declares that the family of models including CK2B, CK5B and CK10B, are electrically identical with the only difference between models being receive signal filtering and displayed coverage area. The differences on these variants does not affect any product radio or EMC performance. The model of CK10B was tested as worst-case representative.

2.3 Test standard and method

Test standard	47 CFR Part 15.249 RSS-210 Issue 10, Dec 2019 RSS-Gen Issue 5, Feb 2021
Test method	ANSI C63.10: 2013 RSS-Gen Issue 5, Feb 2021

Lab performing tests	Vista Laboratories, Inc.
Lab Address	1261 Puerta Del Sol, San Clemente, CA 92673 USA
Phone Number	+1 (949) 393-1123
Website	www.vista-compliance.com

Test Condition	Temperature	Humidity	Atmospheric Pressure
RF Testing	23.2°C	56.9%	1005 mbar

3 Modification of EUT / Deviations from Standards

N/A

4 Test Configuration and Operation

4.1 EUT Test Configuration

The EUT is powered by an external PoE injector. It is connected to a test laptop through a RJ45 cable and receives test commands for RF measurement.

The following software was used for testing and to monitor EUT performance.

Software	Description
EMISoft Vasona	EMC/RF Spurious emission test software used during testing

4.2 Supporting Equipment

Description	Manufacturer	Model #	Serial #
Laptop	Dell	XPS / G1H5102	34917771602
PoE Injector	BTD-CAT6-P1	L-COM	N/A
AC/DC Power supply	PSA60R-240	PHIHONG	P4040093A1
AC/DC adapter	Phoenix Contract	PS/1AC/24DC/5	0000708582

5 Uncertainty of Measurement

Test item	Measurement Uncertainty (dB)
AC Conducted Emissions (150K-30MHz)	±3.5 dB
Radiated Emission (30MHz-1GHz)	±4.6 dB
Radiated Emission (1-18GHz)	±4.9 dB
Radiated Emission (18-40GHz)	±3.5 dB
Radiated Emission (above 40GHz)	±3.5 dB

6 Test Results

6.1 Antenna Requirement

6.1.1 Requirement

Per § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

6.1.2 Result

Analysis:

- EUT uses Integral PCB patch antenna. No standard RF connector is used.

Conclusion:

- EUT complies with antenna requirement in § 15.203.


6.2.3 Test Procedure

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.
2. The power supply for the EUT was fed through a 50 Ω /50 μ H EUT LISN, connected to filtered mains.
3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
4. All other supporting equipment was powered separately from another main supply.
5. The EUT was switched on and allowed to warm up to its normal operating condition.
6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.
7. High peaks, relative to the limit line, were then selected.
8. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. For FCC tests, only Quasi-peak measurements were made; while for CISPR/EN tests, both Quasi-peak and Average measurements were made.
9. All possible modes of operation were investigated. Only the worst-case emissions were measured and reported. All other emissions were relatively insignificant.

6.2.4 Test Result

CONDUCTED EMISSIONS


Test Standard:	LISN B Cond Class B	Mode:	Normal Operation
Frequency Range:	0.15 - 30MHz	Test Date:	03/16/2022
Line:	Live	Test Personnel:	Devin Tai
Remark:	N/A	Test Result:	Pass

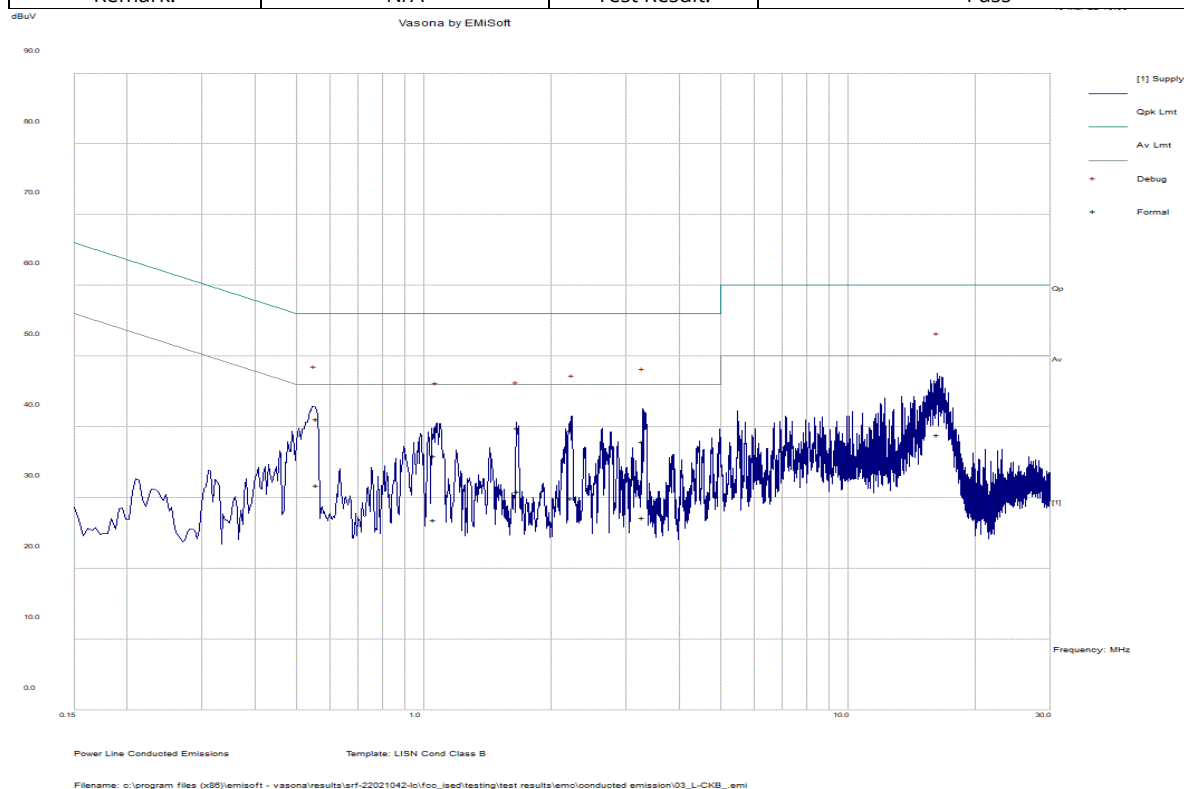

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass/Fail
16.225	34.20	10.10	0.30	44.60	Quasi Peak	Live	60.00	-15.40	Pass
0.558	31.50	9.50	0.10	41.10	Quasi Peak	Live	56.00	-14.90	Pass
3.290	28.10	9.70	0.10	37.90	Quasi Peak	Live	56.00	-18.10	Pass
2.222	29.80	9.60	0.10	39.50	Quasi Peak	Live	56.00	-16.50	Pass
1.663	30.20	9.60	0.10	39.90	Quasi Peak	Live	56.00	-16.10	Pass
1.056	26.20	9.60	0.10	35.90	Quasi Peak	Live	56.00	-20.10	Pass
16.225	28.50	10.10	0.30	38.90	Average	Live	50.00	-11.10	Pass
0.558	22.10	9.50	0.10	31.70	Average	Live	46.00	-14.30	Pass
3.290	17.40	9.70	0.10	27.20	Average	Live	46.00	-18.80	Pass
2.222	20.20	9.60	0.10	29.90	Average	Live	46.00	-16.10	Pass
1.663	21.20	9.60	0.10	30.90	Average	Live	46.00	-15.10	Pass
1.056	17.20	9.60	0.10	26.90	Average	Live	46.00	-19.10	Pass

Report # SRF-22021042-LC-FCC-IC-RF-CKB

Test Standard:	LISN B Cond Class B	Mode:	Normal Operation
Frequency Range:	0.15 - 30MHz	Test Date:	03/16/2022
Line:	Neutral	Test Personnel:	Devin Tai
Remark:	N/A	Test Result:	Pass

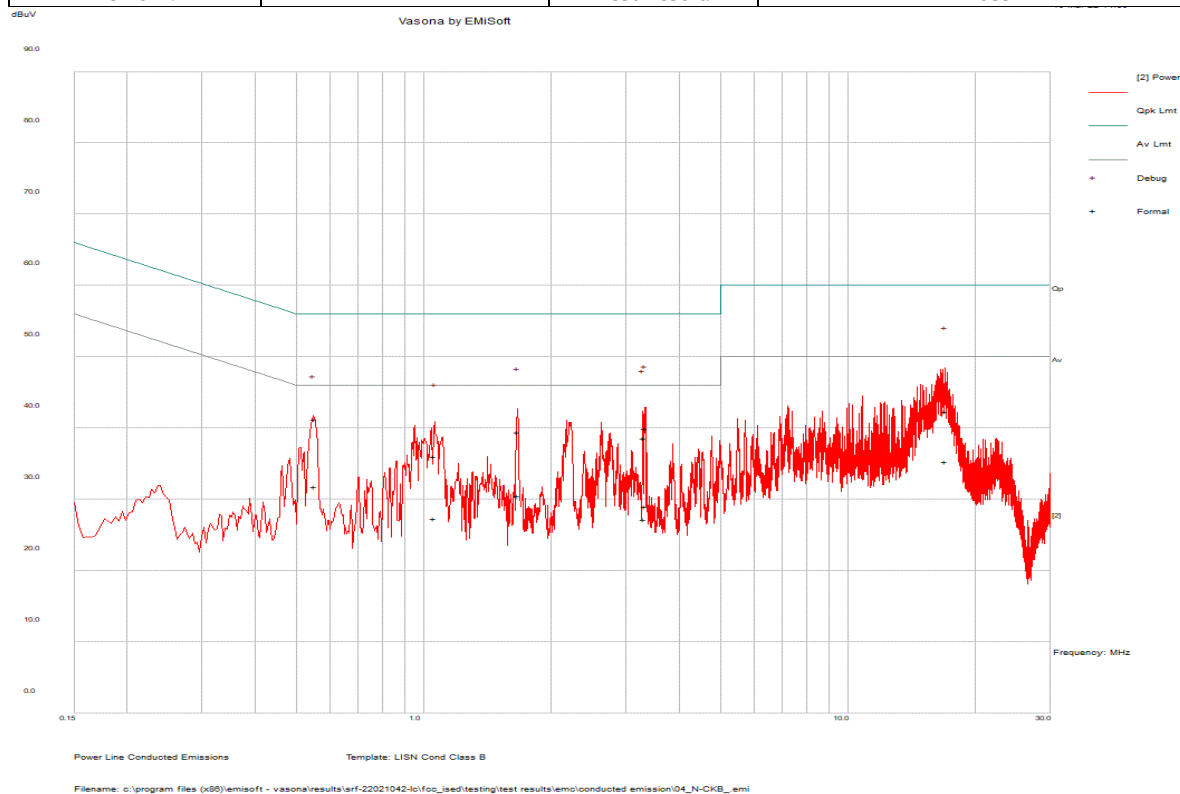

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass/Fail
16.902	32.20	10.10	0.40	42.70	Quasi Peak	Neutral	60.00	-17.30	Pass
2.217	30.40	9.60	0.10	40.10	Quasi Peak	Neutral	56.00	-15.90	Pass
3.322	30.40	9.70	0.10	40.20	Quasi Peak	Neutral	56.00	-15.80	Pass
0.556	31.50	9.50	0.10	41.10	Quasi Peak	Neutral	56.00	-14.90	Pass
1.665	29.80	9.60	0.10	39.60	Quasi Peak	Neutral	56.00	-16.40	Pass
1.060	26.50	9.60	0.10	36.20	Quasi Peak	Neutral	56.00	-19.80	Pass
16.902	25.50	10.10	0.40	36.00	Average	Neutral	50.00	-14.00	Pass
2.217	20.70	9.60	0.10	30.40	Average	Neutral	46.00	-15.60	Pass
3.322	19.60	9.70	0.10	29.50	Average	Neutral	46.00	-16.50	Pass
0.556	21.50	9.50	0.10	31.10	Average	Neutral	46.00	-14.90	Pass
1.665	20.90	9.60	0.10	30.60	Average	Neutral	46.00	-15.40	Pass
1.060	17.60	9.60	0.10	27.30	Average	Neutral	46.00	-18.70	Pass

6.3 20 dB Bandwidth

6.3.1 Requirement

§ 15.215 (c)

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

6.3.2 Test Setup




6.3.3 Test Procedure

According to subclause 6.9.2 of ANSI C63.10-2013:


- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Steps a) through c) might require iteration to adjust within the specified tolerances.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- f) Set detection mode to peak and trace mode to max hold.
- g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the “-xx dB down amplitude” using $[(\text{reference value}) - \text{xx}]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).
- j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.
- k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labelled. Tabular data may be reported in addition to the plot(s).

6.3.4 Test Result


Channel	Frequency (MHz)	Measured Bandwidth (MHz)	Frequency Lower (MHz)	Frequency Upper (MHz)	Result
Low	24040	79.185	24002.005	24081.190	Pass
Mid	24120	79.200	24082.095	24161.295	Pass
High	24200	79.200	24162.020	24241.220	Pass

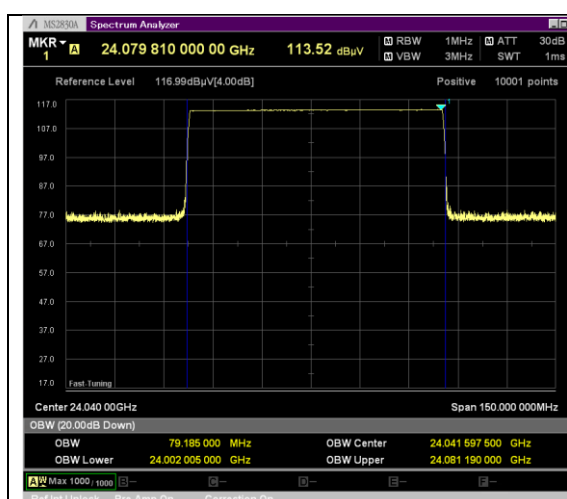

20dB Bandwidth-Low

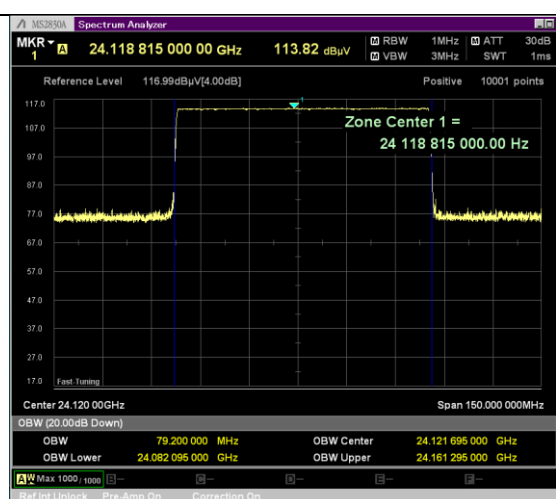

20dB Bandwidth-Mid

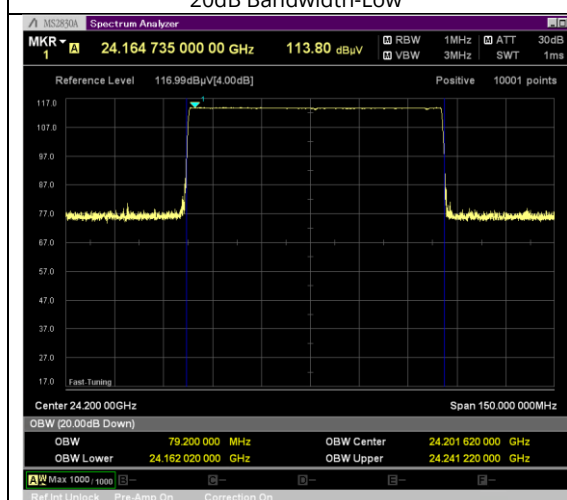

20dB Bandwidth-High

6.4 Occupied Bandwidth (99%)

6.4.1 Requirement

The 99% OBW is for reporting purpose only. The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

6.4.2 Test Procedure

According to subclause 6.9.3 of ANSI C63.10-2013:


1. Set RBW = 1% to 5% of the actual occupied BW.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Span = large enough to capture all products of the modulation process
7. Allow the trace to stabilize.
8. Use automatic bandwidth measurement capability on instrument to obtain BW result.

6.4.3 Test Setup




6.4.4 Test Results


Channel	Frequency (MHz)	Measured Bandwidth (MHz)	Limit (MHz)	Result
Low	24040	76.950	Reference only	N/A
Mid	24120	77.025	Reference only	N/A
High	24200	77.055	Reference only	N/A

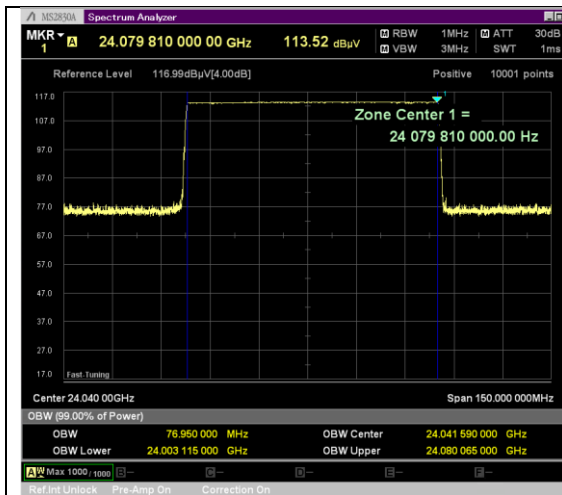

99% Bandwidth-Low

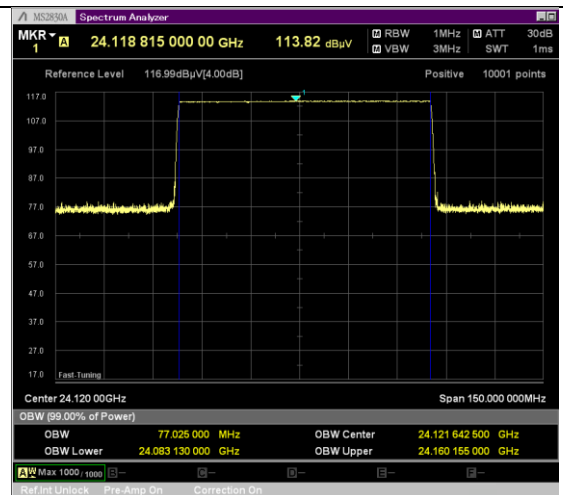

99% Bandwidth-Mid

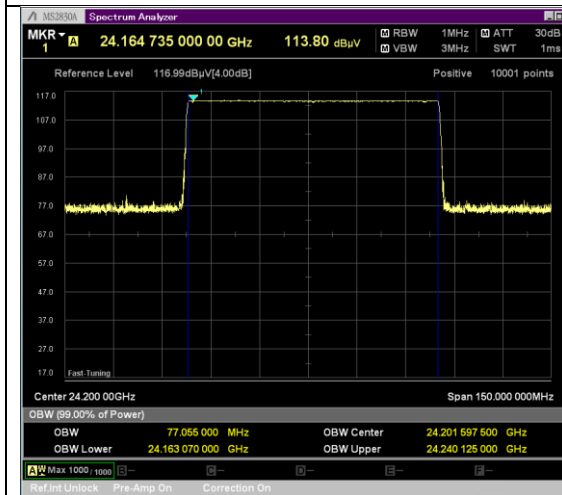

99% Bandwidth-High

6.5 Fundamental Field Strength and Radiated Spurious Emission

6.5.1 Requirement

§ 15.249 (a)

Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

(c) Field strength limits are specified at a distance of 3 meters.


(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Frequency Range (MHZ)	Field Strength (μV/m)
0.009~0.490	2400/F(kHz)
0.490~1.705	24000/F(kHz)
1.705~30.0	30
30 – 88	100
88 – 216	150
216 960	200
Above 960	500


(e) As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth

6.5.2 Test Setup


For Radiated emission below 30MHz

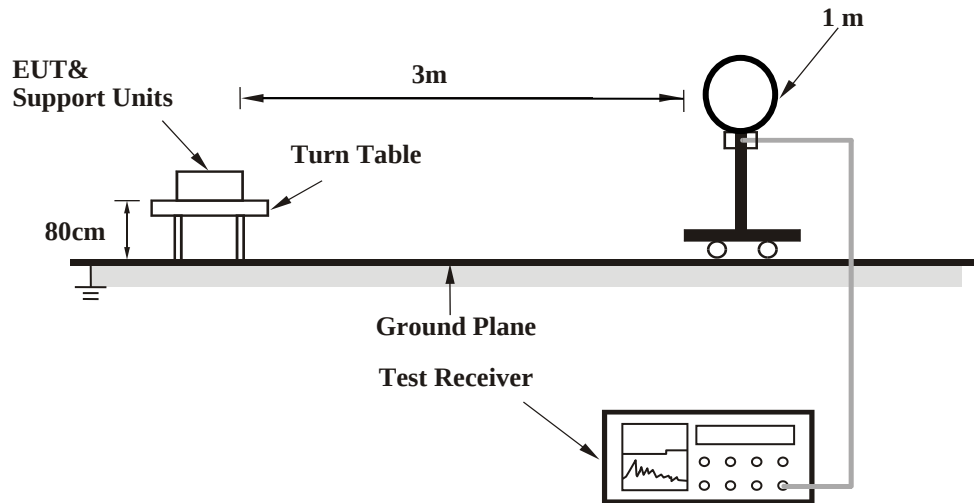

For Radiated emission 30MHz to 1GHz

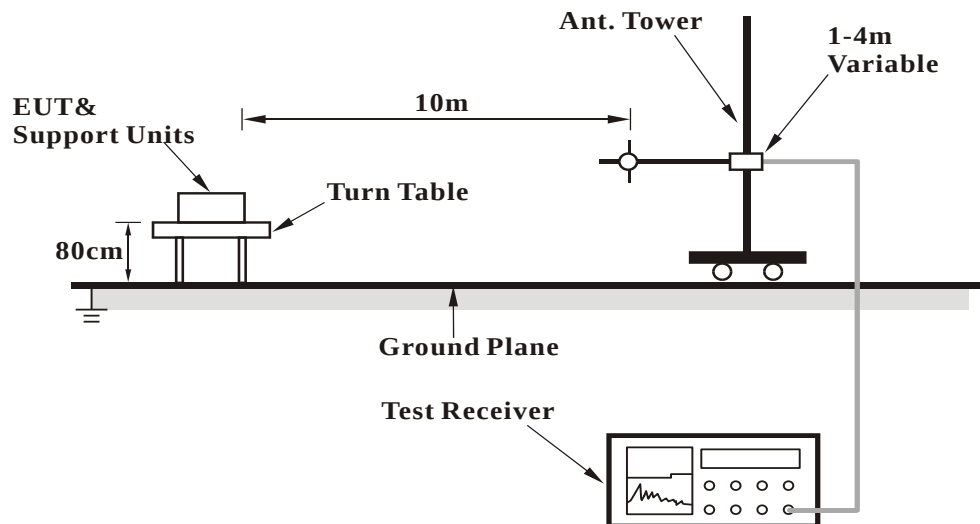

For Radiated emission above 1GHz

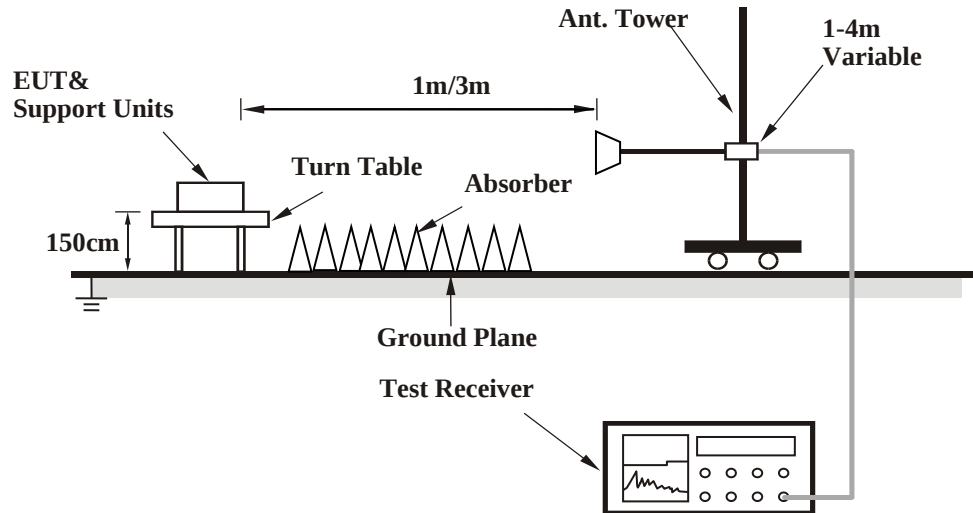

6.5.3 Test Procedure

According to subclause 11.12.2.7, Radiated spurious emission measurements, in ANSI C63.10-2013:

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT was chosen.
 - b. The EUT was then rotated to the direction that gave the maximum emission.
 - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 300 Hz for frequencies below 150KHz.
4. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 10 kHz for frequency between 150KHz – 30MHz.
5. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-Peak detection at frequency between 30MHz - 1GHz.
6. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak and average measurement at frequency above 1GHz.
7. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.

6.5.4 Test Result

FUNDAMENTAL FIELD STRENGTH




Test Channel	Frequency MHz	Level dBuV/m	Measurement Type	Limit dBuV/m	Margin dB	Pass/Fail
Low	24040	113.52	Peak	128	-14.48	Pass
Mid	24120	113.82	Peak	128	-14.18	Pass
High	24200	113.8	Peak	128	-14.20	Pass
Low	24040	92.38	Average	108	-15.62	Pass
Mid	24120	92.99	Average	108	-15.01	Pass
High	24200	93.50	Average	108	-14.50	Pass

RADIATED EMISSIONS BELOW 1 GHZ

Test Standard:	15.249, RSS-210	Mode:	Radiated Emission
Frequency Range:	30 MHz - 1 GHz	Test Date:	03/15/2022
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Devin Tai
Remark:	N/A	Test Result:	Pass


Radiated Emission

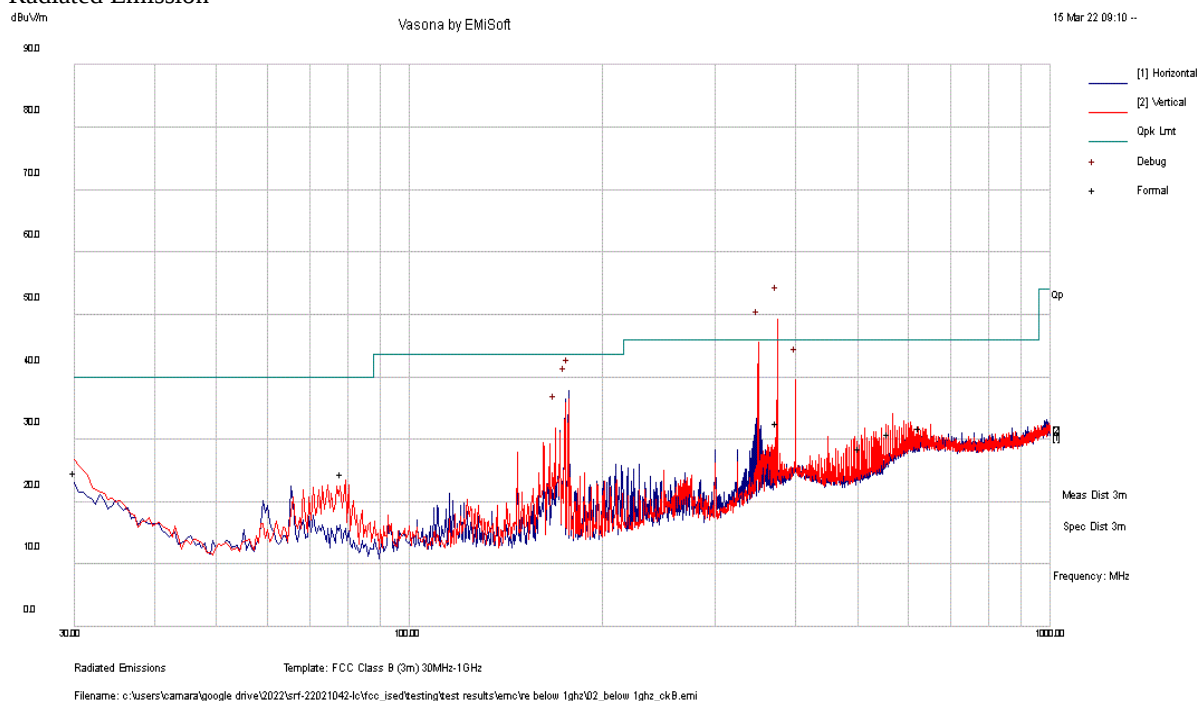

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail
375.01	49.00	6.20	-9.40	45.80	Quasi Max	V	127	275	46.00	-0.20	Pass
350.00	50.60	6.00	-11.10	45.60	Quasi Max	V	142	277	46.00	-0.40	Pass
176.95	49.70	4.50	-17.30	36.90	Quasi Max	H	179	175	43.50	-6.60	Pass
399.98	41.00	6.40	-7.90	39.40	Quasi Max	V	104	149	46.00	-6.60	Pass
175.02	49.30	4.50	-17.40	36.40	Quasi Max	H	211	103	43.50	-7.10	Pass
168.71	44.80	4.40	-17.50	31.80	Quasi Max	V	187	142	43.50	-11.70	Pass

RADIATED EMISSIONS ABOVE 1 GHZ

Test Standard:	15.249, RSS-210	Mode:	Radiated Emission
Frequency Range:	1 GHz - 18 GHz	Test Date:	03/16/2022
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	Devin Tai
Remark:	Low CH	Test Result:	Pass

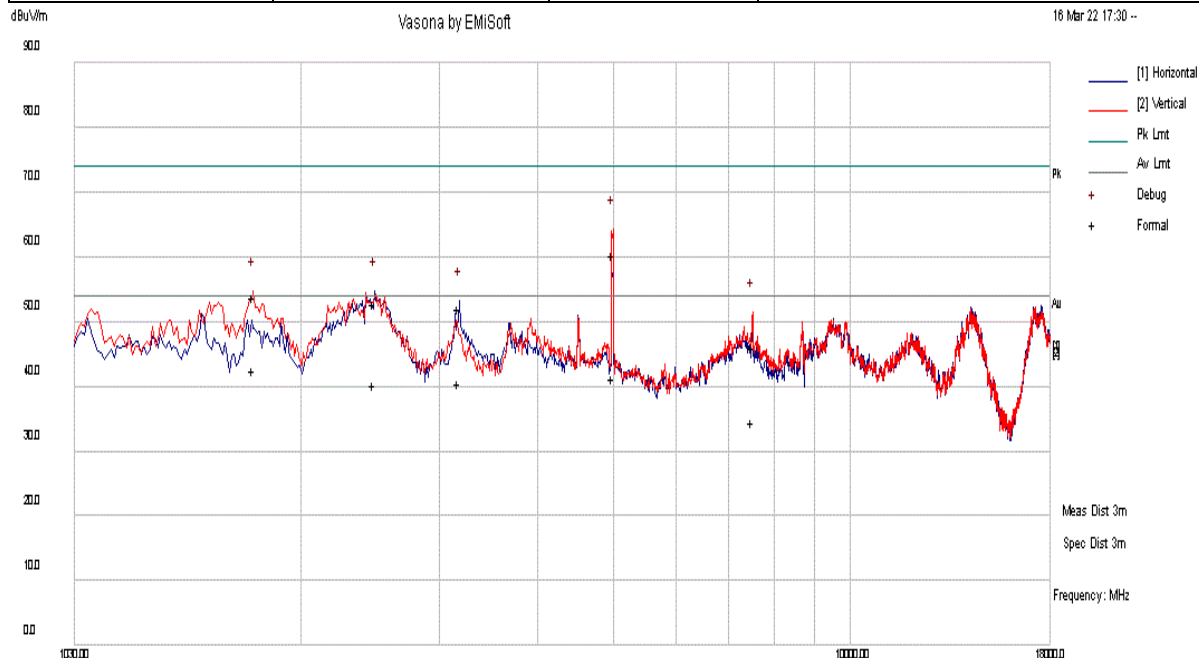

Radiated Emissions

Template: FCC 15.209 (3m) 1-18GHz


Filename: c:\users\camara\google drive\2022\srfr-22021042-lc-fcc-ic-rf-ckb\test results\emove above 1ghz\04_24ghz radar-low-ok-b_emi

1000

Res BW 10Hz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail
4995.10	48.7	9.1	2.7	60.4	Peak Max	V	130	100	74	-13.6	Pass
1740.55	54.5	5.4	-6.1	53.8	Peak Max	V	120	249	74	-20.2	Pass
2482.17	51.1	6.3	-4.5	52.9	Peak Max	H	113	246	74	-21.1	Pass
3181.59	46.7	7.1	-1.6	52.2	Peak Max	H	103	252	74	-21.8	Pass
7521.94	29.7	12	4.5	46.2	Peak Max	V	290	2	74	-27.8	Pass
4995.10	29.6	9.1	2.7	41.4	Average Max	V	130	100	54	-12.6	Pass
1740.55	43.2	5.4	-6.1	42.5	Average Max	V	120	249	54	-11.5	Pass
2482.17	38.5	6.3	-4.5	40.3	Average Max	H	113	246	54	-13.7	Pass
3181.59	35.1	7.1	-1.6	40.7	Average Max	H	103	252	54	-13.3	Pass
7521.94	18.1	12	4.5	34.6	Average Max	V	290	2	54	-19.4	Pass


Test Standard:	15.249, RSS-210	Mode:	Radiated Emission
Frequency Range:	1 GHz - 18 GHz	Test Date:	03/21/2022
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	Devin Tai
Remark:	Mid CH	Test Result:	Pass

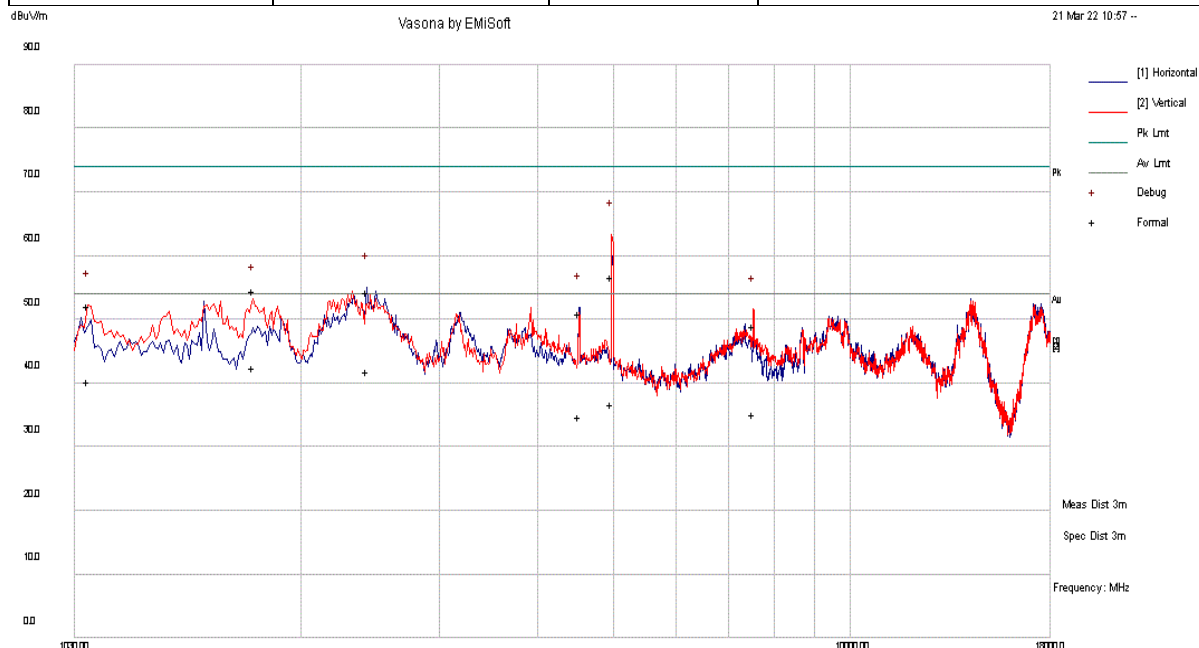

Radiated Emissions Template: FCC 15.209 (3m) 1-18GHz
Filename: c:\users\camara\google drive\2022\srf-22021042-lc-fcc_ised\testing\test results\emc\ve above 1ghz\05_24ghz radar-mid-ck-b_emi

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail
4977.39	44.9	9.1	2.7	56.8	Peak Max	V	237	96	74	-17.2	Pass
2428.08	52.4	6.3	-4.3	54.4	Peak Max	H	153	239	74	-19.6	Pass
1739.29	55.2	5.4	-6.1	54.5	Peak Max	V	103	268	74	-19.5	Pass
1070.85	52.1	4.1	-4	52.2	Peak Max	V	100	148	74	-21.8	Pass
4528.12	40.7	8.7	1.7	51	Peak Max	H	205	332	74	-23	Pass
7536.70	32.3	12	4.6	49	Peak Max	V	228	0	74	-25	Pass
4977.39	24.8	9.1	2.7	36.7	Average Max	V	237	96	54	-17.3	Pass
2428.08	39.9	6.3	-4.3	41.8	Average Max	H	153	239	54	-12.2	Pass
1739.29	43.2	5.4	-6.1	42.5	Average Max	V	103	268	54	-11.5	Pass
1070.85	40.2	4.1	-4	40.3	Average Max	V	100	148	54	-13.7	Pass
4528.12	24.3	8.7	1.7	34.7	Average Max	H	205	332	54	-19.3	Pass
7536.70	18.5	12	4.6	35.1	Average Max	V	228	0	54	-18.9	Pass

Test Standard:	15.249, RSS-210	Mode:	Radiated Emission
Frequency Range:	1 GHz - 18 GHz	Test Date:	03/16/2022
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	Devin Tai
Remark:	High CH	Test Result:	Pass

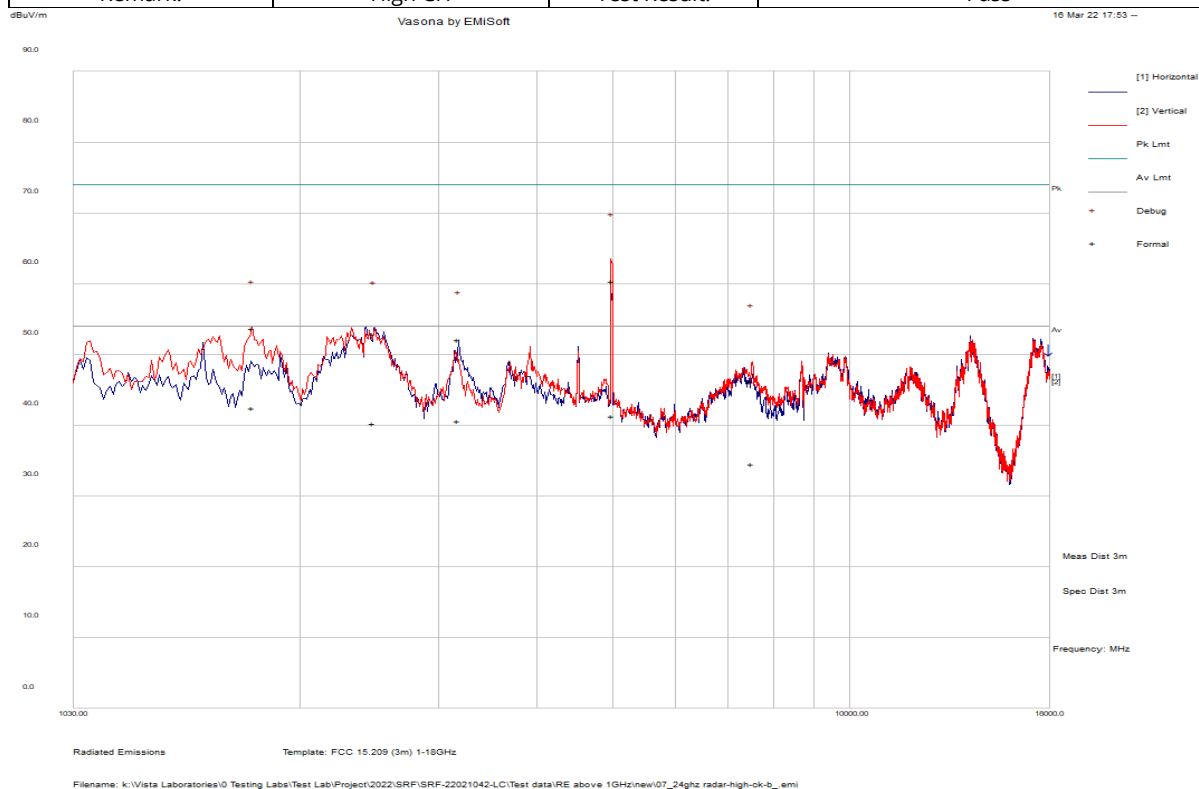


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail
4990.31	48.4	9.1	2.7	60.2	Peak Max	V	138	111	74	-13.8	Pass
1740.62	54.7	5.4	-6.1	54.0	Peak Max	V	129	245	74	-20.0	Pass
2483.06	51.3	6.3	-4.5	53.1	Peak Max	H	123	242	74	-20.9	Pass
3190.32	45.1	7.1	-1.6	50.6	Peak Max	H	114	248	74	-23.4	Pass
7532.71	31.5	12	4.5	48.0	Peak Max	V	282	23	74	-26.0	Pass
4990.31	29.5	9.1	2.7	41.3	Average Max	V	138	111	54	-12.7	Pass
1740.62	43.2	5.4	-6.1	42.5	Average Max	V	129	245	54	-11.5	Pass
2483.06	40.9	6.3	-4.5	42.7	Average Max	H	123	242	54	-11.3	Pass
3190.32	34.2	7.1	-1.6	39.7	Average Max	H	114	248	54	-14.3	Pass
7532.71	19.7	12	4.5	36.2	Average Max	V	282	23	54	-17.8	Pass


RADIATED EMISSIONS (18-40GHz)



Radiated Emission 18-40GHz -Low (Peak)

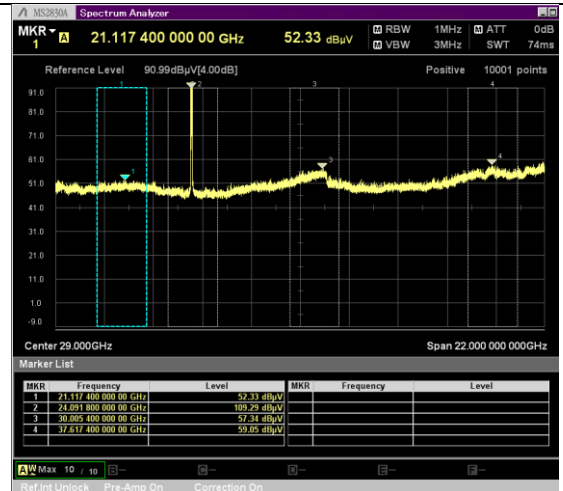

Radiated Emission 18-40GHz -Mid (Peak)

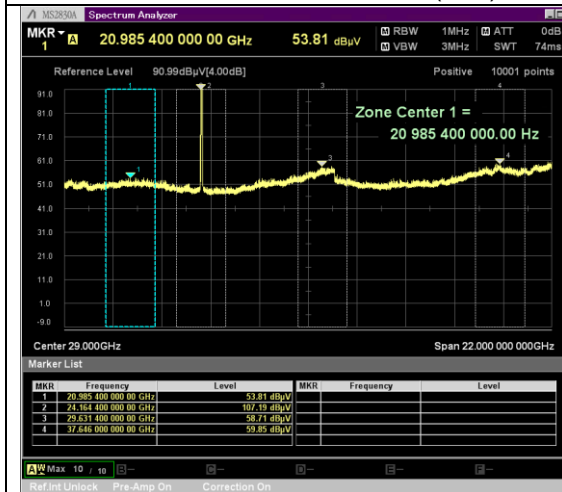

Radiated Emission 18-40GHz -High (Peak)

Test Channel	Frequency MHz	Level dBuV/m	Measurement Type	Limit dBuV/m	Margin dB	Pass/Fail
Low	20569.60	52.68	Peak	74	-21.32	Pass
Low	29950.40	57.57	Peak	74	-16.43	Pass
Low	37448.00	58.65	Peak	74	-15.35	Pass
Low	20569.60	43.84	Average	54	-10.16	Pass
Low	29950.40	49.16	Average	54	-4.84	Pass
Low	37448.00	50.37	Average	54	-3.63	Pass
Mid	21117.40	52.33	Peak	74	-21.67	Pass
Mid	30005.40	57.34	Peak	74	-16.66	Pass
Mid	37617.40	59.05	Peak	74	-14.95	Pass
Mid	21117.40	43.53	Average	54	-10.47	Pass
Mid	30005.40	48.61	Average	54	-5.39	Pass
Mid	37617.40	50.20	Average	54	-3.80	Pass
High	20985.40	53.81	Peak	74	-20.19	Pass
High	29631.40	58.71	Peak	74	-15.29	Pass
High	37646.00	59.85	Peak	74	-14.15	Pass
High	20985.40	44.85	Average	54	-9.15	Pass
High	29631.40	50.57	Average	54	-3.43	Pass
High	37646.00	51.55	Average	54	-2.45	Pass

Note:

The emission at around 24 GHz is fundamental emission. No other outstanding emission was found except noise floor.

RADIATED EMISSIONS (40-60GHZ)

Test Channel	Frequency MHz	Level dBuV/m	Measurement Type	Limit dBuV/m	Margin dB	Pass/Fail
Low	48080	73.5	Peak	88	-14.5	Pass
Mid	48240	74.9	Peak	88	-13.1	Pass
High	48400	71.3	Peak	88	-16.7	Pass
Low	48080	58.0	Average	68	-10.0	Pass
Mid	48240	57.5	Average	68	-10.5	Pass
High	48400	57.0	Average	68	-11.0	Pass

Note:

The emission at around 24 GHz is fundamental emission. No other outstanding emission was found except noise floor.

RADIATED EMISSIONS (60-90GHZ)

Test Channel	Frequency MHz	Level dBuV/m	Measurement Type	Limit dBuV/m	Margin dB	Pass/Fail
Low	72120	75.3	Peak	88	-12.7	Pass
Mid	72360	77.7	Peak	88	-10.3	Pass
High	72600	77.1	Peak	88	-10.9	Pass
Low	72120	61.6	Average	68	-6.4	Pass
Mid	72360	61.6	Average	68	-6.4	Pass
High	72600	61.1	Average	68	-6.9	Pass

RADIATED EMISSIONS (90-100GHZ)

Test Channel	Frequency MHz	Level dBuV/m	Measurement Type	Limit dBuV/m	Margin dB	Pass/Fail
Low	96160	74.2	Peak	88	-13.8	Pass
Mid	96480	74.7	Peak	88	-13.3	Pass
High	96800	73.6	Peak	88	-14.4	Pass
Low	96160	54.0	Average	68	-14.0	Pass
Mid	96480	56.2	Average	68	-11.9	Pass
High	96800	60.1	Average	68	-7.9	Pass

7 EUT and Test Setup Photos

See FCC exhibits

8 Test Instrument List

Equipment	Manufacturer	Model	Instrument Number	Cal. Date	Cal. Due
Semi-Anechoic Chamber	ETS-Lindgren	10M	VL001	10/18/2020	10/18/2022
Shielding Control Room	ETS-Lindgren	Series 81	VL006	N/A	N/A
Spectrum Analyzer	Keysight	N9020A	MY50110074	06/17/2021	06/17/2022
Spectrum Analyzer	Anritsu	MS2830A	6201145210	05/15/2020	05/15/2022
EMC Test Receiver	R&S	ESL6	100230	06/14/2021	06/14/2022
LISN (9KHz – 30MHz)	EMCO	3816/2	9705-1066	05/04/2021	05/04/2022
Bi-Log Antenna	ETS-Lindgren	3142E	217921	11/15/2021	11/15/2022
Horn Antenna (1-18GHz)	Electro-Metrics	EM-6961	6292	05/14/2021	05/14/2022
Horn Antenna (18-40GHz)	Com-Power	AH-840	101109	06/24/2021	06/24/2022
Preamplifier	RF Bay, Inc.	LPA-10-20	11180621	07/16/2021	07/16/2022
True RMS Multi-meter	UNI-T	UT181A	C173014829	05/05/2021	05/05/2022
Temp / Humidity / Pressure Meter	PCE Instruments	PCE-THB 40	R062028	05/15/2021	05/15/2022
RF Attenuator	Pasternack	PE7005-3	VL061	07/16/2021	07/16/2022
Preamplifier 100KHz - 40GHz	Aeroflex	33711-392-77150-11	064	07/16/2021	07/16/2022
EM Center Control	ETS-Lindgren	7006-001	160136	N/A	N/A
Turn Table	ETS-Lindgren	2181-3.03	VL002	N/A	N/A
Boresight Antenna Tower	ETS-Lindgren	2171B	VL003	N/A	N/A
Loop Antenna (9k-30MHz)	Com-Power	AL-130	121012	05/16/2021	05/16/2022
RE test cable(below 6GHz)	Vista	RE-6GHz-01	RE-6GHz-01	07/16/2021	07/16/2022
RE test cable (1-18GHz)	PhaseTrack	II-240	RE-18GHz-01	07/16/2021	07/16/2022
RE test cable (>18GHz)	Sucoflex	104	344903/4	07/16/2021	07/16/2022
Pulse limiter	Com-Power	LIT-930A	531727	07/16/2021	07/16/2022
CE test cable #1	FIRST RF	FRF-C-1002-001	CE-6GHz-01	07/16/2021	07/16/2022
CE test cable#2	FIRST RF	FRF-C-1002-001	CE-6GHz-02	07/16/2021	07/16/2022
Vector Signal Generator	Keysight	N5182A	US47080548	06/17/2021	06/17/2022
RF Power Amplifier (80-1000MHz)	Ophir	5226FE	1013/1815	N/A	N/A
RF Power Amplifier (700-6000MHz)	Ophir	5293FE	1063/1815	N/A	N/A
Horn Antenna (1-18GHz)	FT-RF	HA-07M18G-NF	180010HA	N/A	N/A
Horn Antenna (40-60GHz)	OML.Inc	M19RH	19121801-19	12/13/2019	12/13/2022
Harmonic Mixer (40-60GHz)	OML.Inc	M19HWA	191213-1-19	12/13/2019	12/13/2022
Horn Antenna (60-90GHz)	OML.Inc	M12RH	19121801-12	12/13/2019	12/13/2022

Report #	SRF-22021042-LC-FCC-IC-RF-CKB
-----------------	-------------------------------

Harmonic Mixer (60-90GHz)	OML.Inc	M12HWA	191213-1-12	12/13/2019	12/13/2022
Horn Antenna (90-140GHz)	OML.Inc	M08RH	19121801-08	12/13/2019	12/13/2022
Harmonic Mixer (90-140GHz)	OML.Inc	M08HWA	191213-1-08	12/13/2019	12/13/2022