



A D T

DFS TEST REPORT

REPORT NO.: RF140123E01-2

MODEL NO.: NFA-BAC-MR-02

FCC ID: COFNFBACMR02

RECEIVED: Jan. 23, 2014

TESTED: Feb. 08, 2014

ISSUED: Feb. 21, 2014

APPLICANT: UNIVERSAL GLOBAL SCIENTIFIC
INDUSTRIAL CO., LTD.

ADDRESS: 141, Lane 351, Sec. 1, Taiping Road.,
Tsaotuen, Nantou 54261, Taiwan

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

This report should not be used by the client to claim
product certification, approval, or endorsement by
TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



A D T

Table of Contents

| | |
|--|----|
| RELEASE CONTROL RECORD | 3 |
| 1. CERTIFICATION..... | 4 |
| 2. EUT INFORMATION | 5 |
| 2.1 OPERATING FREQUENCY BANDS AND MODE OF EUT | 5 |
| 2.2 EUT SOFTWARE AND FIRMWARE VERSION | 5 |
| 2.3 DESCRIPTION OF AVAILABLE ANTENNAS TO THE EUT..... | 5 |
| 2.4 TRANSMIT POWER CONTROL (TPC) | 8 |
| 2.5 STATEMENT OF MANUFACTURER | 8 |
| 3. U-NII DFS RULE REQUIREMENTS | 9 |
| 3.1 WORKING MODES AND REQUIRED TEST ITEMS | 9 |
| 3.2 TEST LIMITS AND RADAR SIGNAL PARAMETERS | 10 |
| 4. TEST & SUPPORT EQUIPMENT LIST | 13 |
| 4.1 TEST INSTRUMENTS | 13 |
| 4.2 DESCRIPTION OF SUPPORT UNITS | 13 |
| 5. TEST PROCEDURE | 14 |
| 5.1 BVADT DFS MEASUREMENT SYSTEM:..... | 14 |
| 5.2 CALIBRATION OF DFS DETECTION THRESHOLD LEVEL: | 15 |
| 5.3 DEVIATION FROM TEST STANDARD | 16 |
| 5.4 CONDUCTED TEST SETUP CONFIGURATION | 16 |
| 5.4.1 CLIENT WITHOUT RADAR DETECTION MODE..... | 16 |
| 6. TEST RESULTS | 17 |
| 6.1 SUMMARY OF TEST RESULTS | 17 |
| 6.2 DETAILED TEST RESULTS | 18 |
| 6.2.1 TEST MODE: DEVICE OPERATING IN CLIENT WITHOUT RADAR DETECTION MODE..... | 18 |
| 6.2.1.1 DFS DETECTION THRESHOLD | 18 |
| 6.2.1.2 CHANNEL CLOSING TRANSMISSION AND CHANNEL MOVE TIME..... | 19 |
| 6.2.1.3 NON- OCCUPANCY PERIOD..... | 20 |
| 6.2.1.4 NON-ASSOCIATED TEST | 22 |
| 6.2.1.5 NON- CO-CHANNEL TEST | 22 |
| 7. INFORMATION ON THE TESTING LABORATORIES..... | 23 |
| 8. APPENDIX-A | 24 |
| 9. APPENDIX B - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB | 26 |



A D T

RELEASE CONTROL RECORD

| ISSUE NO. | REASON FOR CHANGE | DATE ISSUED |
|---------------|-------------------|---------------|
| RF140123E01-2 | Original release | Feb. 21, 2014 |



A D T

1. CERTIFICATION

PRODUCT: 802.11ac/a/b/g/n + BT Wireless Module

BRAND NAME : UG

MODEL NO.: NFA-BAC-MR-02

TEST SAMPLE: ENGINEERING SAMPLE

APPLICANT: UNIVERSAL GLOBAL SCIENTIFIC INDUSTRIAL CO., LTD.

TESTED: Feb. 08, 2014

STANDARDS: FCC Part 15, Subpart E (Section 15.407)

FCC 06-96

The above equipment (Model: NFA-BAC-MR-02) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and was in compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : *Midoli Peng* , **DATE:** Feb. 21, 2014

(Midoli Peng, Specialist)

APPROVED BY : *May Chen* , **DATE:** Feb. 21, 2014

(May Chen, Manager)



A D T

2. EUT INFORMATION

2.1 OPERATING FREQUENCY BANDS AND MODE OF EUT

TABLE 1: OPERATING FREQUENCY BANDS AND MODE OF EUT

| OPERATIONAL MODE | OPERATING FREQUENCY RANGE | |
|--|---------------------------|--|
| | 5250~5350MHz | 5470~5725MHz (Disable 5600 ~ 5650MHz) |
| Client without radar detection and ad hoc function | ✓ | ✓ |

2.2 EUT SOFTWARE AND FIRMWARE VERSION

TABLE 2: THE EUT SOFTWARE/FIRMWARE VERSION

| PLATFORM | NO. | PRODUCT | MODEL NO. | SOFTWARE/FIRMWARE VERSION |
|----------|-----|---------------------------------------|---------------|--|
| Linux | 1 | 802.11ac/a/b/g/n + BT Wireless Module | NFA-BAC-MR-02 | PCIE8897-15.68.201.p88-M26154 47-GPL-(FP68) |

2.3 DESCRIPTION OF AVAILABLE ANTENNAS TO THE EUT

TABLE 3: ANTENNA LIST

| Transmitter Circuit | Brand | Model | Antenna Gain(dBi) <Including cable loss> | Frequency range (GHz to GHz) | Antenna Type | Connector Type | Cable Loss (dB) | Cable Length (mm) |
|--------------------------------------|------------------------------|-------------|---|---------------------------------|--------------|----------------|-----------------|-------------------|
| Chain (0) Ant. 1 (WLAN Ant) | High-Tek Electronics Co.,Ltd | DC33001JB20 | 1.5 | 2.4~2.4835 | PIFA | i-pex(MHF) | 0.65 | 260 |
| | | | 0.68 | 5.15~5.35 | PIFA | i-pex(MHF) | 1.02 | |
| | | | 2.77 | 5.47~5.75 | PIFA | i-pex(MHF) | 1.07 | 260 |
| Chain (1) Ant. 2 (WLAN+BT Ant) | High-Tek Electronics Co.,Ltd | DC33001JB30 | 2.72 | 5.75~5.85 | PIFA | i-pex(MHF) | 1.09 | |
| | | | -1.55 | 2.4~2.4835 | PIFA | i-pex(MHF) | 0.98 | 390 |
| | | | 1.57 | 5.15~5.35 | PIFA | i-pex(MHF) | 1.53 | |
| | | | 2.77 | 5.47~5.7 | PIFA | i-pex(MHF) | 1.6 | 390 |
| | | | 1.70 | 5.75~5.85 | PIFA | i-pex(MHF) | 1.64 | |



A D T

TABLE 4 : EUT MAXIMUM CONDUCTED POWER

IEEE 802.11a

| ANT No. | FREQUENCY BAND (MHz) | MAX. POWER | |
|---------|----------------------|-------------------|------------------|
| | | OUTPUT POWER(dBm) | OUTPUT POWER(mW) |
| 2 | 5250~5350 | 15.11 | 32.434 |
| 2 | 5470~5725 | 16.11 | 40.832 |

IEEE 802.11ac(VHT20)

| ANT No. | FREQUENCY BAND (MHz) | MAX. POWER | |
|---------|----------------------|-------------------|------------------|
| | | OUTPUT POWER(dBm) | OUTPUT POWER(mW) |
| 1+2 | 5250~5350 | 18.32 | 67.9 |
| 1+2 | 5470~5725 | 18.7 | 74.158 |

IEEE 802.11ac(VHT40)

| ANT No. | FREQUENCY BAND (MHz) | MAX. POWER | |
|---------|----------------------|-------------------|------------------|
| | | OUTPUT POWER(dBm) | OUTPUT POWER(mW) |
| 1+2 | 5250~5350 | 17.48 | 56.017 |
| 1+2 | 5470~5725 | 17.4 | 54.943 |

IEEE 802.11ac(VHT80)

| ANT No. | FREQUENCY BAND (MHz) | MAX. POWER | |
|---------|----------------------|-------------------|------------------|
| | | OUTPUT POWER(dBm) | OUTPUT POWER(mW) |
| 1+2 | 5250~5350 | 11.68 | 14.724 |
| 1+2 | 5470~5725 | 11.48 | 14.047 |



A D T

TABLE 5 : EUT MAXIMUM EIRP POWER

IEEE 802.11a

| ANT No. | FREQUENCY BAND (MHz) | MAX. POWER | |
|---------|----------------------|-------------------|------------------|
| | | OUTPUT POWER(dBm) | OUTPUT POWER(mW) |
| 2 | 5250~5350 | 16.68 | 46.559 |
| 2 | 5470~5725 | 18.88 | 77.268 |

IEEE 802.11ac(VHT20)

| ANT No. | FREQUENCY BAND (MHz) | MAX. POWER | |
|---------|----------------------|-------------------|------------------|
| | | OUTPUT POWER(dBm) | OUTPUT POWER(mW) |
| 1+2 | 5250~5350 | 19.89 | 97.499 |
| 1+2 | 5470~5725 | 21.47 | 140.281 |

IEEE 802.11ac(VHT40)

| ANT No. | FREQUENCY BAND (MHz) | MAX. POWER | |
|---------|----------------------|-------------------|------------------|
| | | OUTPUT POWER(dBm) | OUTPUT POWER(mW) |
| 1+2 | 5250~5350 | 19.05 | 80.353 |
| 1+2 | 5470~5725 | 20.17 | 103.992 |

IEEE 802.11ac(VHT80)

| ANT No. | FREQUENCY BAND (MHz) | MAX. POWER | |
|---------|----------------------|-------------------|------------------|
| | | OUTPUT POWER(dBm) | OUTPUT POWER(mW) |
| 1+2 | 5250~5350 | 13.25 | 21.135 |
| 1+2 | 5470~5725 | 14.25 | 26.607 |



A D T

2.4 TRANSMIT POWER CONTROL (TPC)

U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an EIRP of less than 500 mW.

Maximum EIRP of this device is 140.281mW which less than 500mW, therefore it's not require TPC function.

2.5 STATEMENT OF MANUFACTURER

This device (Client) is without radar detection, then the manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user. **And the device doesn't have Ad Hoc mode on DFS frequency band.**



A D T

3. U-NII DFS RULE REQUIREMENTS

3.1 WORKING MODES AND REQUIRED TEST ITEMS

The manufacturer shall state whether the UUT is capable of operating as a Master and/or a Client. If the UUT is capable of operating in more than one operating mode then each operating mode shall be tested separately. See tables 6 and 7 for the applicability of DFS requirements for each of the operational modes.

TABLE 6: APPLICABILITY OF DFS REQUIREMENTS PRIOR TO USE A CHANNEL

| REQUIREMENT | OPERATIONAL MODE | | |
|---------------------------------|------------------|--------------------------------|-----------------------------|
| | MASTER | CLIENT WITHOUT RADAR DETECTION | CLIENT WITH RADAR DETECTION |
| Non-Occupancy Period | ✓ | ✓ | ✓ |
| DFS Detection Threshold | ✓ | Not required | ✓ |
| Channel Availability Check Time | ✓ | Not required | Not required |
| Uniform Spreading | ✓ | Not required | Not required |
| U-NII Detection Bandwidth | ✓ | Not required | ✓ |

TABLE 7: APPLICABILITY OF DFS REQUIREMENTS DURING NORMAL OPERATION

| REQUIREMENT | OPERATIONAL MODE | | |
|-----------------------------------|------------------|--------------------------------|-----------------------------|
| | MASTER | CLIENT WITHOUT RADAR DETECTION | CLIENT WITH RADAR DETECTION |
| DFS Detection Threshold | ✓ | Not required | ✓ |
| Channel Closing Transmission Time | ✓ | ✓ | ✓ |
| Channel Move Time | ✓ | ✓ | ✓ |
| U-NII Detection Bandwidth | ✓ | Not required | ✓ |



3.2 TEST LIMITS AND RADAR SIGNAL PARAMETERS

DETECTION THRESHOLD VALUES

TABLE 8: DFS DETECTION THRESHOLDS FOR MASTER DEVICES AND CLIENT DEVICES WITH RADAR DETECTION

| MAXIMUM TRANSMIT POWER | VALUE (SEE Note 1 and 2) |
|------------------------|--------------------------|
| ≥ 200 milliwatt | -64 dBm |
| < 200 milliwatt | -62 dBm |

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.



TABLE 9: DFS RESPONSE REQUIREMENT VALUES

| PARAMETER | VALUE |
|-----------------------------------|---|
| Non-occupancy period | Minimum 30 minutes |
| Channel Availability Check Time | 60 seconds |
| Channel Move Time | 10 seconds See Note 1. |
| Channel Closing Transmission Time | 200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2. |
| U-NII Detection Bandwidth | Minimum 80% of the UNII 99% transmission power bandwidth. See Note 3. |

Note 1: The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

- For the Short Pulse Radar Test Signals this instant is the end of the Burst.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar Burst generated.
- For the Long Pulse Radar Test Signal this instant is the end of the 12 second period defining the Radar Waveform.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.



PARAMETERS OF DFS TEST SIGNALS

Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

TABLE 10: SHORT PULSE RADAR TEST WAVEFORMS

| RADAR TYPE | PULSE WIDTH (μsec) | PRI (μsec) | NUMBER OF PULSES | MINIMUM PERCENTAGE OF SUCCESSFUL DETECTION | MINIMUM NUMBER OF TRIALS |
|-----------------------------|--------------------|------------|------------------|--|--------------------------|
| 1 | 1 | 1428 | 18 | 60% | 30 |
| 2 | 1-5 | 150-230 | 23-29 | 60% | 30 |
| 3 | 6-10 | 200-500 | 16-18 | 60% | 30 |
| 4 | 11-20 | 200-500 | 12-16 | 60% | 30 |
| Aggregate (Radar Types 1-4) | | | | 80% | 120 |

TABLE 11: LONG PULSE RADAR TEST WAVEFORM

| RADAR TYPE | PULSE WIDTH (μsec) | CHIRP WIDTH (MHz) | PRI (μsec) | NUMBER OF PULSES PER BURST | NUMBER OF BURSTS | MINIMUM PERCENTAGE OF SUCCESSFUL DETECTION | MINIMUM NUMBER OF TRIALS |
|------------|--------------------|-------------------|------------|----------------------------|------------------|--|--------------------------|
| 5 | 50-100 | 5-20 | 1000-2000 | 1-3 | 8-20 | 80% | 30 |

TABLE 12: FREQUENCY HOPPING RADAR TEST WAVEFORM

| RADAR TYPE | PULSE WIDTH (μsec) | PRI (μsec) | PULSES PER HOP | HOPPING RATE (kHz) | HOPPING SEQUENCE LENGTH (msec) | MINIMUM PERCENTAGE OF SUCCESSFUL DETECTION | MINIMUM NUMBER OF TRIALS |
|------------|--------------------|------------|----------------|--------------------|--------------------------------|--|--------------------------|
| 6 | 1 | 333 | 9 | 0.333 | 300 | 70% | 30 |



4. TEST & SUPPORT EQUIPMENT LIST

4.1 TEST INSTRUMENTS

TABLE 13: TEST INSTRUMENTS LIST.

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|-----------------------------|-----------|------------|-----------------|------------------|
| Spectrum Analyzer R&S | FSW8 | 101497 | Aug.07.2013 | Aug 06, 2014 |
| Vector Signal Generator R&S | SMJ100A | 101878 | Aug 13, 2013 | Aug 12, 2014 |

4.2 DESCRIPTION OF SUPPORT UNITS

TABLE 14: SUPPORT UNIT INFORMATION.

| NO. | PRODUCT | BRAND | MODEL NO. | ID | SPEC. |
|-----|--------------------|-------|-----------|---------------------|---|
| 1 | WIRELESS AC MODULE | Alpha | WMC-AC01 | RRK20120600 56-1 | The maximum EIRP is 27.64 dBm, Antenna Gain is 3.428dBi |

NOTE: This device was functioned as a Master Slave device during the DFS test.

TABLE 15: SOFTWARE/FIRMWARE INFORMATION.


| NO. | PRODUCT | MODEL NO. | SOFTWARE/FIRMWARE VERSION |
|-----|--------------------|-----------|---------------------------|
| 1. | WIRELESS AC MODULE | WMC-AC01 | 1.00 Wed 06 Mar 2013 |

5. TEST PROCEDURE

5.1 BVADT DFS MEASUREMENT SYSTEM:

A complete BVADT DFS Measurement System consists of two subsystems: (1) the Radar Signal Generating Subsystem and (2) the Traffic Monitoring Subsystem. The control PC is necessary for generating the Radar waveforms in Table 10, 11 and 12. The traffic monitoring subsystem is specified to the type of unit under test (UUT).

CONDUCTED SETUP CONFIGURATION OF ADT DFS MEASUREMENT SYSTEM

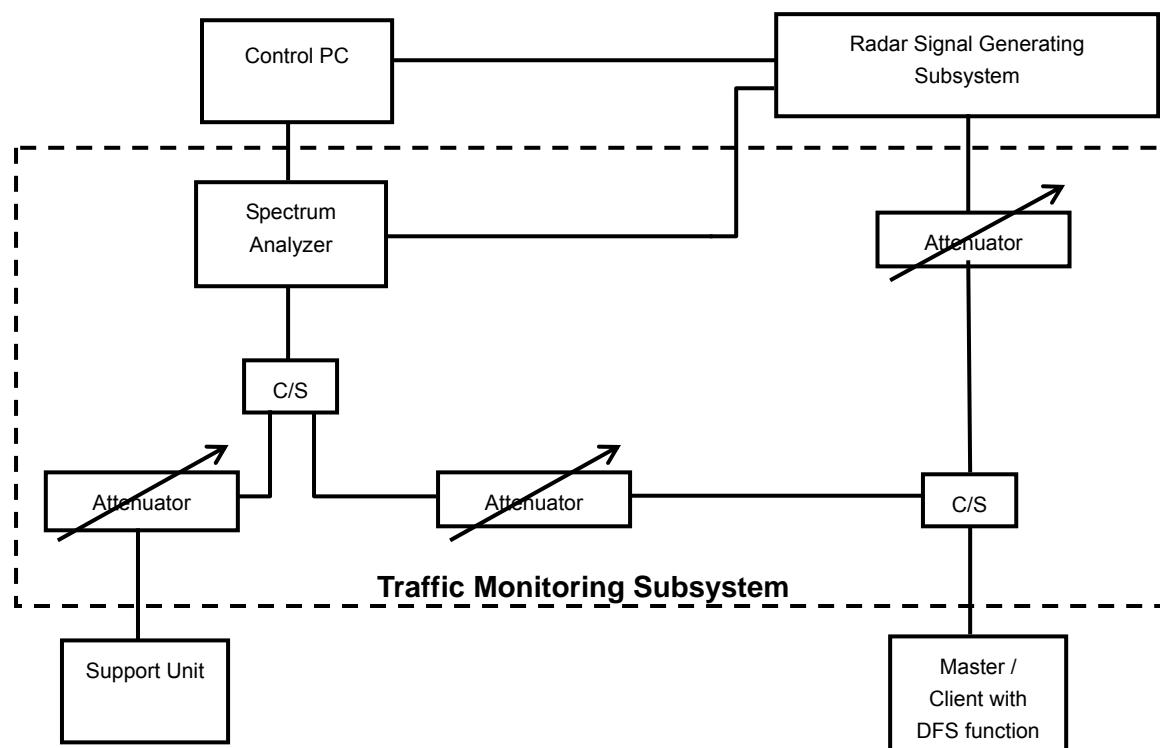


The test transmission will always be from the Master Device to the Client Device. While the Client device is set up to associate with the Master device and play the MPEG file (6 $\frac{1}{2}$ Magic Hours) from Master device, the designated MPEG test file and instructions are located at:

<http://ntiacsd.ntia.doc.gov/dfs/>.

5.2 CALIBRATION OF DFS DETECTION THRESHOLD LEVEL:

The measured channel is 5500 MHz in 20MHz Bandwidth, 5510MHz in 40MHz Bandwidth and 5530MHz in 80MHz Bandwidth. The radar signal was the same as transmitted channels, and injected into the antenna port of AP (master) or Client Device with Radar Detection, measured the channel closing transmission time and channel move time. The Master antenna gain is 3.428dBi and required detection threshold is -59.572dBm (= -64 +1 +3.428)dBm. The calibrated conducted detection threshold level is set to -59.572 dBm.

CONDUCTED SETUP CONFIGURATION OF CALIBRATION OF DFS DETECTION THRESHOLD LEVEL

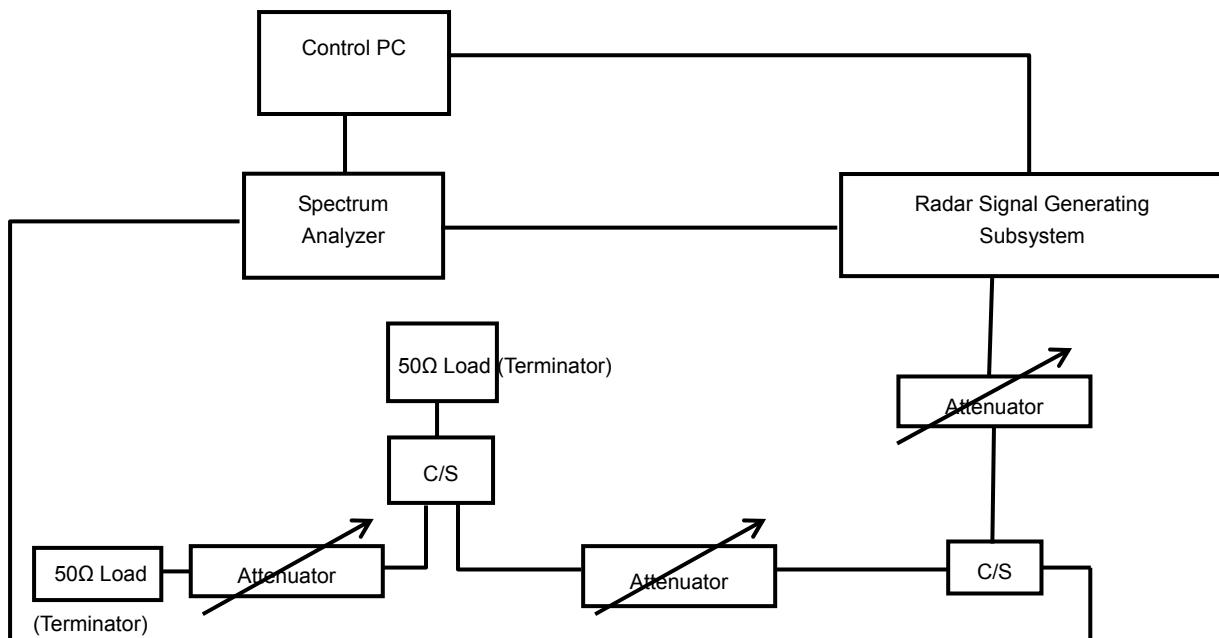


5.3 DEVIATION FROM TEST STANDARD

No deviation.

5.4 CONDUCTED TEST SETUP CONFIGURATION

5.4.1 CLIENT WITHOUT RADAR DETECTION MODE

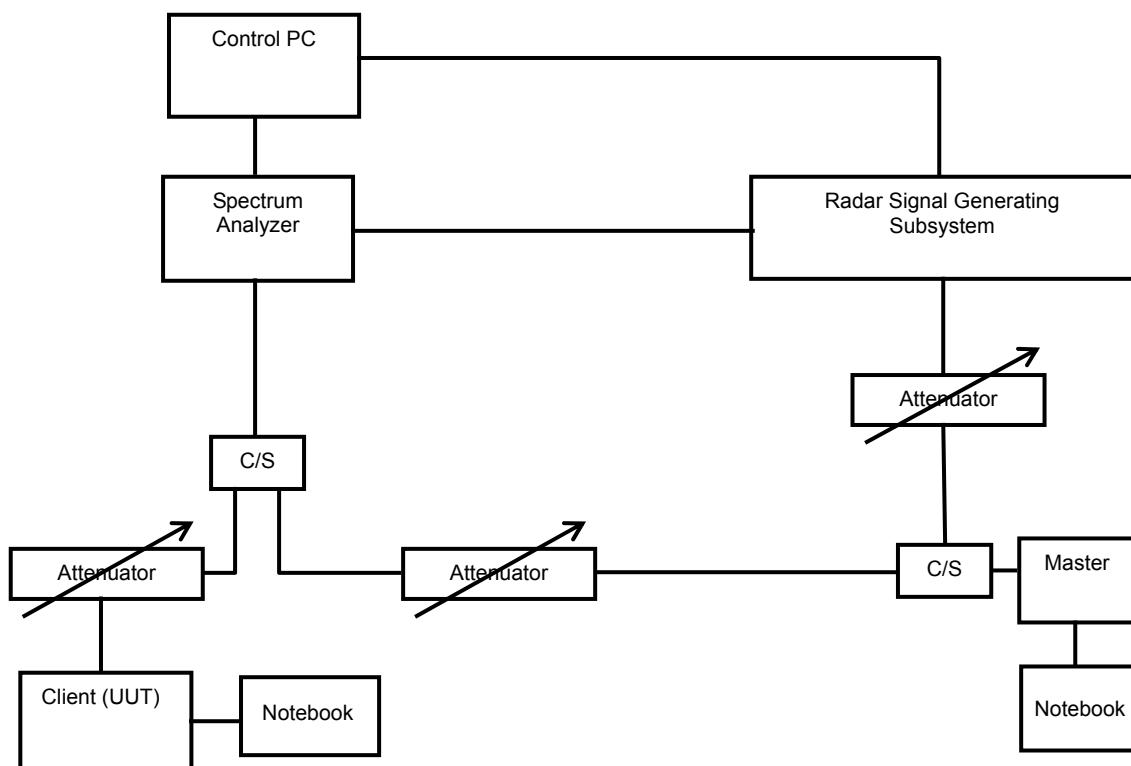

The UUT is a U-NII Device operating in Client mode without radar detection. The radar test signals are injected into the Master Device.



6. TEST RESULTS

6.1 SUMMARY OF TEST RESULTS

| CLAUSE | TEST PARAMETER | REMARKS | PASS/FAIL |
|--------|-----------------------------------|----------------|-----------|
| 15.407 | DFS Detection Threshold | Not Applicable | NA |
| 15.407 | Channel Availability Check Time | Not Applicable | NA |
| 15.407 | Channel Move Time | Applicable | Pass |
| 15.407 | Channel Closing Transmission Time | Applicable | Pass |
| 15.407 | Non- Occupancy Period | Applicable | Pass |
| 15.407 | Uniform Spreading | Not Applicable | NA |
| 15.407 | U-NII Detection Bandwidth | Not Applicable | NA |
| 15.407 | Non-associated test | Applicable | Pass |
| 15.407 | Non-Co-Channel test | Applicable | Pass |

6.2 DETAILED TEST RESULTS

6.2.1 TEST MODE: DEVICE OPERATING IN CLIENT WITHOUT RADAR DETECTION MODE.


The radar test signals are injected into the Master Device.

This test was investigated for different bandwidth (20MHz、40MHz and 80MHz).

The following plots was done on 80MHz as a representative

6.2.1.1 DFS DETECTION THRESHOLD


The Required detection threshold is -59.572dBm (= -64 +3.428+1)dBm. The conducted radar burst level is set to -59.572dBm.

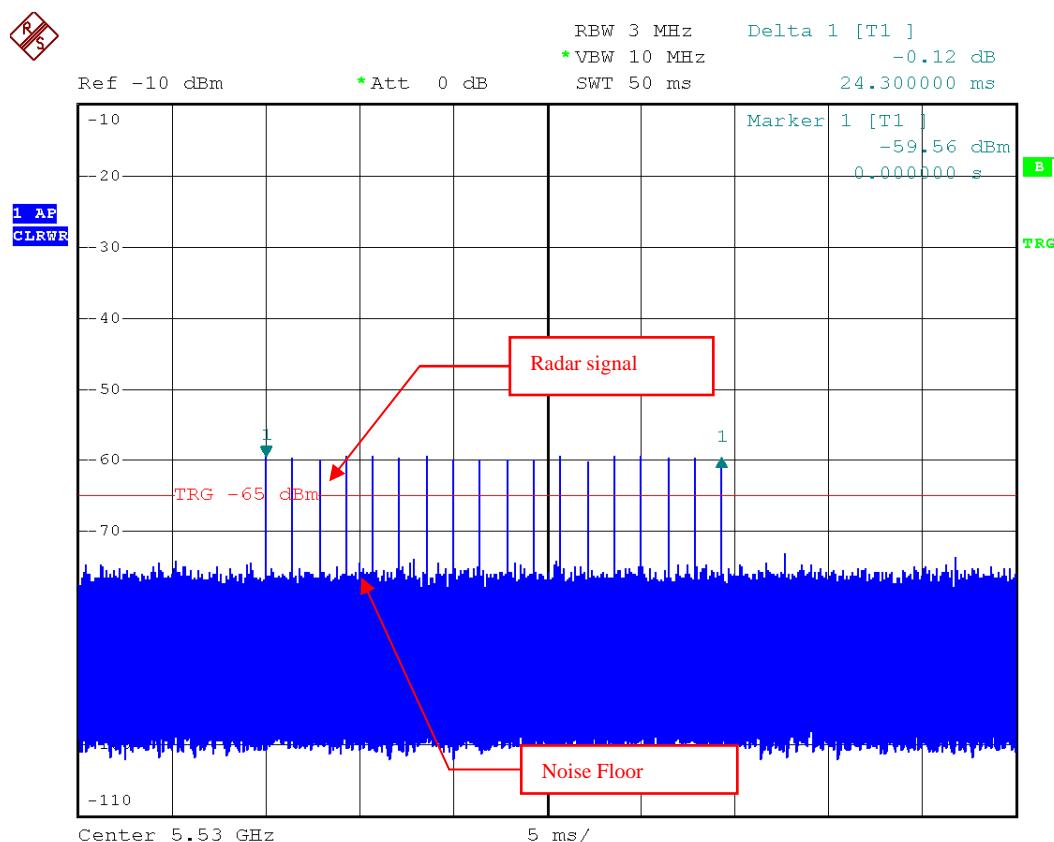

Radar Signal 1


6.2.1.2 CHANNEL CLOSING TRANSMISSION AND CHANNEL MOVE TIME

Channel Closing Transmission Time & Channel Move Time ac80 @ CH 106 - 5530 MHz

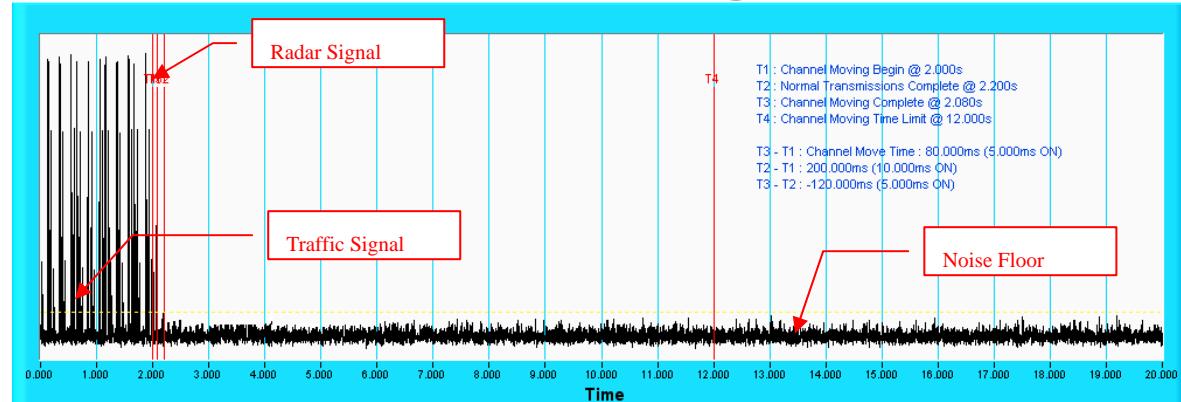

NOTE: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

Channel Closing Transmission Time & Channel Move Time ac80 @ CH 106 - 5530 MHz

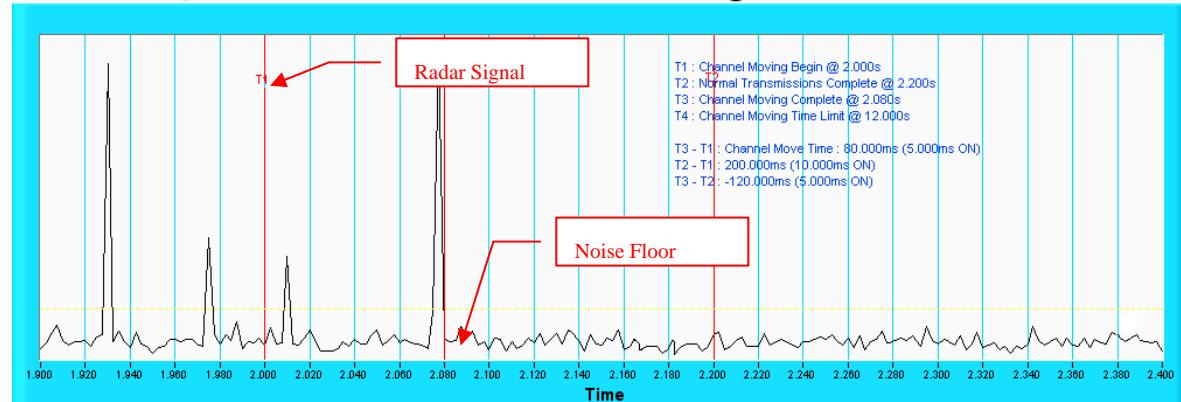


NOTE: An expanded plot for the device vacates the channel in the required 500ms.

6.2.1.3 NON- OCCUPANCY PERIOD


ASSOCIATED TEST

1) Test results demonstrating an associated client link is established with the master on a test frequency.

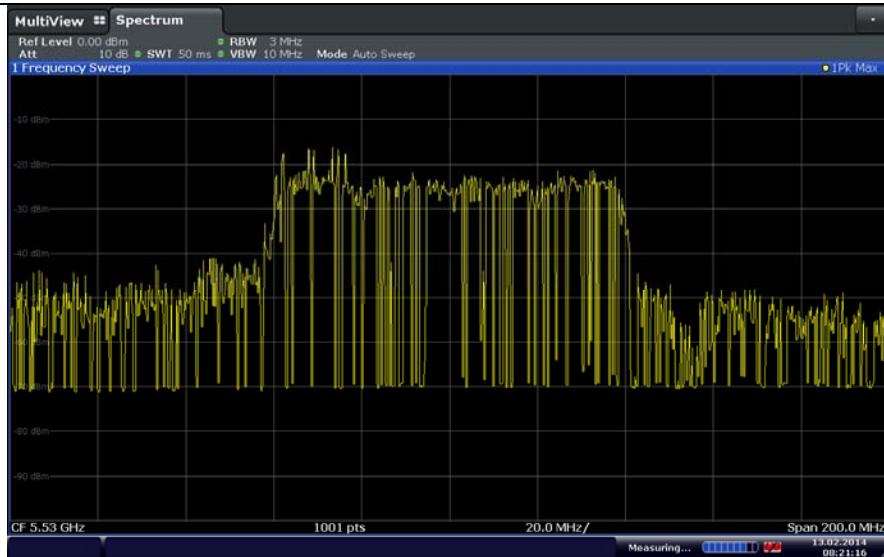


EUT (Client) links with master on 5530MHz

2) The client and DFS-certified master device are associated, and the movie can be streamed as specified in the DFS Order for a non-occupancy period test.

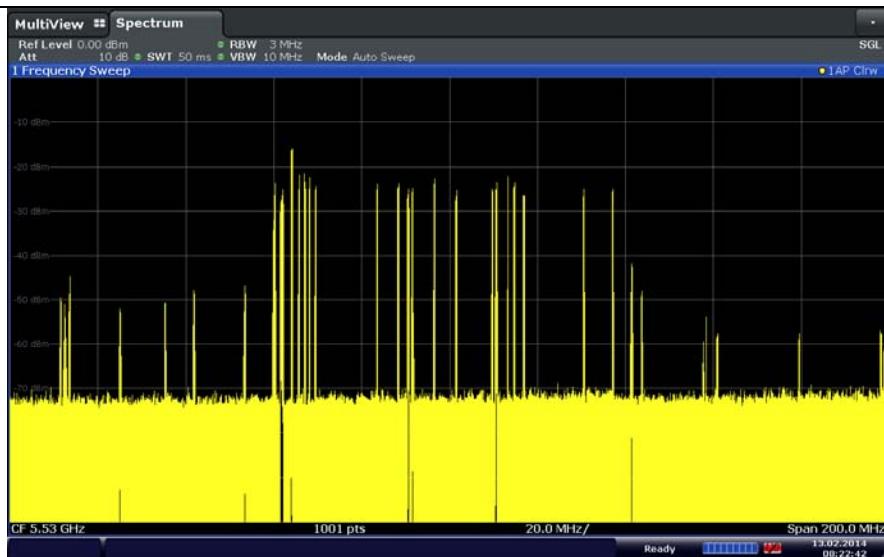

Client plays a specified files via master.

3). The device transmits one type of radar as specified in the DFS Order.

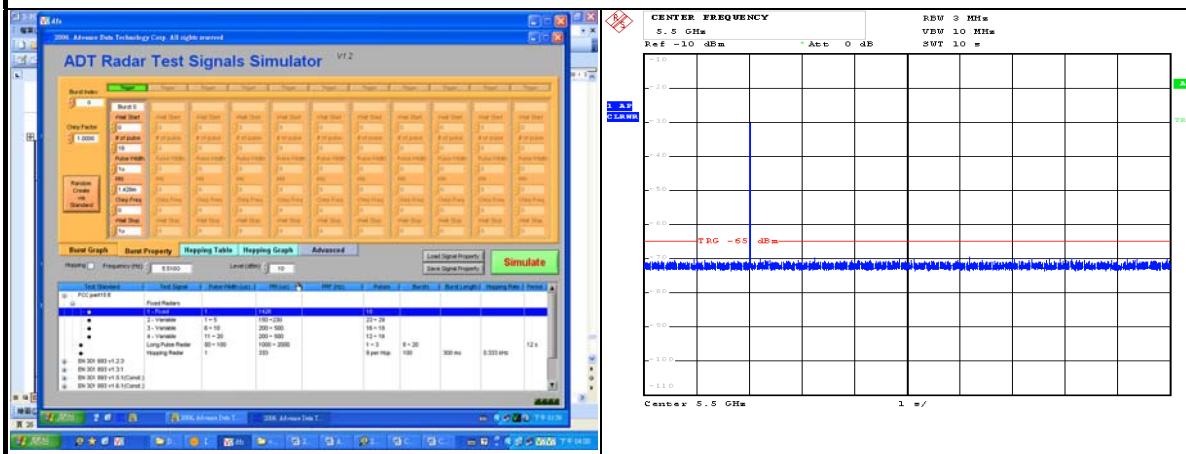


Radar 1 is used to test during DFS testing.

4) The test frequency has been monitored to ensure no transmission of any type has occurred for 30 minutes;

Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear;

5) An analyzer plot that contains a single 30-minute sweep on the original test frequency.

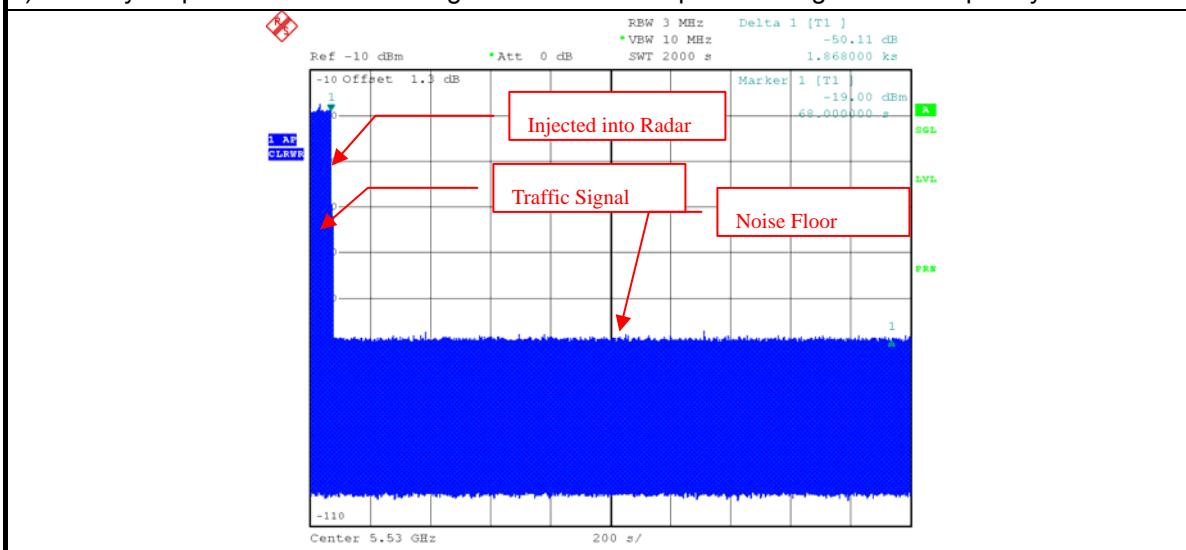


6.2.1.4 NON-ASSOCIATED TEST

Master was off.

During the 30 minutes observation time, The UUT did not make any transmissions in the DFS band after UUT power up.

Non - Associated Test @ CH102 - 5510MHz

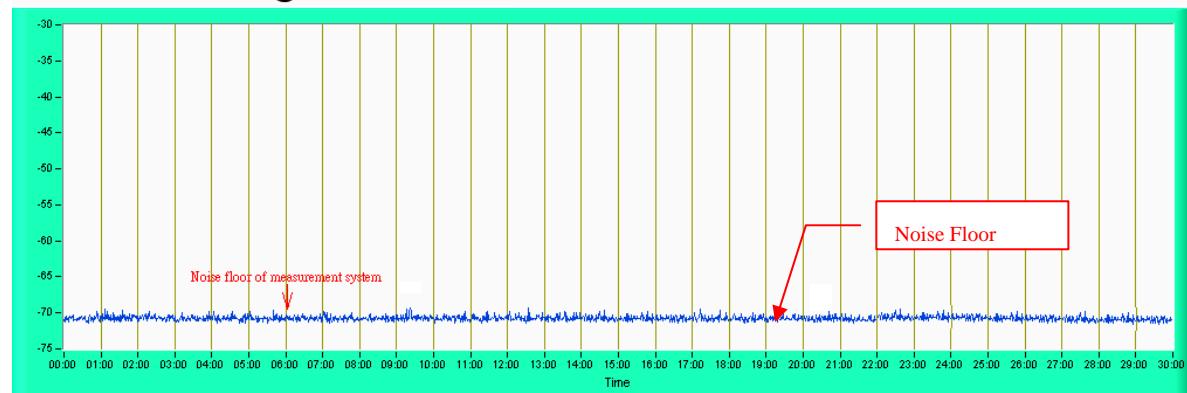

6.2.1.5 NON- CO-CHANNEL TEST

The UUT was investigated after radar was detected the channel and made sure no co-channel operation with radars.



A D T

7. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232
Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.





A D T

8. APPENDIX-A

Notch band in 5600-5650MHz


Verify that the 5600 - 5650 MHz band is notched.

Test results demonstrating last channel shall not exceed the band edge on 5600~5650MHz.

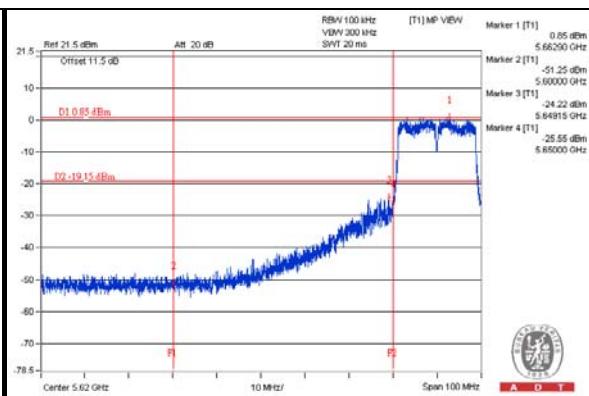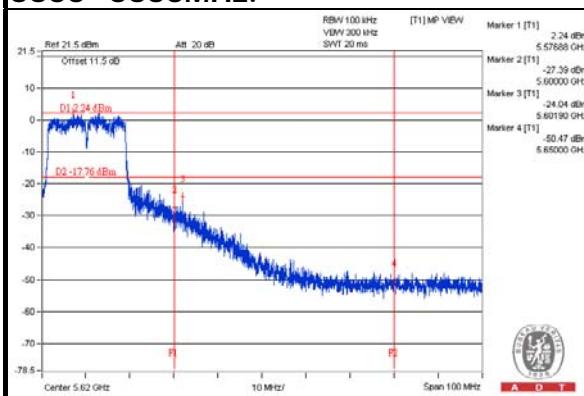

**802.11n (20MHz) OFDM MODULATION
(CH 116: 5580MHz)**


**802.11n (20MHz) OFDM MODULATION
(CH 132: 5660MHz)**

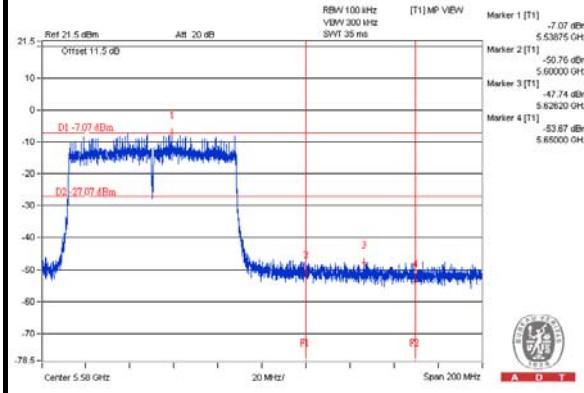

**802.11ac (80MHz) OFDM
MODULATION
(CH 106: 5530MHz)**


NON BEACON ON DFS BAND

- 1) Test results demonstrating no any beacon on DFS band after power up.
- 2) Observation time is 10min after power up.

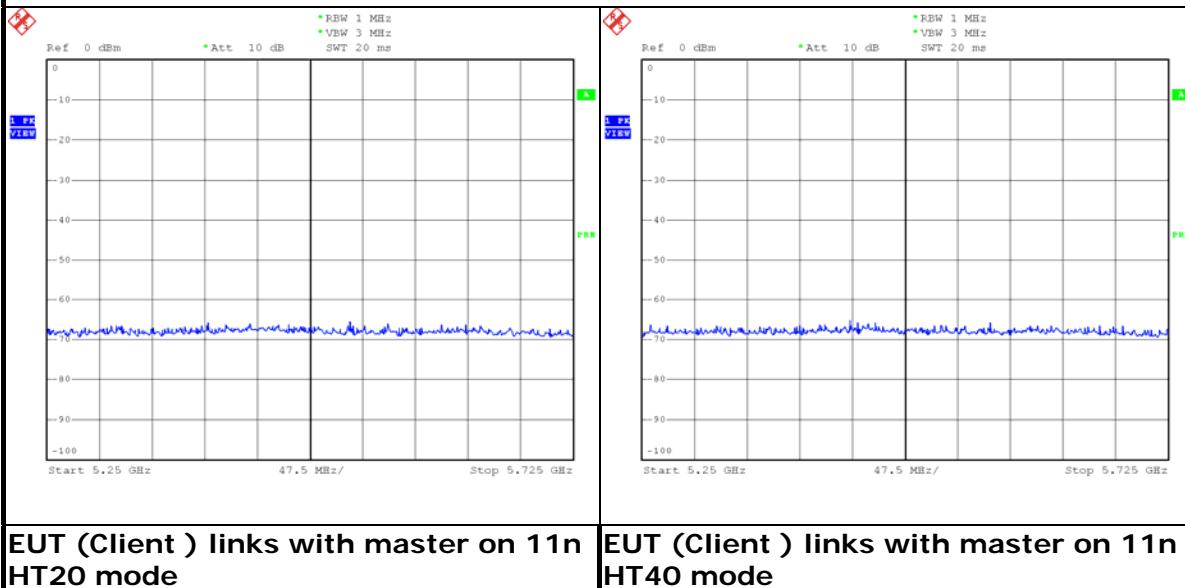

BAND EDGE AT NEARBY DFS BAND

- 1) Test results demonstrating last channel (20dB BW) shall not exceed the band edge on 5150~5250MHz.

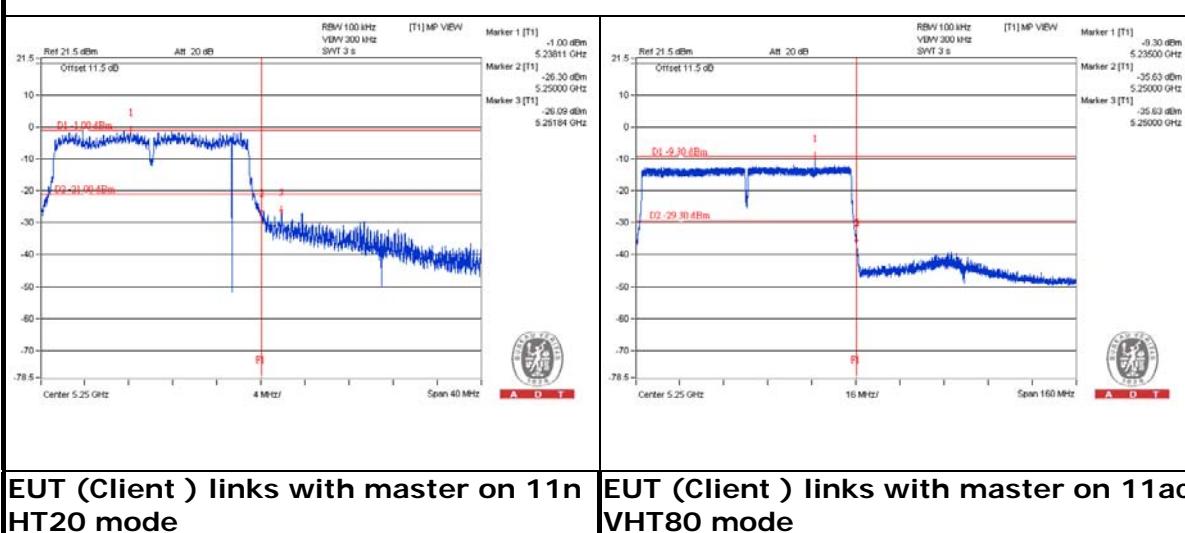



A D T

9. APPENDIX B - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---