



Compliance Certification Services Inc.

Report No: C140611S03-SF

FCCID: COJTALPV2B711

Date of Issue :June 16, 2014

WIFI-Body	2
WIFI-Body -Edge1	3



Test Laboratory: Compliance Certification Services Inc.

Date: 6/13/2014

WIFI-Body Rear CH6**DUT: Tablet; Type: V2;**

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.992$ S/m; $\epsilon_r = 50.46$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.08, 7.08, 7.08); Calibrated: 7/26/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial: TP:1102
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)


WIFI/IEEE802.11b Body Rear CH6/Area Scan (8x8x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.375 W/kg**WIFI/IEEE802.11b Body Rear CH6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.283 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.571 W/kg

SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.120 W/kg

Maximum value of SAR (measured) = 0.449 W/kg

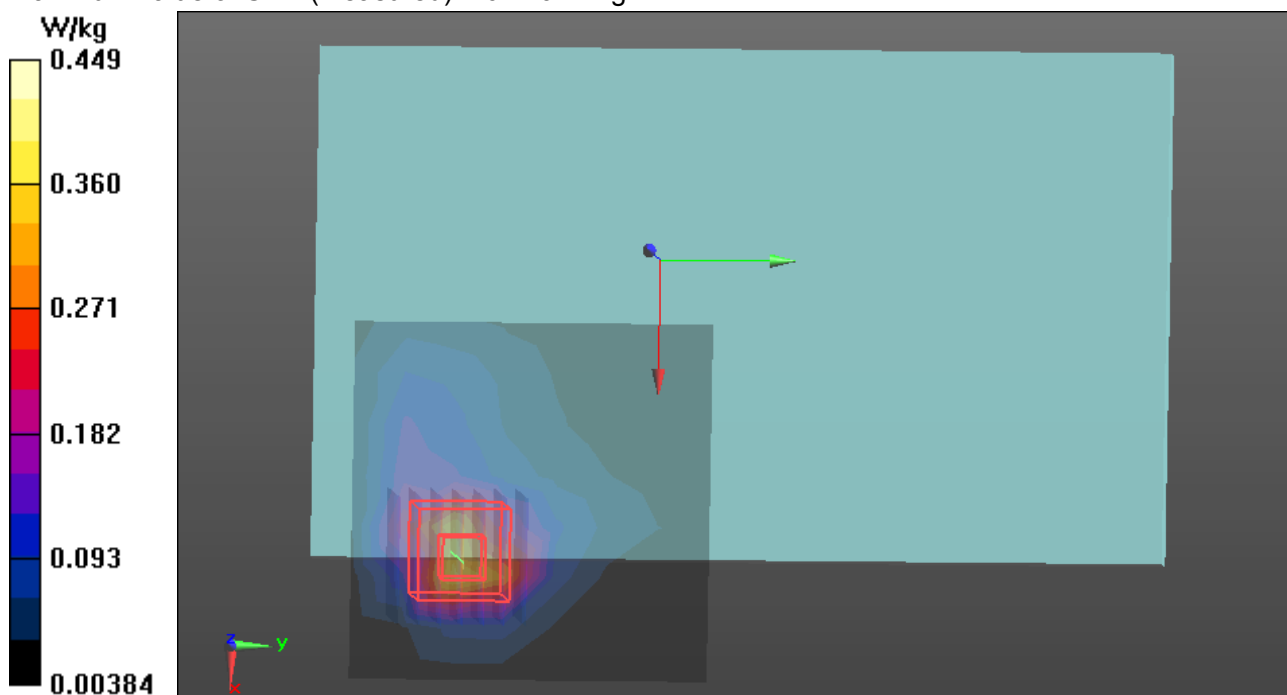



Test Laboratory: Compliance Certification Services Inc.

Date: 6/13/2014

WIFI-Body -Edge1 Rear CH6**DUT: Tablet; Type: V2;**

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.992$ S/m; $\epsilon_r = 50.46$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.08, 7.08, 7.08); Calibrated: 7/26/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial: TP:1102
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WIFI/IEEE802.11b Body Rear CH6/Area Scan (13x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.601 W/kg

WIFI/IEEE802.11b Body Rear CH6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.899 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.992 W/kg

SAR(1 g) = 0.375 W/kg; SAR(10 g) = 0.151 W/kg

Maximum value of SAR (measured) = 0.689 W/kg

