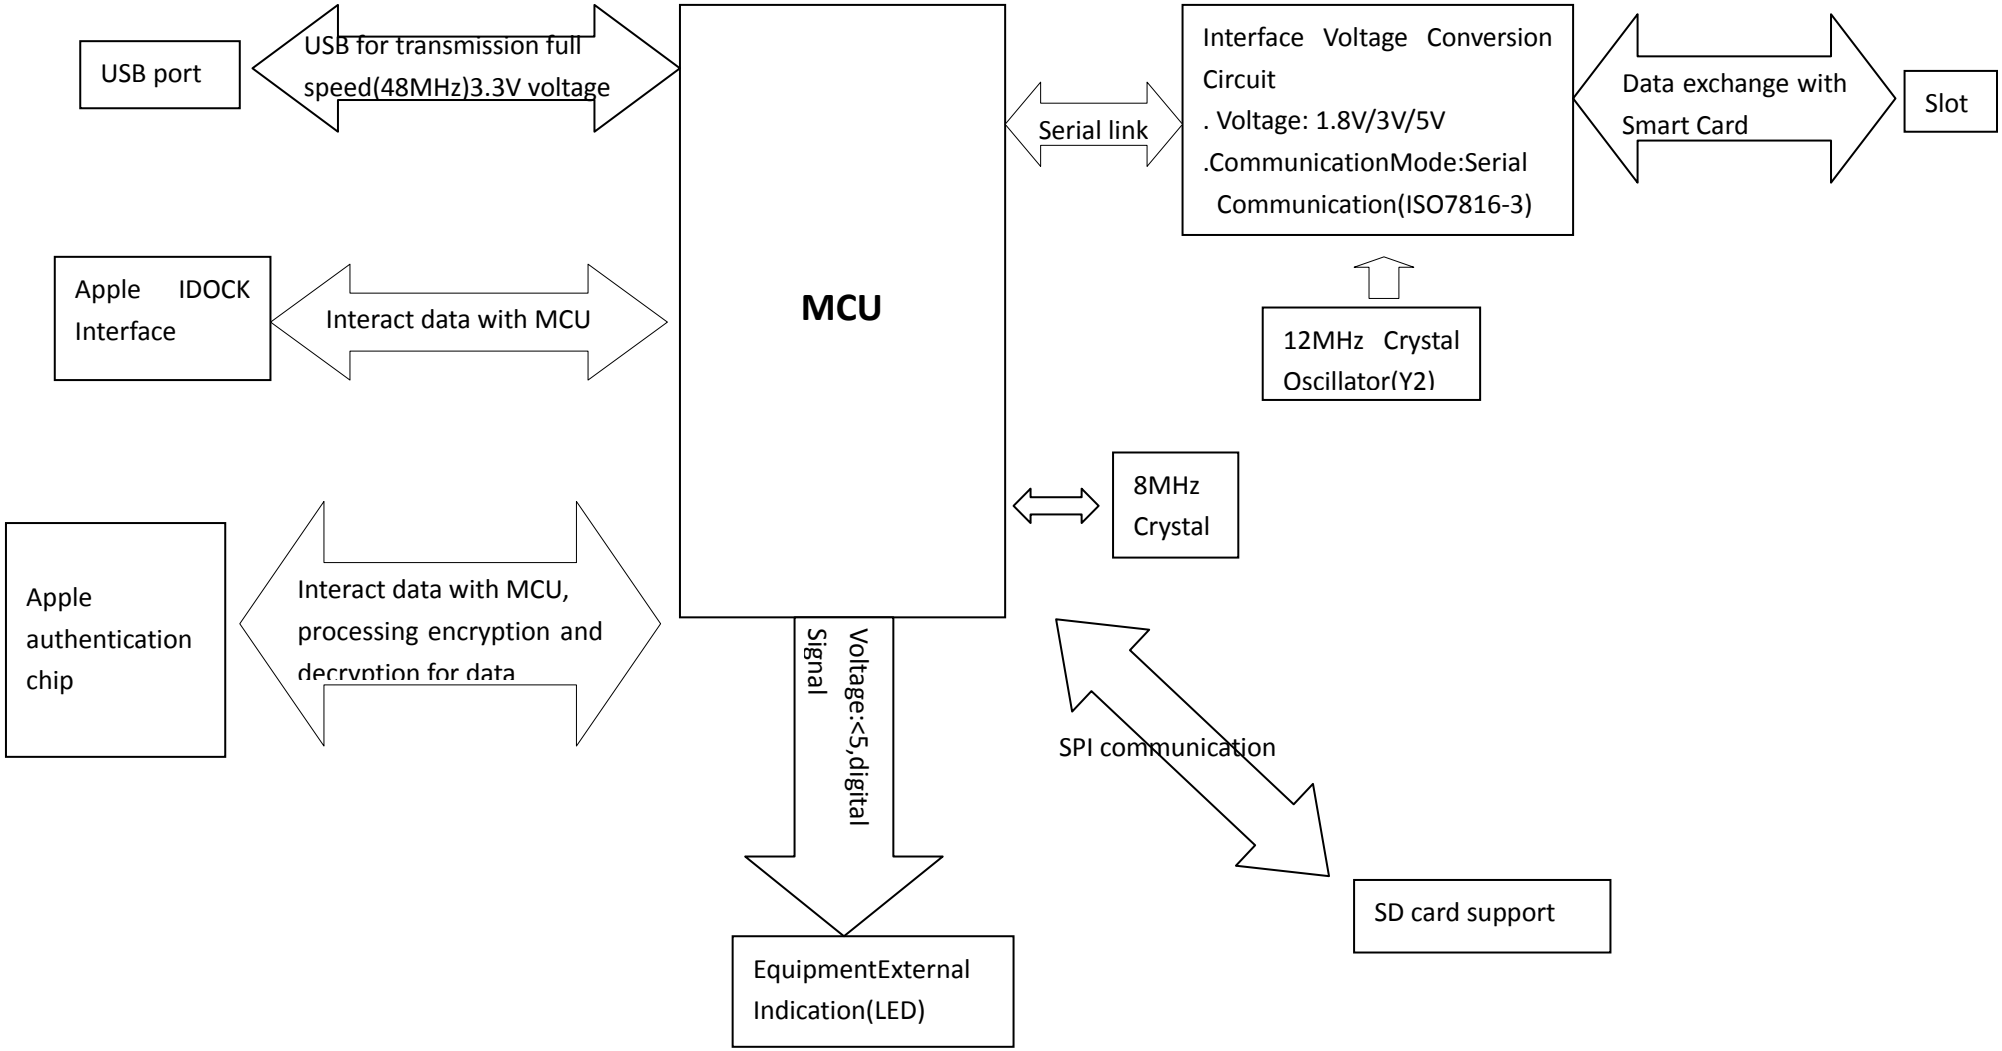
USB port
USB for transmission full speed(48MHz)3.3V voltage
Apple IDOCK Interface
Interact data with MCU
Apple authentication chip
Interact data with MCU, processing encryption and decryption for data
MCU
Serial link
Interface Voltage Conversion Circuit
. Voltage: 1.8V/3V/5V
.CommunicationMode:Serial Communication(ISO7816-3)
Data exchange with Smart Card
Slot
12MHz Crystal Oscillator(Y2)
8MHz Crystal
Voltage:<5,digital Signal
EquipmentExternal Indication(LED)
SPI communication
SD card support