




Mobile payment in your life

SmartCard Reader and
Payment Adaptor for
iphone/ipad

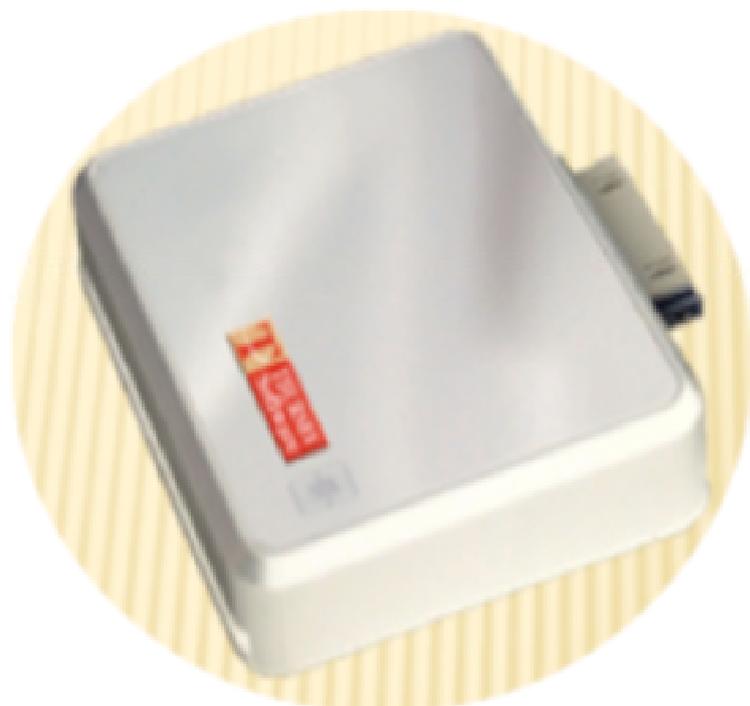

The users manual or instruction manual shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation :

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



 HHXT

Smartcard reader can be applied to iPhone/iPad/iPod or PCs. It is applied to IC operation and high security application requiring electronic payment, network security, e-commerce and authentication etc. It is an ideal product for authentication, e-commerce, family bank, information security, identity and access control systems.

Application

Interface Type	Full speed Micro-USB2.0(12M bps)
Power Supply Mode	USB 5V
Communication Protocol	PC/SC, CCID
Card Interface	ISO/IEC 7816-1/2/3 SmartCard, MicroSD Interface ISO 7816-4 SmartCard
Data Transfer Rate	9600-38400bps
Supported Operating System	IOS(3.x and higher),OSX(10.5.6 and higher),Andriod 2.x, linux(2.6 and higher),windows CE(5.0 and higher),windows(xp and higher)
Operating Temperature	0℃~50℃
Operating Humidity	20~85%
Standard and Certiflon	ISO-7816 Class A, B, C(5V, 3V, 1.8V) EN 60950/IEC 60950, EMV2000 Level 1

Financial Application / Enterprise Security / Public Service / Catering, Entertainment, Consumption

 HHXT

Beijing huahuixintong Technology Co.,Ltd
Room 619, Digital Media Plaza, No.7, Xinxu Road,Shangdi, Haidian District, Beijing,100085, China
Tel:0086-10-62967290
E-mail:market@ewcdma.com vivienne@ewcdma.com Website:www.ewcdma.com