

FCC PART 15 CLASS B
EMI MEASUREMENT AND TEST REPORT
For

Shenzhen Starworth Manufacturing Co., Ltd
Building No.27,ChenTian Industrial Estate,Xixiang,Bao'an,ShenZhen,China

FCC ID: COQSB-B07B-M24

December 11, 2012

This Report Concerns: Original Report	Equipment Type: MID
Test Engineer:	Anna Lv <i>Anna Lv</i>
Test Engineer of performing the tests:	Hans Hu <i>Hans Hu</i>
Report No.:	BST12111048Y
Receive EUT Date/Test Date:	November 19, 2012/ November 19, 2012- December 11, 2012
Reviewed By:	Mike Moo <i>Mike Moo</i>
Prepared By:	Shenzhen BST Technology Co.,Ltd. 3F,Weames Technology Building, No. 10 Kefa Road, Science Park, Nanshan District,Shenzhen,Guangdong,China Tel: 0755-26747751-3 Fax: 0755-26747751-3 ext.826

Note: The test report is specially limited to the above company and this particular sample only. It may not be duplicated without prior written consent of Shenzhen Starworth Manufacturing Co., Ltd This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the US Government.

TABLE OF CONTENTS

1.	GENERAL INFORMATION	3
1.1.	Report information.....	3
2.	PRODUCT DESCRIPTION	4
2.1.	EUT Description	4
2.2.	Block Diagram of EUT Configuration	4
2.3.	Support Equipment List	4
2.4.	Test Conditions	5
3.	TEST RESULTS SUMMARY	6
4.	TEST EQUIPMENT USED	7
5.	CONDUCTED EMISSION TEST	8
5.1.	Measurement Uncertainty	8
5.2.	Block Diagram of Test Setup	8
5.3.	Test Standard	8
5.4.	Conducted Emission Limit(Class B)	9
5.5.	EUT Configuration on Test	9
5.6.	Operating Condition of EUT	9
5.7.	Test Procedure	9
5.8.	Test Result	9
6.	RADIATED EMISSION MEASUREMENT	12
6.1.	Measurement Uncertainty	12
6.2.	Block Diagram of EUT Configuration	12
6.3.	Test Standard	12
6.4.	Radiated Emission Limit(Class B)	13
6.5.	EUT Configuration on Test	13
6.6.	Operating Condition of EUT	13
6.7.	Test Procedure	14
6.8.	Test Result	14

1. GENERAL INFORMATION

1.1. Report information

1.1.1.This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that Shenzhen Starworth Manufacturing Co., Ltd approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that Shenzhen Starworth Manufacturing Co., Ltd in any way guarantees the later performance of the product/equipment.

1.1.2.The sample/s mentioned in this report is/are supplied by Applicant, Shenzhen Starworth Manufacturing Co., Ltd therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through Shenzhen Starworth Manufacturing Co., Ltd, unless the applicant has authorized Shenzhen Starworth Manufacturing Co., Ltd in writing to do so.

Test Facility -

The test site used to collect the radiated data is located on the address of
Global United Technology Service Co., Ltd
(FCC Registered Test Site Number: 600491) on
2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District,
Shenzhen, China 518102

The Test Site is constructed and calibrated to meet the FCC requirements.


2. PRODUCT DESCRIPTION

2.1. EUT Description

Applicant : Shenzhen Starworth Manufacturing Co., Ltd
 Address : Building No.27, ChenTian Industrial Estate, Xixiang, Bao'an, ShenZhen, China
 Manufacturer : Shenzhen Starworth Manufacturing Co., Ltd
 Address : Building No.27, ChenTian Industrial Estate, Xixiang, Bao'an, ShenZhen, China
 EUT Description : MID
 Trade Name : 
 Model Number : SW-B07B-M24, LT7033E
 Power Supply : DC 5V (Powered by 120V/60 Hz Adapter)

The series products, model name: SW-B07B-M24, LT7033E have the same circuit diagram, PCB layout, software, RF Module, Features and functionality. The differences are the model name, so, we select SW-B07B-M24 to test.

2.2. Block Diagram of EUT Configuration

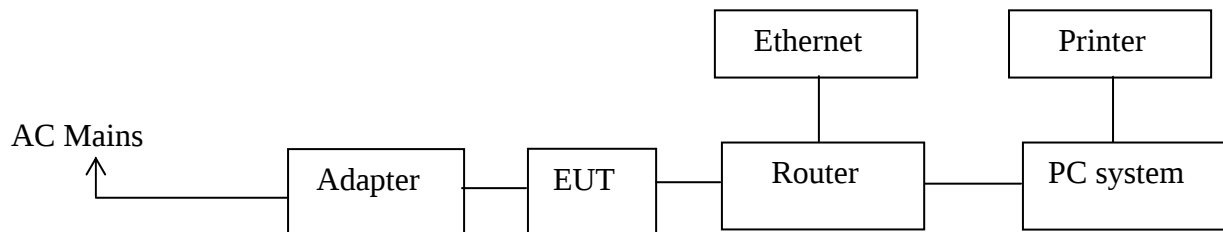

2.3. Support Equipment List

Name	Model No	S/N	Manufacturer	Used (Y/N)
Adapter Input:100-240V, 50/60Hz, 0.3A Max Output:5V, 2.0A	SMS-01050200-S04US	--	Shenzhen Starworth Manufacturing Co., Ltd	Y
PC system	AM1830	N/A	Acer	Y
Printer	HP1020	N/A	HP	Y
Router	PL-R860	N/A	TP-LINK	Y

2.4. Test Conditions

Temperature: 23~27°C

Relative Humidity: 50~63 %

3. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	Test Results
Conducted disturbance	Pass
Radiated disturbance	Pass

Remark: "N/A" means "Not applicable."

4. TEST EQUIPMENT USED

EQUIPMENT/FACILITIES	MANUFACTURER	MODEL	SERIAL NO.	DATE OF CAL.	CAL. INTERVAL
3m Semi-Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 30 2012	1 Year
Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Jul. 04 2012	1 Year
BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRO NIK	VULB9163	GTS214	Feb. 25 2012	1 Year
Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRO NIK	9120D-829	GTS208	June 30 2012	1 Year
Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 30 2012	1 Year
EMI Test Software	AUDIX	E3	N/A	N/A	N/A
Cable	Resenberger	N/A	NO.1	Apr. 6, 2012	1 Year
Cable	SCHWARZBECK	N/A	NO.2	Apr. 6, 2012	1 Year
Cable	SCHWARZBECK	N/A	NO.3	Apr. 6, 2012	1 Year
Amplifier(100kHz-3GHz)	HP	8347A	GTS204	Jul. 04 2012	1 Year
Amplifier(2GHz-20GHz)	HP	8349B	GTS206	Jul. 04 2012	1 Year
Amplifier (18-26GHz)	R&S	AFS33-1800 2 650-30-8P-4 4	GTS218	June 30 2012	1 Year
Band filter	Amindeon	82346	GTS219	Mar. 31 2012	1 Year
Active Loop Antenna	Beijing Daze	ZN30900A	GTS215	Mar. 31 2012	1 Year
Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	Sep. 08 2012	1 Year
EMI Test Receiver	R&S	ESCS30	GTS223	Jul. 04 2012	1 Year
10dB Pulse Limita	R&S	N/A	GTS224	Jul. 04 2012	1 Year
Coaxial Switch	ANRITSU CORP	MP59B	GTS225	Jul. 04 2012	1 Year
LISN	SCHWARZBECK MESS-ELEKTRO NIK	NSLK 8127	GTS226	Jul. 04 2012	1 Year
Coaxial Cable	SCHWARZBECK	N/A	NO.4	Apr. 6, 2012	1 Year
EMI Test Software	AUDIX	E3	N/A	N/A	N/A


5. CONDUCTED EMISSION TEST

5.1. Measurement Uncertainty


The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is + 2.88 dB.

5.2. Block Diagram of Test Setup

5.2.1. Block Diagram of connection between the EUT and the simulators

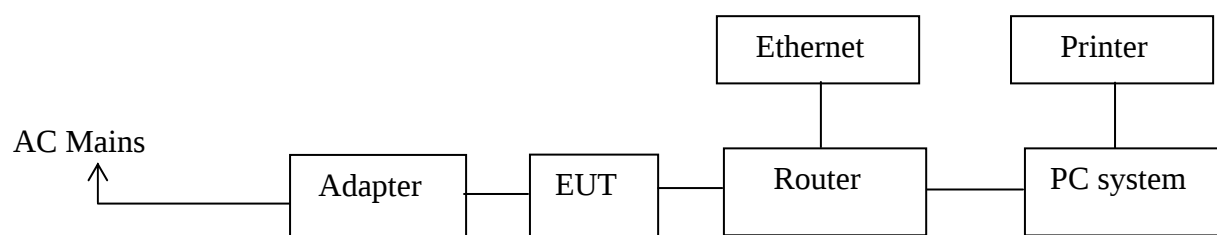

5.2.2. Test Setup Diagram

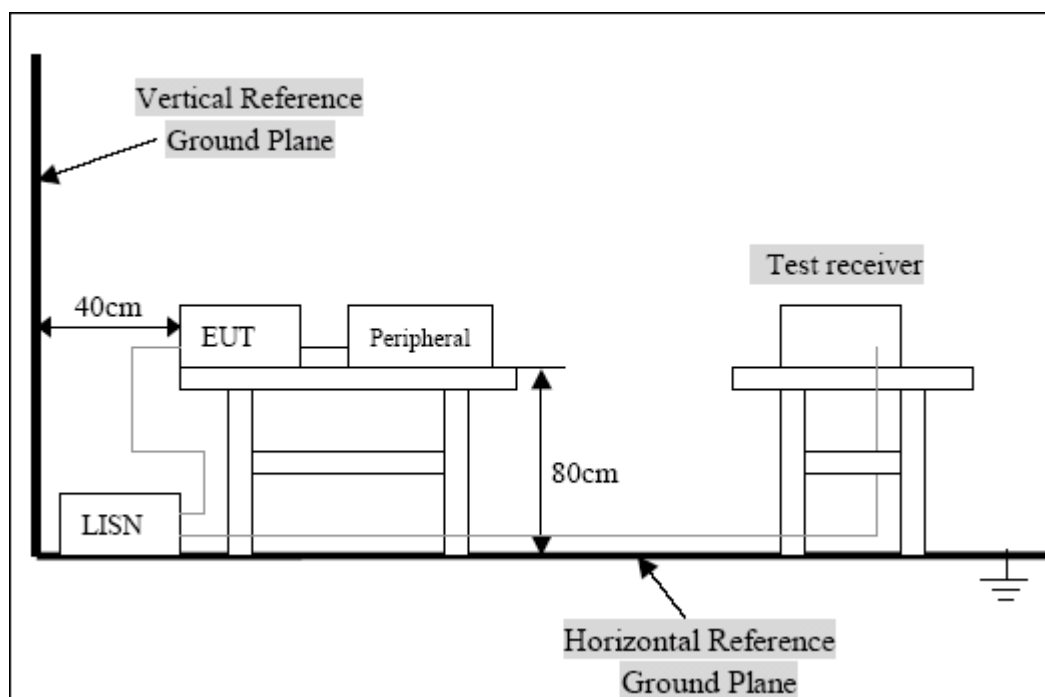

5.3. Test Standard

FCC Part 15 CLASS B

ANSI C63.4 2003

5.4. Conducted Emission Limit(Class B)

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

5.5. EUT Configuration on Test

The following equipments are installed on conducted emission test to meet FCC Part 15 requirement and operating in a manner, which tends to maximize its emission characteristics in a normal application.

5.6. Operating Condition of EUT

5.6.1. Setup the EUT and simulators as shown in Section 6.1.

5.6.2. Turn on the power of all equipments.

5.6.3. Let the EUT work in test mode (Connect to a router and the router attached to PC) and test it.

5.7. Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI test receiver is used to test the emissions form both sides of AC line. The bandwidth of EMI test receiver is set at 9kHz.

5.8. Test Result


Pass

L Line

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V)	(dB μ V)	(dB)	
0,15	24,54	10.44	34,98	56,00	-21,02	AVG
0,72	15,87	10.43	26,30	46,00	-19,70	AVG
5,36	20,24	10.41	30,65	50,00	-19,35	AVG
0,18	48,32	10.41	58,73	64,37	-5,64	QP
0,33	35,78	10.53	46,31	59,35	-13,04	QP
2,49	26,32	10.6	36,92	56,00	-19,08	QP

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

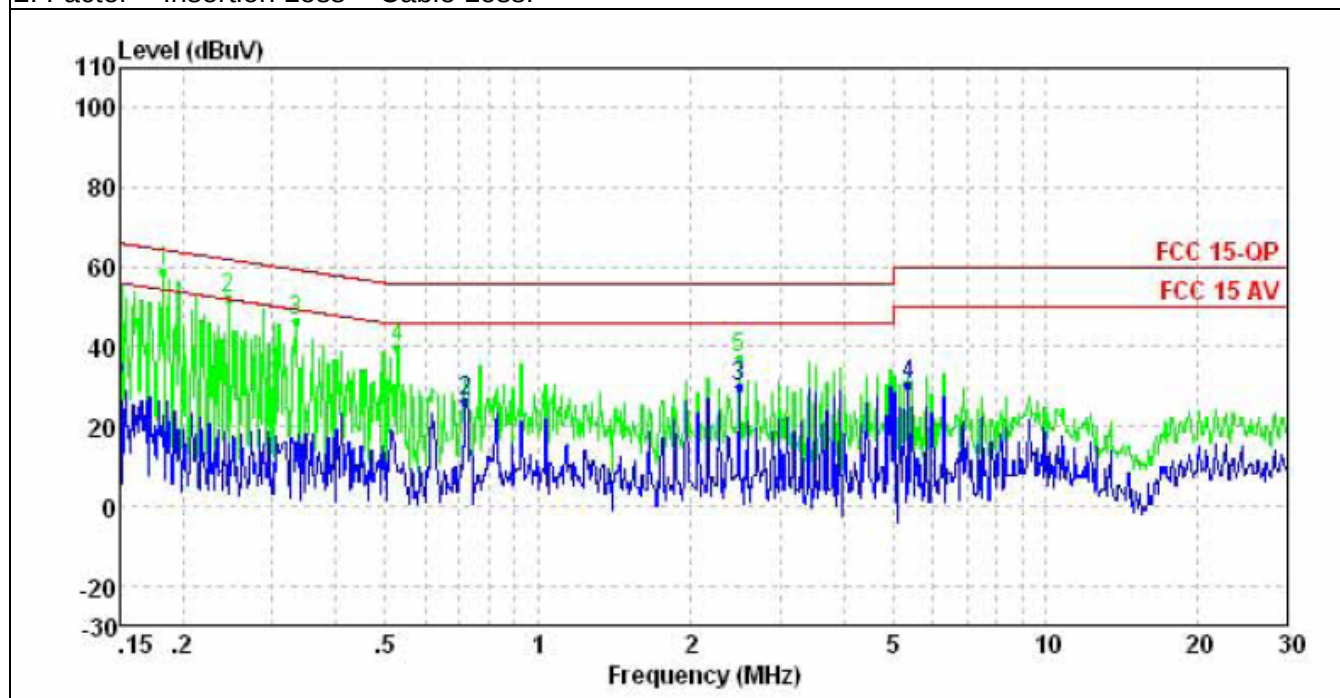


N Line

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0,15	21,28	10.4	31,68	55,87	-24,19	AVG
2,49	19,40	10.41	29,81	46,00	-16,19	AVG
5,36	19,79	10.4	30,19	50,00	-19,81	AVG
0,16	48,81	10.41	59,22	65,38	-6,16	QP
0,21	45,57	10.67	56,24	63,23	-6,99	QP
3,42	26,99	10.67	36,66	56,00	-19,34	QP

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

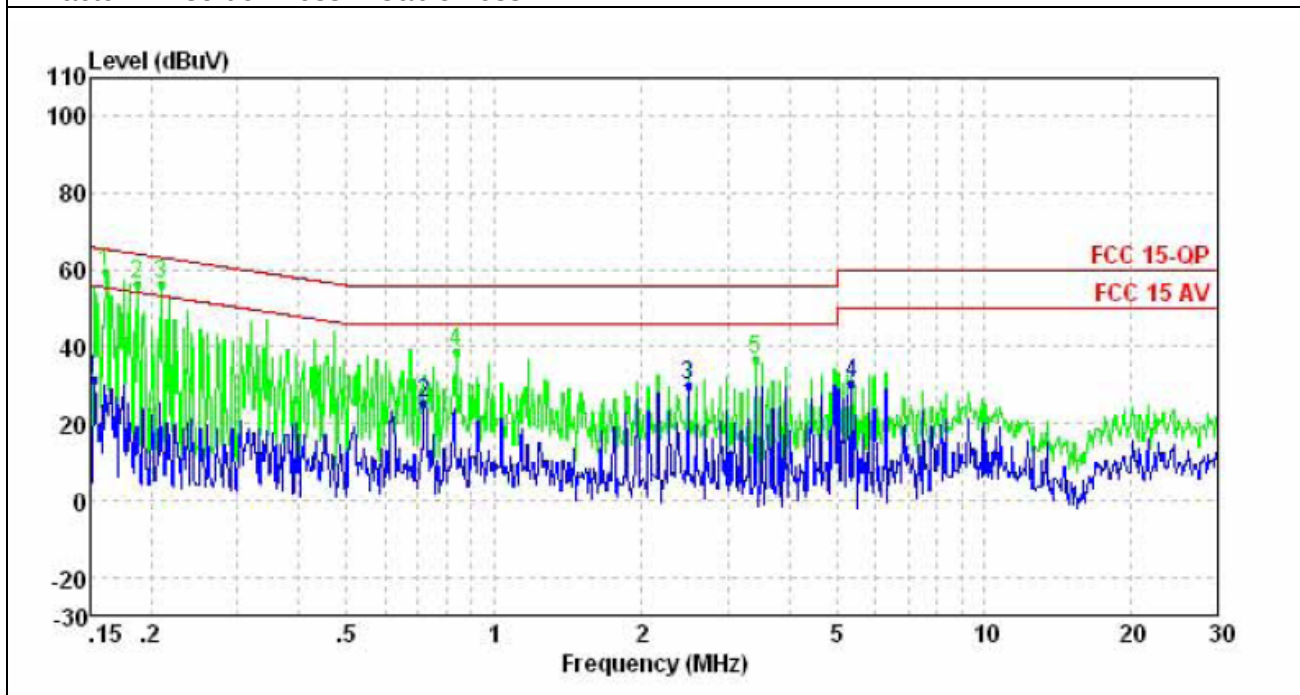


6. RADIATED EMISSION MEASUREMENT

6.1. Measurement Uncertainty


The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any radiation emissions measurement is + 5.10 dB.

6.2. Block Diagram of EUT Configuration

6.2.1. Block Diagram of connection between the EUT and the simulators

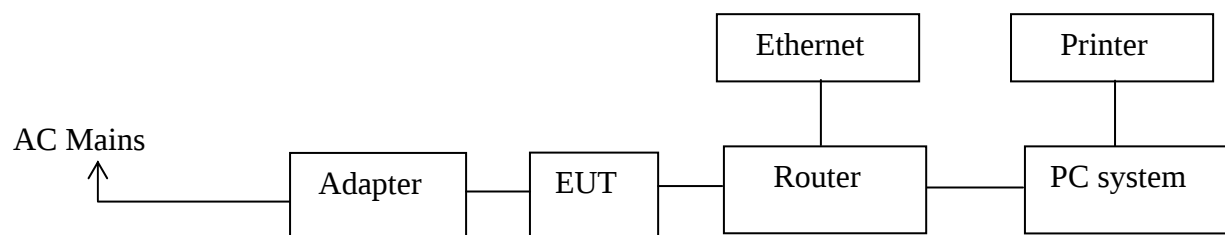

6.2.2. Semi-anechoic Chamber Test Setup Diagram

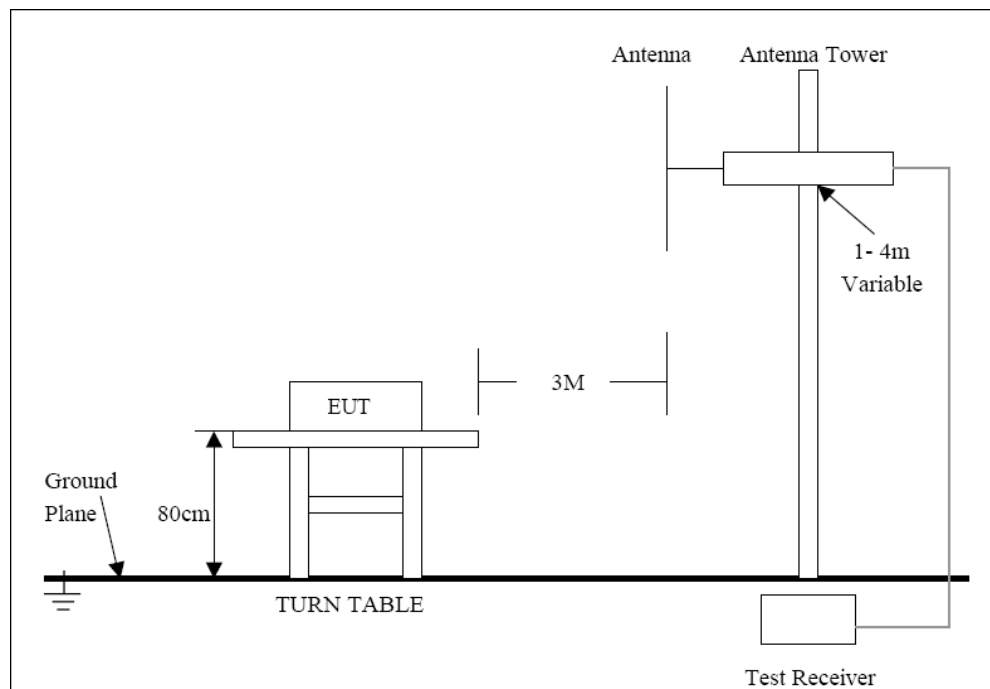

6.3. Test Standard

FCC Part 15 CLASS B
ANSI C63.4 2003

6.4. Radiated Emission Limit(Class B)

FREQUENCY (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMITS (dB μ V/m)
30 ~ 88	3	40.0
88 ~ 216	3	43.5
216 ~ 960	3	46.0
Above 1000	3	54.0

Note:(1) The smaller limit shall apply at the edge between two frequency bands.

(2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the EUT or system.

6.5. EUT Configuration on Test

The following equipment are installed on Radiated Emission Measurement to meet the Commission requirements and operating regulations in a manner which tends to maximize Its emission characteristics in normal application.

6.6. Operating Condition of EUT

6.6.1.Setup the EUT as shown on Section 7.1

6.6.2.Turn on the power of all equipments.

6.6.3.Let the EUT work in test mode (Connect to a router and the router attached to PC) and test it.

6.7. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Calibrated Loop antenna is used as receiving antenna for frequencies below 30MHz, Calibrated Bilog antenna is used as receiving antenna for frequencies between 30 MHz and 1 GHz, Calibrated Horn antenna is used as receiving antenna for frequencies above 1000MHz. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement.

The bandwidth of test receiver is set at 9kHz in below 30MHz. and set at 120kHz in 30-1000MHz.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Peak detector and Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector. The frequency range from 9kHz to 1000MHz is checked. All the test results are listed in Section 7.7. The measurements greater than 20dB below the limit are not report. Through three orthogonal axes to determine which attitude and equipment arrangement produces the highest emission relative to the limit. And Y direction is worst mode

6.8. Test Result


PASS

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
37,76	24,54	11.93	36,47	40,00	-3,53	QP
500,45	29,27	8.72	37,99	46,00	-8,01	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

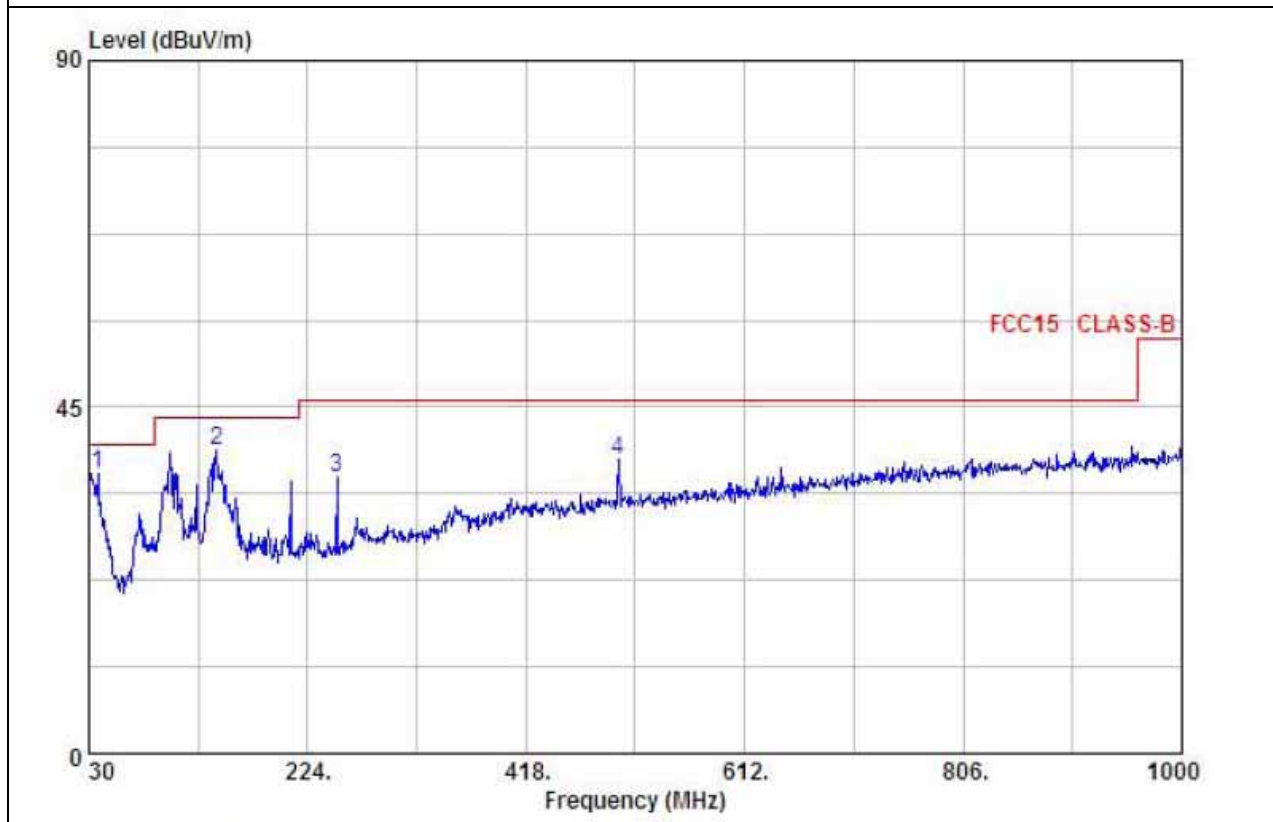


Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
37,76	29,05	8.72	37,77	40,00	-2,23	QP
500,45	21,77	13.99	35,76	46,00	-10,24	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

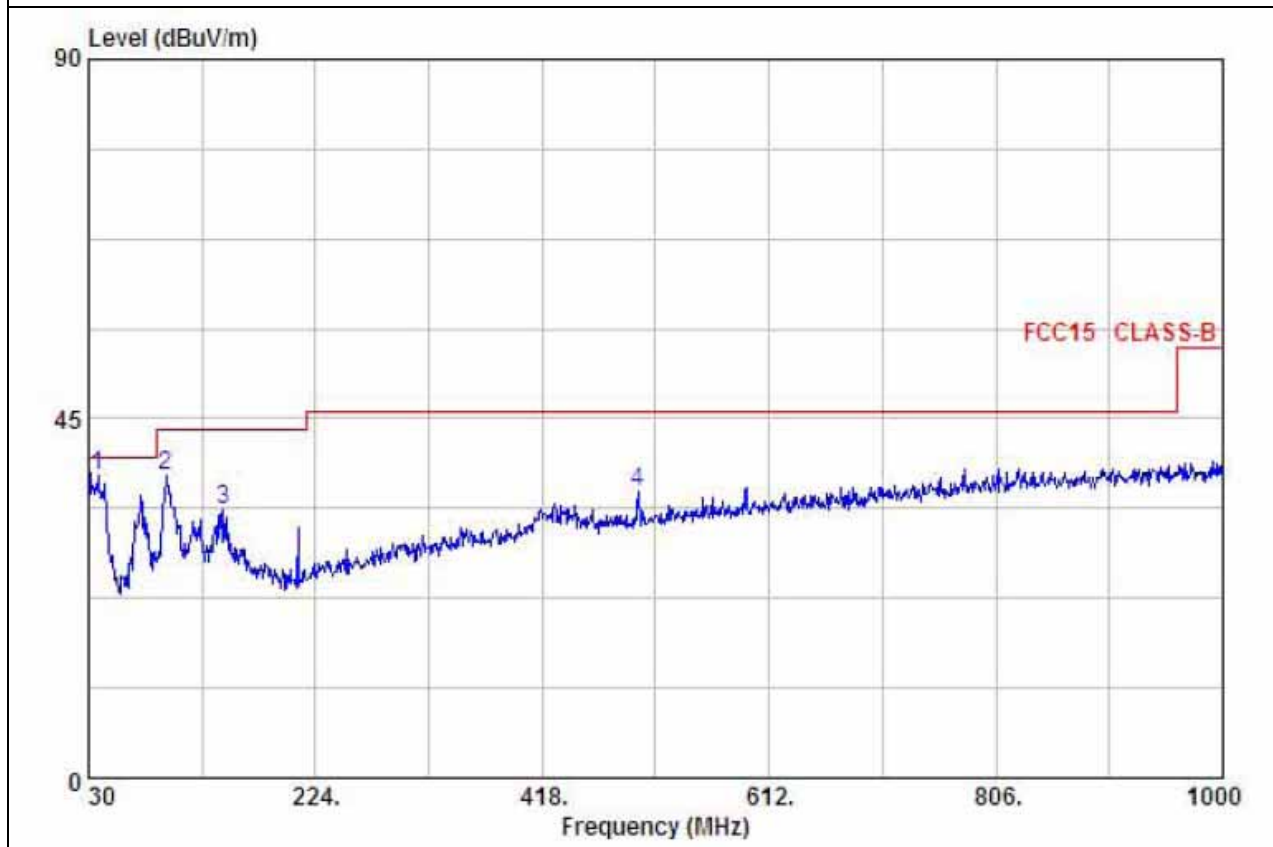


Plot of Radiation Emissions Test Data (Above 1GHz)

Horiyontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB μ V)	(dB μ V/m)	(dB μ V/m)	(dB)	
1158	34.18	30.74	64.92	74,00	-9.08	PK
1158	16.13	30.74	46.87	54,00	-7.13	AV
2337	26.81	34.77	61.58	74,00	-12.42	PK
2337	9.58	34.77	44.35	54,00	-9.65	AV
3539	26.08	39.81	65.89	74,00	-8.11	PK
3539	8.11	39.81	47.92	54,00	-6.08	AV

Remark:

Factor = Antenna Factor + Cable Loss.

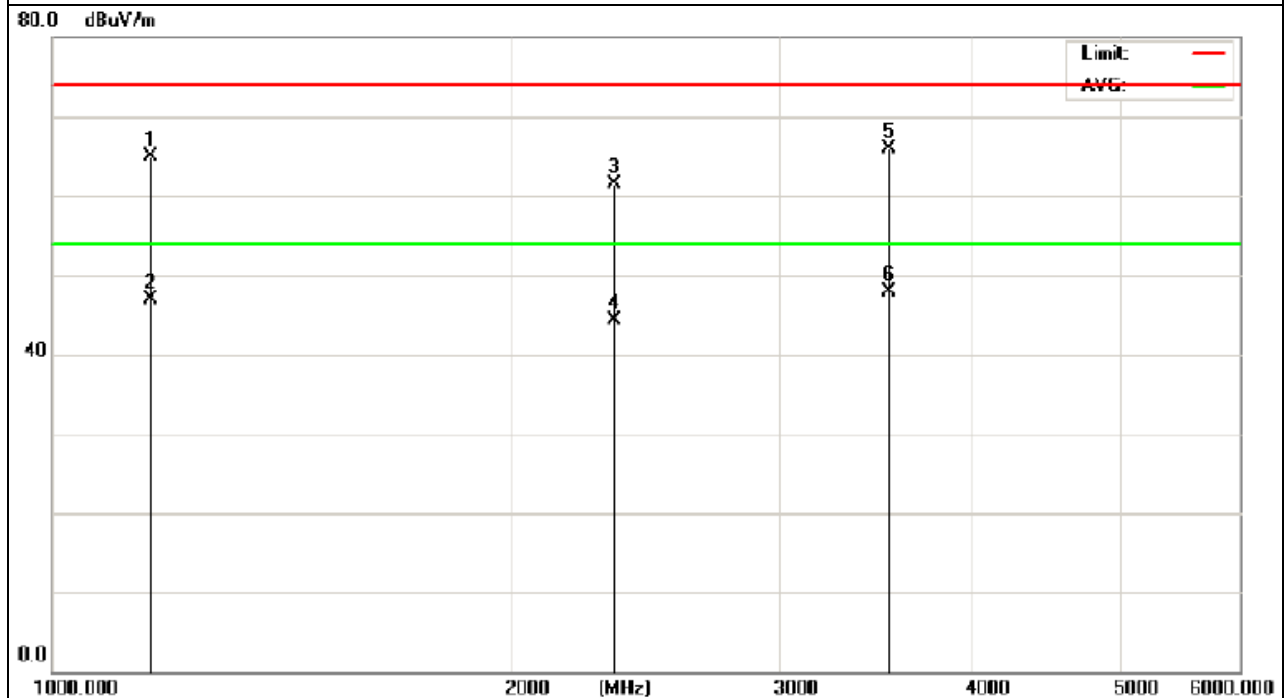

Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1736	30.56	32.82	63.38	74,00	-10.62	PK
1736	15.03	32.82	47.85	54,00	-6.15	AV
2295	28.08	35.14	63.22	74,00	-10.78	PK
2295	8.14	35.14	43.28	54,00	-10.72	AV
3216	25.07	38.08	63.15	74,00	-10.85	PK
3216	8.75	38.08	46.83	54,00	-7.17	AV

Remark:

Factor = Antenna Factor + Cable Loss.

