



# **13.56 MHz Radio Test Report**

**FCC ID: COWB0514  
IC: 10188A-COWB0514**

**This report concerns (check one) :  Original Grant  Class I Change**

**Issued Date** : Sep. 23, 2013  
**Project No.** : 1308C022  
**Equipment** : Portable Bluetooth Speaker  
**Model Name** : B0514  
**Applicant** : Beats Electronics, LLC  
**Address** : 1601 Cloverfield Blvd. Suite 5000N, Santa Monica, CA 90404, USA

**Tested by:** Neutron Engineering Inc. EMC Laboratory

**Date of Receipt:** Sep. 06, 2013

**Date of Test:** Sep. 06, 2013~ Sep. 20, 2013

**Testing Engineer** : David Mao  
(David Mao)

**Technical Manager** : Leo Hung  
(Leo Hung)

**Authorized Signatory** : Steven Lu  
(Steven Lu)

## **Neutron Engineering Inc.**

No.3, Jinshagang 1st Road, ShiXia,  
Dalang Town, Dong Guan, China.

TEL: 0769-8318-3000

FAX: 0769-8319-6000



## Declaration

**Neutron** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

**Neutron**'s reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

**Neutron**'s reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron**'s authorized written approval.

**Neutron**'s laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

## Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



## Table of Contents

1	CERTIFICATION	6
2	SUMMARY OF TEST RESULTS	7
2.1	TEST FACILITY	8
2.2	MEASUREMENT UNCERTAINTY	8
3	GENERAL INFORMATION	9
3.1	GENERAL DESCRIPTION OF EUT	9
3.2	DESCRIPTION OF TEST MODES	10
3.3	BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.4	DESCRIPTION OF SUPPORT UNITS	12
4	EMC EMISSION TEST	13
4.1	CONDUCTED EMISSION MEASUREMENT	13
4.1.1	POWER LINE CONDUCTED EMISSION Limits	13
4.1.2	MEASUREMENT INSTRUMENTS LIST AND SETTING	13
4.1.3	TEST PROCEDURE	14
4.1.4	DEVIATION FROM TEST STANDARD	14
4.1.5	TEST SETUP	14
4.1.6	EUT OPERATING CONDITIONS	14
4.1.7	TEST RESULTS	15
4.2	RADIATED EMISSION TEST	18
4.2.1	LIMIT	18
4.2.2	MEASUREMENT INSTRUMENTS LIST	19
4.2.3	TEST PROCEDURE	20
4.2.4	DEVIATION FROM TEST STANDARD	20
4.2.5	TEST SETUP	21
4.2.6	EUT OPERATING CONDITIONS	21
4.2.7	TEST RESULTS (BELOW 30MHZ) - FCC PART 15.209	22
4.2.8	TEST RESULTS - (30-1000MHZ) - FCC PART 15.209	23
4.2.9	TEST RESULTS- FCC PART 15.225	25
4.3	FREQUENCY STABILITY MEASUREMENT	26
4.3.1	LIMIT	26
4.3.2	MEASUREMENT INSTRUMENTS LIST	26
4.3.3	TEST PROCEDURE	26
4.3.4	DEVIATION FROM TEST STANDARD	26
4.3.5	EUT OPERATING CONDITIONS	26
4.3.6	TEST RESULTS	27
5.	20dB SPECTRUM BANDWIDTH MEASUREMENT	28
5.2.	TEST PROCEDURES	28
5.3.	TEST SETUP LAYOUT	28



## **Table of Contents**

5.4. TEST DEVIATION	28
5.5. EUT OPERATION DURING TEST	28
5.6. TEST RESULT	29
6. EUT TEST PHOTO	30



**REPORT ISSUED HISTORY**

Issued No.	Description	Issued Date
NEI-FICP-2-1308C022	Original Issue.	Sep. 23, 2013
-	-	-



## 1 CERTIFICATION

Equipment : Portable Bluetooth Speaker  
Brand Name : Beats by Dr. Dre  
Model Name : B0514  
Applicant : Beats Electronics, LLC  
Manufacturer : Beats Electronics, LLC  
Address : 1601 Cloverfield Blvd. Suite 5000N, Santa Monica, CA 90404, USA  
Factory : Premium Loudspeakers (Huizhou) Co., Ltd.  
Address : Tymphony Industrial Area Xinlian Village, Xinxu Town, Huizhou City, Guangdong, P.R. China  
Date of Test : Jul. 18, 2013~ Jul. 22, 2013  
Test Item : ENGINEERING SAMPLE  
Standard(s) : FCC Part 15, Subpart C: 15.225  
Canada RSS-210:2010; Canada RSS-GEN:2010  
ANSI C63.4: 2009

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FICP-2-1308C022) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).



## 2 SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part 15, Subpart C: 15.225;Canada RSS-210 :2010 ;RSS-GEN :2010				
Standard(s) Section		Test Item	Judgment	Remark
15.207	RSS-GEN 7.2.2	Conducted emission	PASS	
15.35 / 15.205 / 15.209 / 15.225	RSS-210 Annex 2(A2.6)	Radiated emission	PASS	
15.225(e)	RSS-210 Annex 2(A2.6)	Frequency Stability	PASS	
15.203		Antenna Requirement	PASS	
	RSS-210 Annex 8(A8.5)	20dB Occupied Bandwidth Measurement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this test report.



## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **DG-C02/DG-CB03** at the location of No.3,Jinshagang 1st Road, ShiXia, Dalang Town, Dong Guan, China.523792  
Neutron's test firm number is 319330  
Neutron's test firm number for IC 4428B-1

## 2.2 MEASUREMENT UNCERTAINTY

**The measurement uncertainty is not specified by FCC rules and for reference only.**  
The reported uncertainty of measurement  $y \pm U$  , where expended uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2** , providing a level of confidence of approximately **95%**.  
The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2.

### A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
DG-C02	CISPR	150 KHz ~ 30MHz	1.94	

### B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)	NOTE
DG-CB03	CISPR	9K~30MHz	V	3.79	
		9K~30MHz	H	3.57	
		30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	H	3.60	
		200MHz ~ 1,000MHz	V	3.86	
		200MHz ~ 1,000MHz	H	3.94	
		1GHz~18GHz	V	3.12	
		1GHz~18GHz	H	3.68	
		18GHz~40GHz	V	4.15	
		18GHz~40GHz	H	4.14	



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	Portable Bluetooth Speaker				
Brand Name	Beats by Dr. Dre				
Model Name	B0514				
Model Difference	N/A				
Product Description	<table border="1"><tr><td>Operation Frequency:</td><td>13.56 MHz</td></tr><tr><td>Antenna Designation:</td><td>Loop Antenna</td></tr></table> <p>More details of EUT technical specification, please refer to the User's Manual.</p>	Operation Frequency:	13.56 MHz	Antenna Designation:	Loop Antenna
Operation Frequency:	13.56 MHz				
Antenna Designation:	Loop Antenna				
Power Source	#1 DC Voltage supplied from AC/DC adapter. Brand/Model:DYS/DYS404-120300W #2 Supplied from Li-ion battery pack. Model: J273/ICR1865NH-2S2P #3 Supplied from USB charging.				
Power Rating	#1 I/P 100-240V~50/60Hz 1.0A MAX O/P:12.0V/3.0A #2 DC 7.2V 31.68Wh 4400mAh #3 I/P AC 120V/50Hz O/P DC 5V				
Connecting I/O Port(s)	Please refer to the User's Manual				

**Note:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



## 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Test Mode	Description
Mode 1	TX

Conducted emission test	
Final Test Mode	Description
Mode 1	TX

Radiated emission test	
Final Test Mode	Description
Mode 1	TX


Frequency Stability test/ Antenna Requirement test/ 20dB Occupied Bandwidth Measurement	
Final Test Mode	Description
Mode 1	TX

- (1) The EUT is considered a portable unit; it was pre-tested on the positioned of each 3 axis. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.
- (2) The EUT system operated these mode (AC adapter, Li-ion battery and USB) were found to be the worst case during the pre-scanning test is Li-ion battery.




### 3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

**Conducted:**

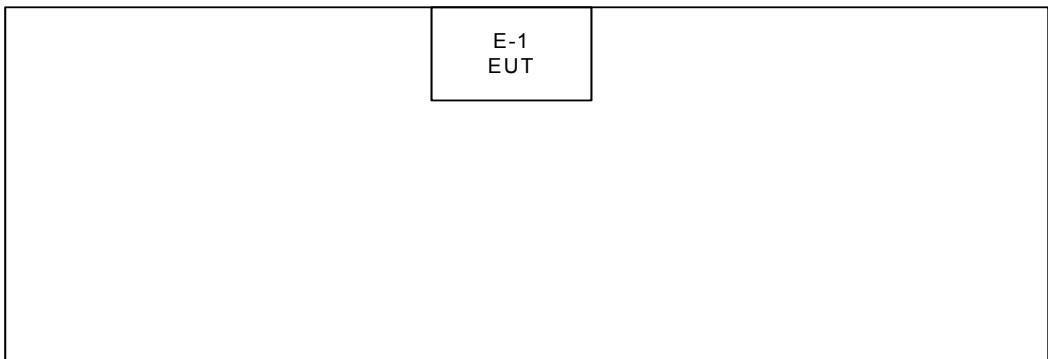

**Radiated:**

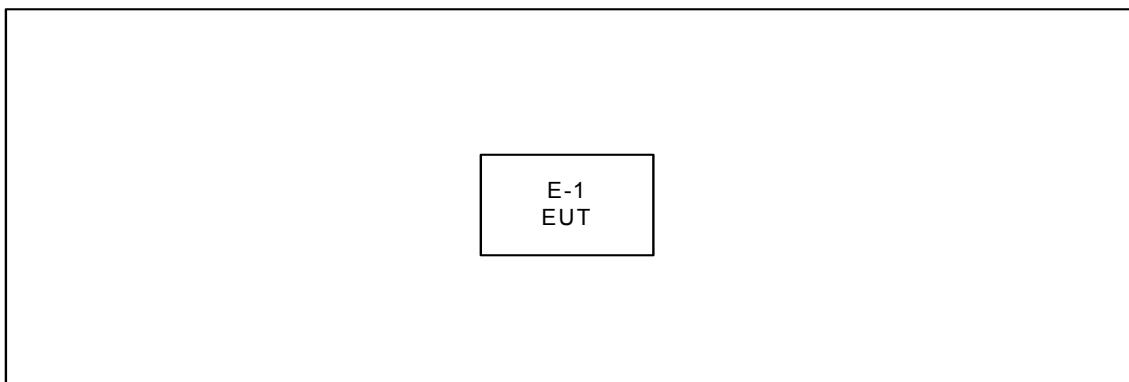



### **3.4 DESCRIPTION OF SUPPORT UNITS**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID/IC	Series No.	Note
E-1	Portable Bluetooth Speaker	Beats by Dr. Dre	B0514	COWB0514 / 10188A-COWB0514	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note
-	-	-	-	-

**Note:**

(1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



## 4 EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

#### 4.1.2 MEASUREMENT INSTRUMENTS LIST AND SETTING

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00052765	Apr. 25, 2014
2	LISN	R&S	ENV216	100087	Nov.16, 2013
3	Test Cable	N/A	C_17	N/A	Mar.15, 2014
4	EMI TEST RECEIVER	R&S	ESCS30	826547/022	Apr. 25, 2014
5	50Ω Terminator	SHX	TF2-3G-A	08122902	Apr. 25, 2014

Remark: " N/A" denotes no model name, serial or calibration specified.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


#### 4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

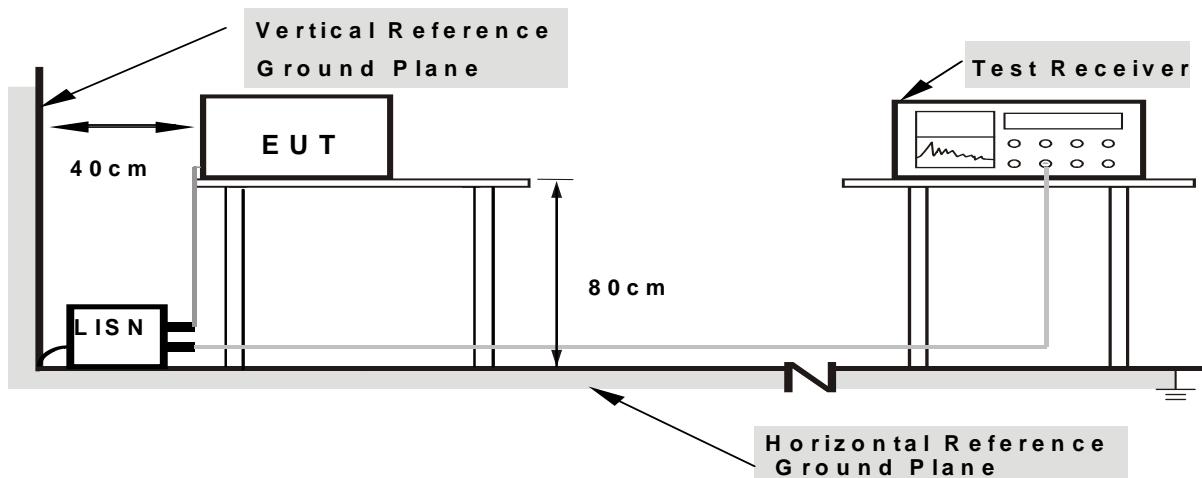

**Note:** 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

#### 4.1.6 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




#### **4.1.7 TEST RESULTS**

##### **Remark**

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “\*” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.




E.U.T :	Portable Bluetooth Speaker	Model Name	B0514
Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1010hPa	Test Power :	AC 120V/60Hz
Test Mode :	TX	Phase:	Line

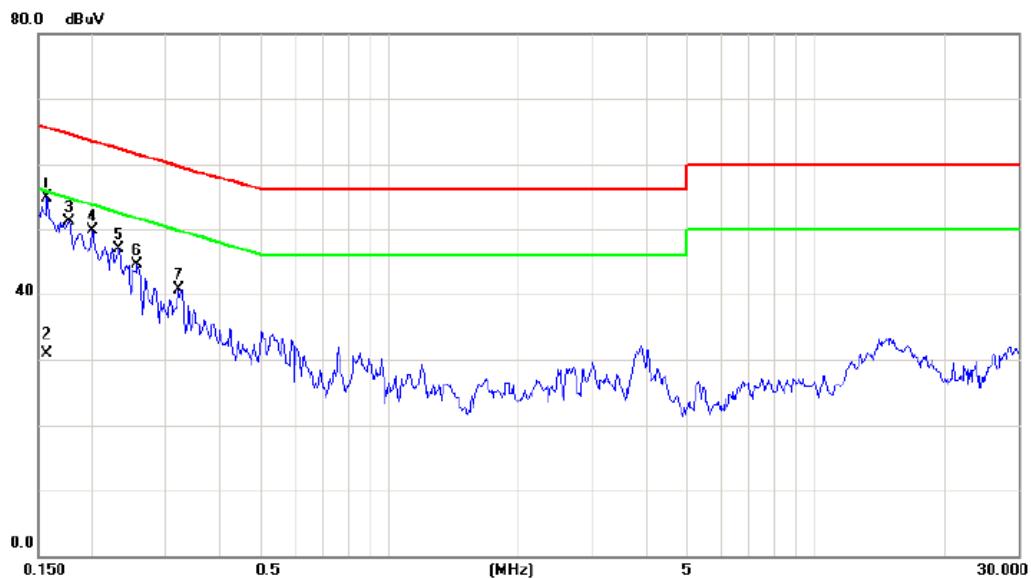

No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
		dBuV	dB	dBuV	dB			
1 *	0.1577	45.10	9.63	54.73	65.58	-10.85	peak	
2	0.1577	21.30	9.63	30.93	55.58	-24.65	AVG	
3	0.1773	41.36	9.65	51.01	64.61	-13.60	peak	
4	0.2006	40.06	9.65	49.71	63.59	-13.88	peak	
5	0.2320	37.19	9.65	46.84	62.38	-15.54	peak	
6	0.2560	34.89	9.66	44.55	61.56	-17.01	peak	
7	0.3200	31.03	9.67	40.70	59.71	-19.01	peak	



E.U.T :	Portable Bluetooth Speaker	Model Name	B0514
Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1010hPa	Test Power :	AC 120V/60Hz
Test Mode :	TX	Phase:	Neutral

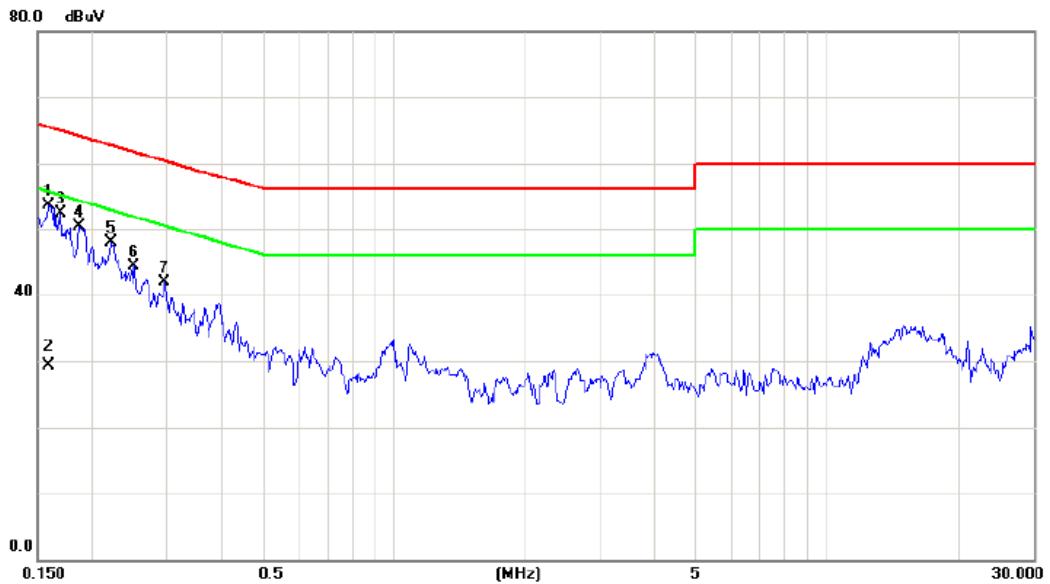

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1	*	0.1590	43.86	9.70	53.56	65.52	-11.96	peak	
2		0.1590	19.70	9.70	29.40	55.52	-26.12	AVG	
3		0.1695	42.59	9.70	52.29	64.98	-12.69	peak	
4		0.1872	40.65	9.71	50.36	64.16	-13.80	peak	
5		0.2220	38.11	9.71	47.82	62.74	-14.92	peak	
6		0.2515	34.64	9.72	44.36	61.71	-17.35	peak	
7		0.2943	32.10	9.72	41.82	60.40	-18.58	peak	



## 4.2 RADIATED EMISSION TEST

### 4.2.1 LIMIT

<b>FCC Part 15.209</b>				
Frequency (MHz)	Field Strength Limitation		Field Strength Limitation at 3m Measurement Dist	
	(uV/m)	Dist	(uV/m)	(dBuV/m)
0.009 – 0.490	2400 / F(KHz)	300m	10000 * 2400/F(KHz)	20log 2400/F(KHz) + 80
0.490 – 1.705	24000 / F(KHz)	30m	100 * 24000/F(KHz)	20log 24000/F(KHz) + 40
1.705 – 30.00	30	30m	100* 30	20log 30 + 40
30.0 – 88.0	100	3m	100	20log 100
88.0 – 216.0	150	3m	150	20log 150
216.0 – 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500

<b>FCC Part 15.225(a)/(b)/(c)</b>				
Frequency (MHz)	Field Strength Limitation		Field Strength Limitation at 3m Measurement Dist	
	(uV/m)	Dist	(uV/m)	(dBuV/m)
13.553 – 13.567	15,848	30 m	15,848*100	124
13.567 – 13.710	334	30 m	334*100	90.5
13.110 – 13.410	106	30 m	106*100	80.5
13.710 – 14.010				

#### Note

- :
  - (1) The tighter limit shall apply at the boundary between two frequency range.
  - (2) Limitation expressed in dBuV/m is calculated by 20log Emission Level (uV/m).
  - (3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of  $L_{d1} = L_{d2} * (d_2/d_1)^2$ .
- Example:
  - F.S Limit at 30m distance is 30uV/m , then F.S Limitation at 3m distance is adjusted as  $L_{d1} = L_1 = 30uV/m * (10)^2 = 100 * 30 uV/m$
- (4) The test result calculated as following:
  - Measurement Value = Reading Level + Correct Factor
  - Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
  - Margin Level = Measurement Value – Limit Value



#### 4.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Apr. 25, 2014
2	Amplifier	HP	8447D	2944A09673	Apr. 25, 2014
3	Test Receiver	R&S	ESCI	100382	Apr. 25, 2014
4	Test Cable	N/A	C-01_CB03	N/A	Jun.25, 2014
5	Antenna	ETS	3115	00075789	Apr. 25, 2014
6	Amplifier	Agilent	8449B	3008A02274	Apr. 25, 2014
7	Spectrum	Agilent	E4408B	US39240143	Nov. 16, 2013
8	Test Cable	HUBER+SUHNER	C-45	N/A	Apr. 30, 2014
9	Controller	CT	SC100	N/A	N/A
10	Horn Antenna	EMCO	3115	9605-4803	Apr. 25, 2014
11	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Apr. 25, 2014
12	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Oct.23, 2013

Remark: " N/A " denotes no model name, serial no. or calibration specified.



#### **4.2.3 TEST PROCEDURE**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

**NOTE: (FCC PART 15.209)**

- a. Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode with Detector BW=120 kHz.
- b. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.

**NOTE: (FCC PART 15.225)**


- a. Spectrum Setting:  
9 KHz – 150 KHz, RBW= 200Hz, VBW=200Hz, Sweep time = 200 ms.  
150 K Hz – 30 MHz, RBW= 10 KHz, VBW=10 KHz, Sweep time = 200 ms.  
30 MHz – 1000 MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
- b. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- c. The Log-Bicon Antenna will use to test frequency range from 30MHz to 1000MHz and the Loop Antenna will use to test frequency below 30MHz.

#### **4.2.4 DEVIATION FROM TEST STANDARD**


No deviation

#### 4.2.5 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

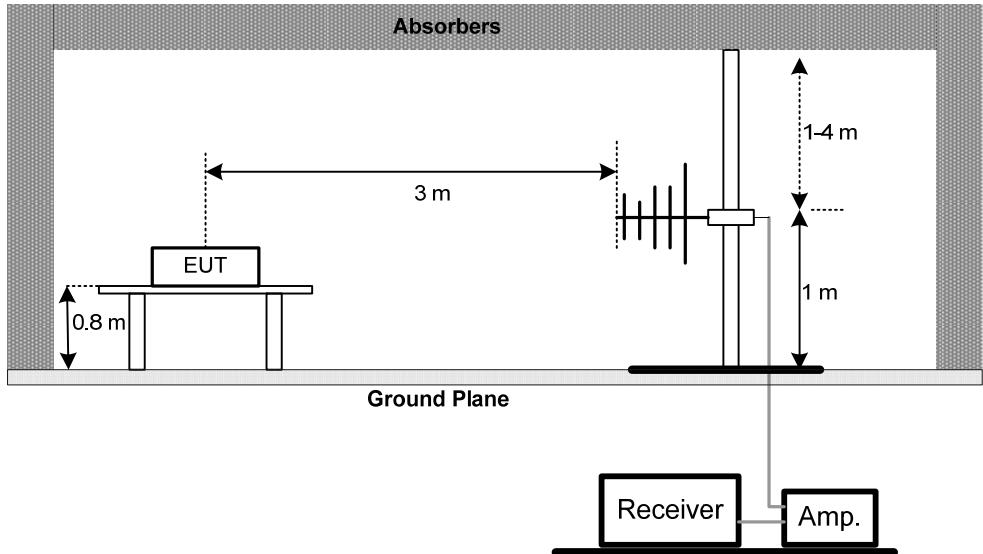

(B) For radiated emissions below 30MHz

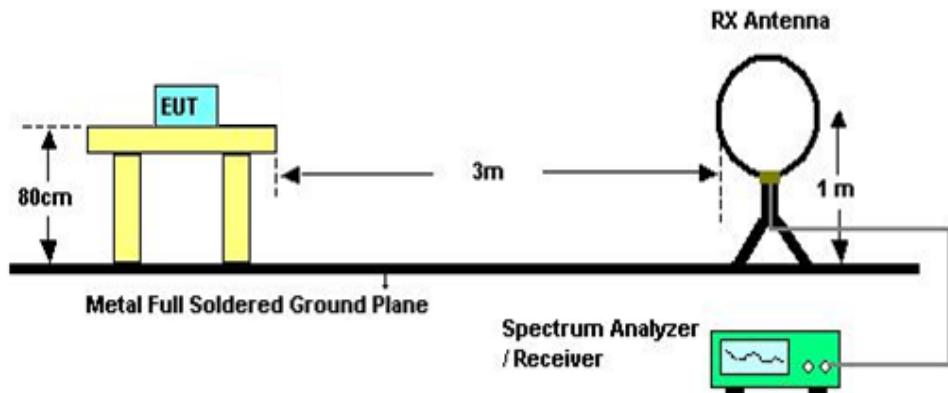

#### 4.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

**4.2.7 TEST RESULTS (BELOW 30MHZ) - FCC PART 15.209**

EUT :	Portable Bluetooth Speaker	Model Name	B0514
Temperature :	25 °C	Relative Humidity :	58 %
Pressure :	1010 hPa	Test Voltage :	DC 7.2V
Test Mode :	TX MODE		

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.0099	0°	25.63	24.30	49.93	127.74	-77.81	AVG
0.0099	0°	27.89	24.30	52.19	147.74	-95.55	PK
0.0306	0°	23.64	23.63	47.27	117.90	-70.63	AVG
0.0306	0°	25.84	23.63	49.47	137.90	-88.43	PK
0.0382	0°	20.03	23.14	43.17	115.95	-72.78	AVG
0.0382	0°	22.74	23.14	45.88	135.95	-90.07	PK
0.0469	0°	22.36	22.60	44.96	114.18	-69.22	AVG
0.0469	0°	25.07	22.60	47.67	134.18	-86.51	PK
0.3581	0°	21.51	20.14	41.65	96.52	-54.87	AVG
0.3581	0°	23.25	20.14	43.39	116.52	-73.13	PK
1.2754	0°	27.18	19.57	46.75	65.49	-18.74	QP

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.0095	90°	17.46	24.30	41.76	128.01	-86.25	AVG
0.0095	90°	19.65	24.30	43.95	148.01	-104.06	PK
0.0372	90°	21.53	23.21	44.74	116.18	-71.45	AVG
0.0372	90°	23.65	23.21	46.86	136.18	-89.33	PK
0.0406	90°	20.47	23.00	43.47	115.44	-71.97	AVG
0.0406	90°	22.89	23.00	45.89	135.44	-89.55	PK
0.0725	90°	19.64	21.95	41.59	110.40	-68.81	AVG
0.0725	90°	22.43	21.95	44.38	130.40	-86.02	PK
0.3628	90°	20.32	20.13	40.45	96.41	-55.96	AVG
0.3628	90°	22.74	20.13	42.87	116.41	-73.54	PK
1.8150	90°	26.15	19.52	45.67	69.54	-23.87	QP


**Remark**

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.



#### 4.2.8 TEST RESULTS - (30-1000MHZ) - FCC PART 15.209


E.U.T	Portable Bluetooth Speaker	Model Name	B0514
Temperature	26 °C	Relative Humidity	60%
Test Voltage	DC 7.2V	Polarization	Vertical
Test Mode	TX		

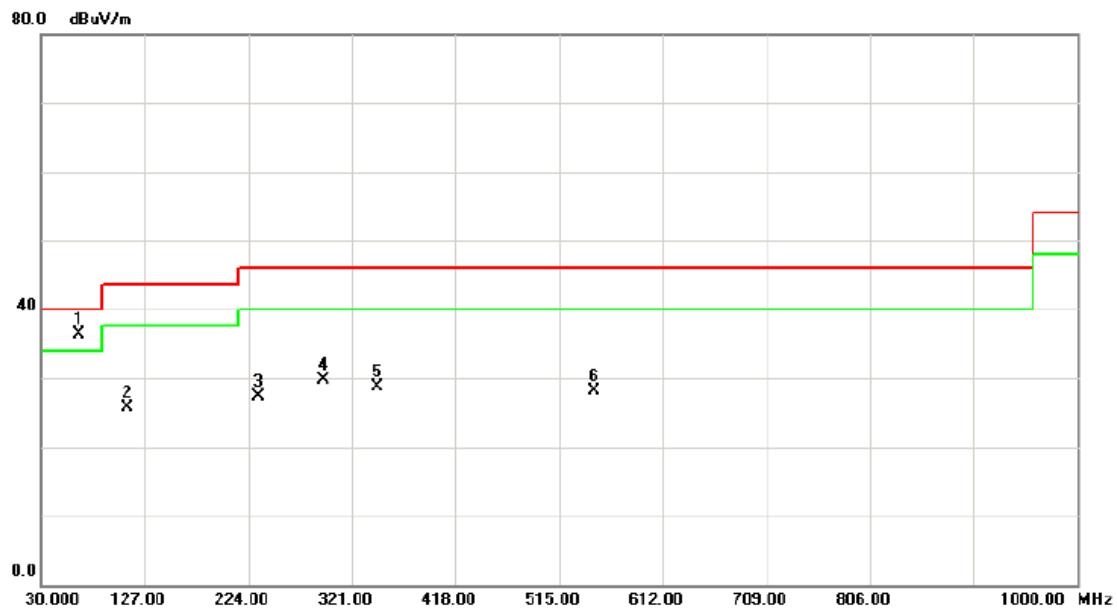

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	65.8900	52.01	-15.76	36.25	40.00	-3.75	peak	
2		110.5100	40.38	-14.69	25.69	43.50	-17.81	peak	
3		233.7000	41.92	-14.61	27.31	46.00	-18.69	peak	
4		293.8400	41.30	-11.60	29.70	46.00	-16.30	peak	
5		345.2500	40.16	-11.44	28.72	46.00	-17.28	peak	
6		547.9800	35.91	-7.76	28.15	46.00	-17.85	peak	



E.U.T	Portable Bluetooth Speaker	Model Name	B0514
Temperature	26 °C	Relative Humidity	60%
Test Voltage	DC 7.2V	Polarization	Horizontal
Test Mode	TX		

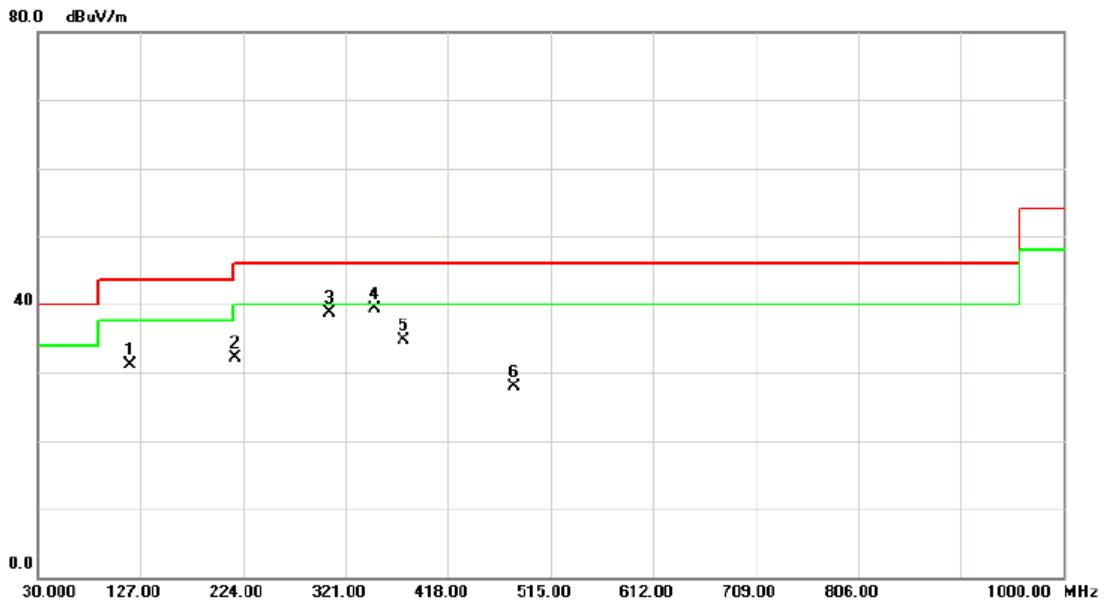

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		117.3000	45.22	-14.12	31.10	43.50	-12.40	peak	
2		216.2400	47.14	-15.12	32.02	46.00	-13.98	peak	
3		306.4500	49.96	-11.27	38.69	46.00	-7.31	peak	
4	*	348.1600	50.67	-11.46	39.21	46.00	-6.79	peak	
5		376.2900	45.38	-10.63	34.75	46.00	-11.25	peak	
6		480.0800	37.61	-9.77	27.84	46.00	-18.16	peak	



#### 4.2.9 TEST RESULTS- FCC PART 15.225

E.U.T	Portable Bluetooth Speaker	Model Name	B0514
Temperature	26 °C	Relative Humidity	60%
Test Voltage	DC 7.2V		
Test Mode	TX		

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
13.560	0°	32.04	21.27	53.31	124.00	-70.69	
27.120	0°	18.59	21.77	40.36	69.54	-29.18	

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
13.560	90°	30.01	21.27	51.28	124.00	-72.72	
27.120	90°	15.83	21.77	37.60	69.54	-31.94	



#### **4.3 FREQUENCY STABILITY MEASUREMENT**

##### **4.3.1 LIMIT**

###### **FCC Part 15.225(e)**

The frequency tolerance of the carrier signal shall be maintained within +/-0.01% of the operating frequency over a temperature variation of - 20 degrees to + 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

For battery operated equipment, the equipment tests shall be performed using a new battery.

##### **4.3.2 MEASUREMENT INSTRUMENTS LIST**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 16, 2013

Remark: " N/A" denotes no model name, serial no. or calibration specified.

##### **4.3.3 TEST PROCEDURE**

- a. The equipment under test was connected to an external AC power supply and the RF output was connected to a frequency counter via feed through attenuators. The EUT was placed inside the temperature chamber.  
After the temperature stabilized for approximately 20 minutes, the frequency of the output signal was recorded from the counter.
- b. At room temperature (25±5°C), an external variable AC power supply was connected to the EUT. The frequency of the transmitter was measured for 115%, 100% and 85% of the nominal operating input voltage.

##### **4.3.4 DEVIATION FROM TEST STANDARD**

No deviation

##### **4.3.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of **4.1.6** Unless otherwise a special operating condition is specified in the follows during the testing.



#### 4.3.6 TEST RESULTS

E.U.T	Portable Bluetooth Speaker	Model Name	B0514
Temperature	26 °C	Relative Humidity	60%
Test Voltage	AC 120V		
Test Mode	TX		

Frequency Stability Versus Environmental Temperature						
	Temperature (°C)	Voltage (AC)	Frequency (MHz)	Frequency Error (kHz)	Limit (kHz)	Result
	20	120V	13.5601			
0 min	50	120V	13.5599	0.0001	+/- 1.356	PASS
	-20	120V	13.5602	0.0002	+/- 1.356	PASS
2 min	50	120V	13.5601	0.0001	+/- 1.356	PASS
	-20	120V	13.5599	0.0001	+/- 1.356	PASS
5 min	50	120V	13.5598	0.0002	+/- 1.356	PASS
	-20	120V	13.5601	0.0001	+/- 1.356	PASS
10 min	50	120V	13.5599	0.0001	+/- 1.356	PASS
	-20	120V	13.5602	0.0002	+/- 1.356	PASS

Frequency Stability Versus Input Voltage						
Temperature (°C)	Voltage (AC)		Frequency (MHz)	Frequency Error (kHz)	Limit (kHz)	Result
26	V-nom	120V	13.5599	0.0001		
26	V-min	118V	13.5602	0.0002	+/- 1.356	PASS
26	V-max	132V	13.5601	0.0001	+/- 1.356	PASS



## **5. 20dB SPECTRUM BANDWIDTH MEASUREMENT**


### **5.1. LIMIT OF 20dB BANDWIDTH MEASUREMENT**

The 20dB bandwidth shall be specified in operating frequency band.

### **5.2. TEST PROCEDURES**

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 9kHz RBW and 9kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

### **5.3. TEST SETUP LAYOUT**

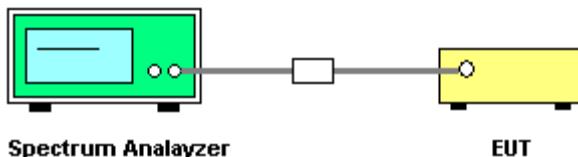

### **5.4. TEST DEVIATION**

There is no deviation with the original standard.

### **5.5. EUT OPERATION DURING TEST**

The EUT was programmed to be in continuously transmitting mode.



## 5.6. TEST RESULT

E.U.T	Portable Bluetooth Speaker	Model Name	B0514
Temperature	26 °C	Relative Humidity	60%
Test Voltage	DC 7.2V		
Test Mode	TX		

Frequency (MHz)	20 dBc Bandwidth (KHz)	99% OBW (KHz)	Result
13.56	18.00	15.40	PASS

