



## FCC 47 CFR PART 15 SUBPART C

### TEST REPORT

For

**Powerbeats Wireless**

**Model: B0516**

**Trade Name: beats**

*Issued to*

**Beats Electronics LLC  
8600 Hayden Place, Culver City, CA 90232**

*Issued by*

**Compliance Certification Services Inc.  
No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township,  
Taoyuan County 33841, Taiwan, R.O.C.**

TEL: 886-3-324-0332  
FAX: 886-3-324-5235  
<http://www.ccsrf.com>  
service@ccsrf.com



**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NIST or any government agencies. The test results in the report only apply to the tested sample.

**Revision History**

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	April 7, 2014	Initial Issue	ALL	Iren Wang



## TABLE OF CONTENTS

<b>1 TEST RESULT CERTIFICATION .....</b>	<b>4</b>
<b>2 EUT DESCRIPTION.....</b>	<b>5</b>
<b>3 TEST METHODOLOGY.....</b>	<b>6</b>
3.1. EUT CONFIGURATION .....	6
3.2. EUT EXERCISE .....	6
3.3. GENERAL TEST PROCEDURES .....	6
3.4. FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS .....	7
3.5. DESCRIPTION OF TEST MODES .....	8
<b>4 INSTRUMENT CALIBRATION .....</b>	<b>9</b>
4.1. MEASUREMENT EQUIPMENT USED .....	9
4.2. MEASUREMENT UNCERTAINTY.....	11
<b>5 FACILITIES AND ACCREDITATIONS .....</b>	<b>12</b>
5.1. FACILITIES .....	12
5.2. EQUIPMENT .....	12
5.3. TABLE OF ACCREDITATIONS AND LISTINGS.....	13
<b>6 SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>14</b>
6.1. SETUP CONFIGURATION OF EUT .....	14
6.2. SUPPORT EQUIPMENT.....	14
<b>7 FCC PART 15.247 REQUIREMENTS .....</b>	<b>15</b>
7.1. 6DB BANDWIDTH .....	15
7.2. PEAK POWER .....	18
7.3. AVERAGE POWER .....	19
7.4. BAND EDGES MEASUREMENT .....	20
7.5. PEAK POWER SPECTRAL DENSITY .....	27
7.6. SPURIOUS EMISSIONS.....	31
7.7. POWERLINE CONDUCTED EMISSIONS .....	41
<b>8 PHOTOGRAPHS OF TEST SETUP .....</b>	<b>44</b>
<b>APPENDIX 1: PHOTOGRAPHS OF EUT .....</b>	<b>48</b>



## 1 TEST RESULT CERTIFICATION

**Applicant:** **Beats Electronics LLC**  
8600 Hayden Place, Culver City, CA 90232

**Manufacturer:** **Beats Electronics LLC**  
8600 Hayden Place, Culver City, CA 90232

**Equipment Under Test:** Powerbeats Wireless

**Trade Name:** beats

**Model:** B0516

**Date of Test:** March 25 ~ 27, 2014

<b>APPLICABLE STANDARDS</b>	
<b>STANDARD</b>	<b>TEST RESULT</b>
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

**Approved by:**

Stan Lin  
Section Manager

**Reviewed by:**

Angel Hu  
Section Manager



## 2 EUT DESCRIPTION

<b>Product</b>	Powerbeats Wireless
<b>Trade Name</b>	beats
<b>Model Number</b>	B0516
<b>Model Name Discrepancy</b>	N/A
<b>EUT Power Rating</b>	5VDC from PC / 3.7VDC from Battery
<b>USB Cable</b>	Shielded 1.0m
<b>Operating Frequency Range</b>	2402 ~ 2480 MHz
<b>Transmit Power</b>	0.32dBm (0.0011W)
<b>Modulation Technique</b>	GFSK (1Mbps)
<b>Number of Channels</b>	40 Channels
<b>Antenna Specification</b>	Monopole Antenna / Gain: -0.79dBi

**Remark:**

1. The sample selected for test was production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **COWB0516** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



### **3 TEST METHODOLOGY**

The tests documented in this report were performed in accordance with ANSI C63.4 (2009), KDB558074 and FCC CFR 47 15.207, 15.209 and 15.247.

#### **3.1. EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2. EUT EXERCISE**

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

#### **3.3. GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 (2009) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.

**3.4. FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS**

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



### **3.5. DESCRIPTION OF TEST MODES**

The EUT (model: B0516) had been tested under operating condition and had been reported as worst case on this test report.

Test program used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

Channel Low (2402MHz), Mid (2440MHz) and High (2480MHz) with 1Mbps data rate was chosen for full testing.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Y axis), lie-down position (X, Z axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.



## 4 INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 4.1. MEASUREMENT EQUIPMENT USED

#### Equipment Used for Emissions Measurement

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY48250064	01/01/2015
Spectrum Analyzer	Agilent	N9010A	MY52220817	03/20/2015
Spectrum Analyzer	R&S	FSL	100837	11/11/2014
Power meter	Anritsu	ML2495A	1033009	09/29/2014
Power Sensor	Anritsu	MA2411B	0917221	09/29/2014

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY48250064	01/01/2015
Spectrum Analyzer	R&S	FSL	100837	11/11/2014
Pre-Amplifier	HP	8447D	2944A06530	08/10/2014
Pre-Amplifier	EMEC	EM01M26G	060570	07/25/2014
Pre-Amplifier	MITEQ	AMF-6F-26040 0-40-8P	985646	08/08/2014
Pre-Amplifier	Agilent	8449B	3008A01738	08/10/2014
EMI Test Receiver	SCHAFFNER	SCR 3501	430	03/30/2015
Loop Antenna	EMCO	6502	2356	06/12/2014
Bilog Antenna	TESEQ	CBL 6112D	35378	09/11/2014
Horn Antenna	EMCO	3115	00022250	08/04/2014
Horn Antenna	EMCO	3116	00026370	12/29/2014
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Test S/W	EZ-EMC			

**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. N.C.R = No Calibration Request.



<b>Powerline Conducted Emissions Test Site #3</b>				
<b>Name of Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial Number</b>	<b>Calibration Due</b>
EMI Test Receiver	R&S	ESCI	101300	09/06/2014
LISN	R&S	ENV216	100069	06/16/2014
LISN	FCC	FCC-LISN-50/2 50-16-2-07	06013	11/20/2014
ISN	TESEQ	ISN-T8	30842	08/09/2014
Current Probe	FCC	F-35	506	07/19/2014
ISN	FCC	FCC-TLISN-T4-02	20396	06/28/2014
Test S/W	EZ-EMC			

**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. N.C.R = No Calibration Request.



## 4.2. MEASUREMENT UNCERTAINTY

For the test methods, according to the present document, the measurement uncertainty figures shall be calculated in accordance with TR 100 028-1 [2] and shall correspond to an expansion factor (coverage factor)  $k = 1,96$  or  $k = 2$  (which provide confidence levels of respectively 95 % and 95,45 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)).

Table 6 is based on such expansion factors.

**Table 6: Maximum measurement uncertainty**

Parameter	Uncertainty
Powerline Conducted Emission	$\pm 0.9898$
3M Semi Anechoic Chamber / 30MHz ~ 200MHz	$\pm 3.5921$
3M Semi Anechoic Chamber / 200MHz ~ 1GHz	$\pm 3.5657$
3M Semi Anechoic Chamber / 1 ~ 8GHz	$\pm 2.5873$
3M Semi Anechoic Chamber / 8 ~ 18GHz	$\pm 2.6646$
3M Semi Anechoic Chamber / 18 ~ 26GHz	$\pm 2.9617$
3M Semi Anechoic Chamber / 26 ~ 40GHz	$\pm 3.4250$

**Remark:** This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



## **5 FACILITIES AND ACCREDITATIONS**

### **5.1. FACILITIES**

All measurement facilities used to collect the measurement data are located at

- No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.  
Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029
- No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan  
Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045
- No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841,Taiwan, R.O.C.  
Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### **5.2. EQUIPMENT**

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

**5.3. TABLE OF ACCREDITATIONS AND LISTINGS**

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	CFR 47, FCC Part15/18, CISPR 22, EN 55022, ICES-003, AS/NZS CISPR 22, VCCI V-3, EN 55011, CISPR 11, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 61000-6-1/2/3/4, EN 55024, CISPR 24, AS/NZS CISPR 24, AS/NZS 61000.6.2, EN 55014-1/-2, ETSI EN 300 386 v1.3.2/v1.3.3, IEC/EN 61000-3-2, AS/NZS 61000.3.2, IEC/EN 61000-3-3, AS/NZS 61000.3.3	 TESTING CERT #0824.01
USA	FCC MRA	3 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 TW1026
Japan	VCCI	3/10 meter Open Area Test Sites and conducted test sites to perform radiated/conducted measurements	<b>VCCI</b> R-2882/2541/2798/725/1868 C-402/747/912 T-1930/1646
Taiwan	TAF	EN 55014-1, CISPR 14, CNS 13781-1, EN 55013, CISPR 13, CNS 13439, EN 55011, CISPR 11, CNS 13803, PLMN09, IS2045-0, LP0002 FCC Part 27/90, Part 15B/C/D/E, RSS-192/193/210/310 ETSI EN 300 328/ 300 220-1/ 300 220-2/ 301 893/ 301 489-01/ 301 489-03/ 301 489-07 / 301 489-17/ 300 440-1/ 300 440-2 AS/NZS 4268, AS/NZS 4771 CISPR 22, EN 55022, CNS 13438, AS/NZS CISPR 22, VCCI, IEC/EN 61000-4-2/3/4/5/6/8/11, CNS 14676-2/3/4/5/6/8, CNS 14934-2/3, CNS 13783-1, CNS 13439, CNS 13803	  Testing Laboratory 0363
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	SL2-IS-E-0014 / IN-E-0014 /A1-E-0014 /R1-E-0014 /R2-E-0014 /L1-E-0014
Canada	Industry Canada	RSS-Gen Issue 3	 IC 2324C-5

**Note:** No part of this report may be used to claim or imply product endorsement by A2LA, TAF or other government agency.



## 6 SETUP OF EQUIPMENT UNDER TEST

### 6.1. SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### 6.2. SUPPORT EQUIPMENT

**For Conducted & Radiated Emission measurement (Above 1GHz):**

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1	Notebook PC	D400	0932RY	E2K24GBRL	DELL	Mini USB Cable: Shielded, 1.0m	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core

**For Radiated Emission (Below 1GHz) and Power line conducted emission measurement:**

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1	LCD Monitor	U2410	CN-OJ257M-72872 -99N-O5AL	FCC DoC	DELL	D-Sub Cable: Shielded, 1.8m with two cores	Unshielded, 1.8m
2	Notebook PC	D400	0932RY	E2K24GBRL	DELL	Mini USB Cable: Shielded, 1.0m	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
3	USB Mouse	M100	N/A	FCC DoC	HP	Unshielded, 1.8m	N/A

**Remark:** Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



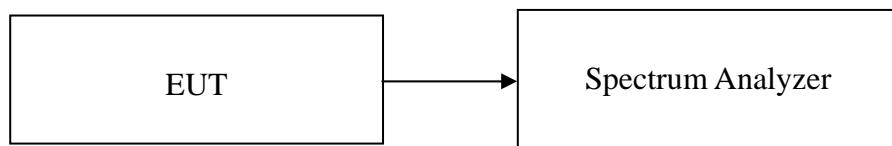
## 7 FCC PART 15.247 REQUIREMENTS

### 7.1. 6dB bandwidth

#### LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

#### Test Configuration



#### TEST PROCEDURE

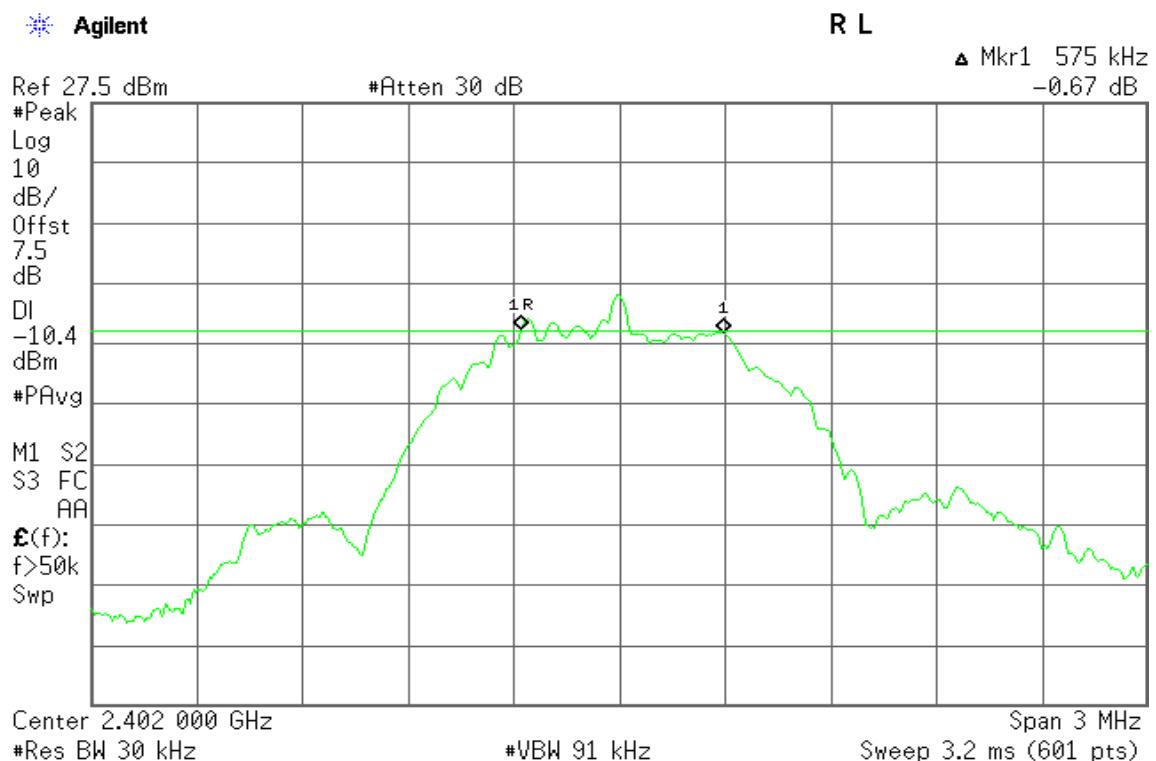
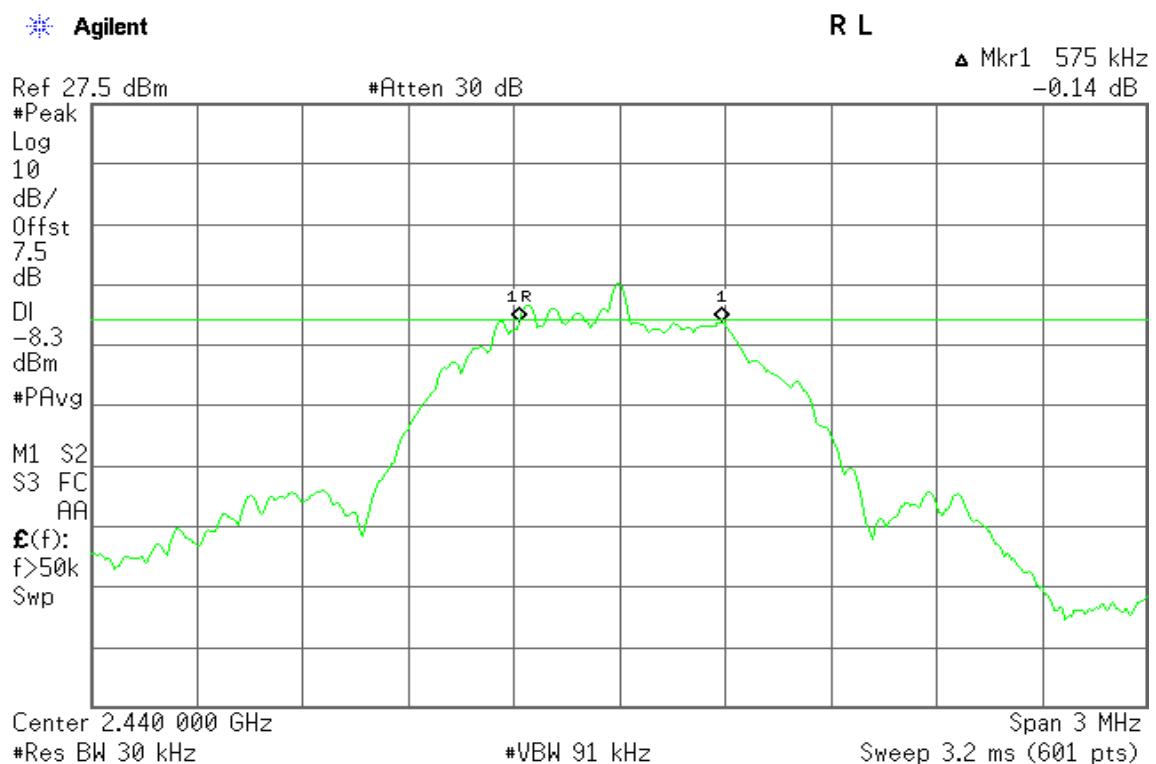
The transmitter output is connected to the spectrum analyzer. Set the RBW=100kHz the emission bandwidth,  $VBW \geq 3 \times RBW$ , Detector = Peak, Trace mode = max hold, Sweep = auto couple. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

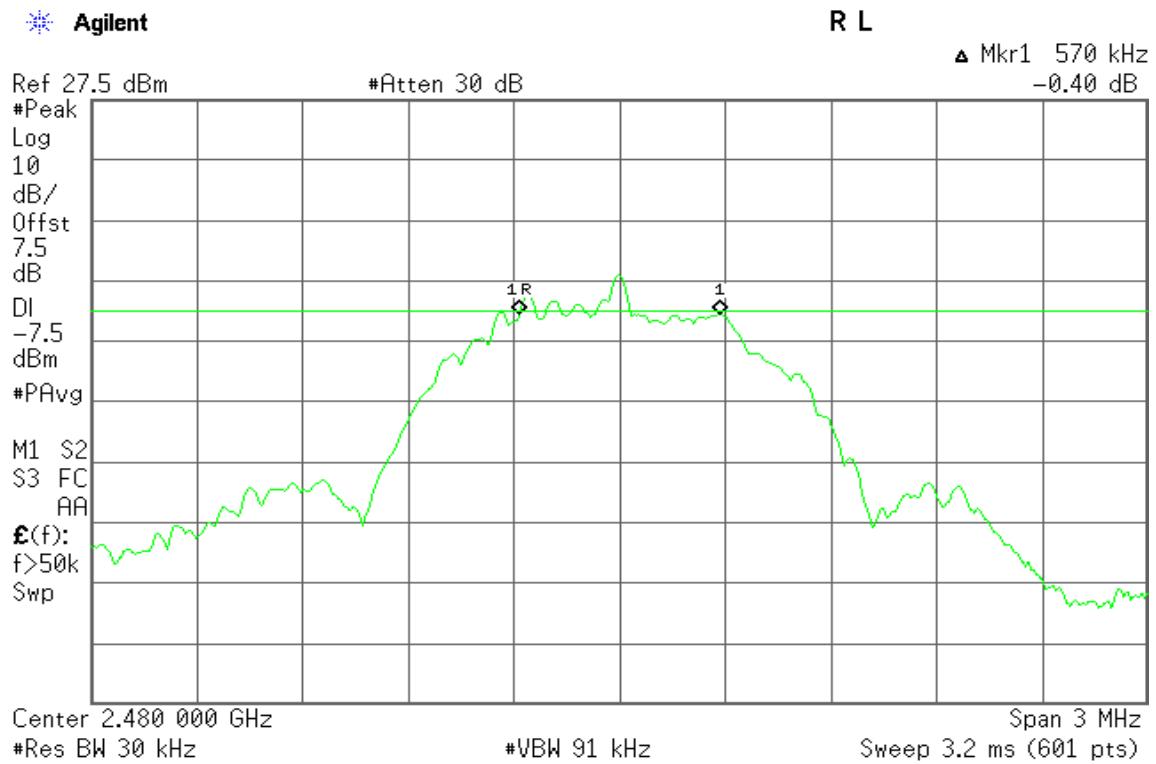
#### TEST RESULTS

*No non-compliance noted*

#### Test Data

Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2402	575	>500	PASS
Mid	2440	575		PASS
High	2480	570		PASS

**Test Plot****6dB Bandwidth (CH Low)****6dB Bandwidth (CH Mid)**

**6dB Bandwidth (CH High)**




## 7.2. PEAK POWER

### LIMIT

According to §15.247, the maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 watt.
2. According to §15.247(b) (4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### TEST CONFIGURATION



### TEST PROCEDURE

#### **Per KDB 558074 v03r01**

*The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.*

### TEST RESULTS

*No non-compliance noted*

### TEST DATA

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Test Result
Low	2402	-2.50	0.0006	1	PASS
Mid	2440	-0.34	0.0009		PASS
High	2480	0.32	0.0011		PASS




## 7.3. AVERAGE POWER

### LIMIT

None; for reporting purposes only.

### TEST CONFIGURATION



### TEST PROCEDURE

#### **Per KDB 558074 v03r01**

*The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.*

### TEST RESULTS

*No non-compliance noted*

### TEST DATA

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2402	-5.68	0.0003
Mid	2440	-3.48	0.0004
High	2480	-2.84	0.0005



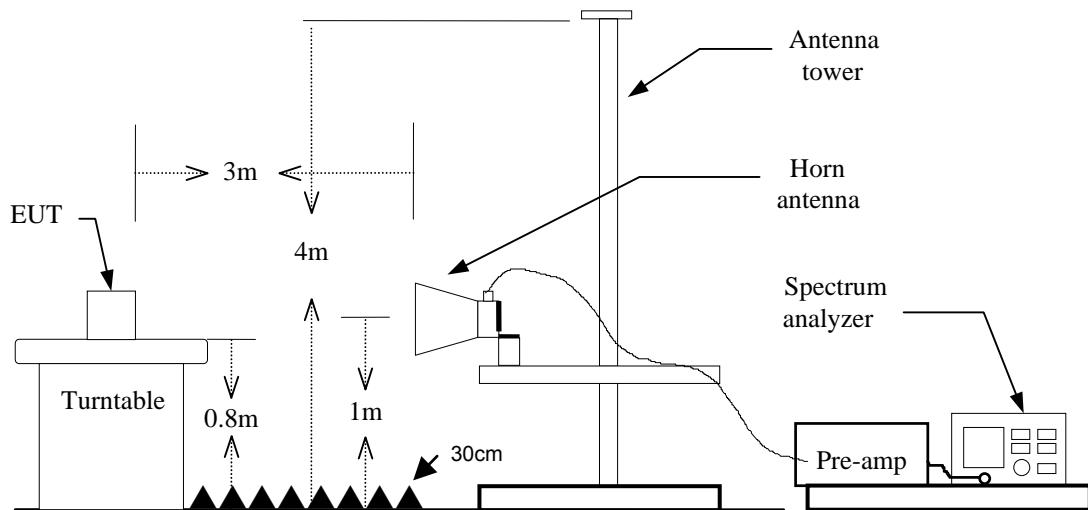
## 7.4. BAND EDGES MEASUREMENT

### LIMIT


According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

### TEST CONFIGURATION

#### For Radiated



#### For Conducted





## **TEST PROCEDURE**

### **For Radiated**

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW= 300Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

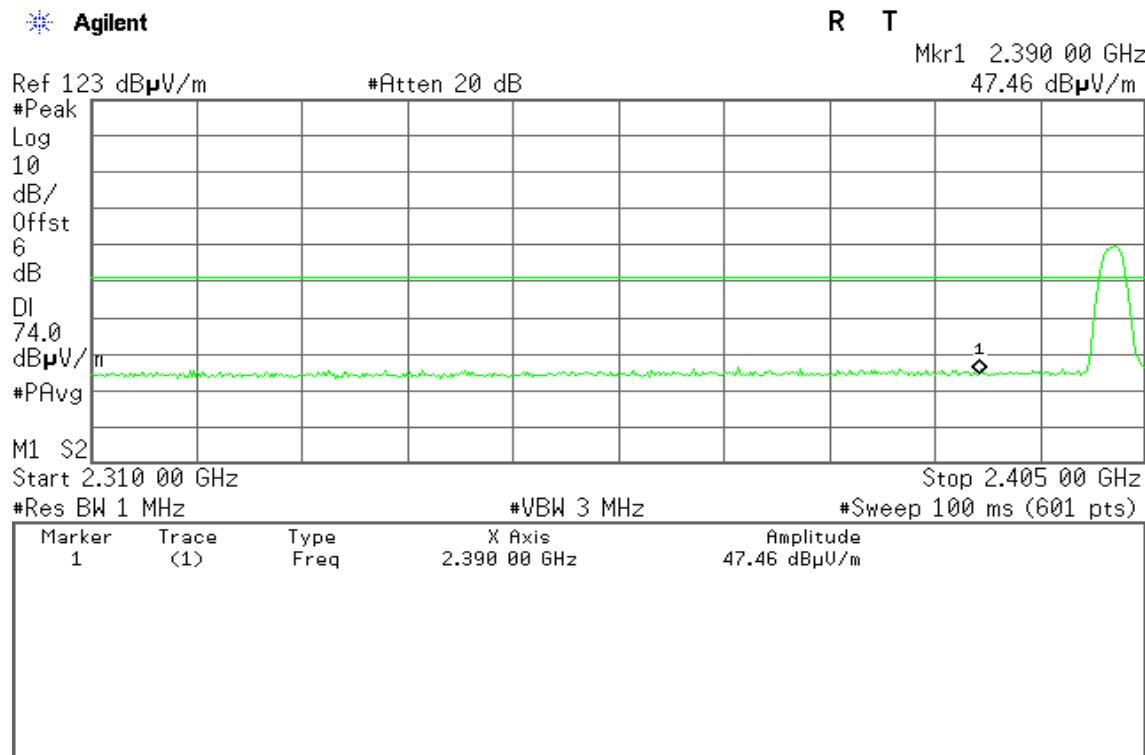
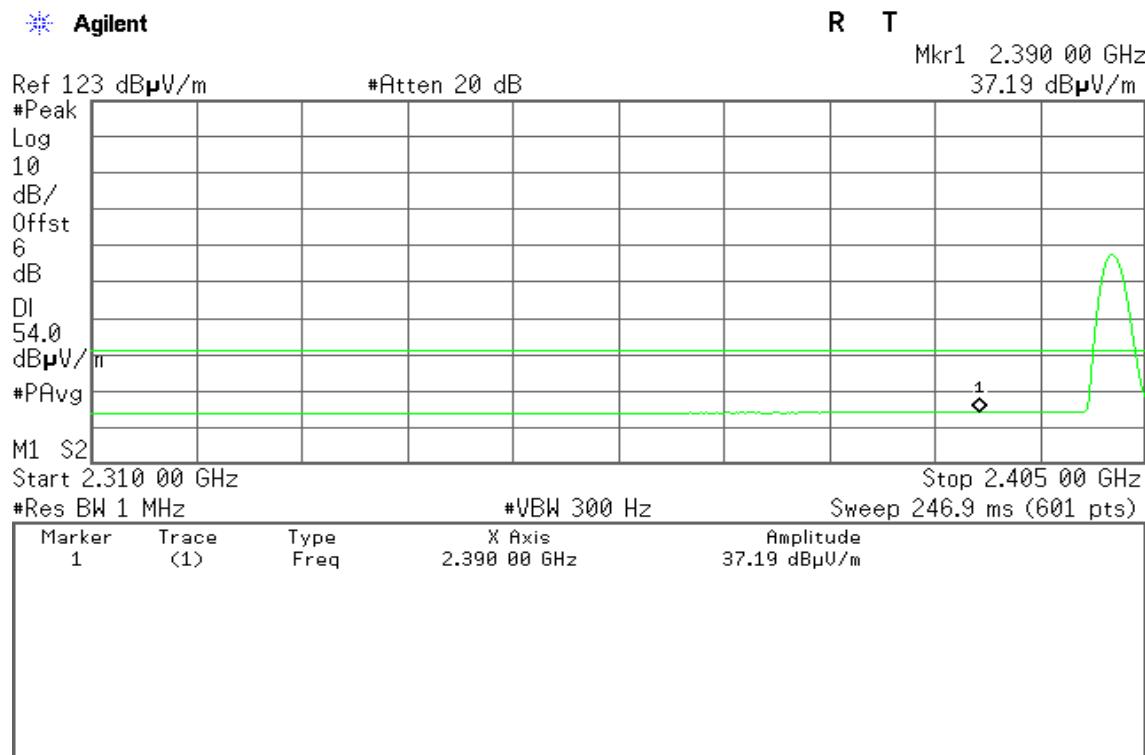
### **For Conducted**

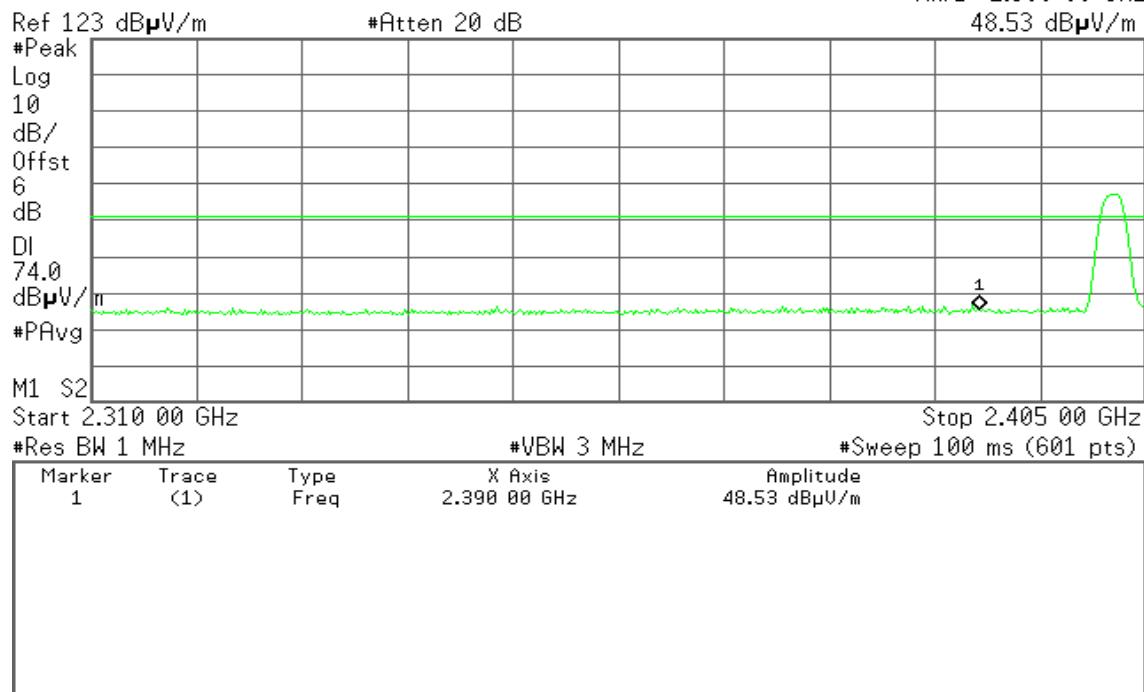
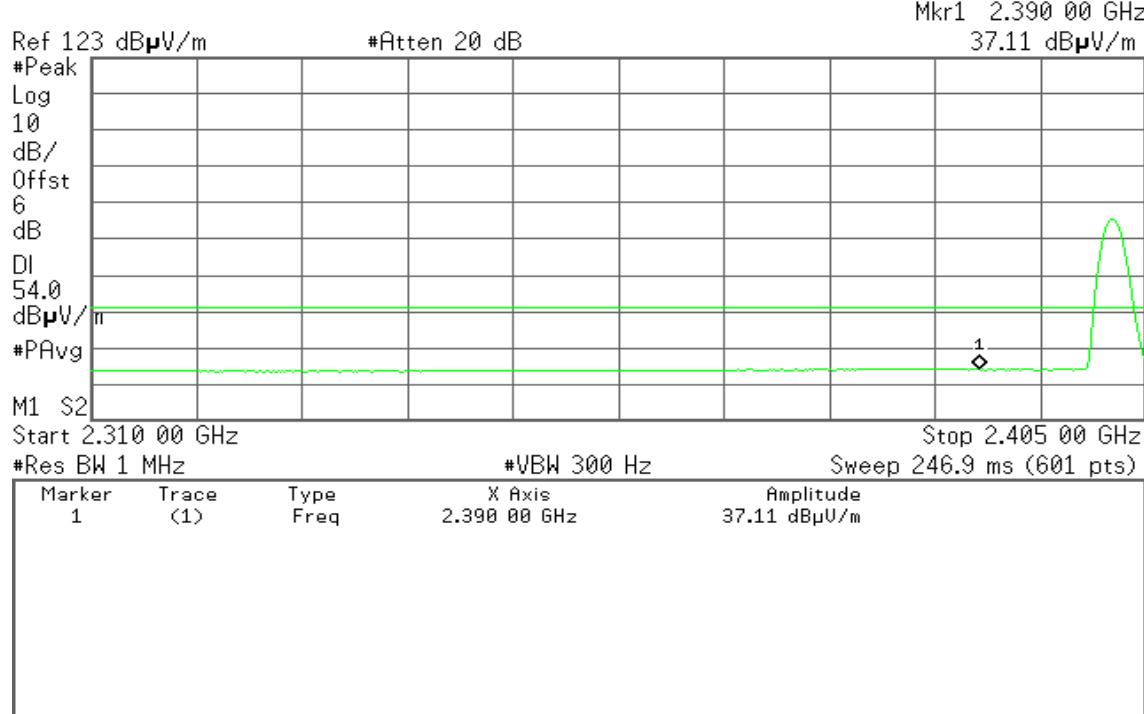
Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

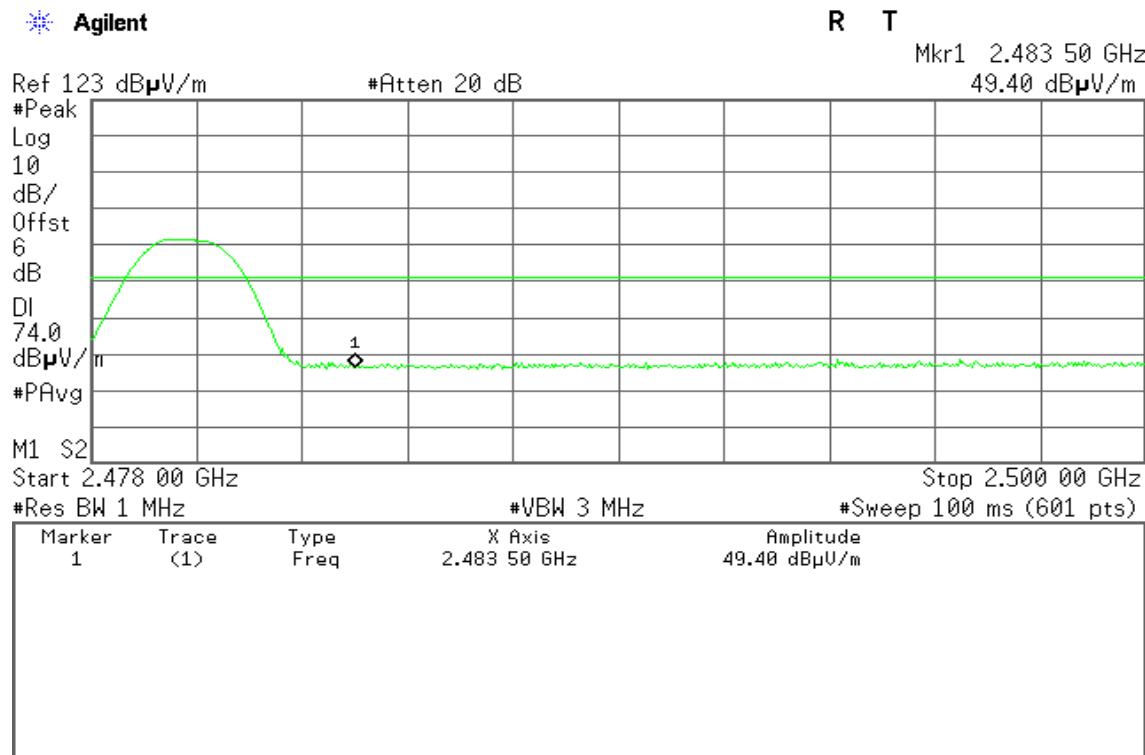
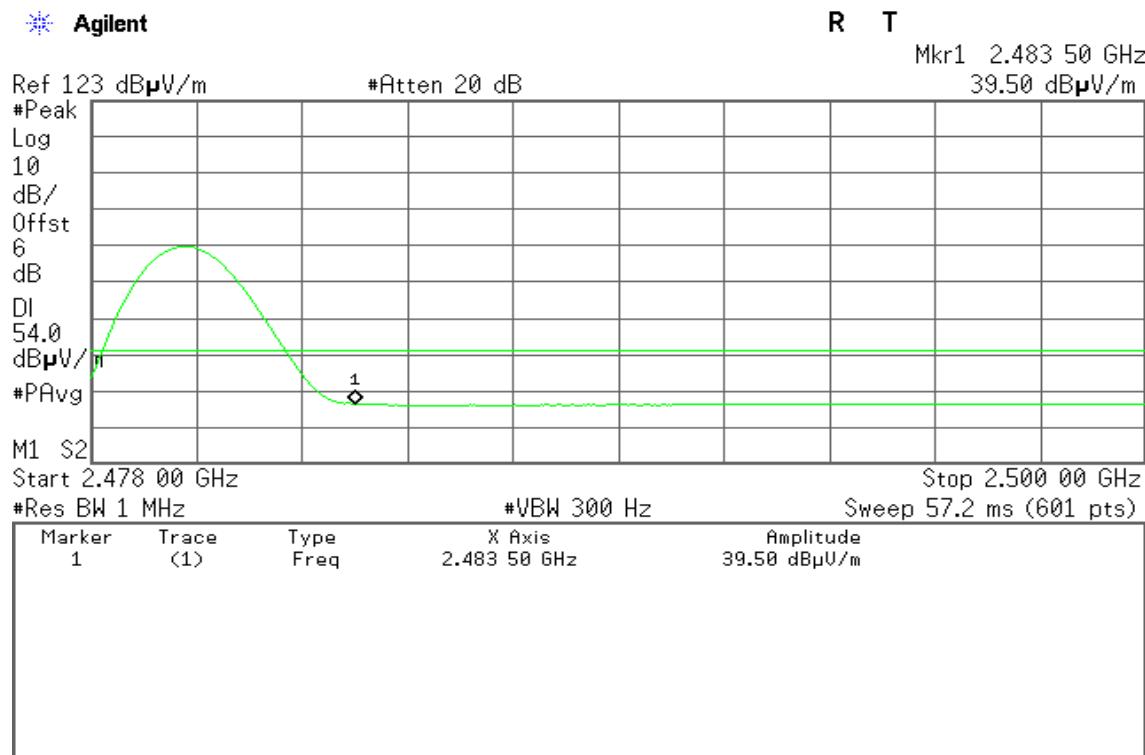
The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

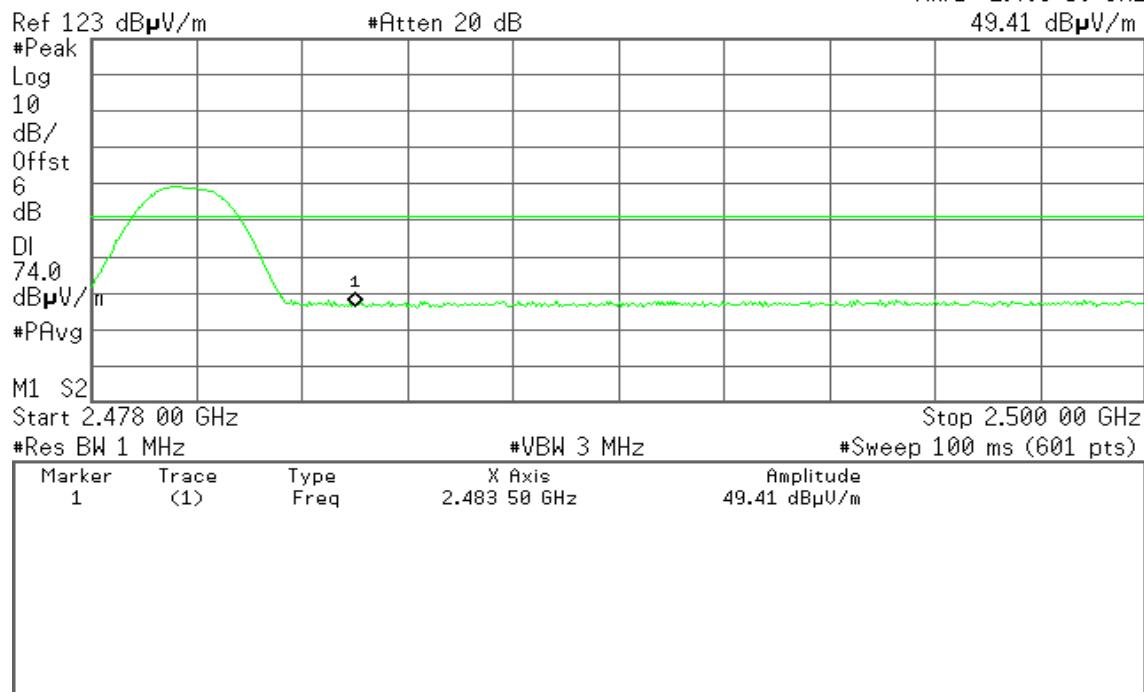
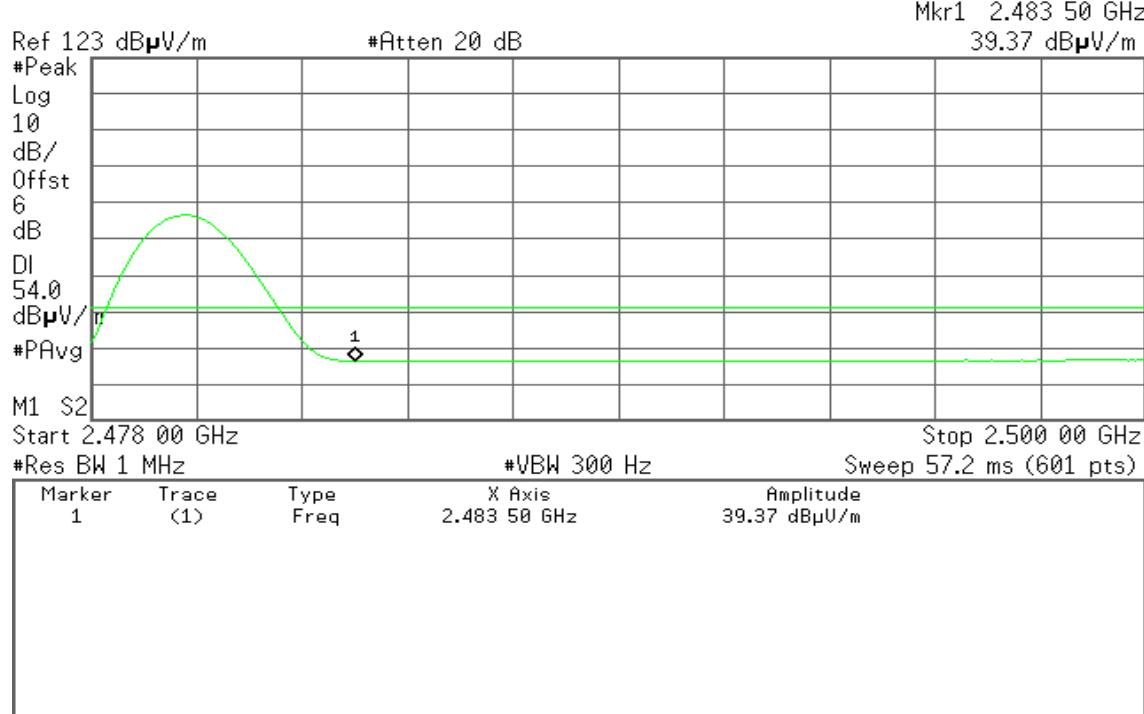
## **TEST RESULTS**

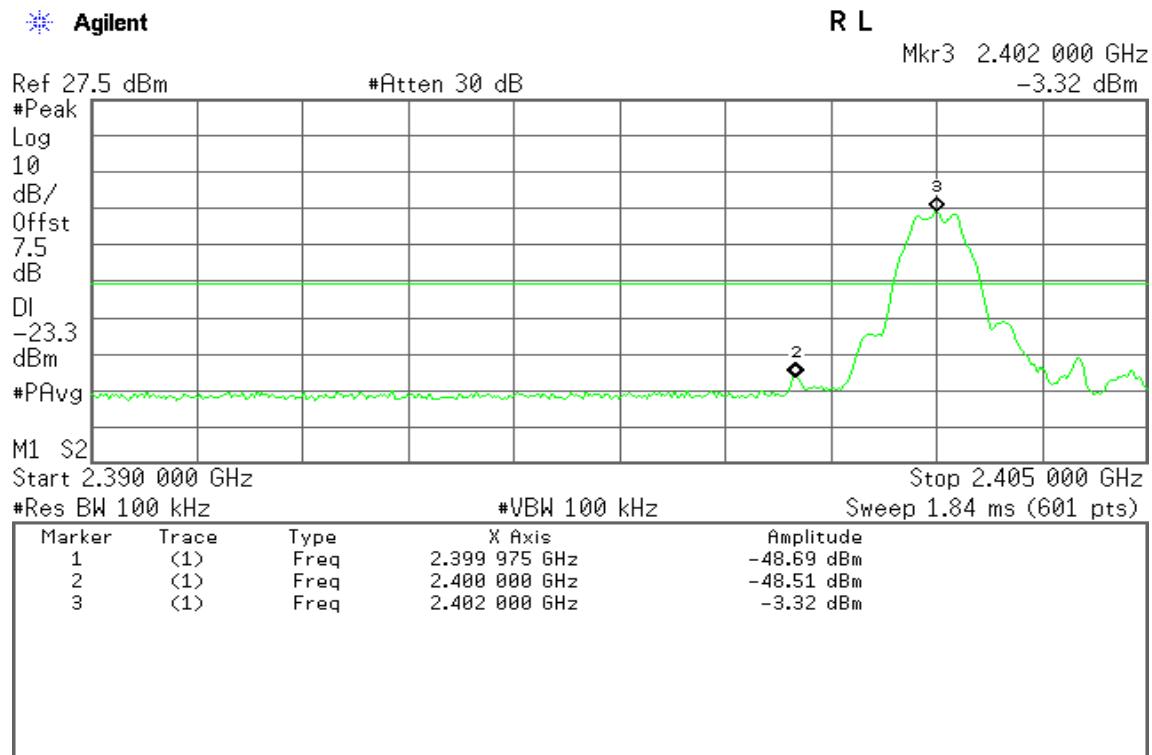
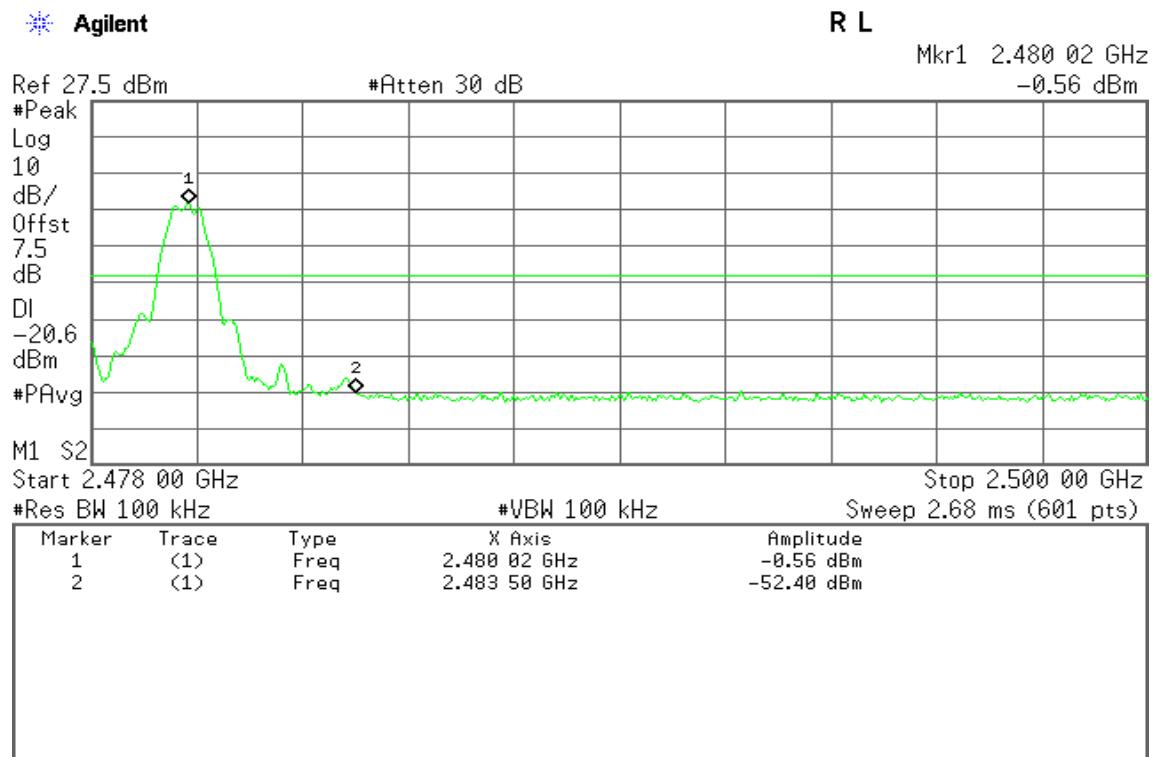
Refer to attach spectrum analyzer data chart.

**Band Edges (CH Low)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**

**Detector mode: Peak****Polarity: Horizontal****Agilent****Detector mode: Average****Polarity: Horizontal****Agilent**

**Band Edges (CH High)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**

**Detector mode: Peak****Polarity: Horizontal****Agilent****Detector mode: Average****Polarity: Horizontal****Agilent**

**Conducted band-edge****CH Low****CH High**




## 7.5. PEAK POWER SPECTRAL DENSITY

### LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

### Test Configuration



## TEST PROCEDURE

### Per KDB 558074 D01 DTS Meas Guidance v02

This procedure must be used if maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit, and is optional if the maximum (average) conducted output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW  $\geq$  3 kHz.
4. Set the VBW  $\geq$  3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat

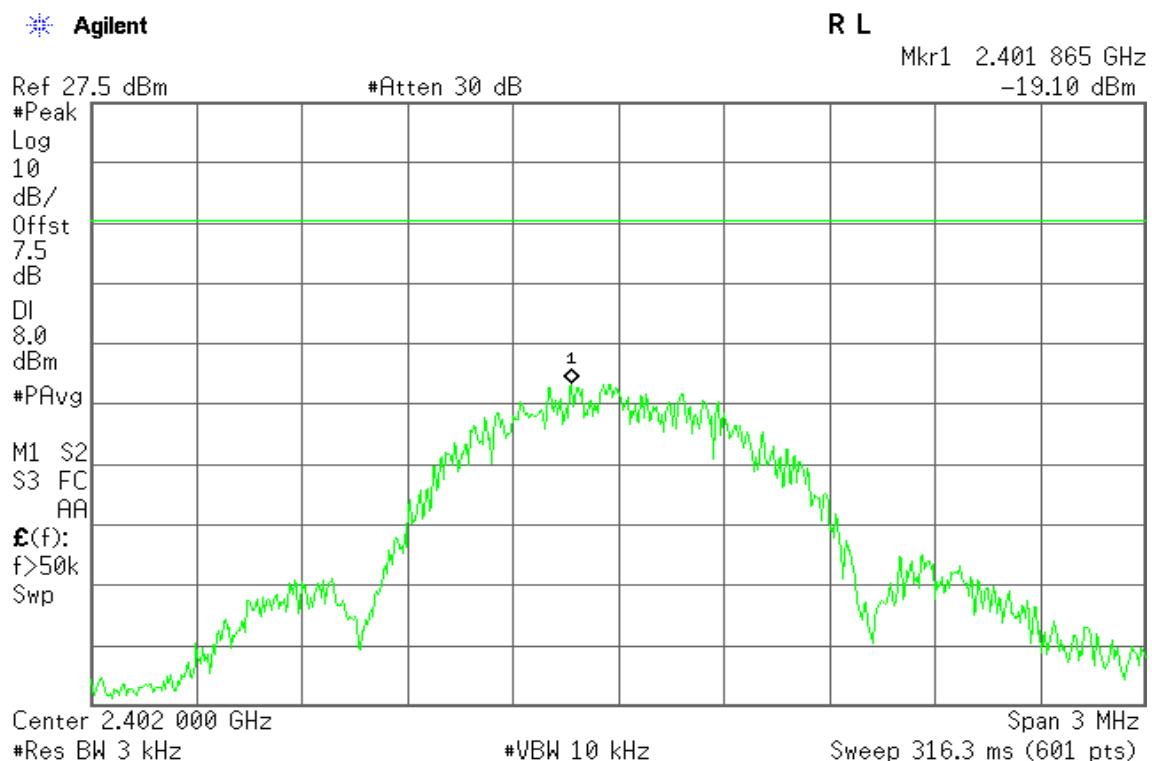
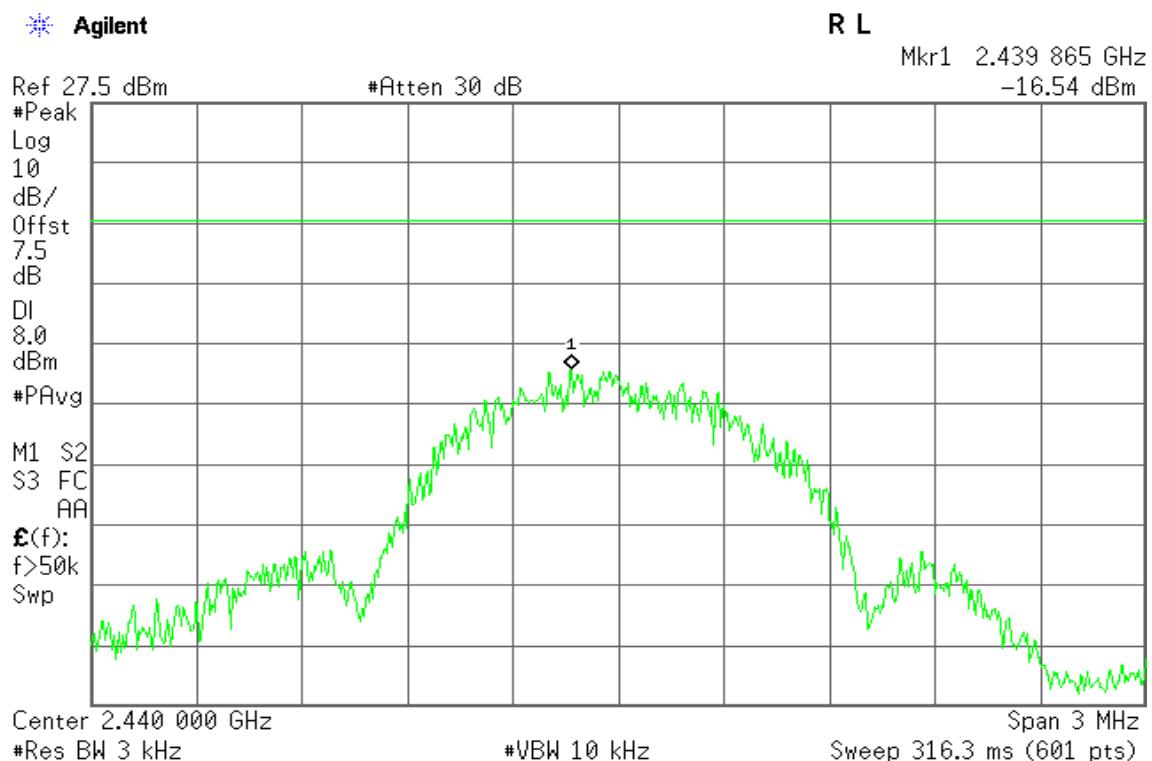


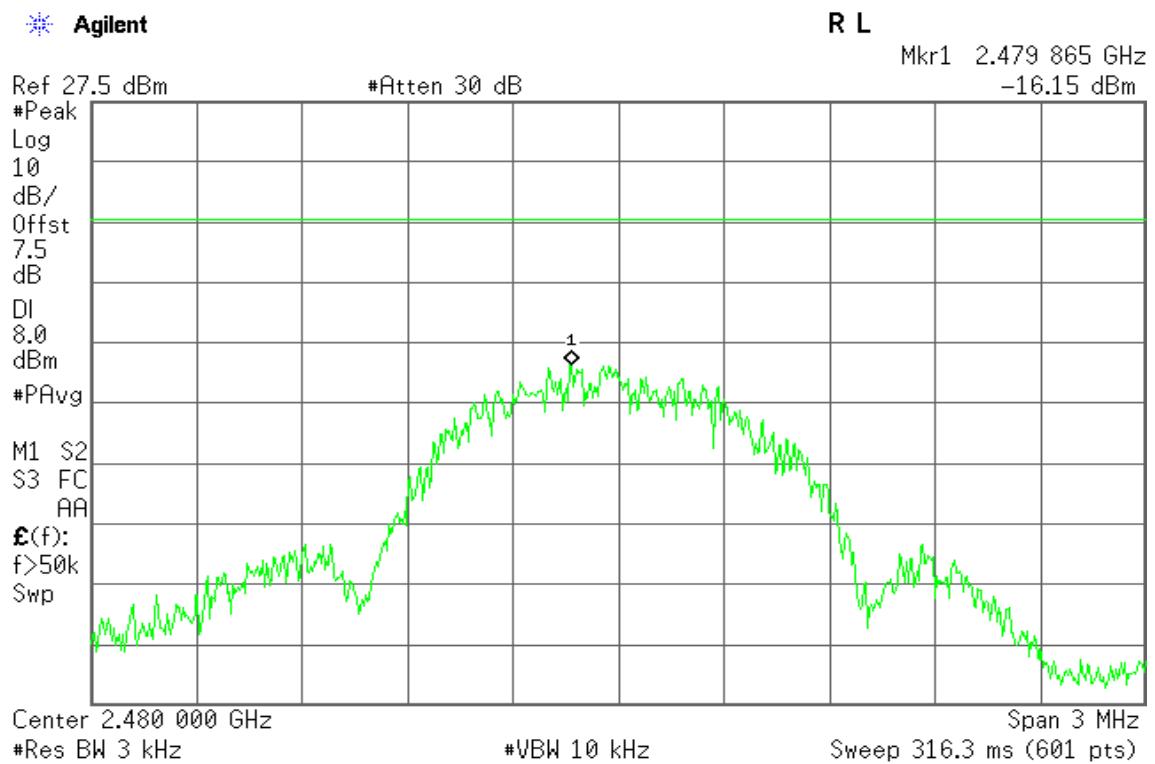
## **TEST RESULTS**

*No non-compliance noted*

### **Test Data**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2402	-19.10	8.00	PASS
Mid	2440	-16.54		PASS
High	2480	-16.15		PASS

**Test Plot****PPSD (CH Low)****PPSD (CH Mid)**

**PPSD (CH High)**




## 7.6. SPURIOUS EMISSIONS

### 7.6.1. Conducted Measurement

#### LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

#### TEST CONFIGURATION



#### TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

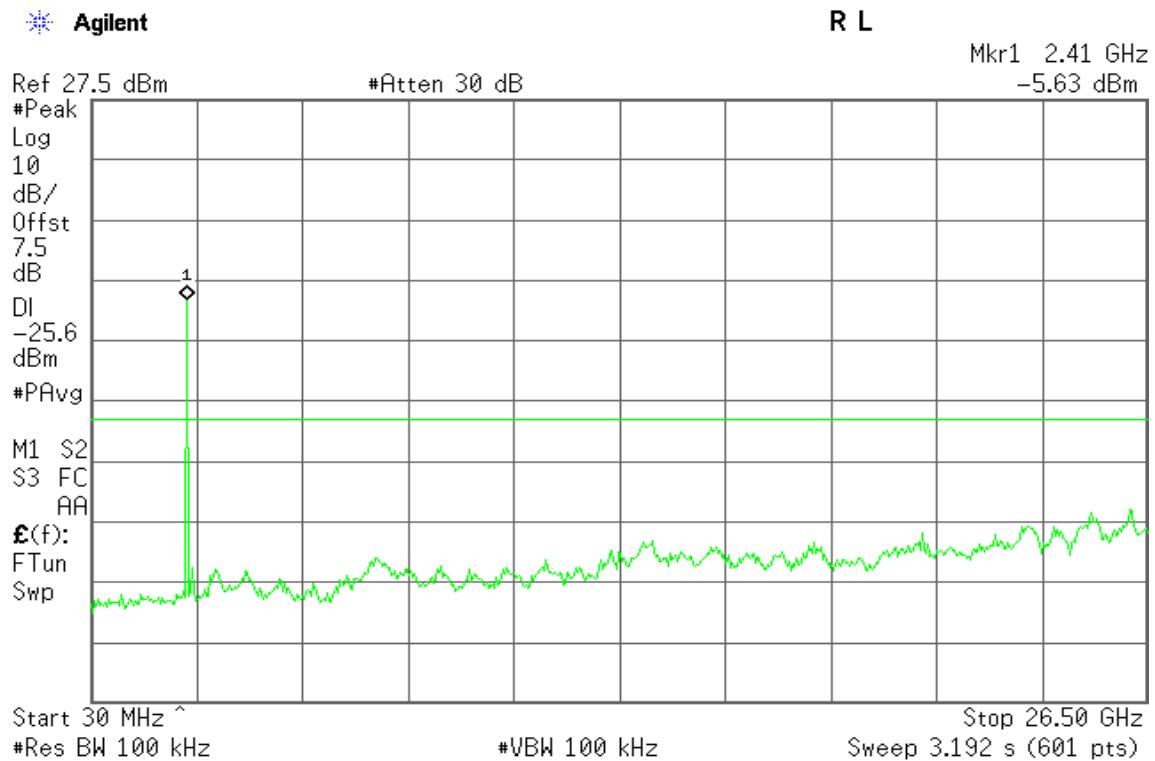
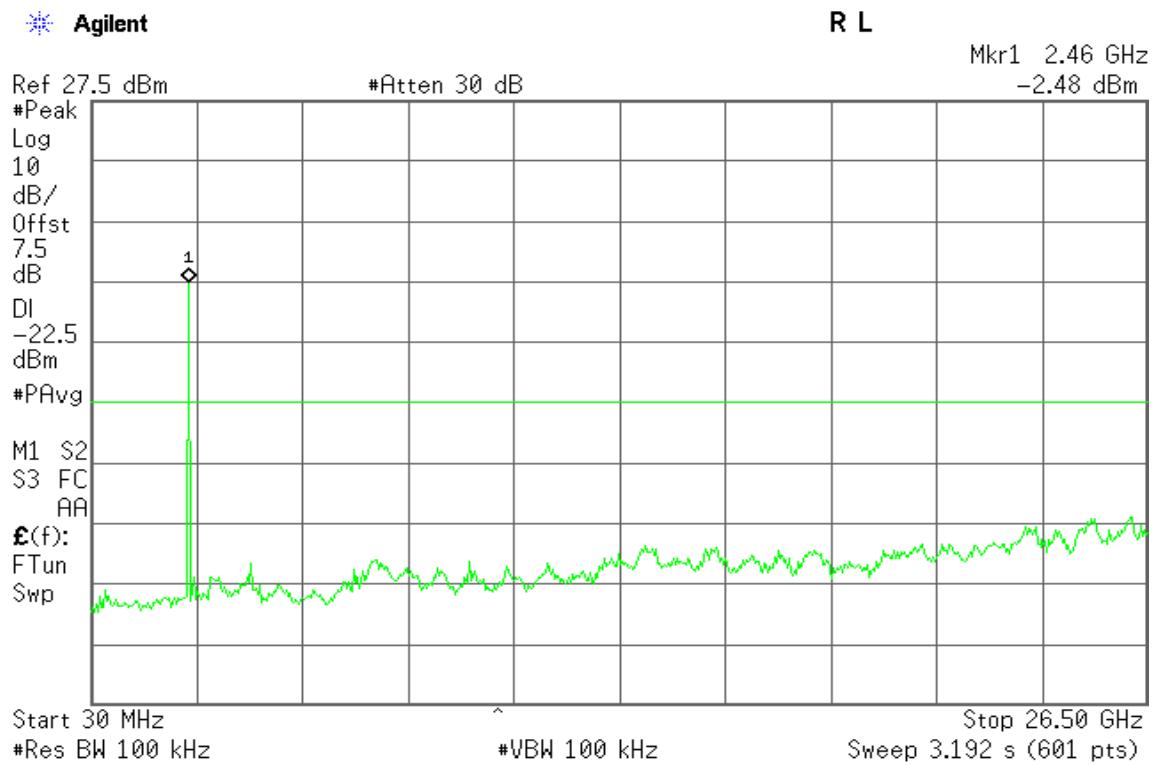
Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

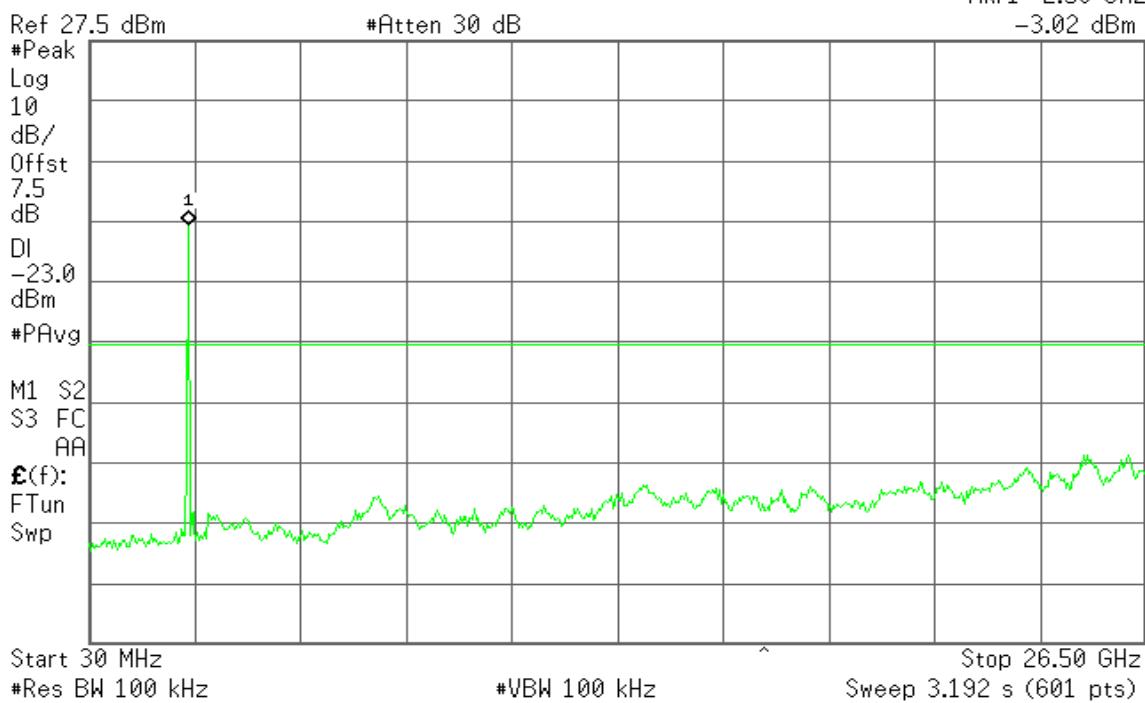
#### TEST RESULTS

*No non-compliance noted*

#### TEST DATA

Refer to attach spectrum analyzer data chart.

**Test Plot****Spurious Emissions****CH Low****CH Mid**

**CH High****Agilent****R L**Mkr1 2.50 GHz  
-3.02 dBm



## 7.6.2. RADIATED EMISSIONS

### LIMIT

- According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu$ V/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

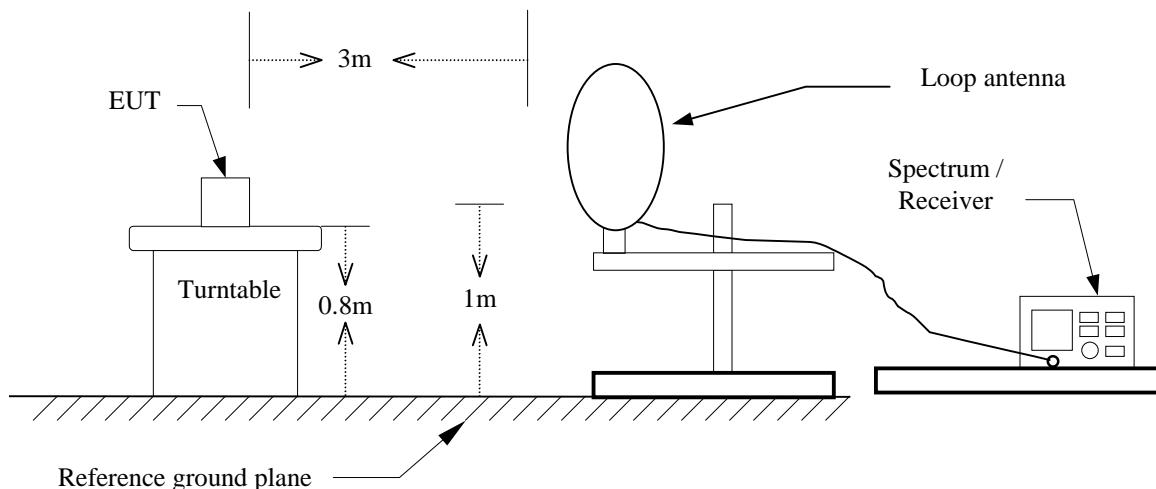
**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

- In the emission table above, the tighter limit applies at the band edges.

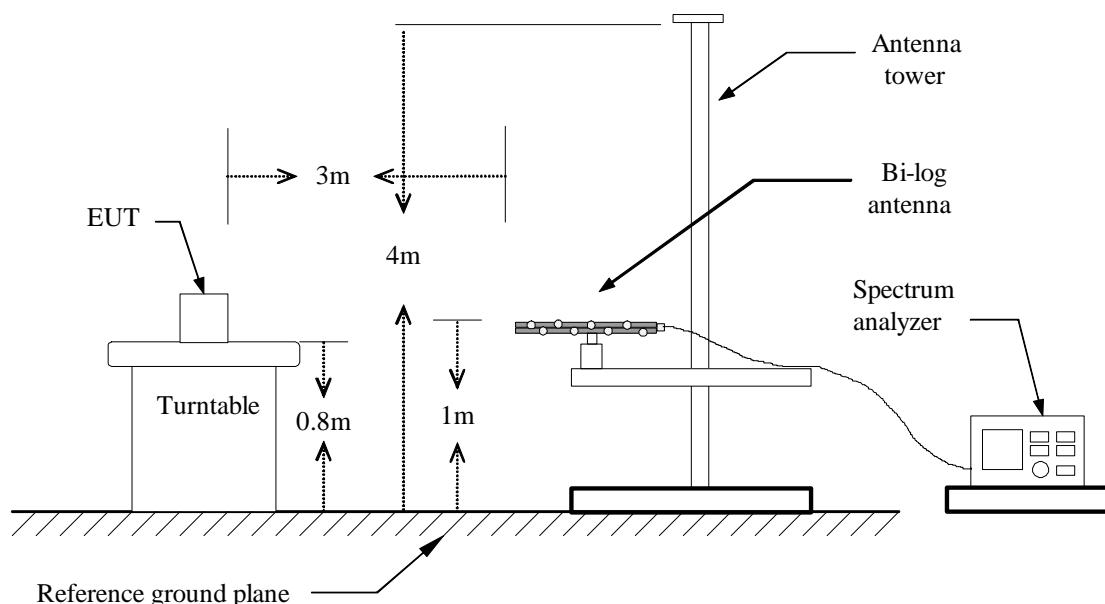
Frequency (Hz)	Field Strength ( $\mu$ V/m at 3-meter)	Field Strength (dB $\mu$ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

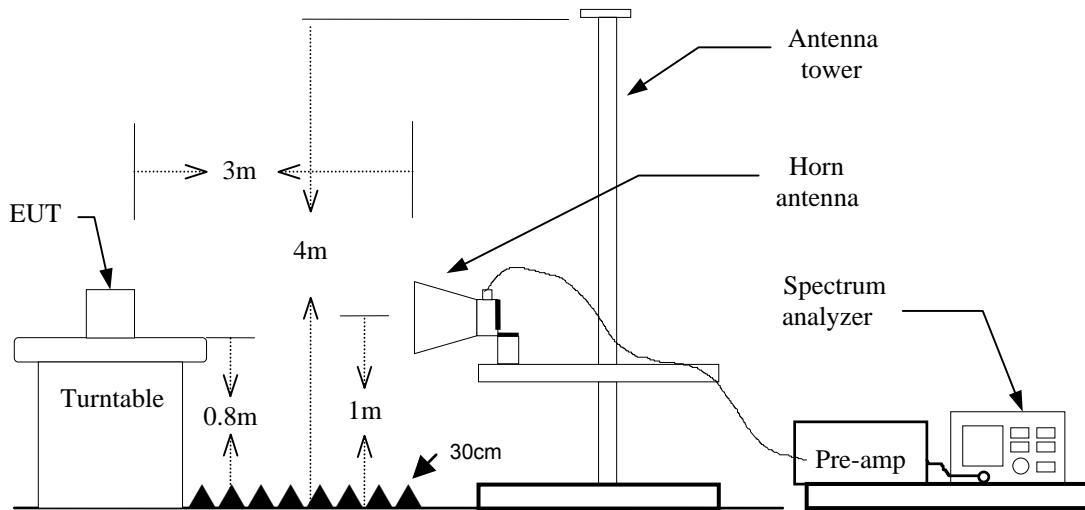
## **TEST CONFIGURATION**

**9kHz ~ 30MHz**



**30MHz ~ 1GHz**



**Above 1 GHz**

**TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

**Below 30MHz**

RBW=10kHz / VBW=30kHz / Sweep=AUTO

**30 ~ 1000MHz:**

RBW=100kHz / VBW=300KHz / Sweep=AUTO

**Above 1GHz:**

- a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
- b) AVERAGE: RBW=1MHz / VBW=300Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.

In case the emission is lower than 30MHz. loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case



## **TEST RESULTS**

### **Below 1 GHz (9kHz ~ 30MHz)**

No emission found between lowest internal used/generated frequency to 30MHz

### **Below 1 GHz (30 ~ 1000MHz)**

No non-compliance noted

## **TEST DATA**

### **Below 1 GHz (9kHz ~ 1000MHz)**

**Operation Mode:** Transmitting      **Test Date:** 2014/3/27

**Temperature:** 26°C      **Tested by:** Francis Lee

**Humidity:** 56 % RH      **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol. (H/V)	Remark
47.4600	48.60	-18.13	30.47	40.00	-9.53	V	QP
119.2399	47.30	-15.12	32.18	43.50	-11.32	V	QP
440.3100	41.20	-9.97	31.23	46.00	-14.77	V	QP
621.7000	38.10	-7.74	30.36	46.00	-15.64	V	QP
666.3200	46.50	-7.32	39.18	46.00	-6.82	V	QP
904.9400	32.90	-3.87	29.03	46.00	-16.97	V	QP
154.1600	46.30	-16.36	29.94	43.50	-13.56	H	QP
224.9700	49.30	-15.78	33.52	46.00	-12.48	H	QP
359.8000	28.80	-10.91	17.89	46.00	-28.11	H	QP
666.3200	44.80	-7.32	37.48	46.00	-8.52	H	QP
707.0600	39.10	-6.96	32.14	46.00	-13.86	H	QP
904.9400	42.30	-3.87	38.43	46.00	-7.57	H	QP

**Remark:**

1. No emission found between lowest internal used / generated frequency to 30 MHz. (9kHz ~ 30MHz)
2. Measuring frequencies from 30 MHz to the 1GHz.
3. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

**Above 1 GHz**

**Operation Mode:** TX / CH Low      **Test Date:** 2014/3/25  
**Temperature:** 26°C      **Tested by:** Francis Lee  
**Humidity:** 56% RH      **Polarity:** Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1472.000	50.24	-5.64	44.60	74.00	-29.40	V	peak
2052.000	50.09	-2.48	47.61	74.00	-26.39	V	peak
2818.000	49.18	-1.84	47.34	74.00	-26.66	V	peak
4300.000	39.45	7.66	47.11	74.00	-26.89	V	peak
4805.000	44.28	5.54	49.82	74.00	-24.18	V	peak
7540.000	38.41	10.77	49.18	74.00	-24.82	V	peak
1402.000	50.39	-6.94	43.45	74.00	-30.55	H	peak
2112.000	49.89	-3.75	46.14	74.00	-27.86	H	peak
2724.000	49.14	-3.16	45.98	74.00	-28.02	H	peak
3680.000	41.49	3.85	45.34	74.00	-28.66	H	peak
4805.000	44.63	5.54	50.17	74.00	-23.83	H	peak
7270.000	38.87	11.42	50.29	74.00	-23.71	H	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Compliance Certification Services Inc.**

Report No.: T140319L06-RP2

FCC ID: COWB0516

Date of Issue: April 7, 2014

**Operation Mode:** TX / CH Mid**Test Date:**

2014/3/25

**Temperature:** 26°C**Tested by:**

Francis Lee

**Humidity:** 56% RH**Polarity:**

Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1496.000	50.65	-5.31	45.34	74.00	-28.66	V	peak
1980.000	49.53	-1.62	47.91	74.00	-26.09	V	peak
2858.000	48.87	-1.26	47.61	74.00	-26.39	V	peak
3600.000	40.30	2.93	43.23	74.00	-30.77	V	peak
4885.000	42.77	4.03	46.80	74.00	-27.20	V	peak
7565.000	38.36	11.78	50.14	74.00	-23.86	V	peak
1394.000	50.45	-7.05	43.40	74.00	-30.60	H	peak
2102.000	49.55	-3.78	45.77	74.00	-28.23	H	peak
2838.000	49.03	-2.19	46.84	74.00	-27.16	H	peak
3900.000	39.86	5.22	45.08	74.00	-28.92	H	peak
4885.000	43.89	6.90	50.79	74.00	-23.21	H	peak
7455.000	38.36	11.08	49.44	74.00	-24.56	H	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Compliance Certification Services Inc.**

Report No.: T140319L06-RP2

FCC ID: COWB0516

Date of Issue: April 7, 2014

**Operation Mode:** TX / CH High**Test Date:** 2014/3/25**Temperature:** 26°C**Tested by:** Francis Lee**Humidity:** 56% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Pol H/V	Remark
1574.000	50.81	-4.91	45.90	74.00	-28.10	V	peak
2196.000	50.56	-1.42	49.14	74.00	-24.86	V	peak
2828.000	49.49	-1.70	47.79	74.00	-26.21	V	peak
3620.000	39.80	2.84	42.64	74.00	-31.36	V	peak
4960.000	43.17	4.94	48.11	74.00	-25.89	V	peak
7630.000	38.44	11.56	50.00	74.00	-24.00	V	peak
1388.000	50.67	-7.21	43.46	74.00	-30.54	H	peak
2108.000	49.90	-3.76	46.14	74.00	-27.86	H	peak
2754.000	49.54	-2.89	46.65	74.00	-27.35	H	peak
3810.000	39.69	5.11	44.80	74.00	-29.20	H	peak
4960.000	43.56	7.41	50.97	74.00	-23.03	H	peak
7250.000	37.53	11.16	48.69	74.00	-25.31	H	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



## 7.7. POWERLINE CONDUCTED EMISSIONS

### LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### TEST CONFIGURATION

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

### TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

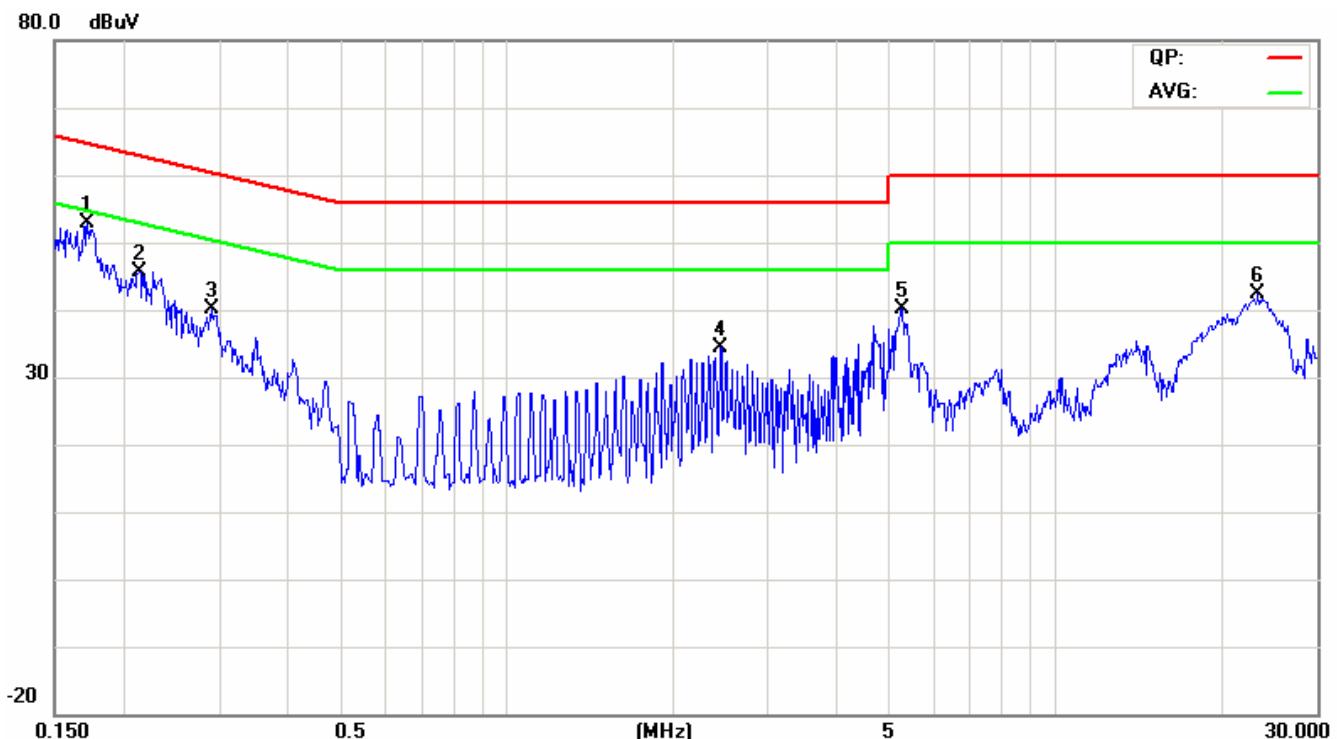
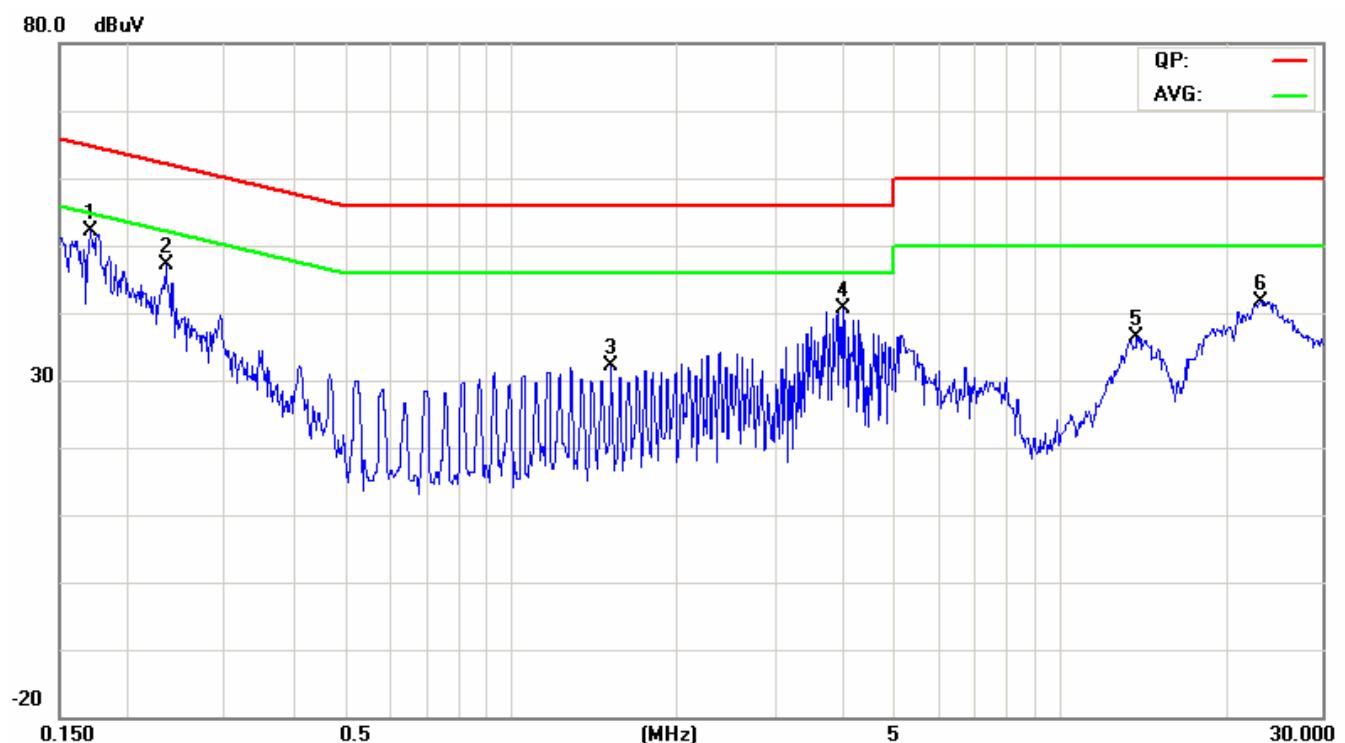
**TEST DATA**

**Operation Mode:** Adapter Charging      **Test Date:** 2014/3/27  
**Temperature:** 25°C      **Tested by:** Francis Lee  
**Humidity:** 57% RH      **Test**

Freq. (MHz)	QP Reading	AV Reading	Corr. factor	QP Result	AV Result	QP Limit	AV Limit	QP Margin	AV Margin	Note
0.1729	38.57	25.91	9.68	48.25	35.59	64.82	54.82	-16.57	-19.23	L1
0.2111	23.85	7.39	9.66	33.51	17.05	63.16	53.16	-29.65	-36.11	L1
0.2924	27.14	16.78	9.68	36.82	26.46	60.45	50.46	-23.63	-24.00	L1
2.4483	21.89	20.44	9.75	31.64	30.19	56.00	46.00	-24.36	-15.81	L1
5.2442	25.77	16.41	9.81	35.58	26.22	60.00	50.00	-24.42	-23.78	L1
23.3663	27.31	23.37	10.06	37.37	33.43	60.00	50.00	-22.63	-16.57	L1
0.1728	37.64	25.92	9.66	47.30	35.58	64.82	54.82	-17.52	-19.24	L2
0.2345	30.88	20.31	9.66	40.54	29.97	62.29	52.29	-21.75	-22.32	L2
1.5150	19.29	15.63	9.71	29.00	25.34	56.00	46.00	-27.00	-20.66	L2
4.0189	27.92	16.76	9.77	37.69	26.53	56.00	46.00	-18.31	-19.47	L2
13.6956	20.04	15.63	9.99	30.03	25.62	60.00	50.00	-29.97	-24.38	L2
23.1400	25.09	19.83	10.16	35.25	29.99	60.00	50.00	-24.75	-20.01	L2

**Remark:**

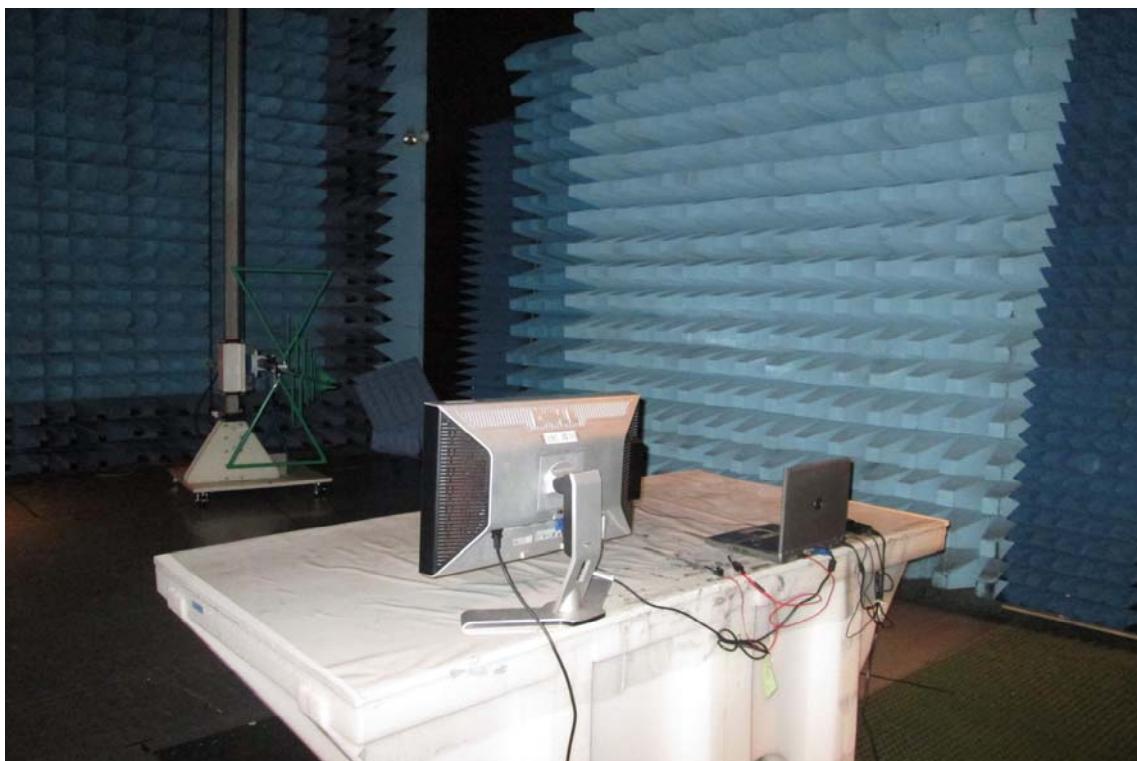
1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. “---” denotes the emission level was or more than 2dB below the Average limit
4. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
5. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)

**Test Plots*****Conducted emissions (Line 1)******Conducted emissions (Line 2)***

## 8 PHOTOGRAPHS OF TEST SETUP

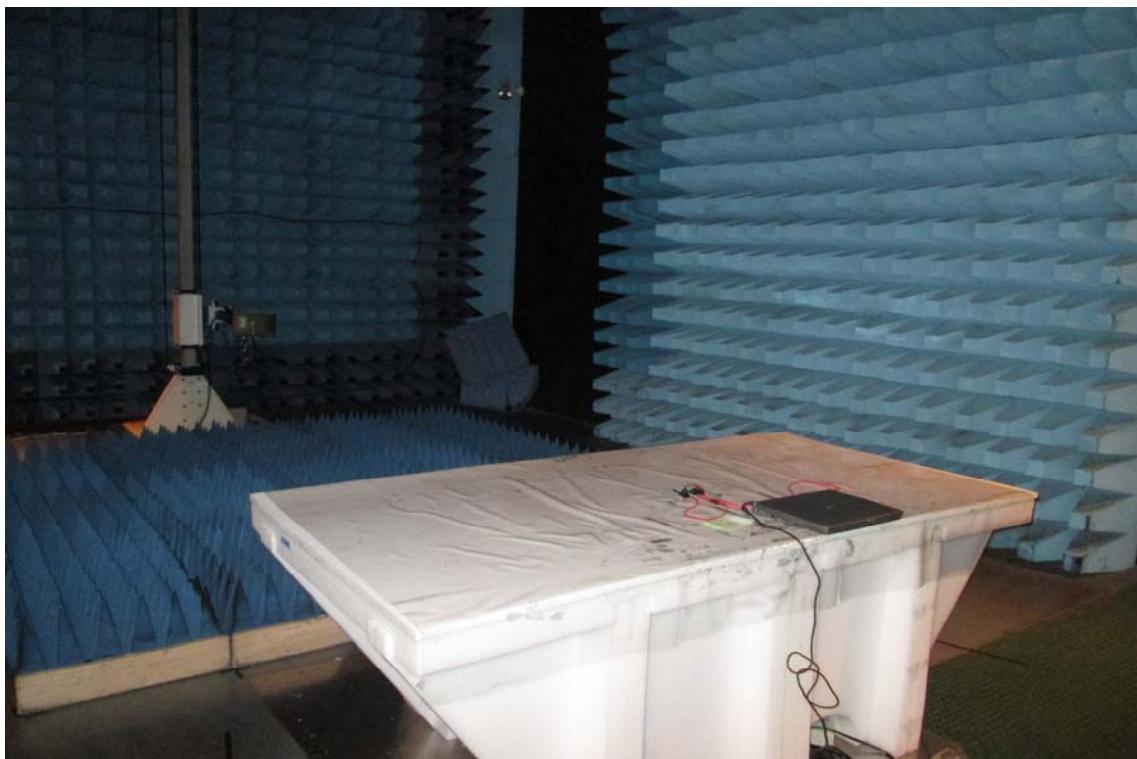
### Radiated Emission Setup Photos

#### Below 1GHz





## Above 1GHz





## Conducted Emission Setup Photo





## Power Line Conducted Emissions Setup Photos





## **APPENDIX 1: PHOTOGRAPHS OF EUT**

**Refer to T140319L06 External Photographs.**