




ELECTROMAGNETIC COMPATIBILITY
ELECTRICAL SAFETY
LASER SPECTROSCOPY
ENVIRONMENTAL PHYSICS

G.S.D. S.r.l.
Certified in accordance with
UNI EN ISO 9001:2008
by
TÜV Rheinland Italia S.r.l.
Certificate N. 39 00 1850509

G.S.D. Srl PISA - Italy	Test Report n. 16556-FCC	Rev. 00
Manufacturer	TWS S.r.l.	
Address	Via Zaccagna, 6 54033 Avenza Carrara (MS) Italy	
Test Family Name	Remote Keyboard	
Testing Laboratory Name	G.S.D. S.r.l.	
Address	Via Marmiceto, 8 56121 Ospedaletto Pisa (PI) Italy	
Tel/Fax	+39 050 984254 / +39 050 984262	
P.IVA/VAT	01343950505	
http – e-mail	www.gsd.it - info@gsd.it	
FCC Listed. Registration Number: 424037.		
Location and Date of Issue	Pisa, 2016 may 20	
G.S.D. s.r.l. Via Marmiceto, 8 56121 OSPEDALETTO - PISA Tel. 050.984254 - Fax 050.984262 P. IVA 01343950505 SENIOR EMC TEST MANAGER <i>Dr. Gian Luca Genovesi</i>  QUALITY MANAGER <i>Dr. David Pelliccia</i> 		

INDEX

1. MANUFACTURER AND EUT IDENTIFICATION	3
2. REFERENCE STANDARDS.....	5
3. RESULT, CONDITION, MEASUREMENT UNCERTAINTY.....	6
4. RADIATED EMISSIONS -FIELD STRENGTH EMISSIONS – EMISSIONS RADIATED OUTSIDE THE BAND.....	8
5. PHOTO.....	43

Report Revision History

Revision details

<i>Date</i>	<i>Page No.(s)</i>	<i>Details</i>
2016 may 20	46	Rev. 00 Initial issue

1. MANUFACTURER AND EUT IDENTIFICATION¹	
Manufacturer	TWS S.r.l..
Address	Via Zaccagna, 6 54033 Avenza Carrara (MS) Italy
Test Family Name	Remote Keyboard
Date of reception	2016 March 15
Sampling	Laboratory sample for certification
Test Item Description	Remote control for Marine Navigator
Nominal Input Voltage	1,5 Vdc - battery operating (1xAAA)
FCC ID	CU9-UX0RK100

¹A detailed documentation is preserved in the internal fascicle.

This document may be only fully reproduced.

Every partial reproduction is only allowed after written approval released by G.S.D. S.r.l.

Report n. 16556-FCC Rev. 00, page 3 / 46



*Fig. 1.1
Equipment Photo*

2. REFERENCE STANDARDS

Tests and measurements are performed accordingly to the reference standards given in the table below:

<i>TEST</i>	<i>STANDARD</i>
Emissions: Conducted and Radiated – Section 15.207 and 15.209	FCC Rules and Regulations, Title 47 Part 15 – Sub part C ANSI C63.4 2014 – American National Standard for Methods of Measuring of Radio-Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz – 40 GHz ANSI C63.10 2013 – American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
§15.249 Operation within the band 2400.00 – 2483.00 MHz:	FCC Rules and Regulations, Title 47 Part 15 – Sub part C ANSI C63.4 2014 – American National Standard for Methods of Measuring of Radio-Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz – 40 GHz ANSI C63.10 2013 – American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Antenna Requirement: §15.203	FCC Rules and Regulations, Title 47 Part 15 – Sub part C

This document may be only fully reproduced.

Every partial reproduction is only allowed after written approval released by G.S.D. S.r.l.

Report n. 16556-FCC Rev. 00, page 5 / 46

3. RESULT, CONDITION, MEASUREMENT UNCERTAINTYSummary of Test Results

<i>TEST</i>	<i>RESULT</i>
<i>Emissions: radiated Section 15.209</i>	<i>Pass</i>
<i>Field Strength Emissions – Emissions outside the bands Section 15.249 (a)(c)(d)(e)</i>	<i>Pass</i>

Measurement uncertainty

<i>TEST</i>	<i>EXPANDED UNCERTAINTY</i>
Conducted Emission – 50Ω/50μH (150 kHz - 30 MHz)	± 3.5 dB
Radiated Emission – (Semianechoic Room) (30 MHz - 18 GHz)	± 4.7 dB

Climatic Conditions

<i>PARAMETER</i>	<i>VALUE</i>
Temperature	(293 ± 3) K
Relative humidity	(50 ± 5) %


Extensions

The results refer only to the sampled EUT and under the specified conditions.

This document may be only fully reproduced.

Every partial reproduction is only allowed after written approval released by G.S.D. S.r.l.

Report n. 16556-FCC Rev. 00, page 6 / 46

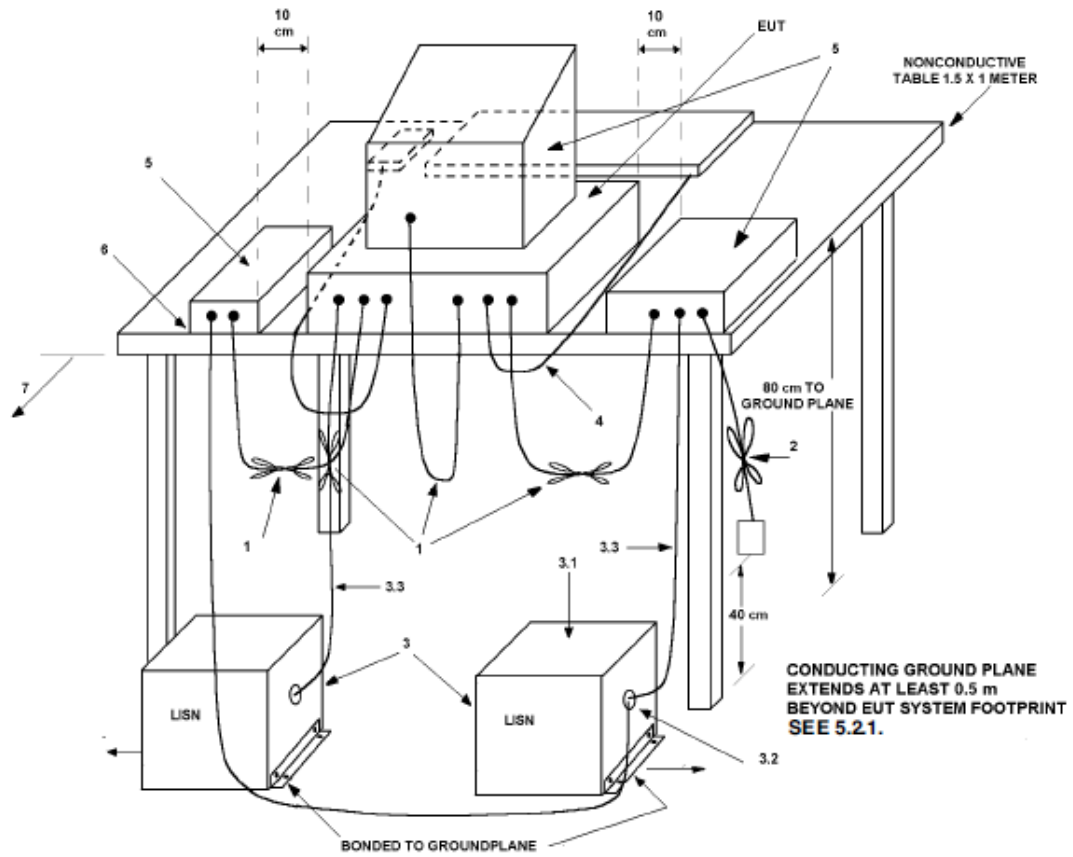

Conducted and Radiated EUT Test Set-up example (ANSI C63.10 2013)

4. RADIATED EMISSIONS -FIELD STRENGTH EMISSIONS – EMISSIONS RADIATED OUTSIDE THE BAND

In the following table you can find the limits established by the reference standard:

§ 15.209 Limits

FREQUENCY RANGE (MHz)	<i>Field Strenght</i> QUASI-PEAK LIMITS [dB (μV/m)]
0.009 ÷ 0.490	48.15 ÷ 13.8 @ 300m
0.490 ÷ 1.705	33.8 ÷ 23 @ 30m
1.705 ÷ 30	29.5 @ 30m
30 ÷ 88	40
88 ÷ 216	43,5
216 ÷ 960	46
Above 960	54

The Field strength of emissions form intentional radiators operated in the 2400.00 – 2483.00 MHz band shall comply with the following:

Fundamental Frequency (MHz)	Field Strenght of Fundamental (mV/m)	Field Strenght of harmonics (μV/m)
2400 – 2483.5	50	500

Field strength are specified at a distance of 3 meters

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation

Test Equipment

EQUIPMENT	MANUFACTURER	MODEL	CAL. DUE
MXE EMI Receiver	Agilent/Keysight	N9038A	01/2017
Anechoic Chamber	Comtest	CSA01	01/2017
Bilog Antenna	Schaffner	CBL6112B	01/2017
Horn Antenna	EMCO	3115	01/2017
Horn Antenna	Alpha Industries	61932500	01/2017
Controller	Deisel	HD100	01/2017
Turn Table	Deisel	MA240	01/2017
LISN	GSD	NTW06	01/2017

This document may be only fully reproduced.

Every partial reproduction is only allowed after written approval released by G.S.D. S.r.l.


Report n. 16556-FCC Rev. 00, page 8 / 46

<u>Test procedure:</u> RE22R02
<u>Notes</u>
Azimuth position EUT-Antenna corresponding to 0° identifies the rotating table orientation (TT) in which the instrument to be tested shows the front part turned towards the antenna. Positive grades individuate clockwise rotations of TT when this one is observed from the top. For negative degrees, TT rotation is counter-clockwise. Antenna height respect to the mass plane is conventionally individuated with: MA=XXX where XXX indicates the height (always positive and greater than 100) expressed in cm. Antenna horizontal polarisation is indicated by POL=H. Antenna vertical polarisation is indicated by POL=V. EUT was tested in the three orthogonal planes.
<u>Results and conclusions</u>
In all the operative conditions, equipment complied with the standard limits. Graphics in following figures show the most significant registrations of the performed measurements.


This document may be only fully reproduced.

Every partial reproduction is only allowed after written approval released by G.S.D. S.r.l.

Report n. 16556-FCC Rev. 00, page 9 / 46

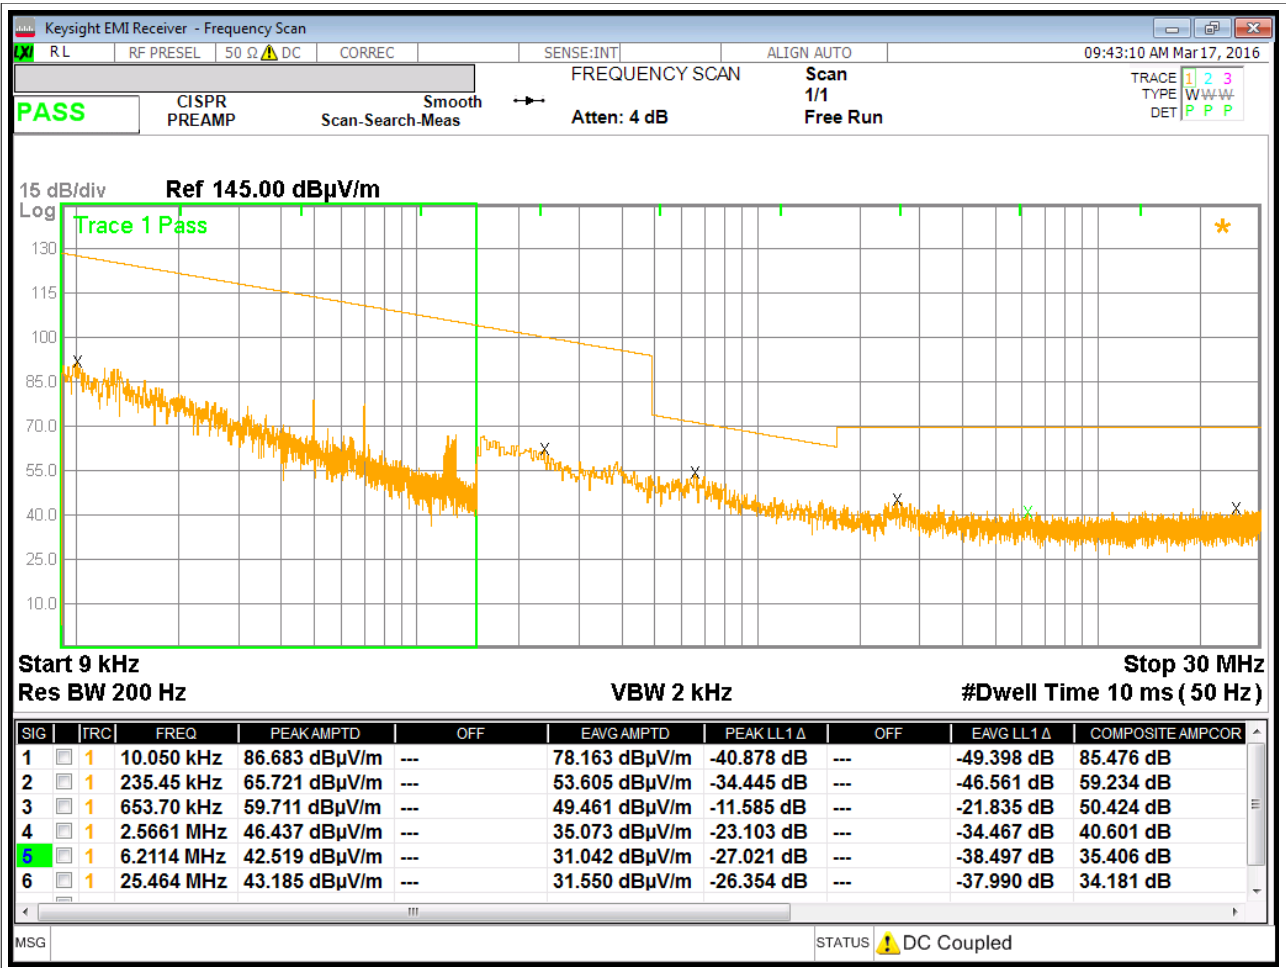


Hortogonal Polarization
ch1

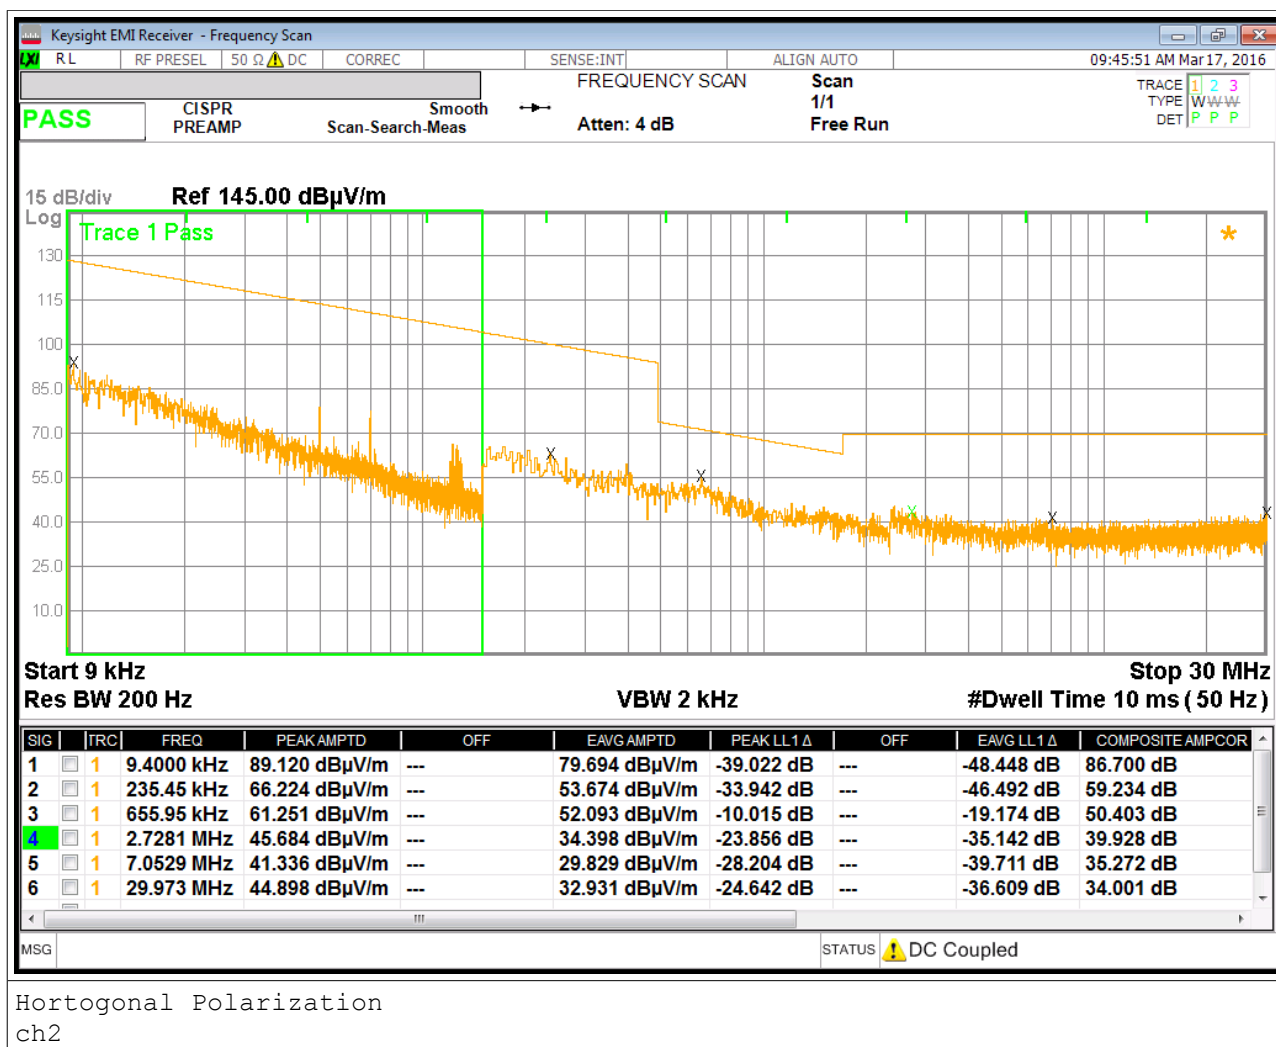

This document may be only fully reproduced.

Every partial reproduction is only allowed after written approval released by G.S.D. S.r.l.


Report n. 16556-FCC Rev. 00, page 11 / 46

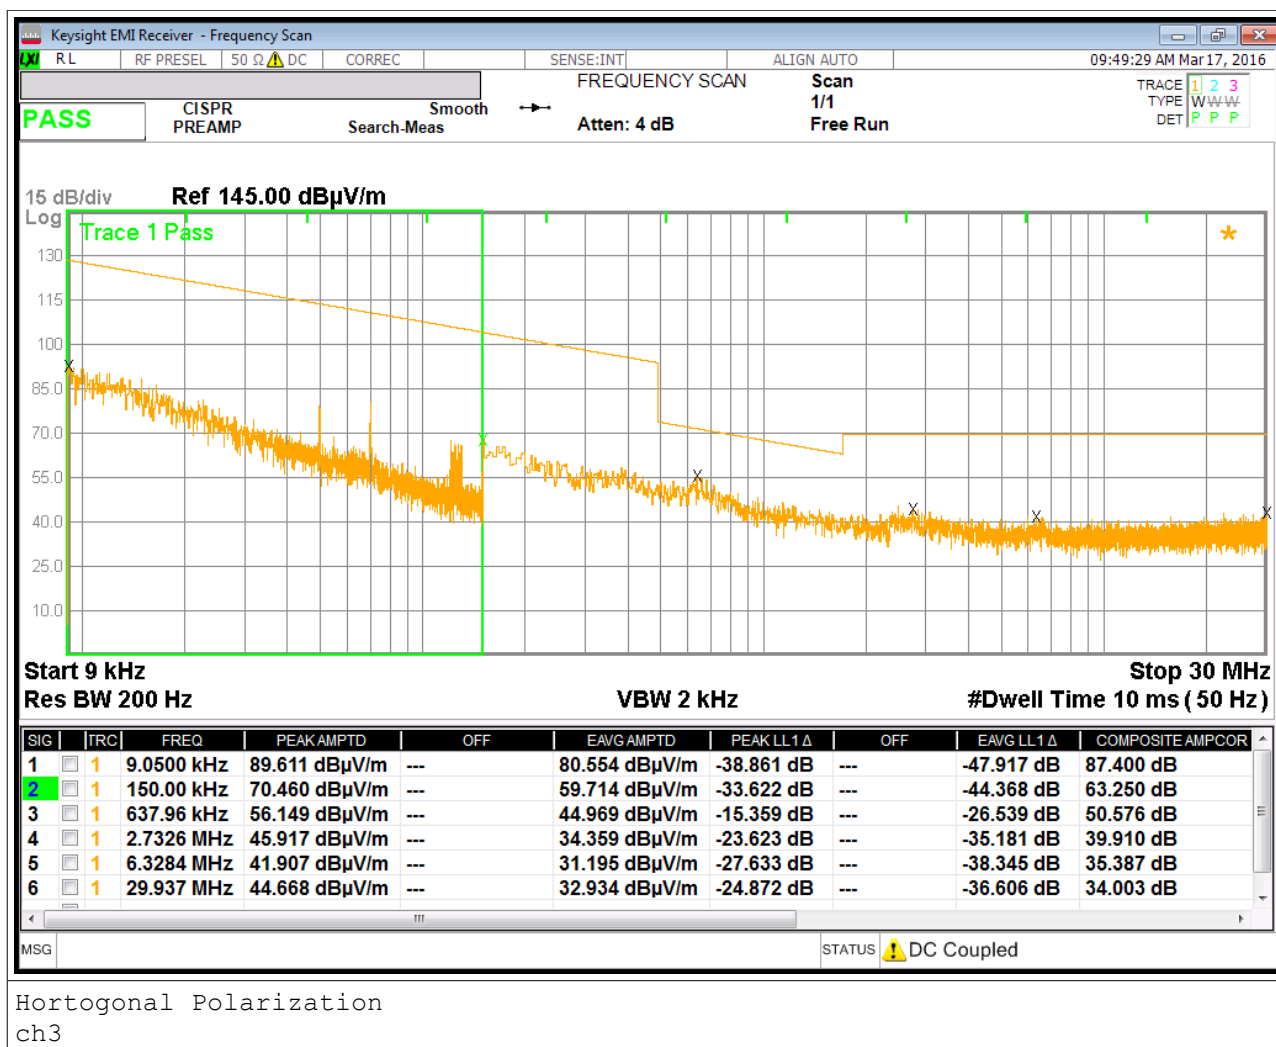

This document may be only fully reproduced.

Every partial reproduction is only allowed after written approval released by G.S.D. S.r.l.


Report n. 16556-FCC Rev. 00, page 12 / 46

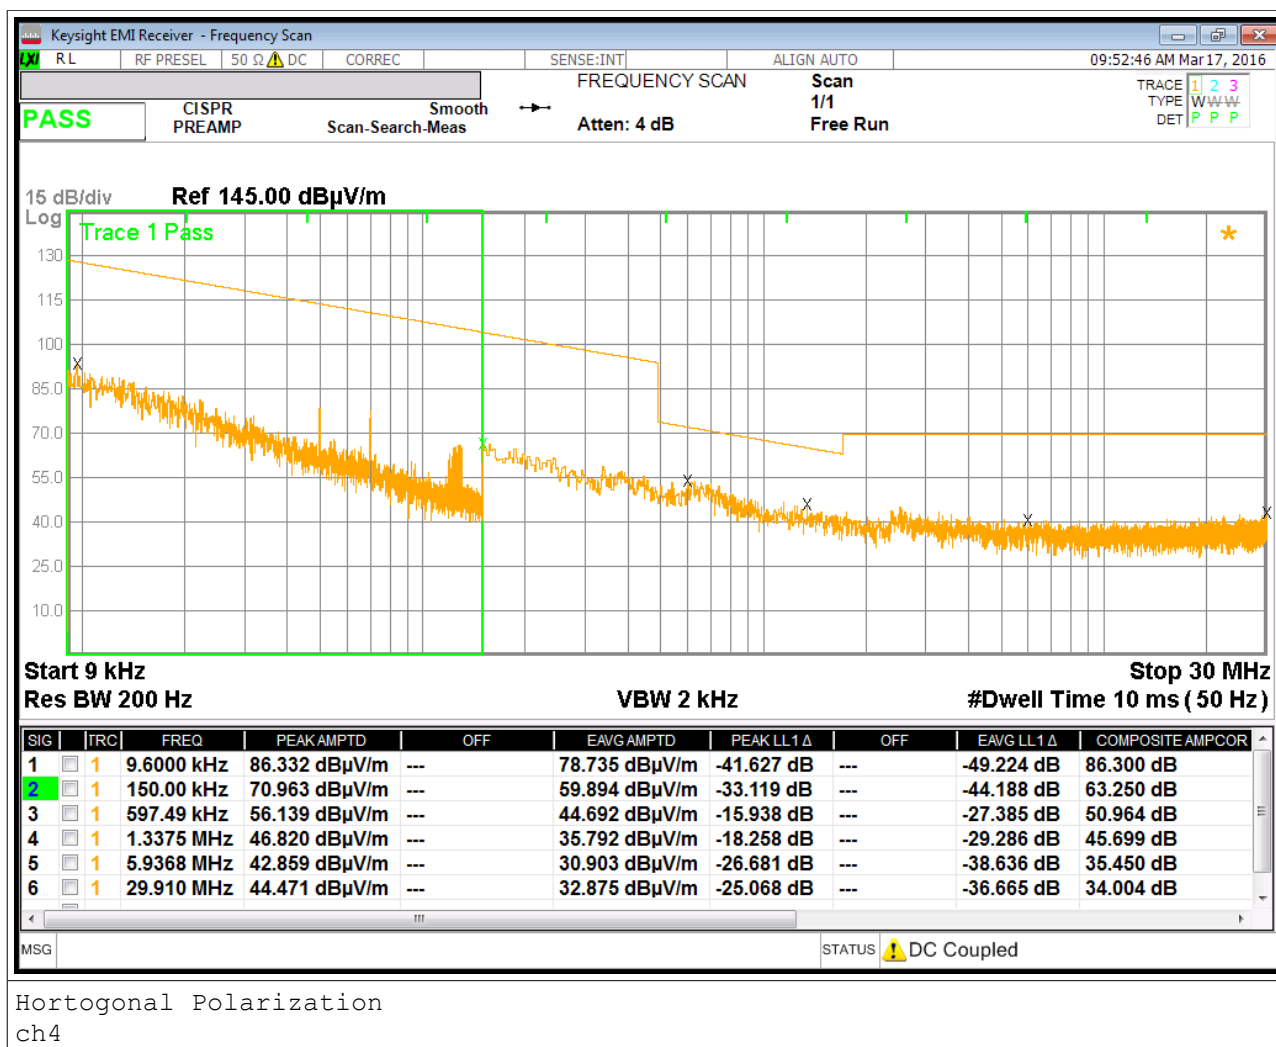



This document may be only fully reproduced.


Every partial reproduction is only allowed after written approval released by G.S.D. S.r.l.

Report n. 16556-FCC Rev. 00, page 13 / 46

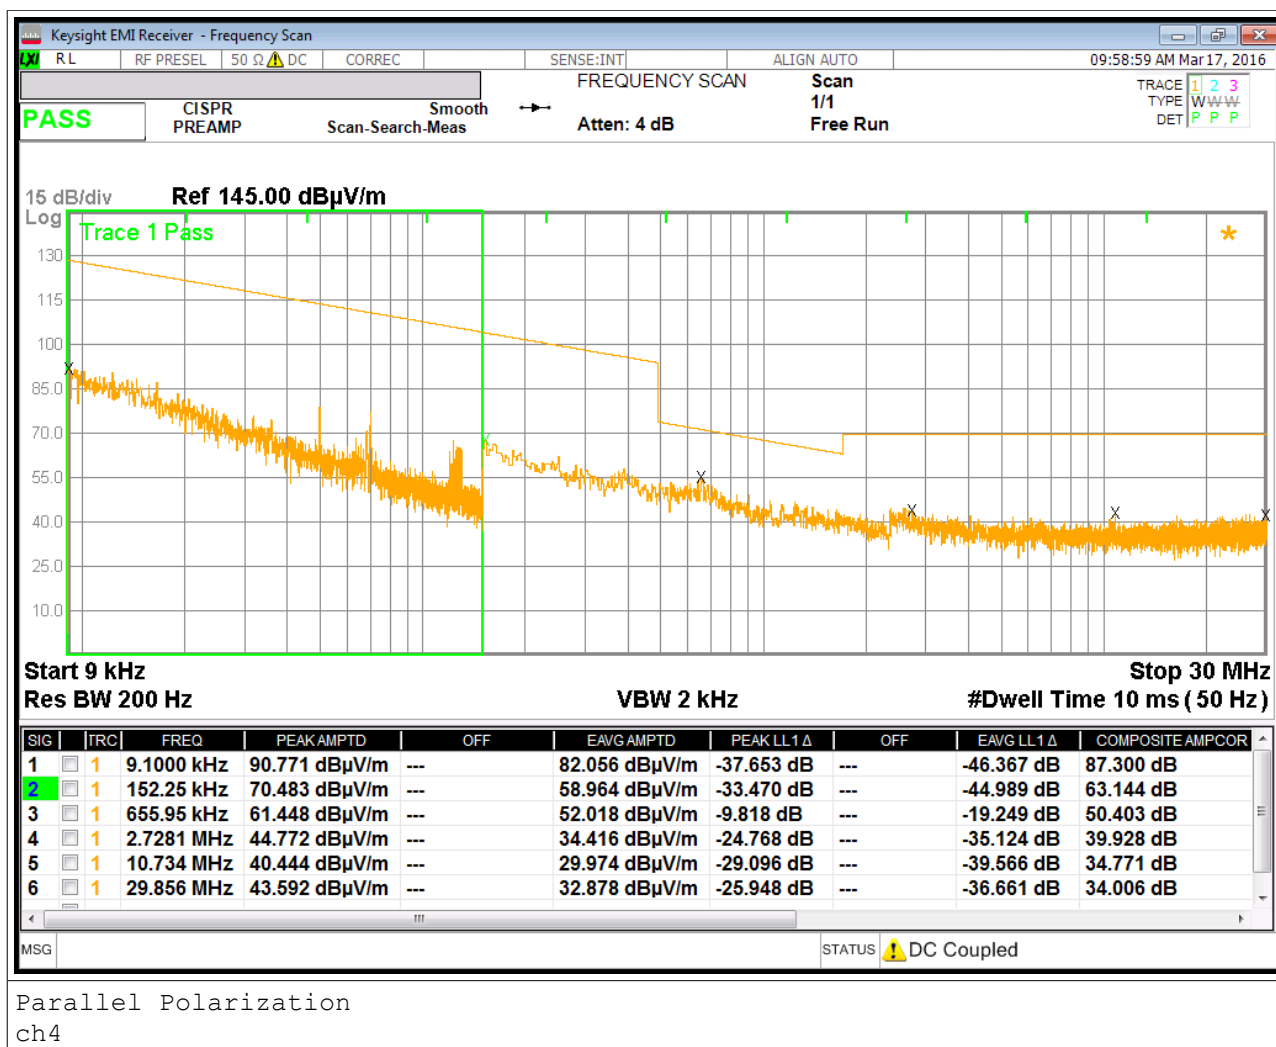

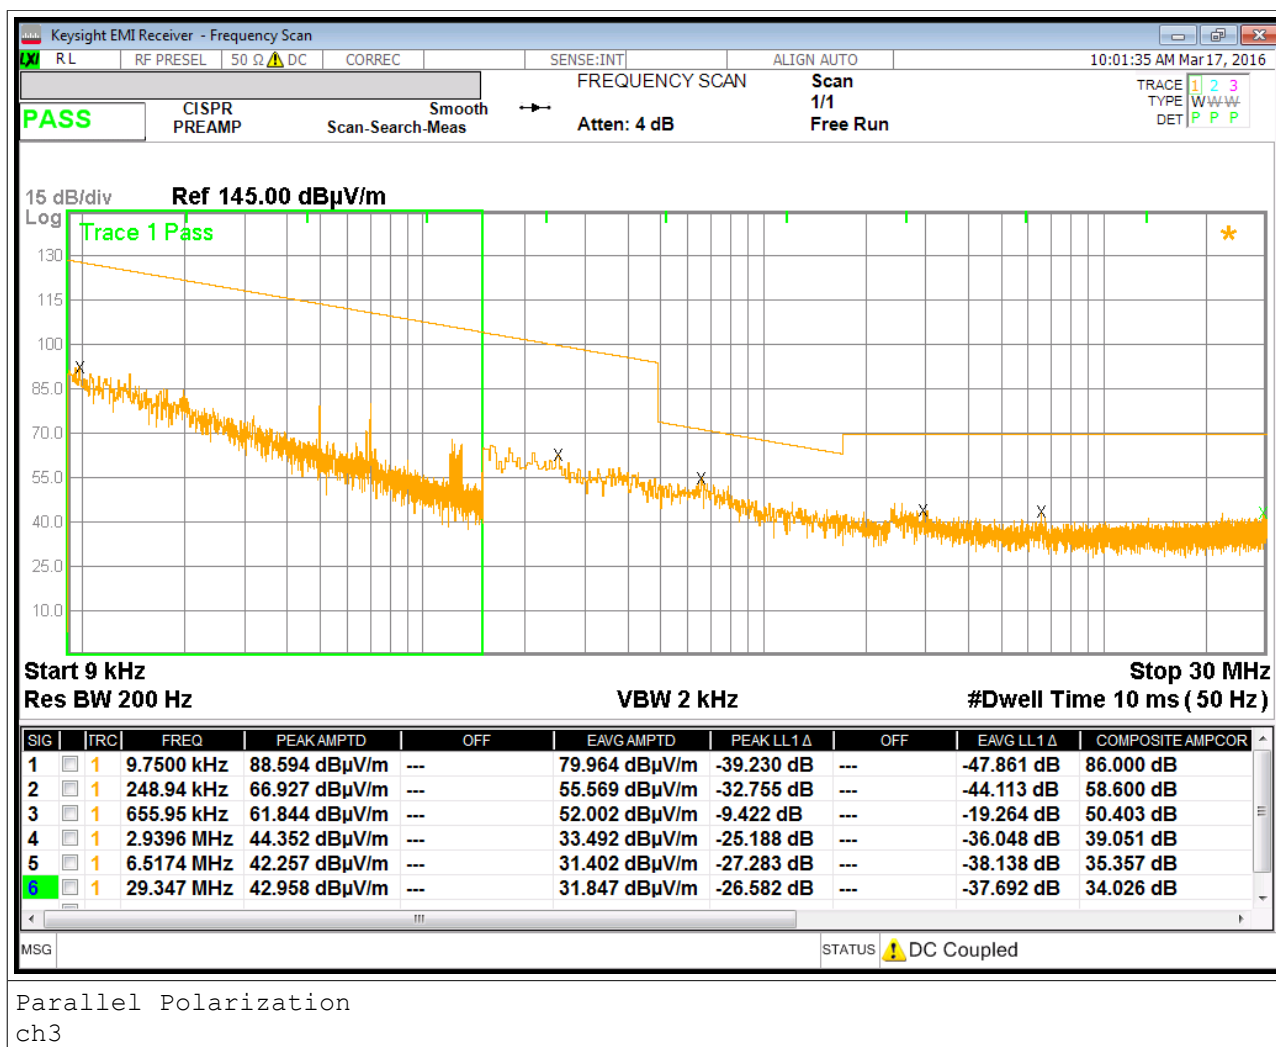

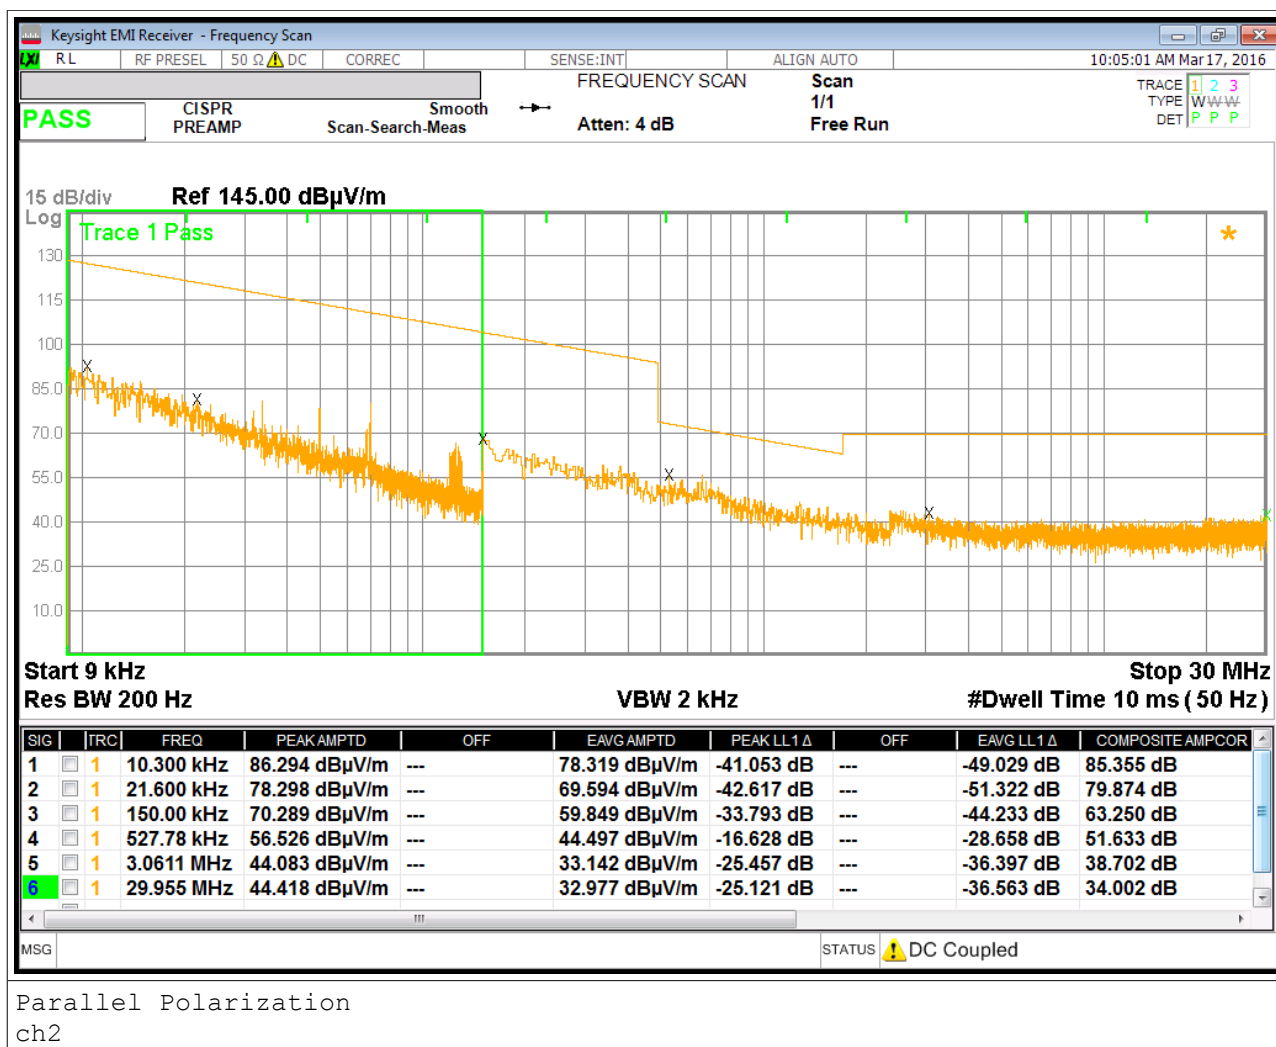


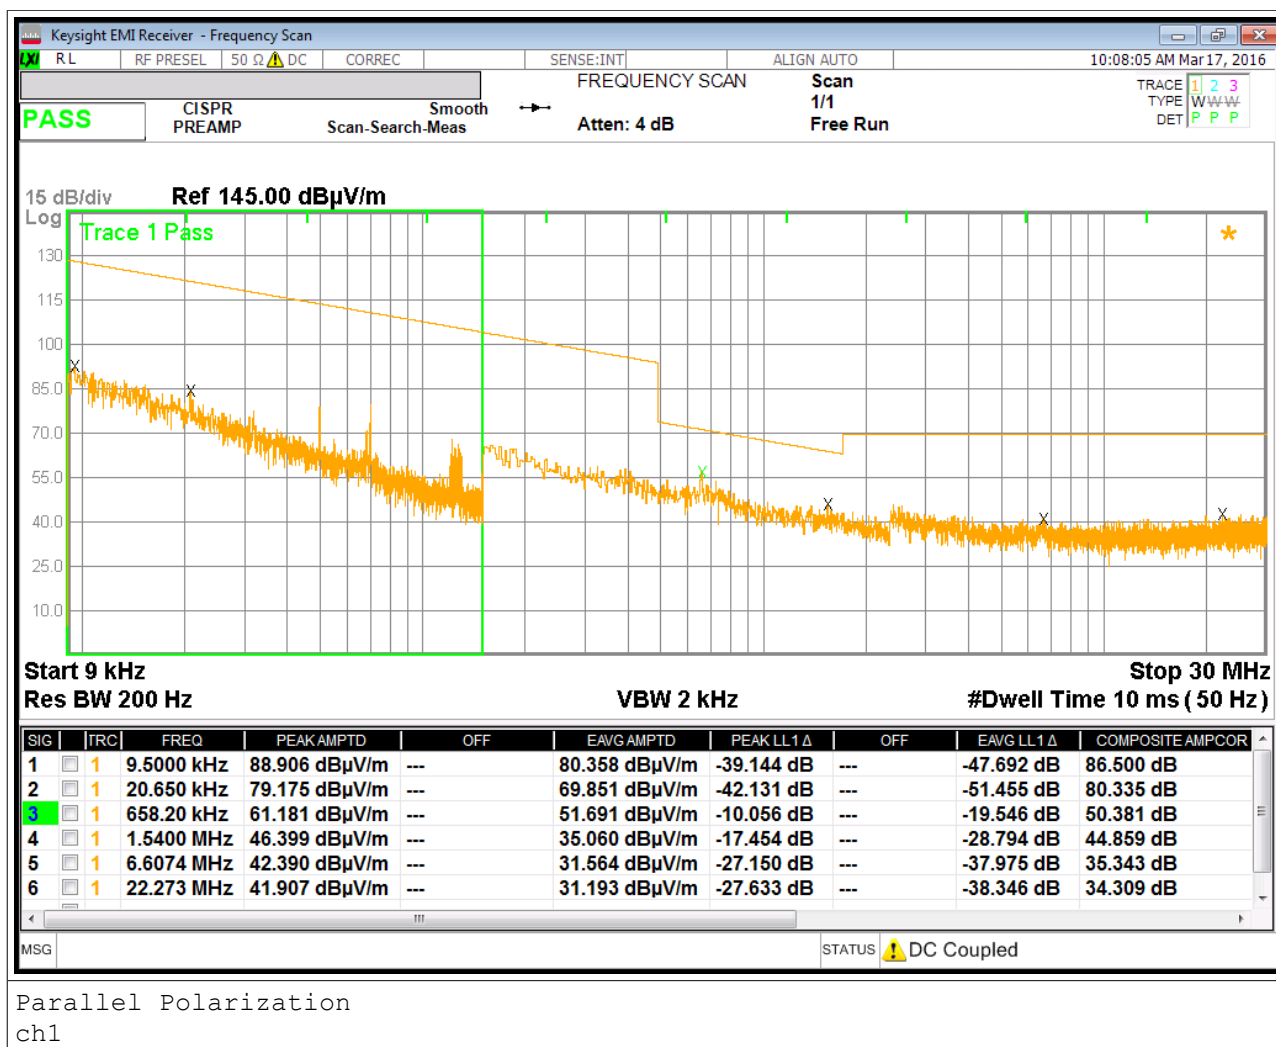



This document may be only fully reproduced.


Every partial reproduction is only allowed after written approval released by G.S.D. S.r.l.


Report n. 16556-FCC Rev. 00, page 17 / 46

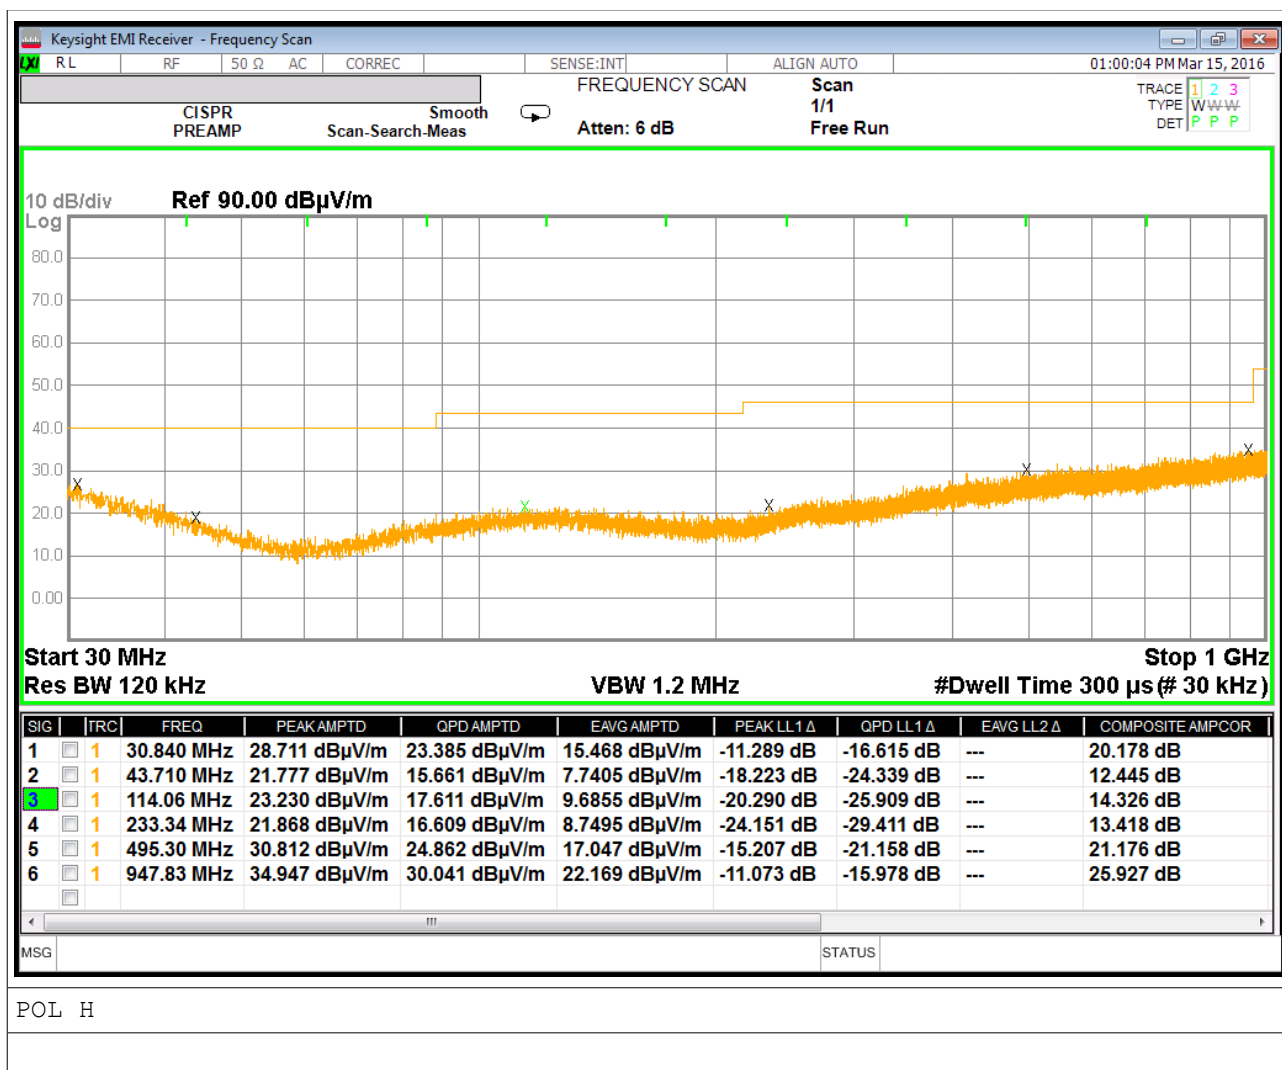


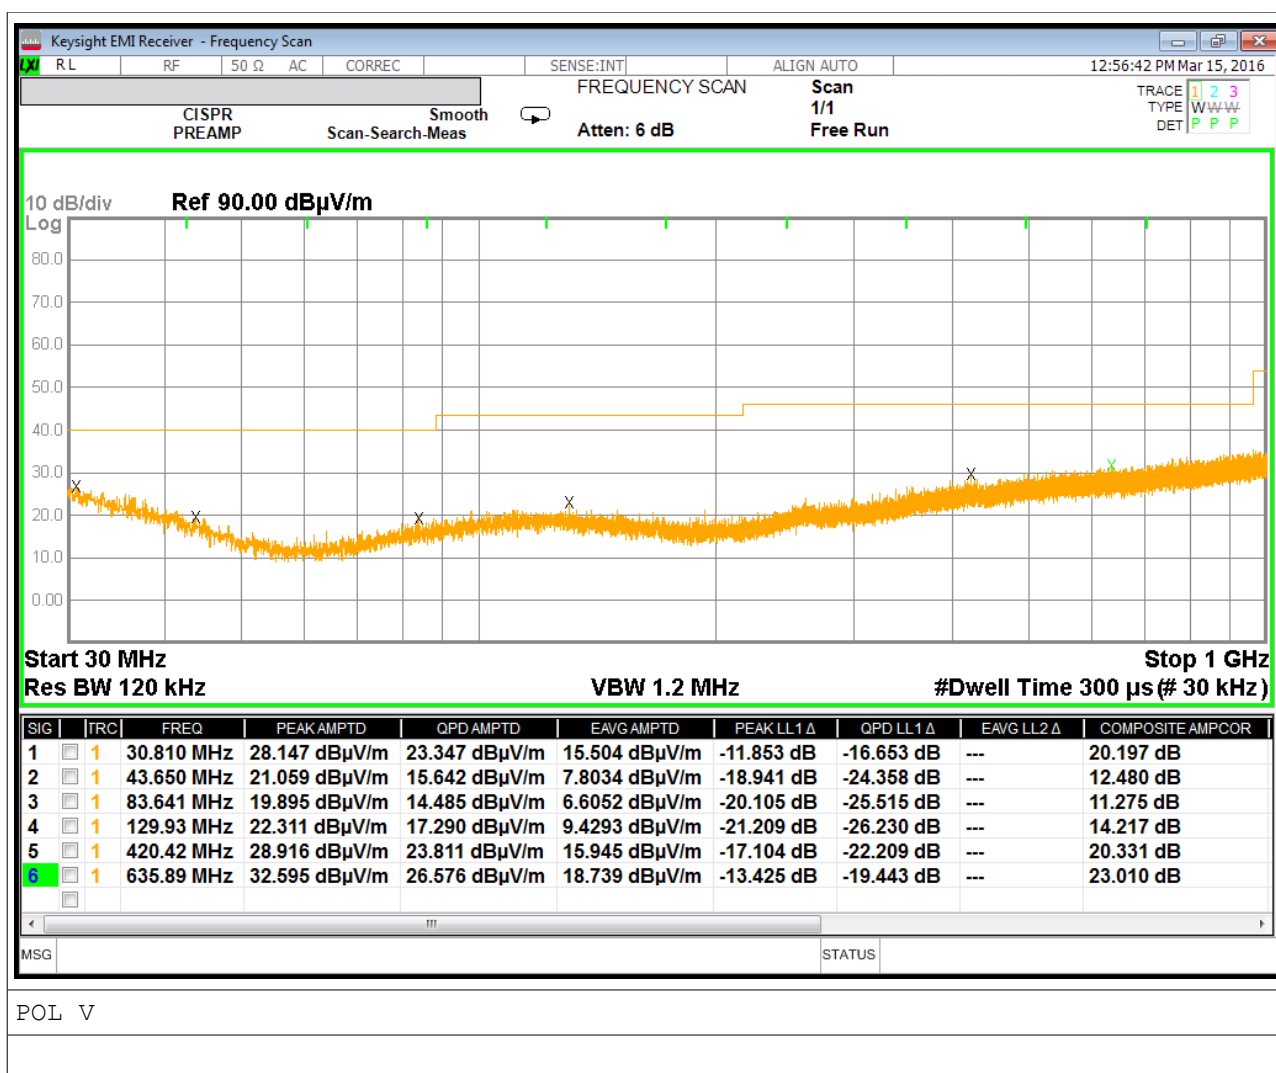


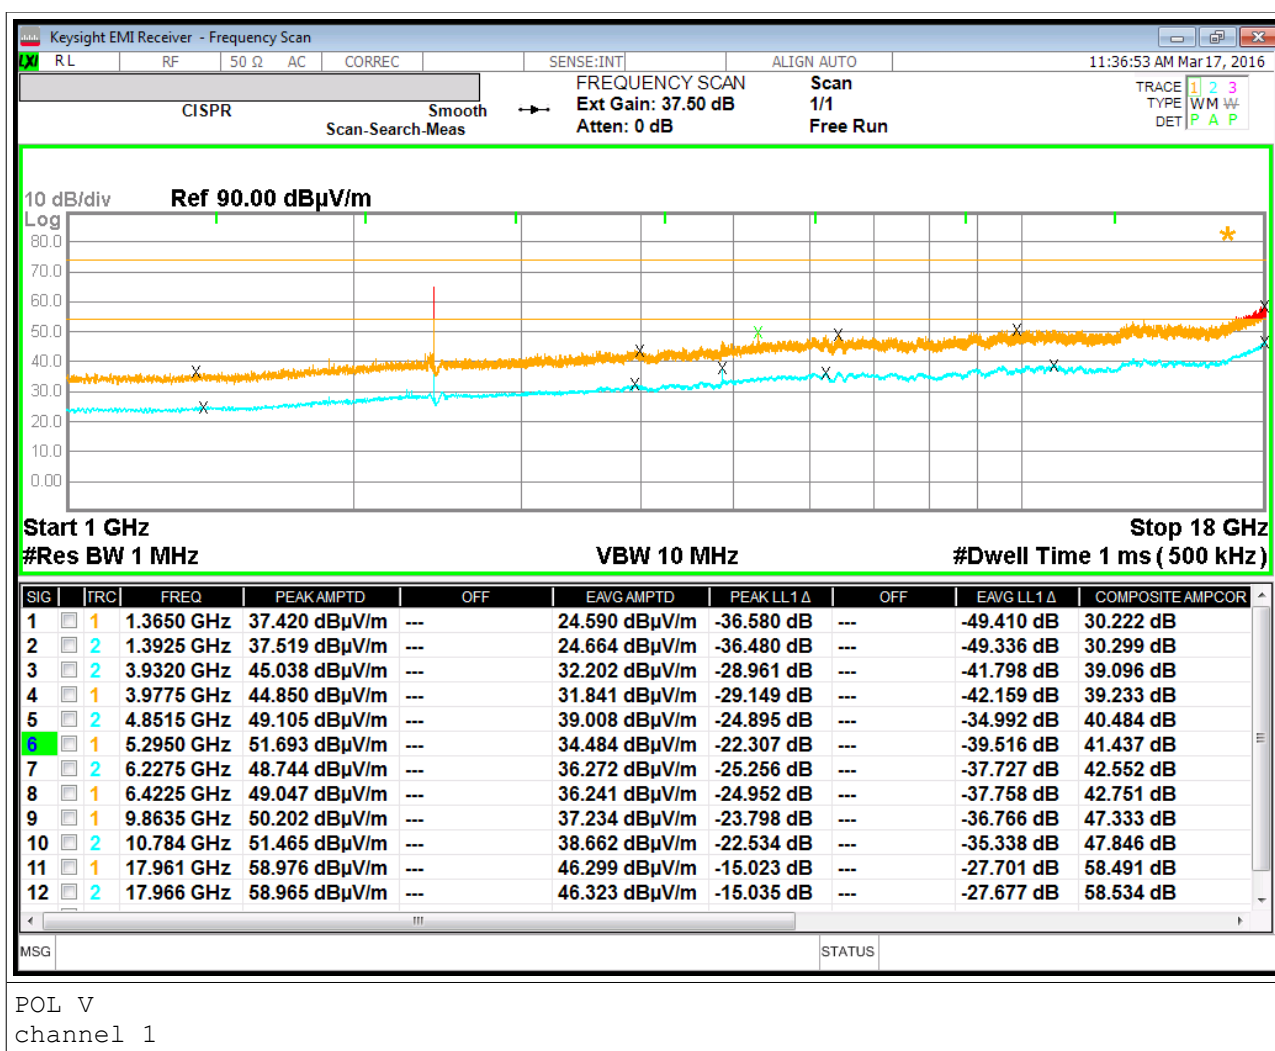


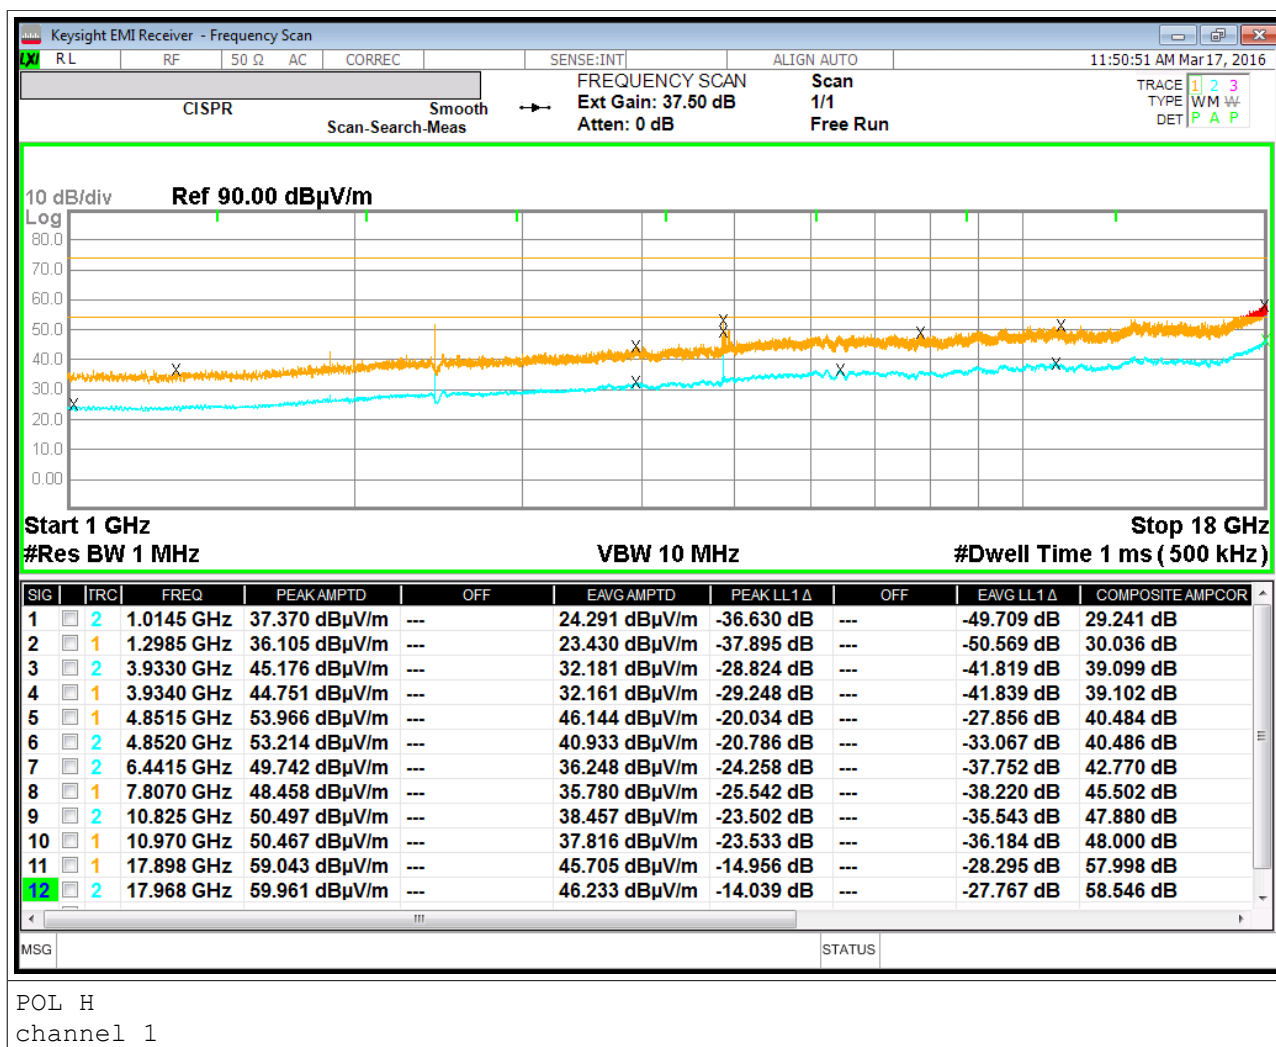


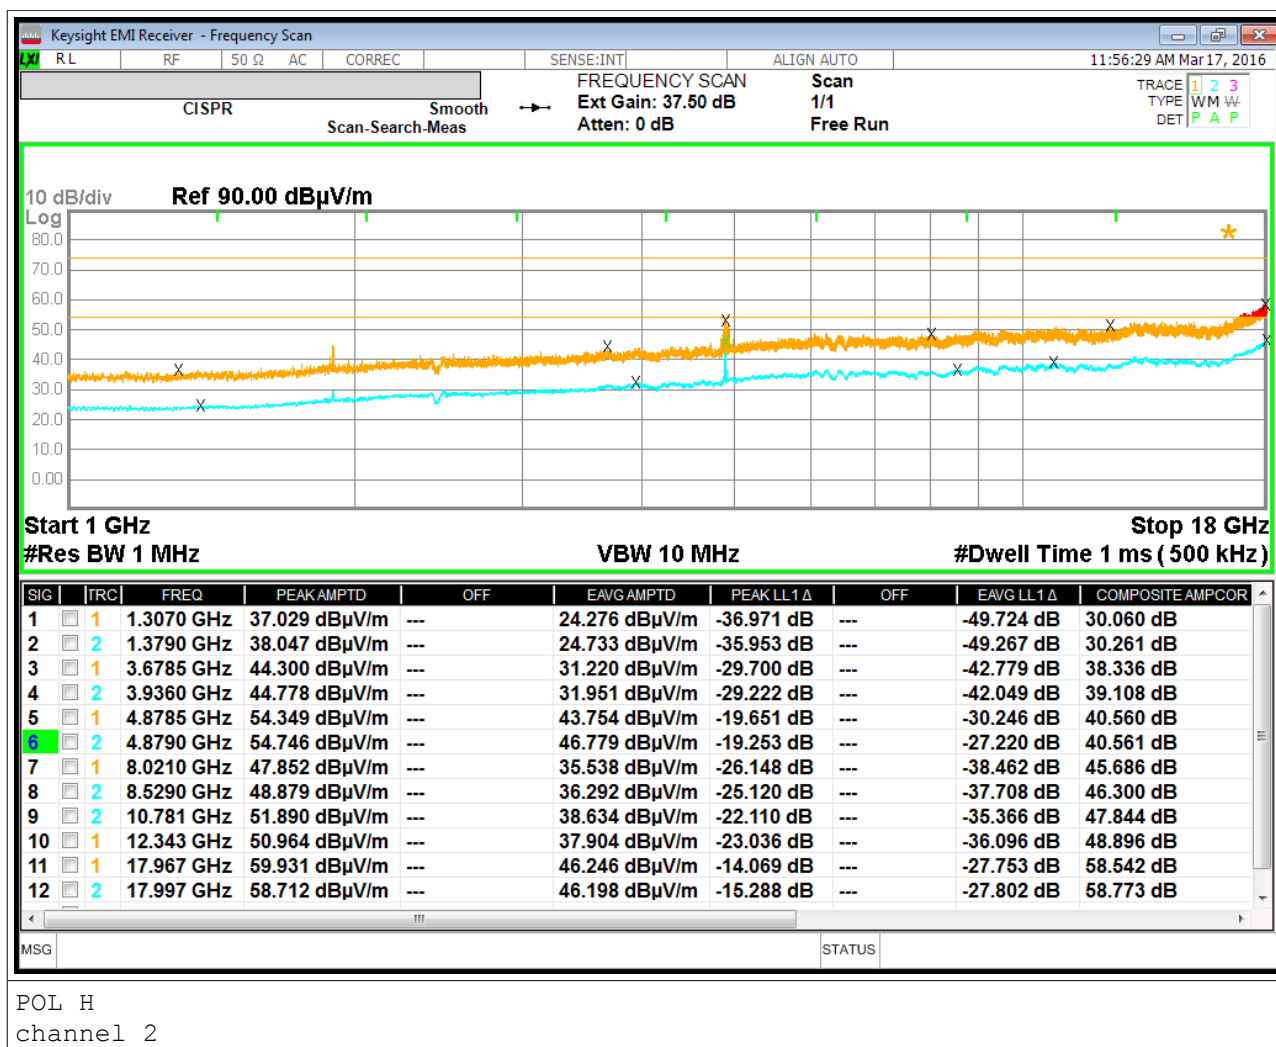

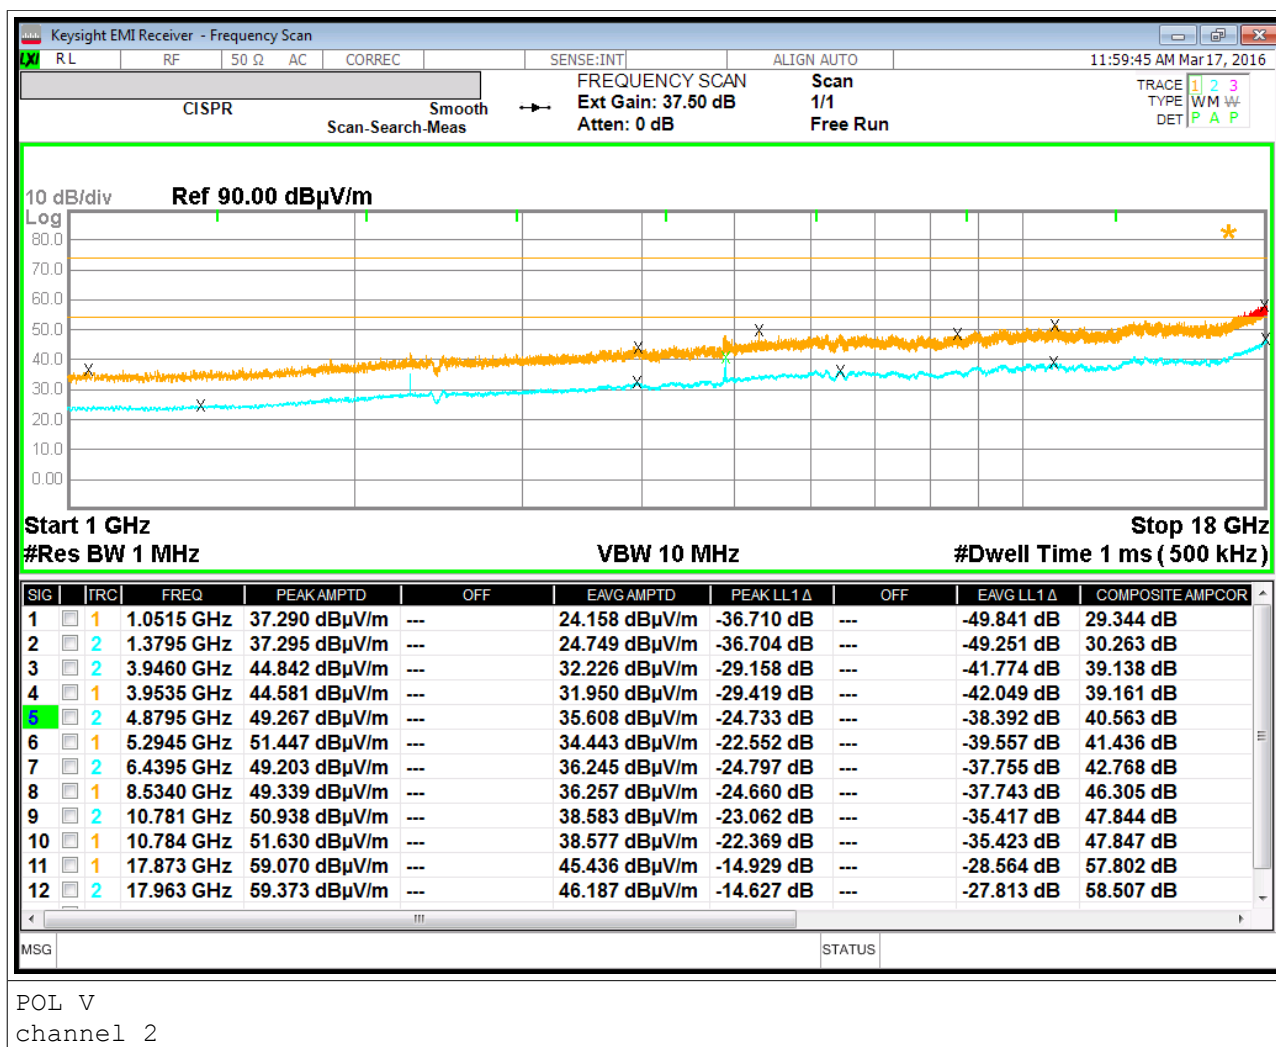

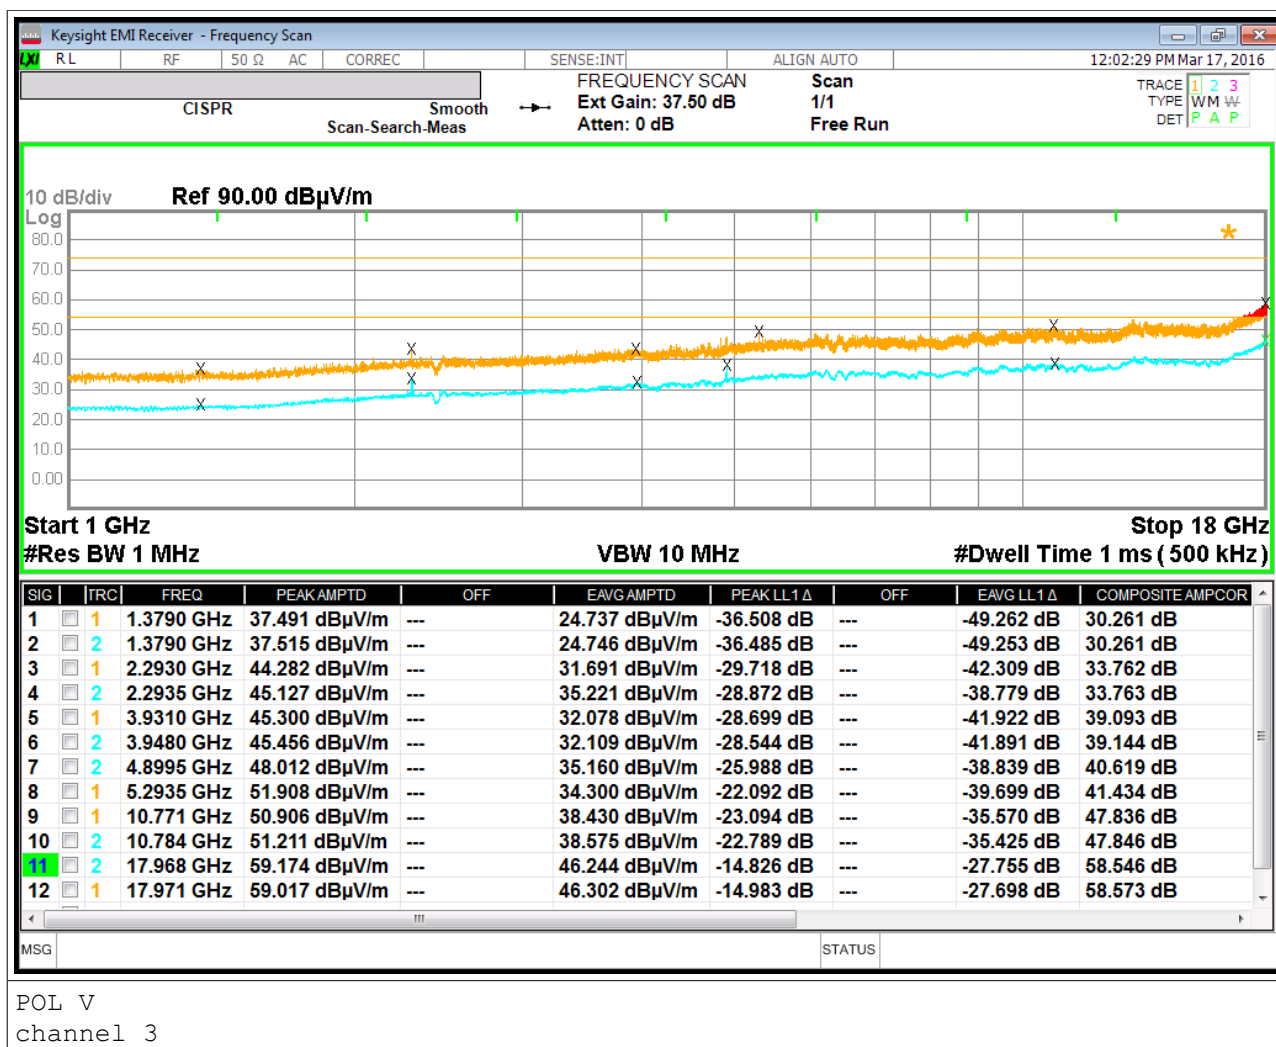

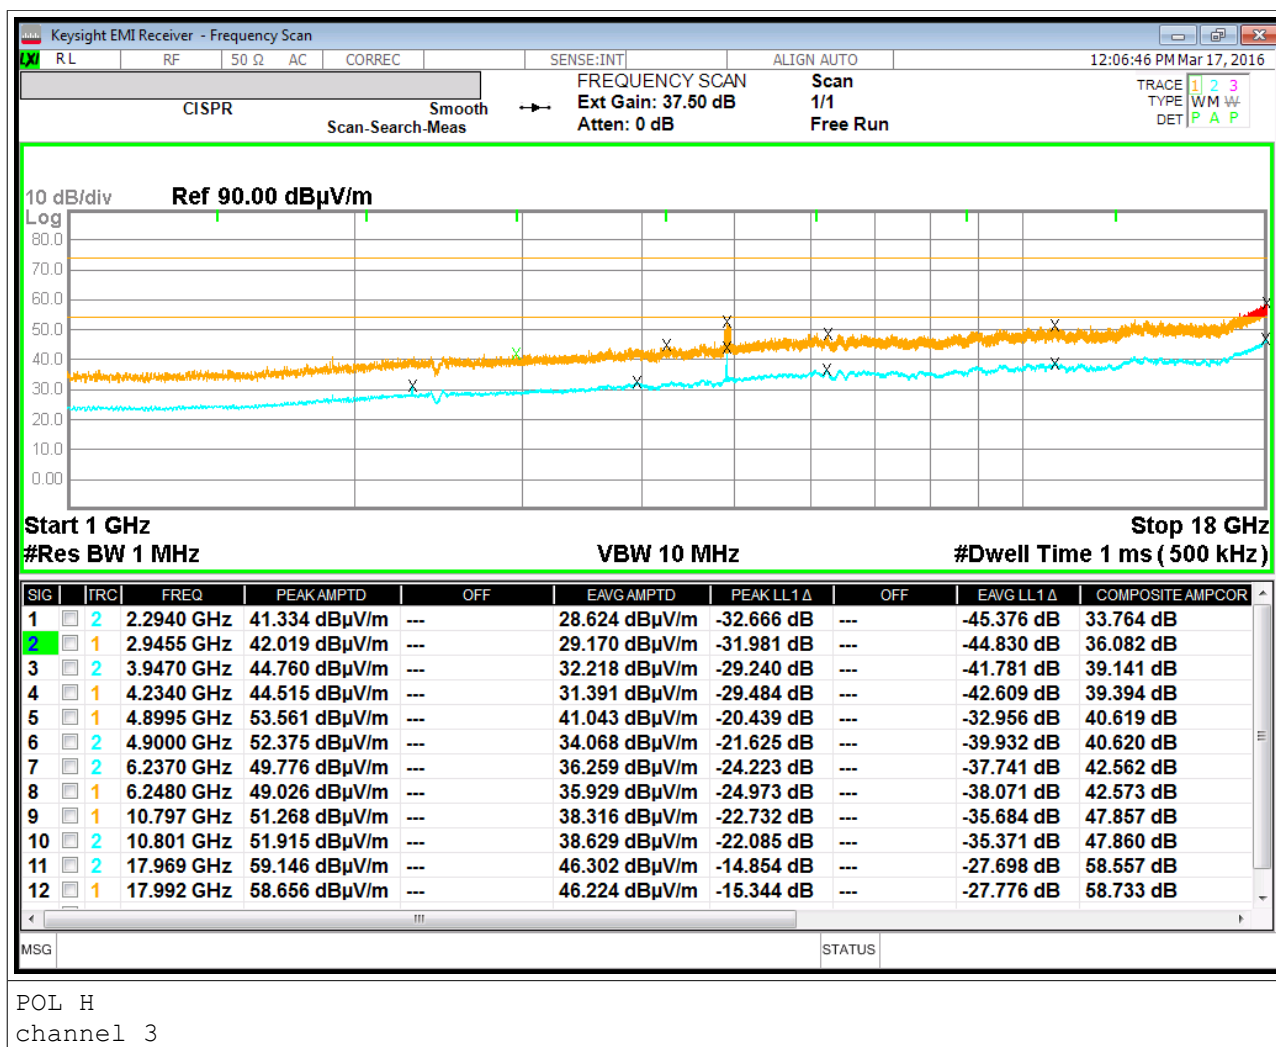


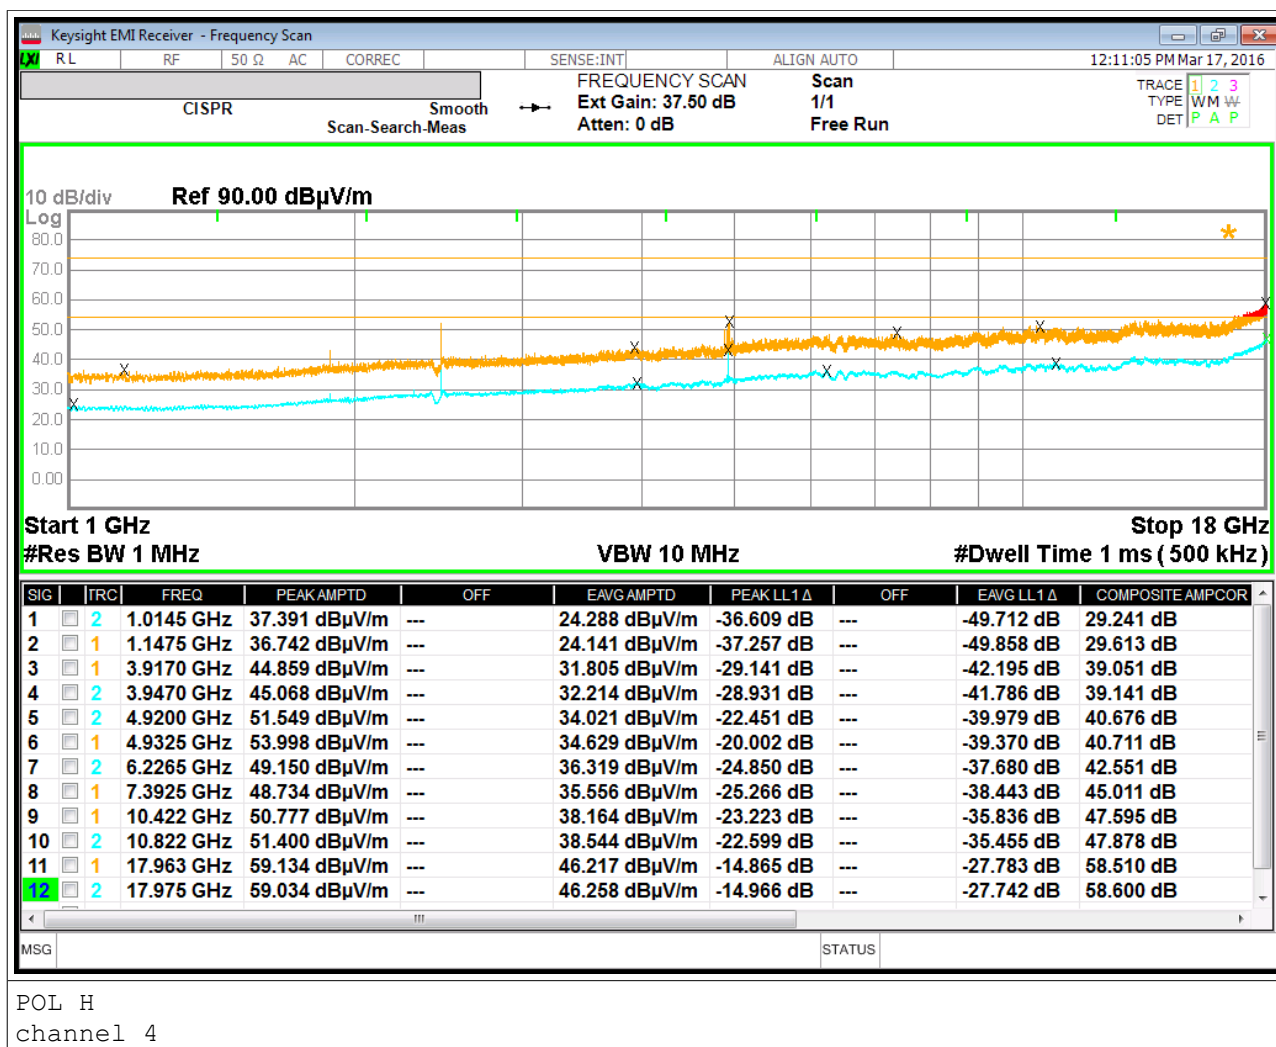



This document may be only fully reproduced.


Every partial reproduction is only allowed after written approval released by G.S.D. S.r.l.


Report n. 16556-FCC Rev. 00, page 26 / 46

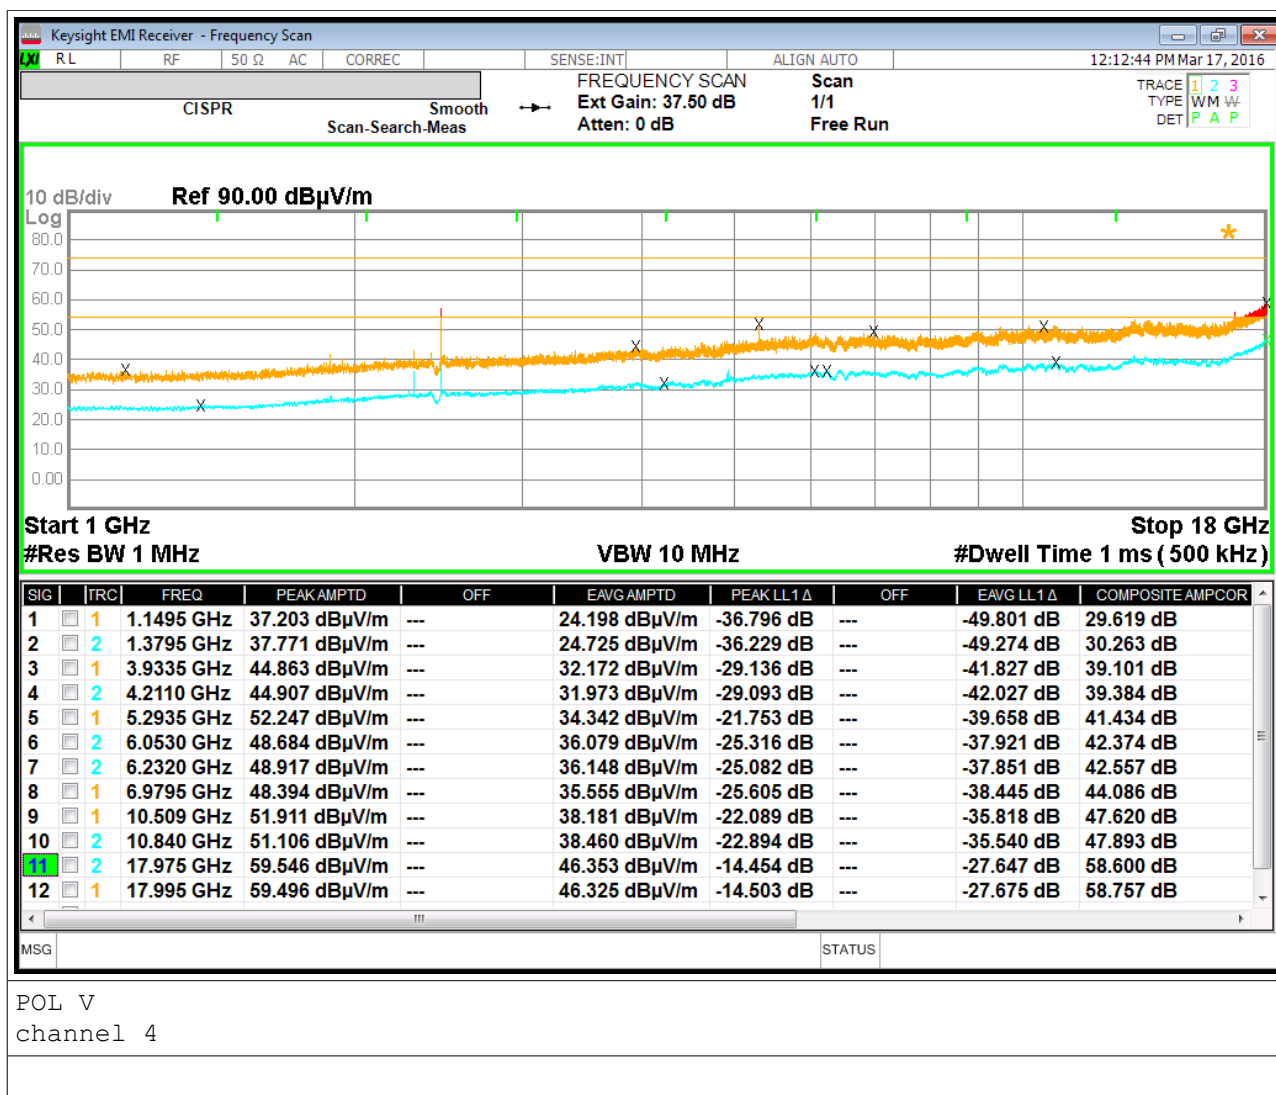


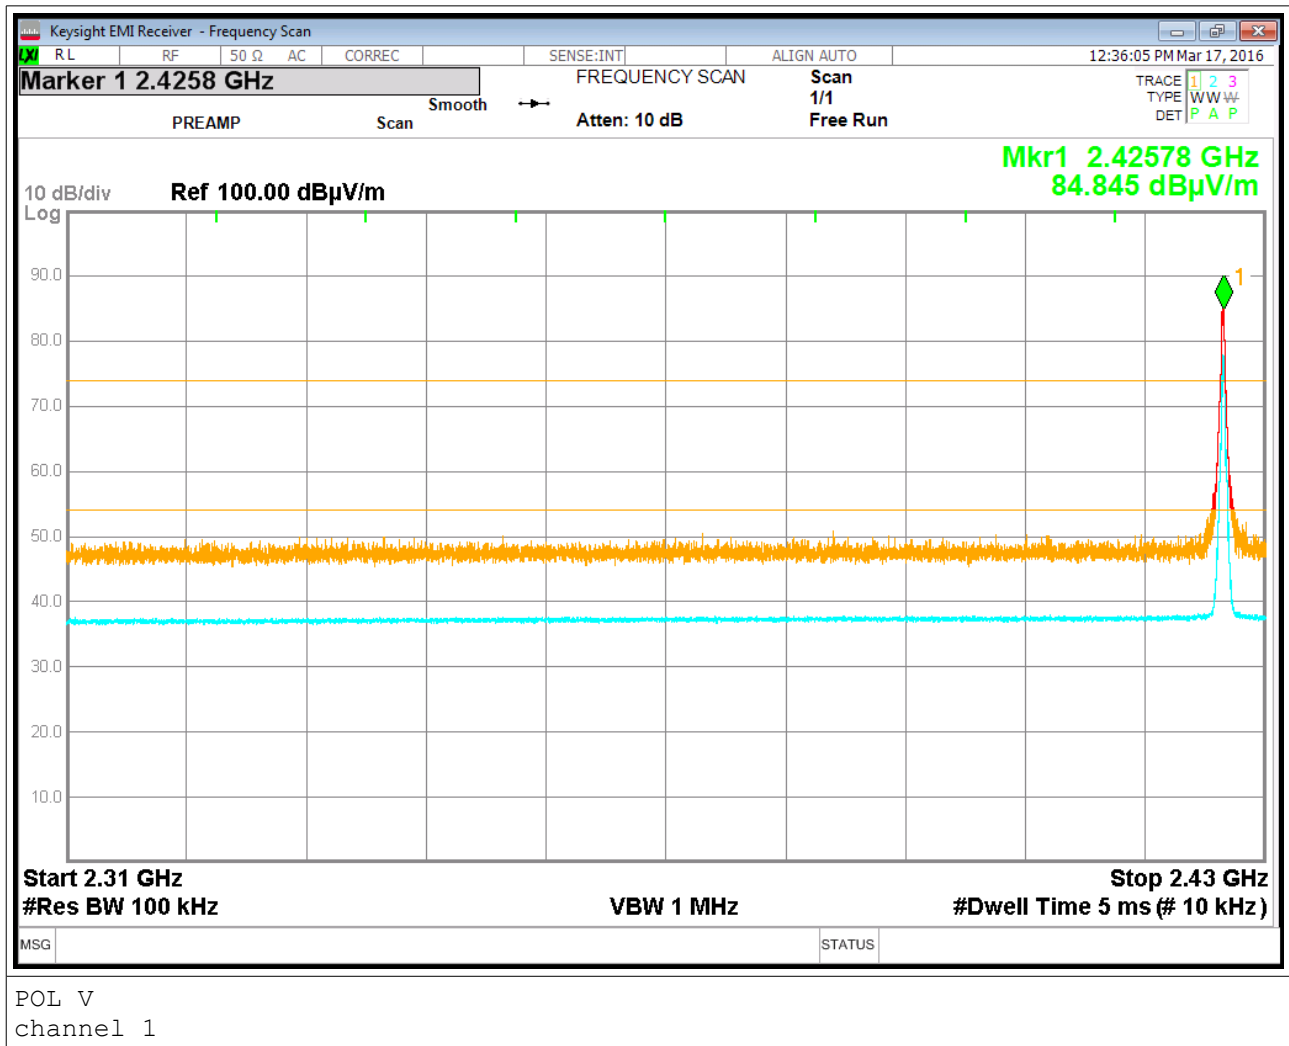


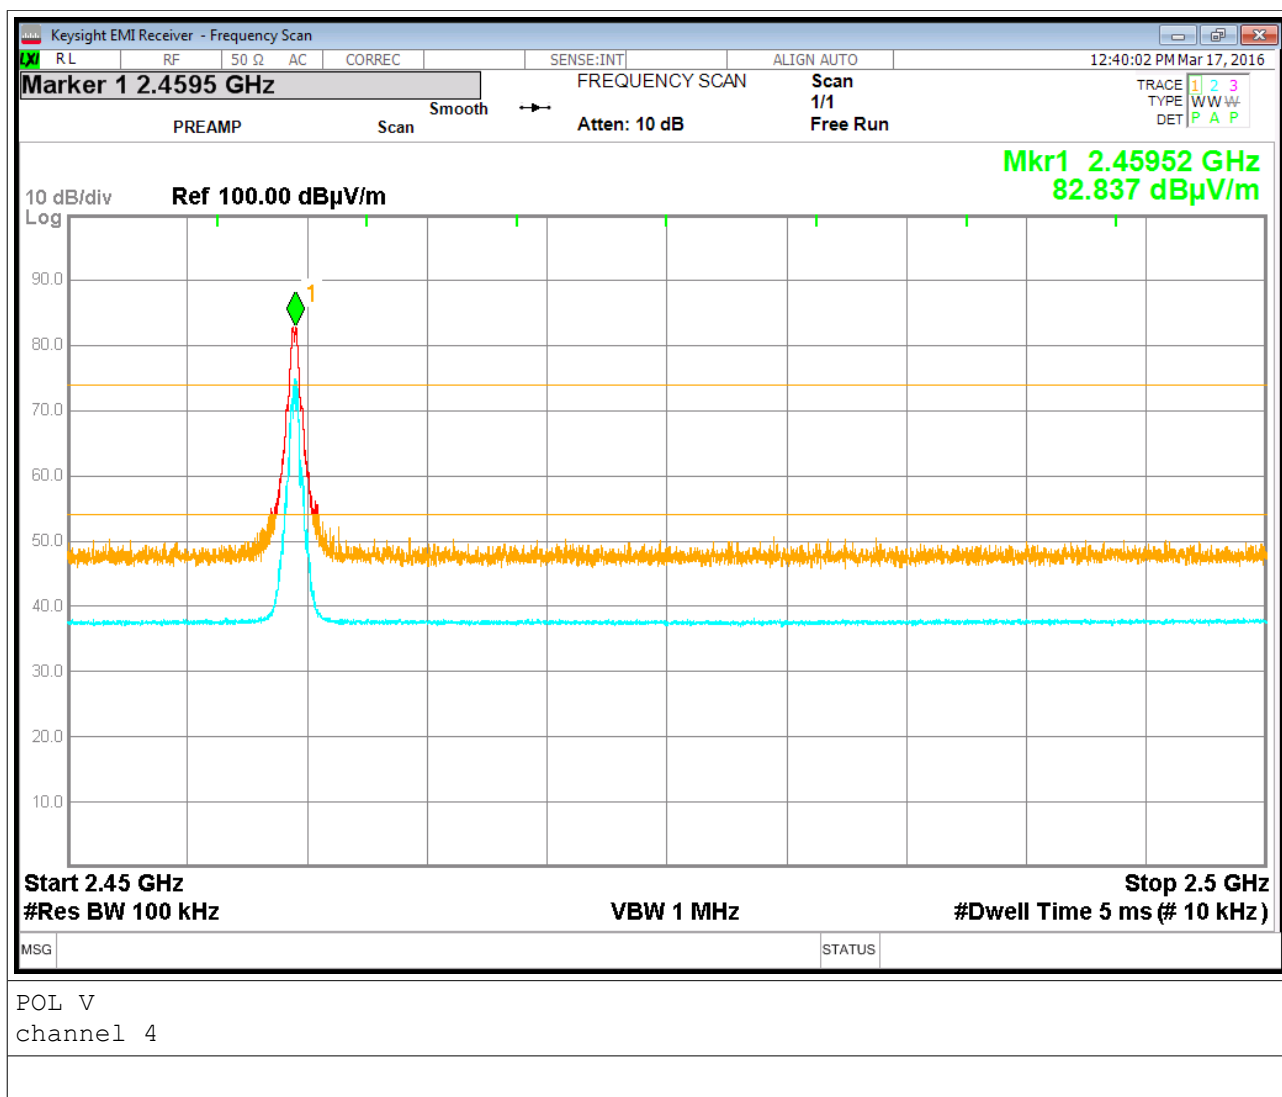


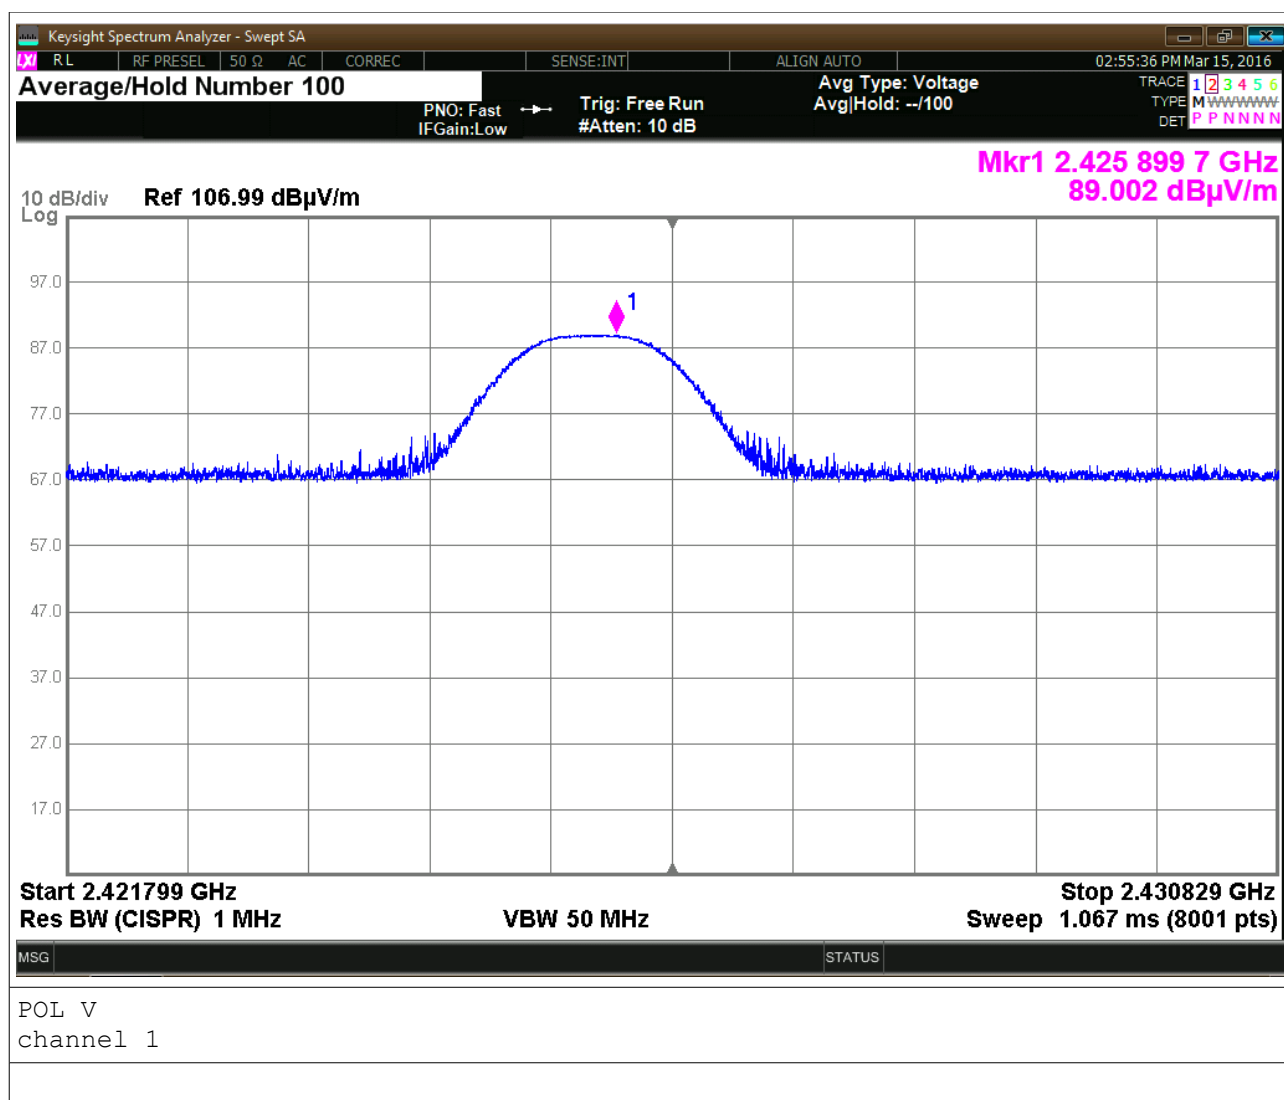


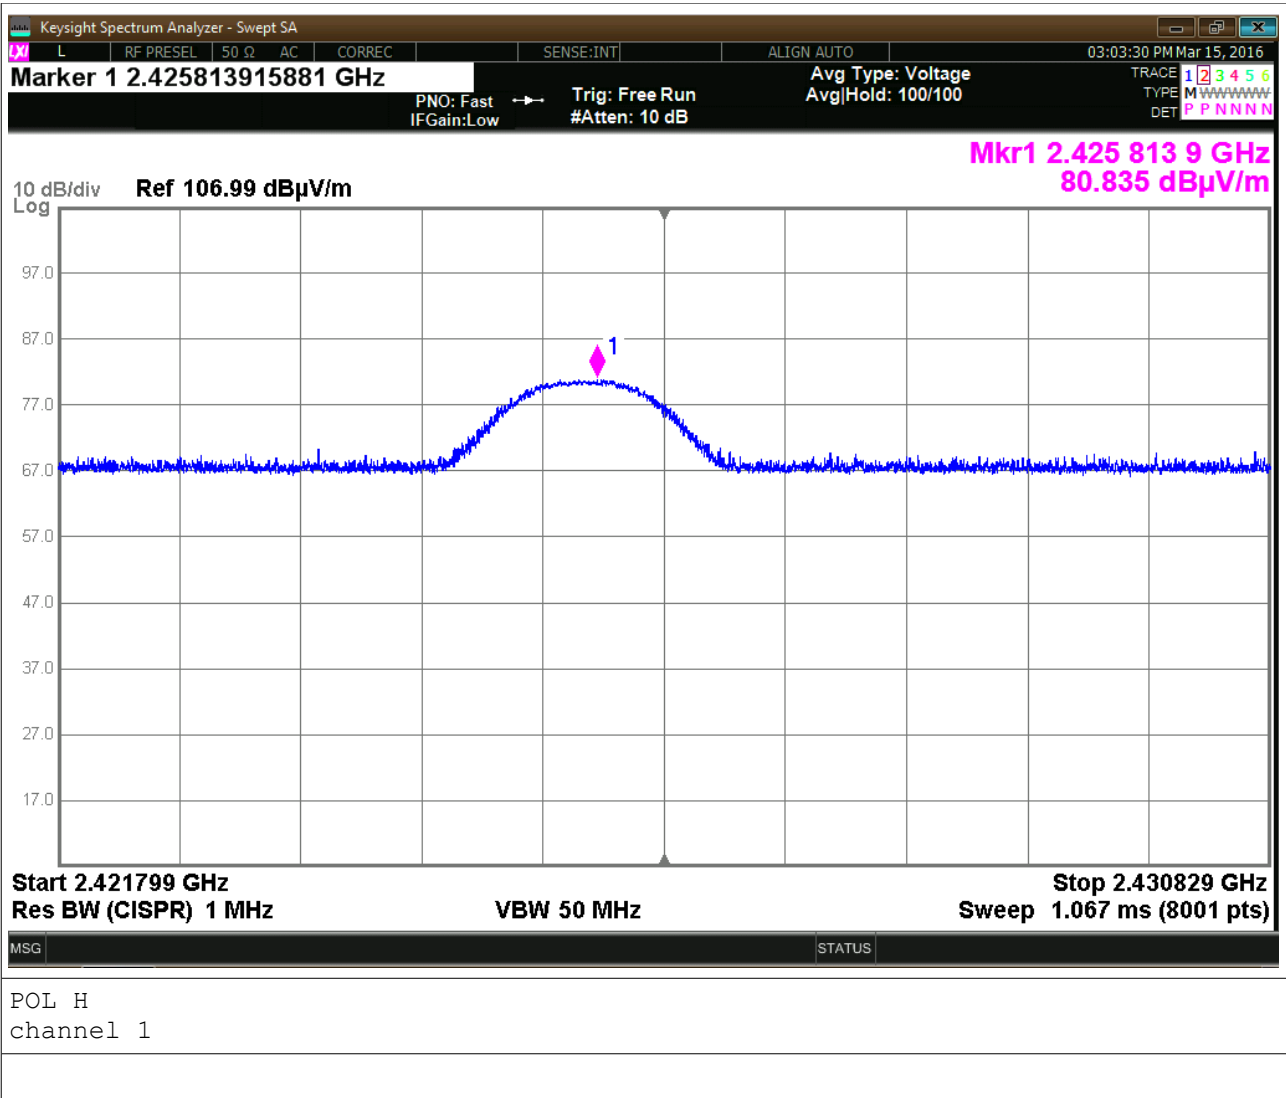


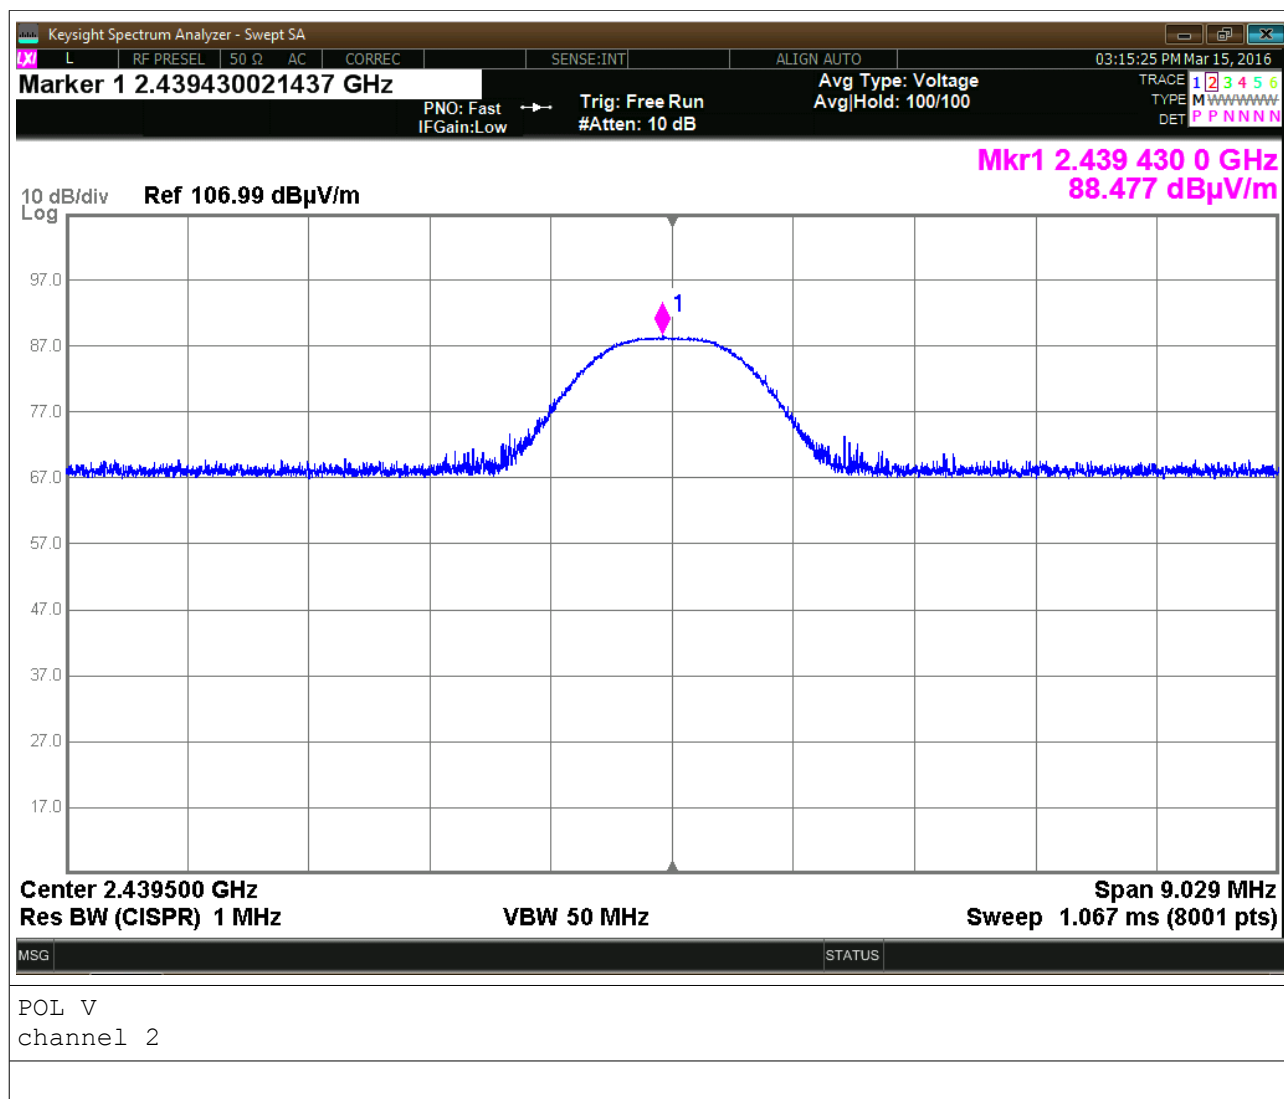


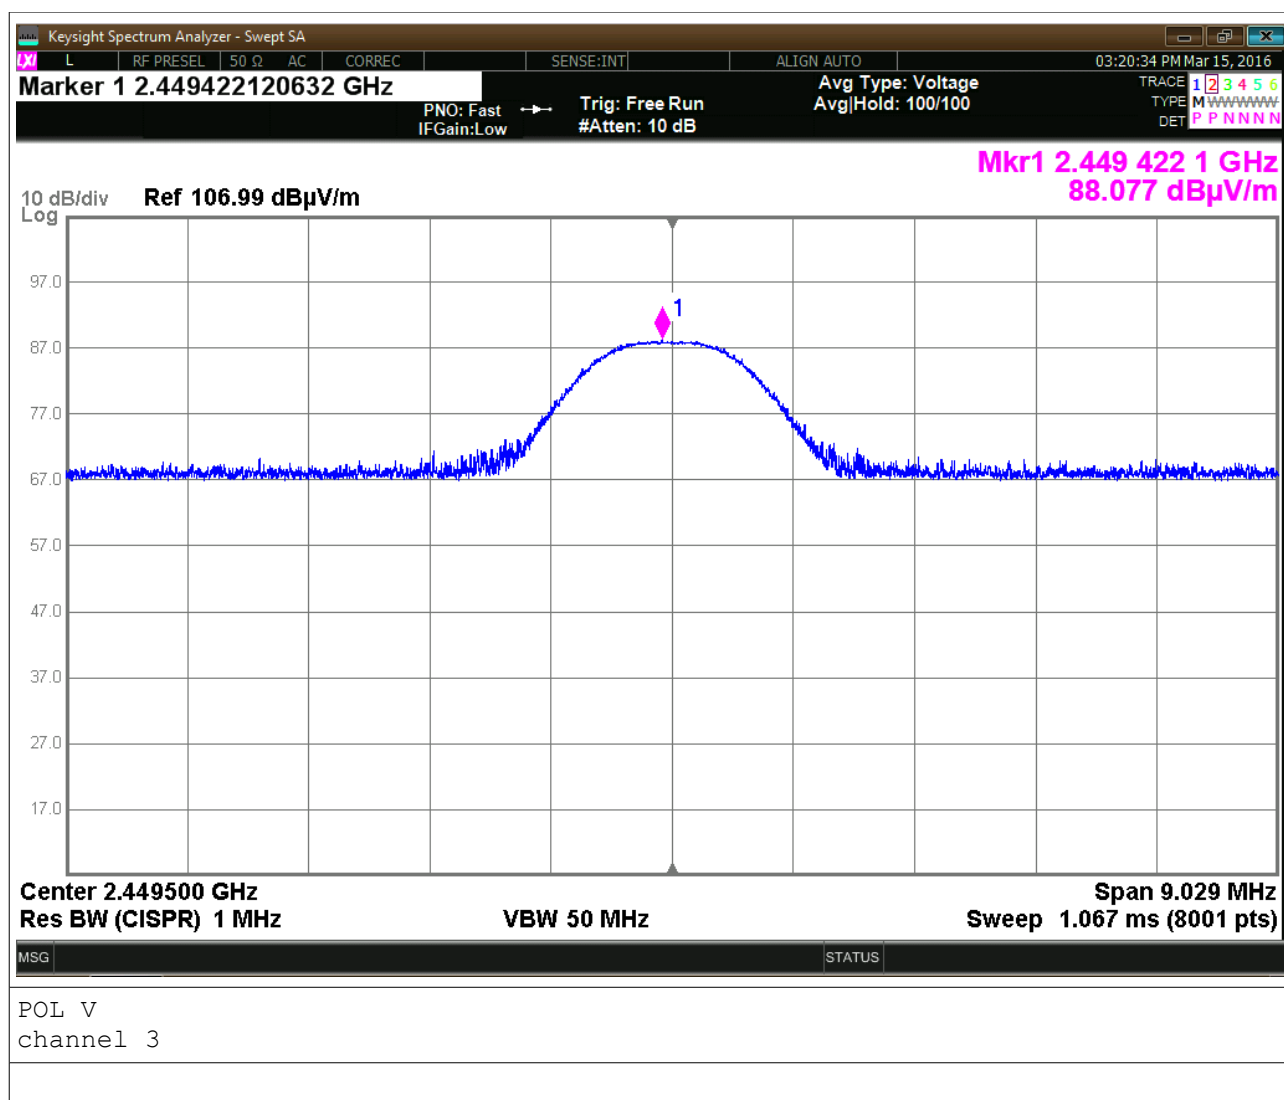


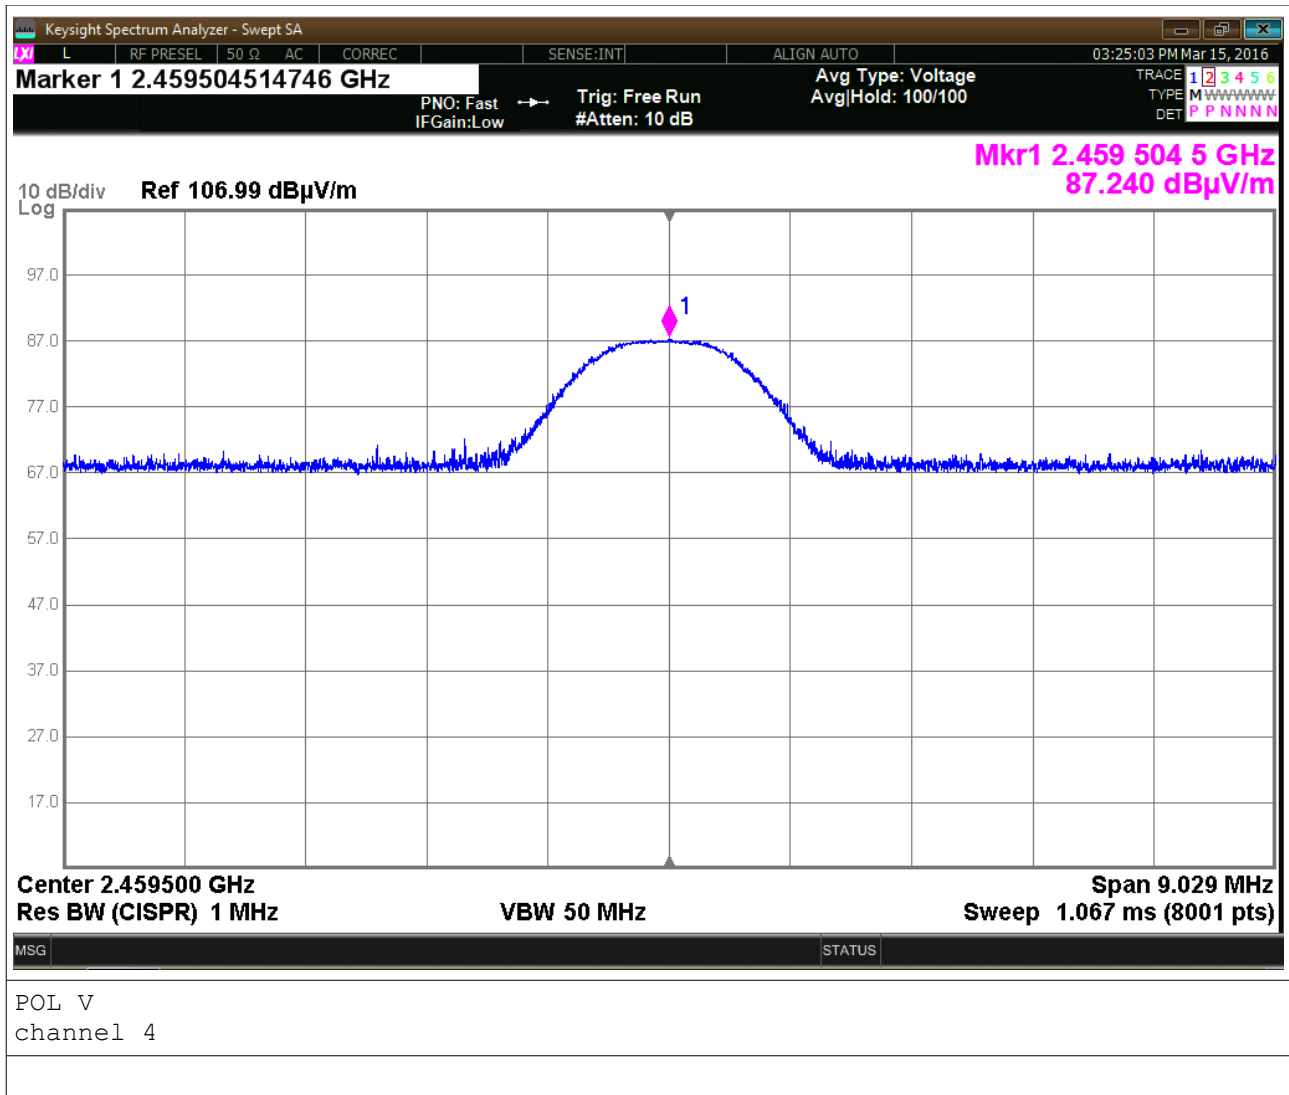


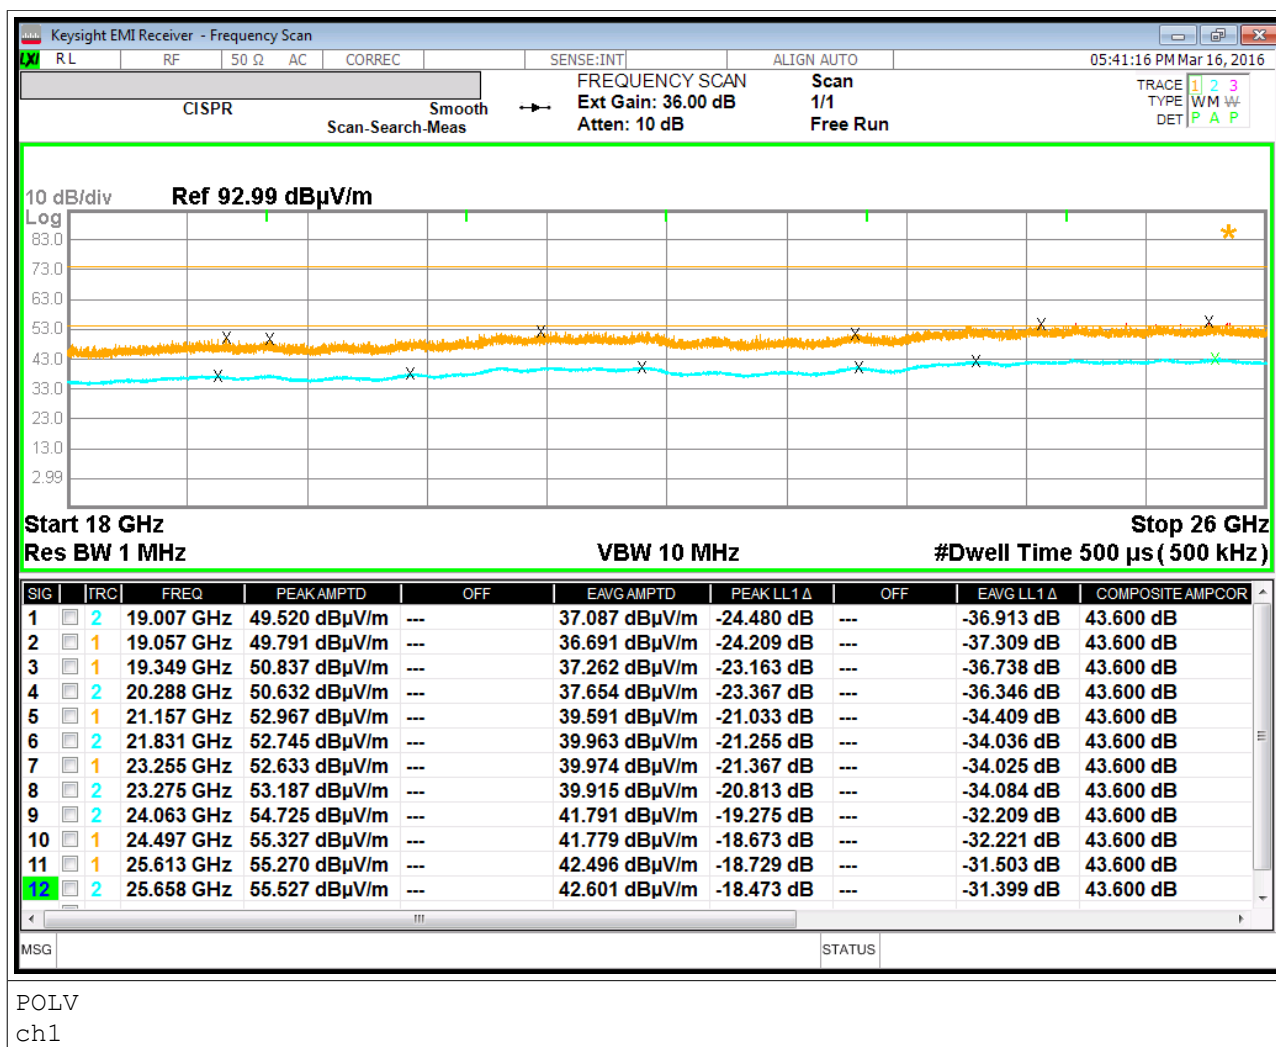


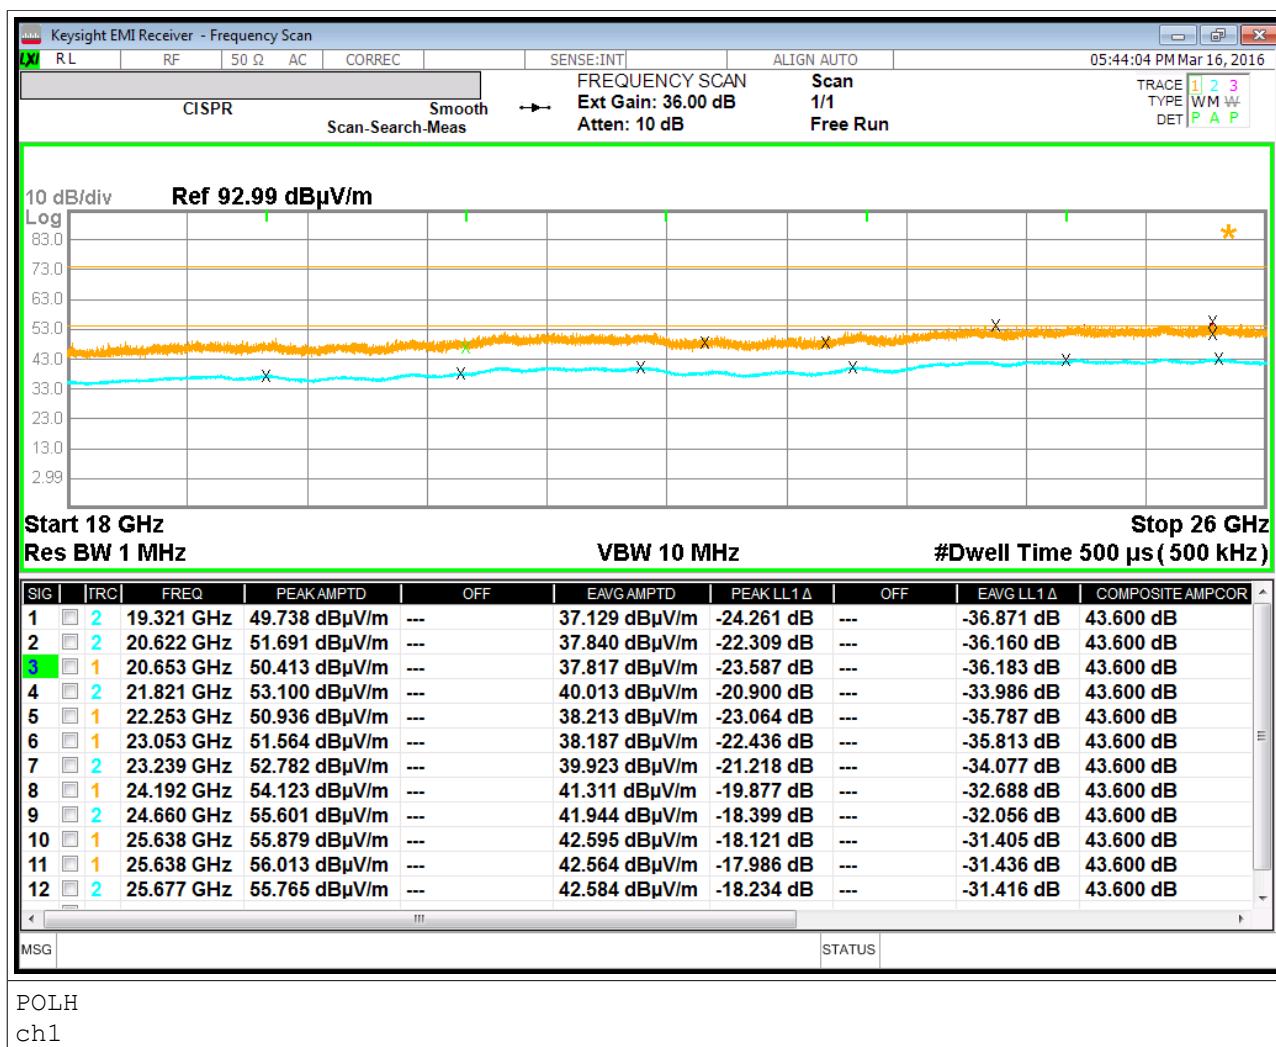


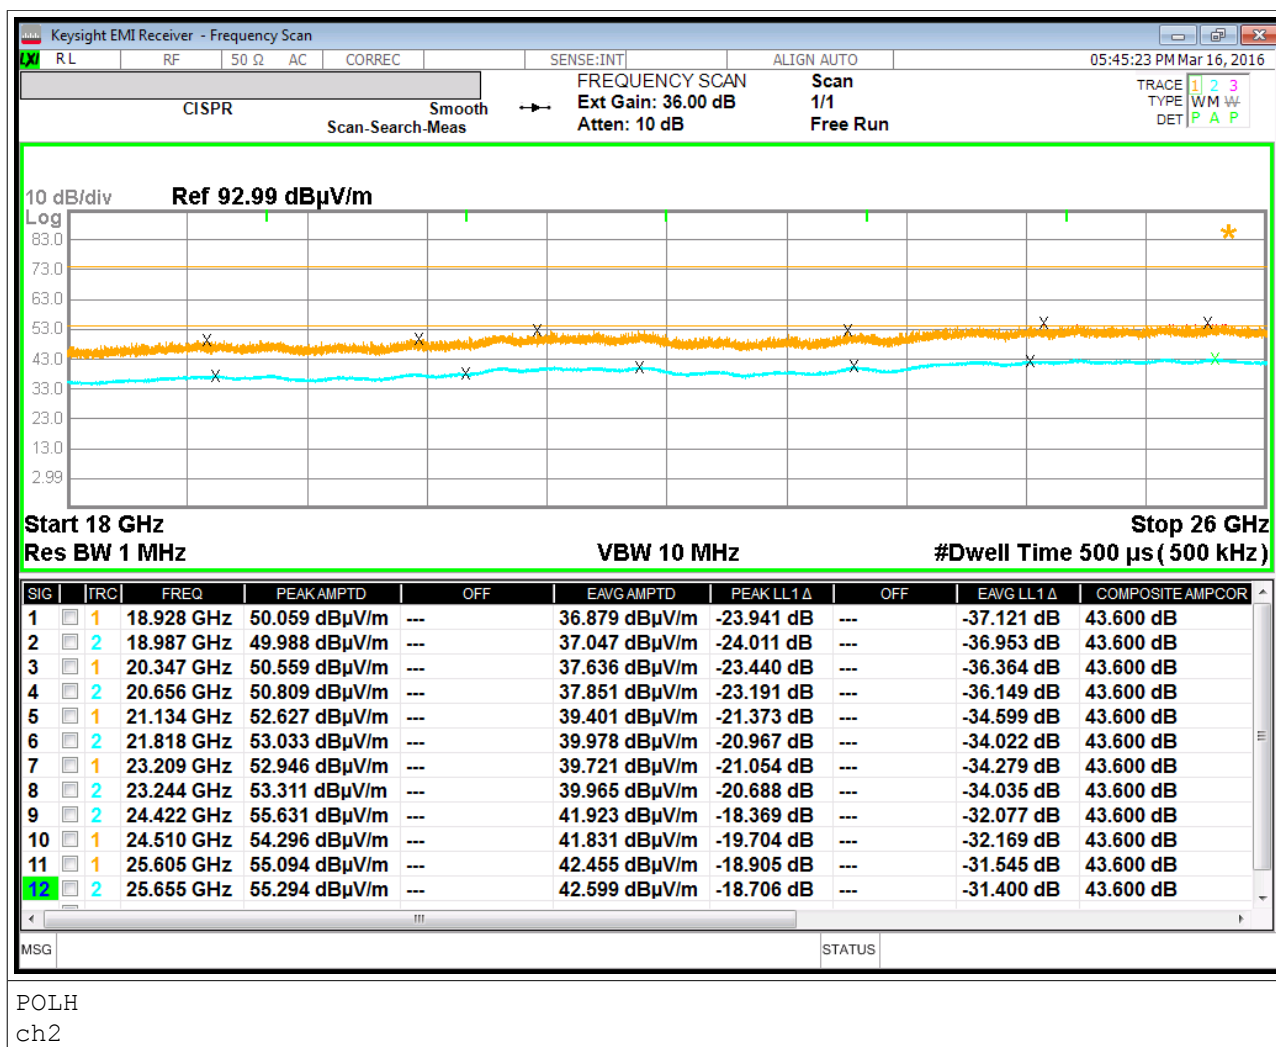


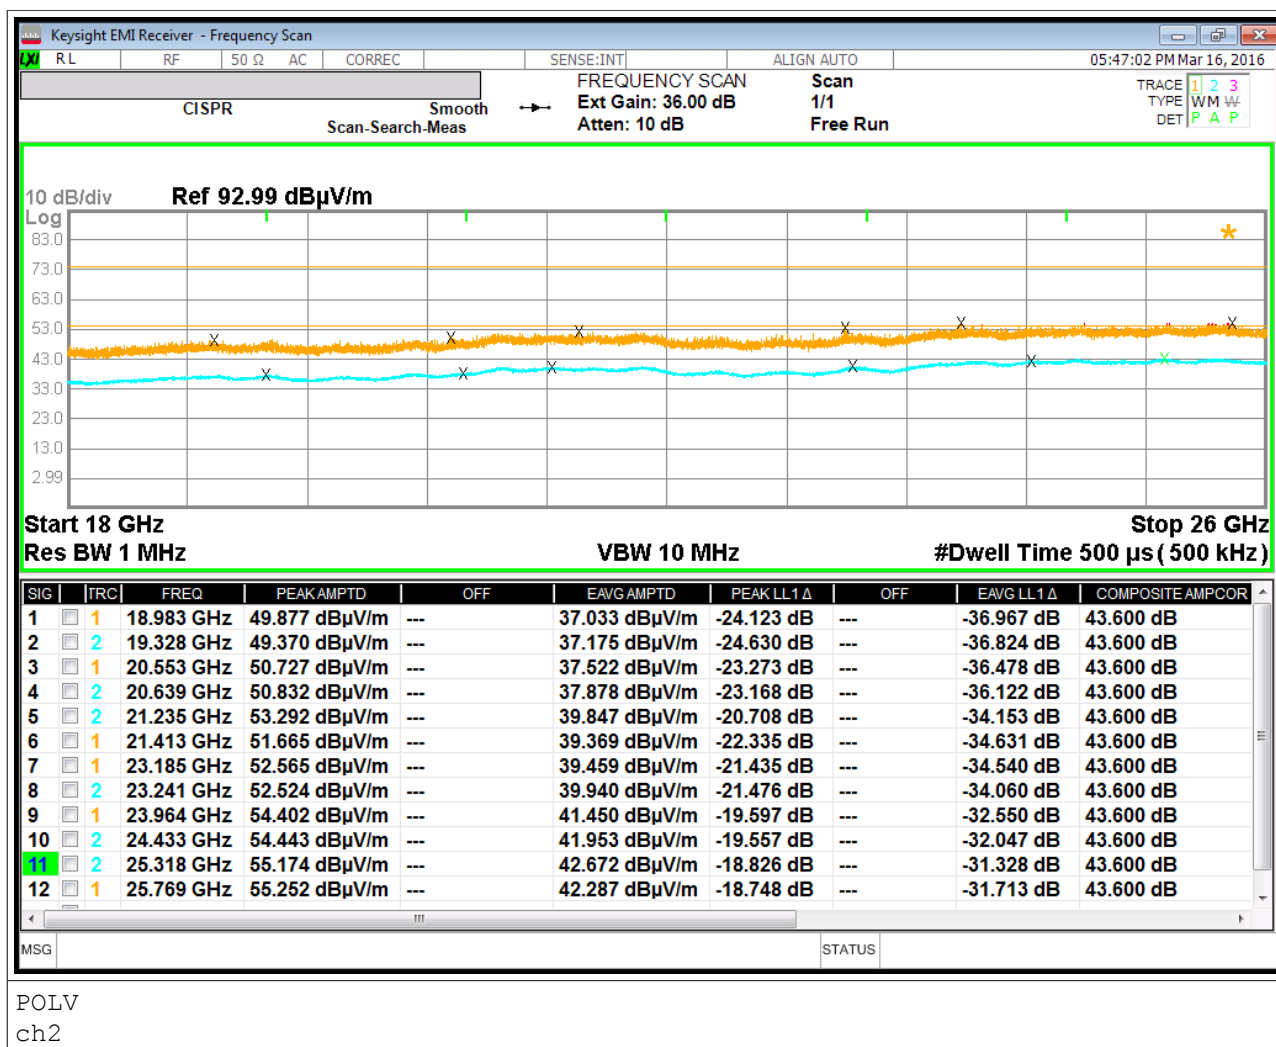

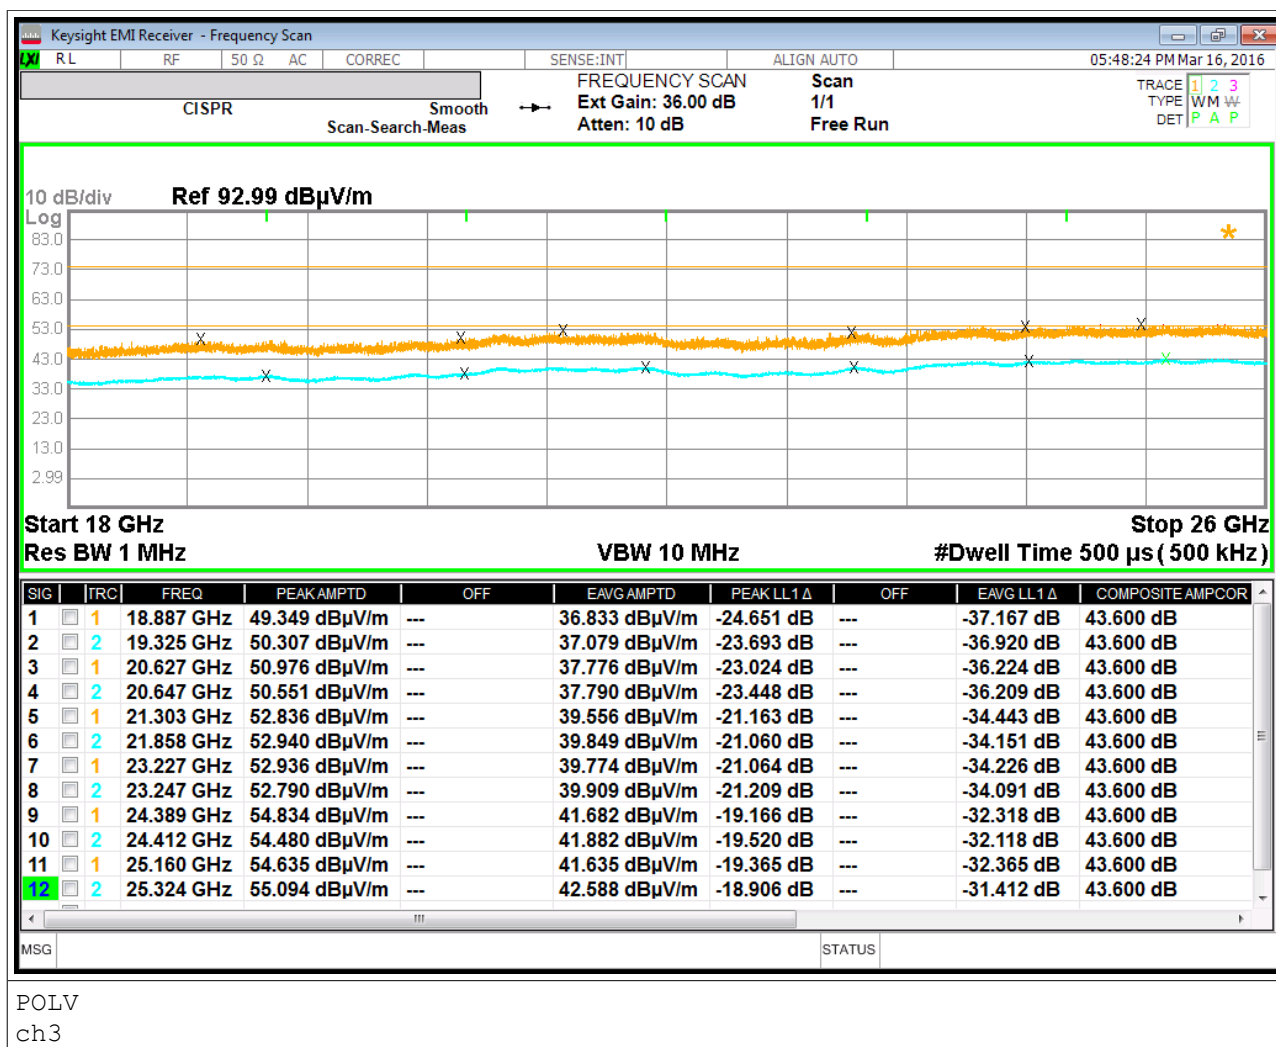

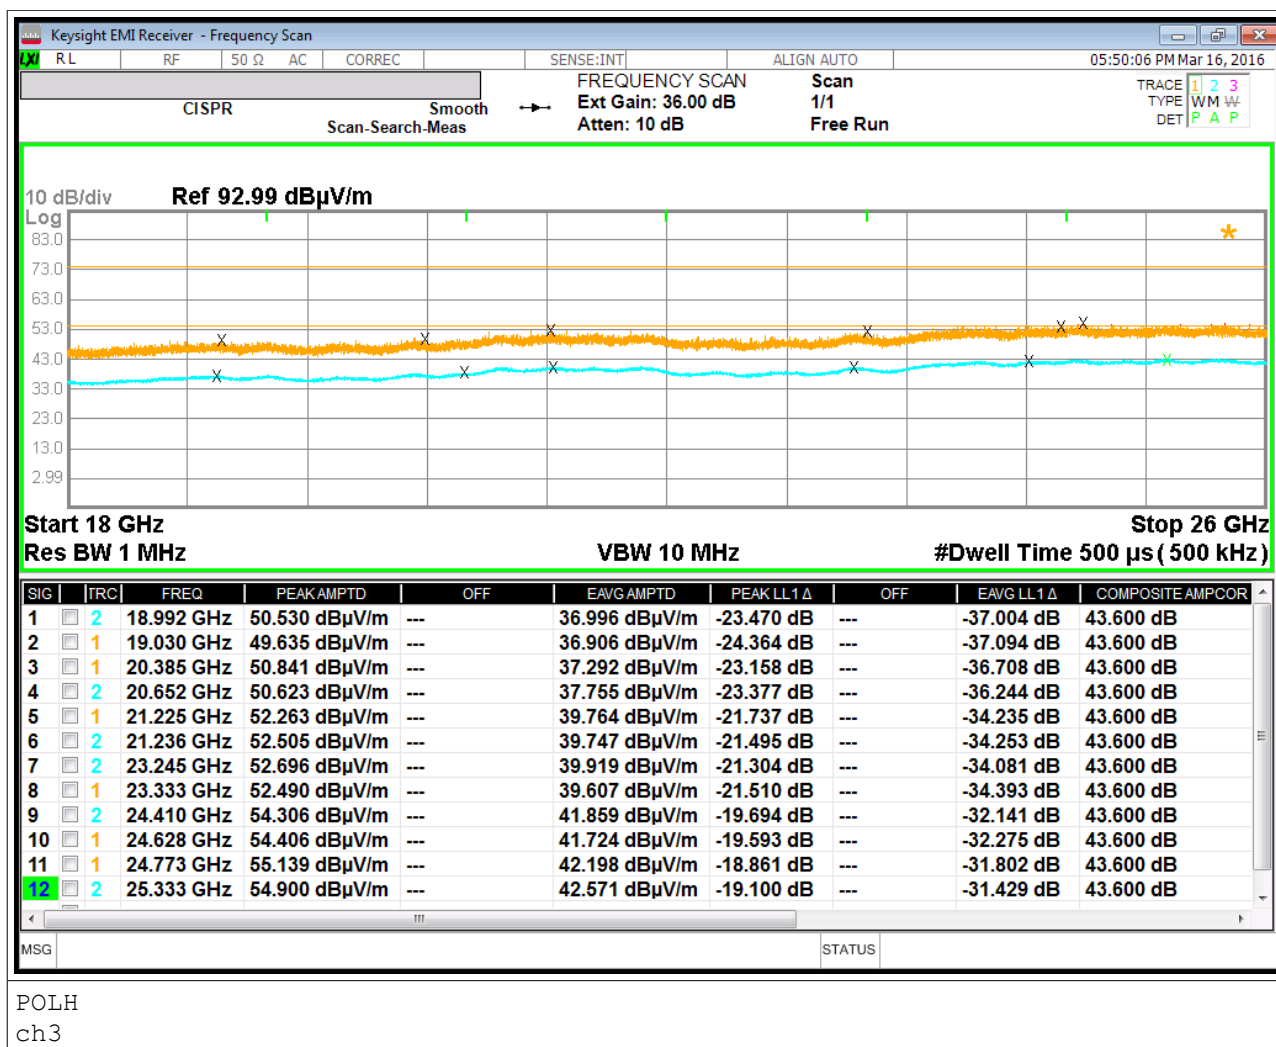

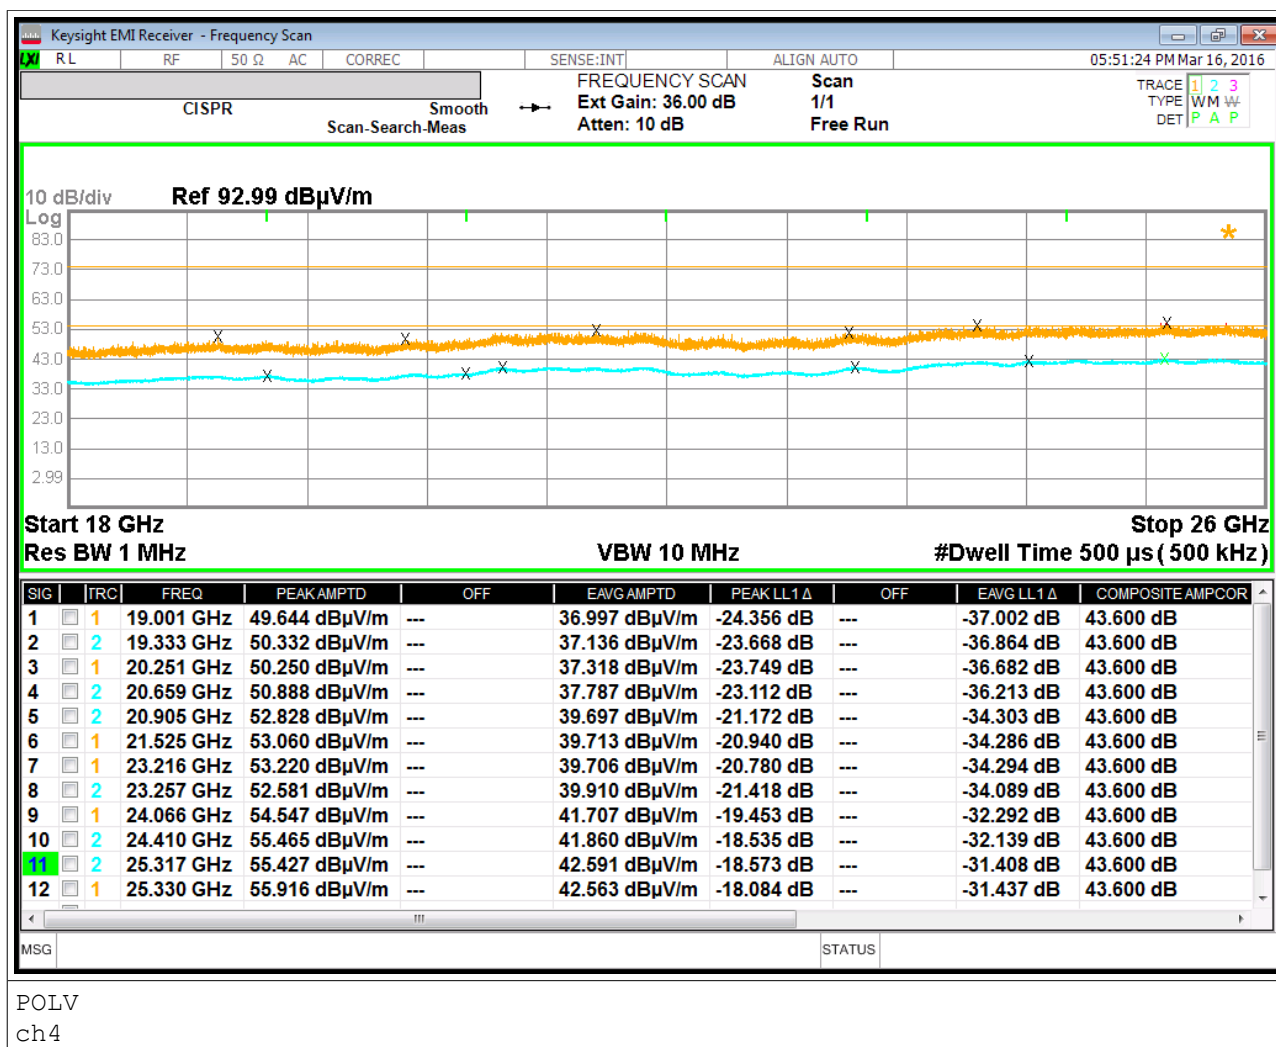

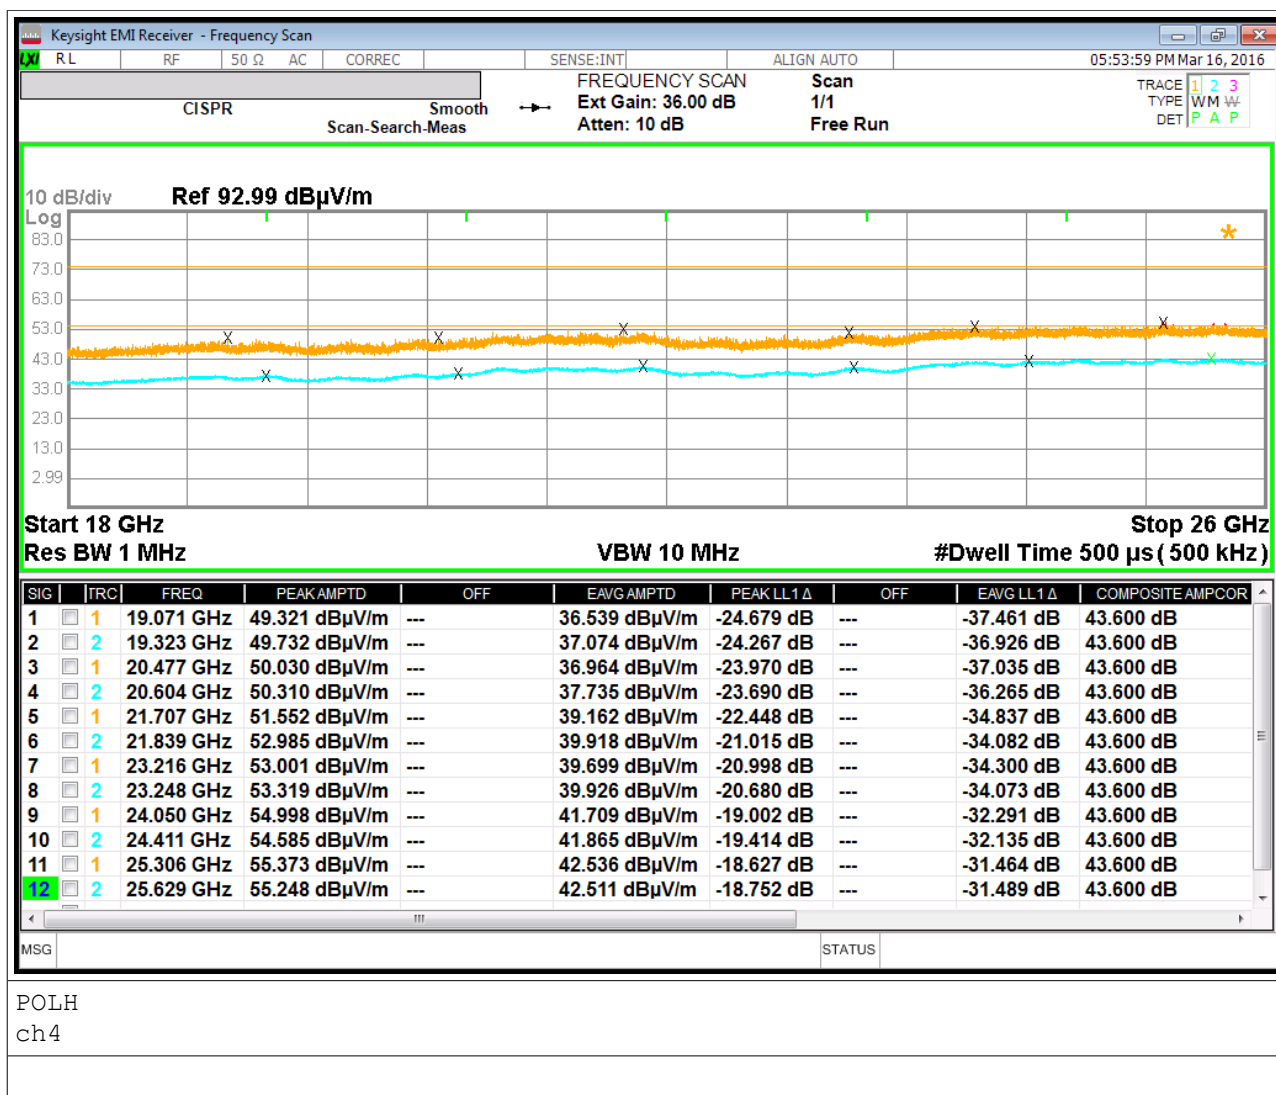

5. PHOTO

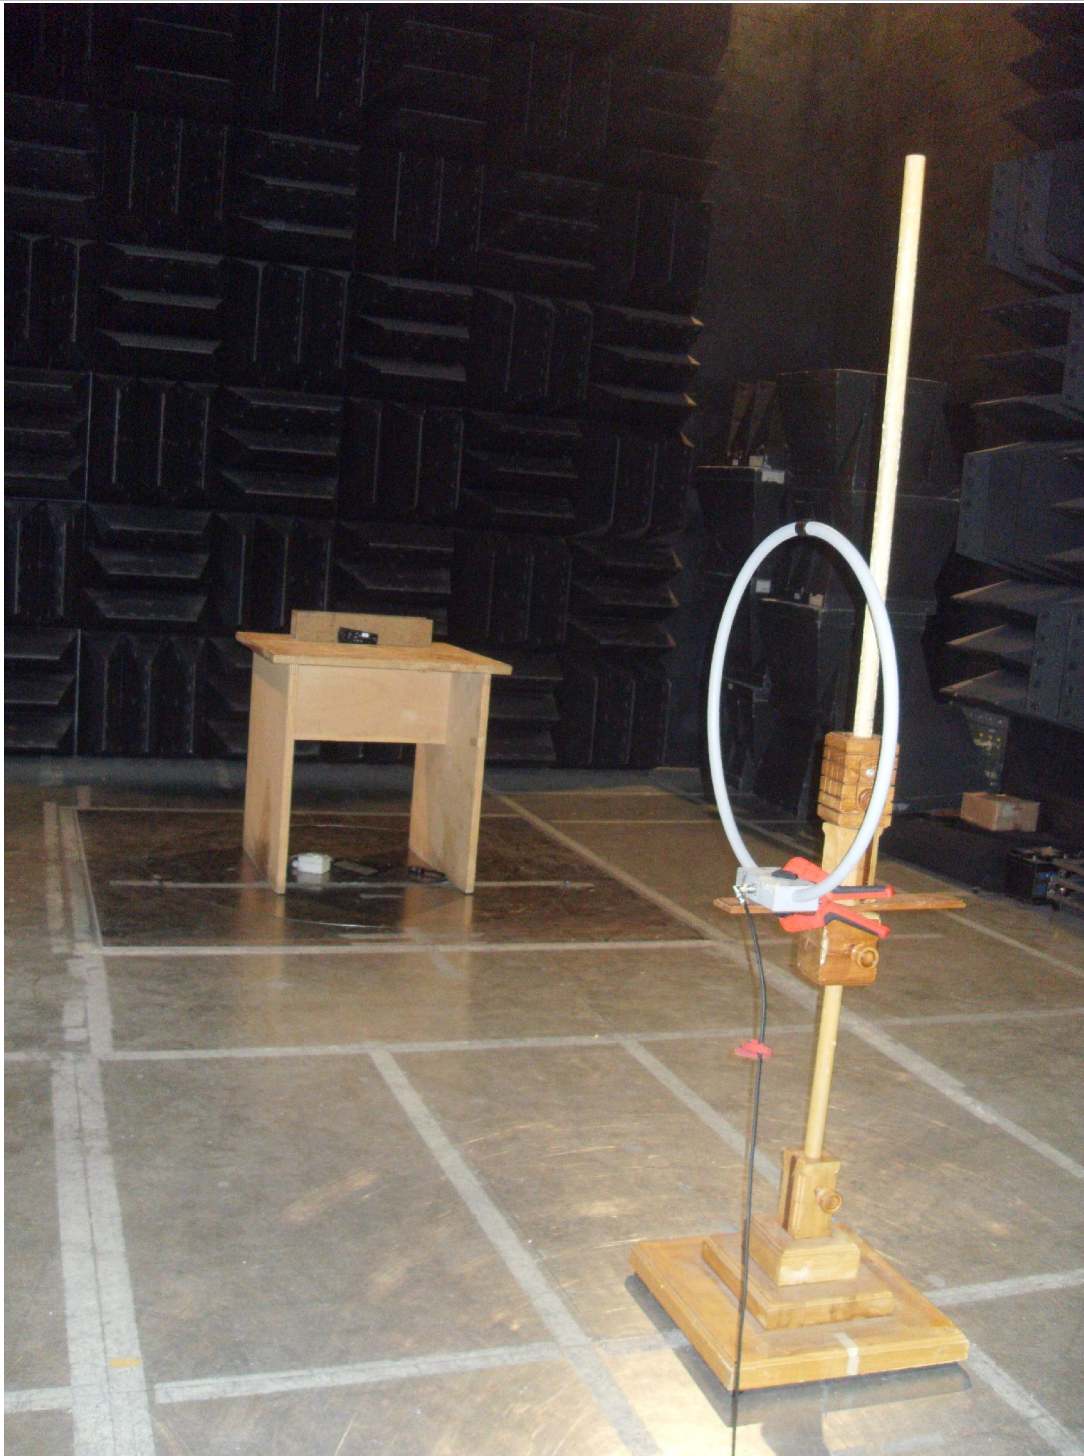


Fig. 5.1

*Radiate Emissions Test Set-up
9 kHz – 30 MHz frequency range*



Fig. 5.2

*Radiated Emissions Test Set-up
Range: 30 – 1000 MHz*



Fig. 5.3

*Radiated Emissions Test Set-up
Range: 1 – 18 GHz*

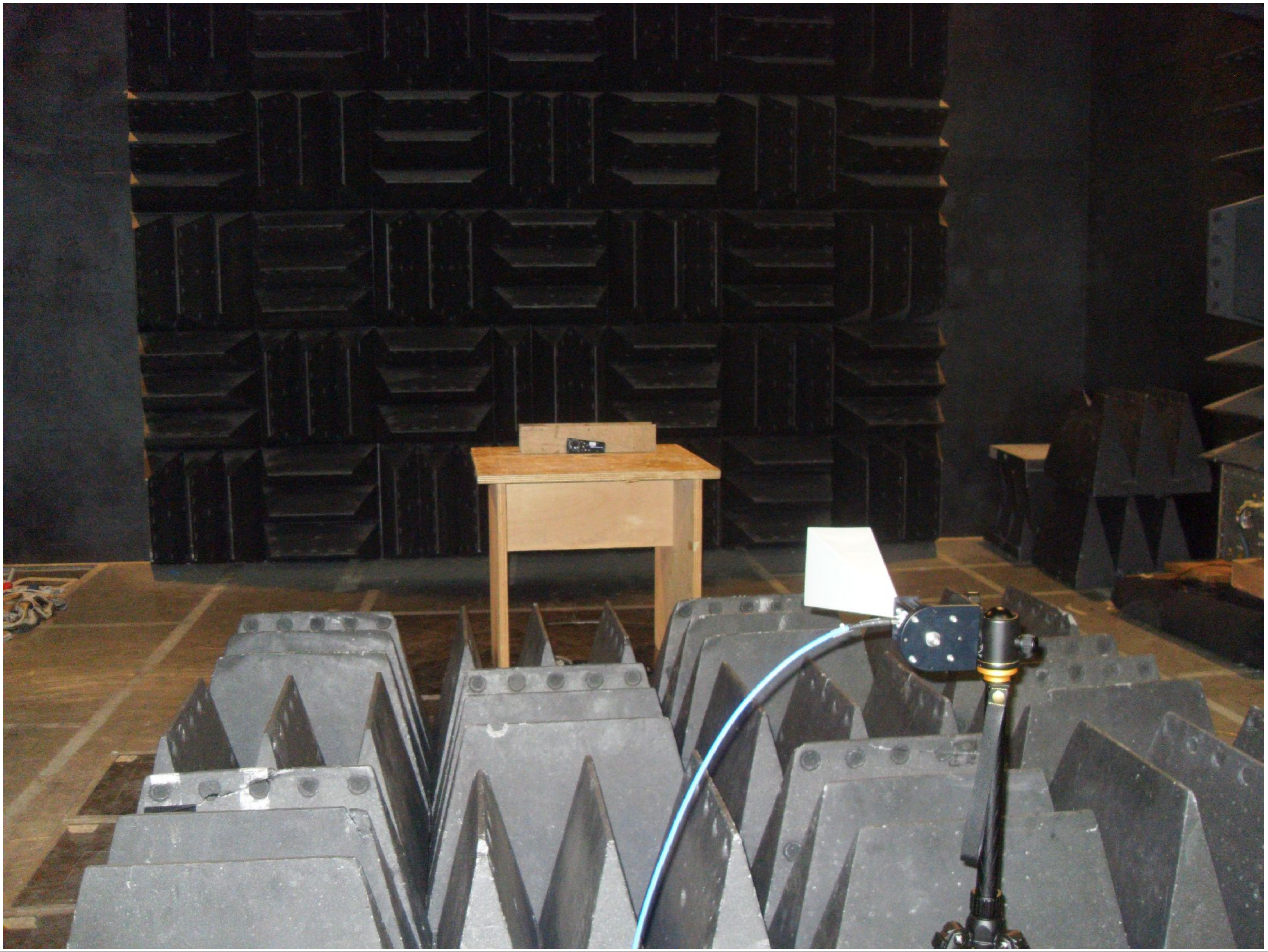


Fig. 5.4

Radiated Emissions Test Set-up

Range: 18 – 26 GHz