

JQA APPLICATION NO.: 400-00206
Issue Date : July 5, 2000
Page 1 of 25

EMI TEST REPORT

JQA APPLICATION NO. : 400-00206
Model No. : TD3610H
Type of Equipment : Radio Controlled Toy
Regulations Applied : CFR 47 FCC Rules and Regulations Part 15
FCC ID : CVTTD3610H
Applicant : NIKKO CO., LTD.
Address : 1-7-14, Mizumoto, Katsushika-ku,
Tokyo 125-0032, Japan
Manufacture : NIKKO TEC INTERNATIONAL LTD.
Address : Room 812, Houston Center, 63 Mody Road,
Tsimshatsui, Kowloon, Hong Kong
Received date of EUT : June 21, 2000

Final Judgment : Passed



TEST RESULTS IN THIS REPORT are obtained in use of equipment that is traceable to
Electrotechnical Lab. of MITI Japan and Communications Research Lab. of MPT Japan.

The test results only respond to the tested sample. It is not allowed to copy this
report even partly without the allowance of the JQA EMC Engineering Dept. Testing Div.

TABLE OF CONTENTS

| | Page |
|--|---------|
| 1 Documentation | |
| 1.1 Test Regulation | 3 |
| 1.2 General Information | 3 |
| 1.3 Test Condition | 4 - 7 |
| 1.4 EUT Modifications / Deviation from Standard | 8 |
| 1.5 Test results | 9 |
| 1.6 Summary | 10 |
| 1.7 Test Configuration / Operation of EUT | 11 |
| 1.8 Preliminary Test and Test setup (Drawings) | 12 - 16 |
| 1.9 EUT Arrangement (Photographs) | 17 |
| 2 Test Data | |
| 2.1 AC Power Line Conducted Emission 0.45 MHz - 30 MHz | N/A |
| 2.2 Radiated Emission (Electric Field) | 18 - 20 |
| 2.3 Frequency Stability | N/A |
| 2.4 Occupied Bandwidth | 21 - 25 |

1 DOCUMENTATION**1.1 TEST REGULATION**

FCC Rules and Regulations Part 15 Subpart A and C (June 23, 1989) Intentional Radiators

Test procedure :

AC power line conducted emission, radiated emission, frequency stability and occupied bandwidth tests were performed according to the procedures in ANSI C63.4-1992.

1.2 GENERAL INFORMATION**1.2.1 Test facility :**

1) Test Facility located at EMC Engineering Dept. Testing Div. :

- No.2 and 3 Anechoic Chambers(3 meters Site).
- Shielded Enclosure.

Expiration date of FCC test facility filing : June 04, 2002

2) EMC Engineering Dept. Testing Div. is recognized under the National Voluntary Laboratory accreditation Program for satisfactory compliance established in title 15, Part 285 Code of Federal Regulations.

NVLAP Lab Code : 200189-0 (Effective through : June 30, 2001)

1.2.2 Description of the Equipment Under Test (EUT) :

| | |
|--------------------------------------|--|
| 1) Type of Equipment | : Radio Controlled Toy |
| 2) Product Type | : Pre-Production |
| 3) Category | : Low Power Communication Device Transmitter |
| 4) EUT Authorization | : Certification |
| 5) FCC ID | : CVTTD3610H |
| 6) Trade Name | : NIKKO |
| 7) Model No. | : TD3610H |
| 8) Operating Frequency Range | : 49.830 MHz - 49.890 MHz |
| 9) Highest Frequency Used in the EUT | : 49.860 MHz |
| 10) Serial No. | : None |
| 11) Date of Manufacture | : June 2000 |
| 12) Power Rating | : DC 9.0V(Battery) |
| 13) EUT Grounding | : None |

1.2.3 Definitions for symbols used in this test report :

x - indicates that the listed condition, standard or equipment is applicable for this report.

— - indicates that the listed condition, standard or equipment is not applicable for this report.

1.3 TEST CONDITION**1.3.1 The measurement of the AC Power Line Conducted Emission**

- was performed in the following test site.
 - was not applicable.


Test location :

Safety Testing Center EMC Engineering Dept. Testing Div.
21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

- Shielded Enclosure
 - Anechoic Chamber No. 2 (portable Type)

Used test instruments :

| Type | Model No. | Manufacturer | Serial No. | Last Cal. | Interval |
|---|-----------|---------------------|--------------|-----------|----------|
| <input type="checkbox"/> - Test Receiver | ESH-2 | Rohde & Schwarz | 880370/016 | Sep. 1999 | 1 Year |
| <input type="checkbox"/> - Test Receiver | ESH-3 | Rohde & Schwarz | 881460/030 | Jun. 1999 | 1 Year |
| <input type="checkbox"/> - LISN(for Peripheral) | KNW-407 | Kyoritsu Electrical | 8-833-6 | Apr. 2000 | 1 Year |
| <input type="checkbox"/> - LISN(for EUT) | KNW-407 | Kyoritsu Electrical | 8-855-2 | Apr. 2000 | 1 Year |
| <input type="checkbox"/> - LISN | KNW-407 | Kyoritsu Electrical | 8-757-1 | Apr. 2000 | 1 Year |
| <input type="checkbox"/> - RF Cable | 3D-2W | Fujikura | 155-21-006E0 | Apr. 2000 | 1 Year |
| <input type="checkbox"/> - RF Cable | 3D-2W | Fujikura | 155-21-007E0 | Apr. 2000 | 1 Year |
| <input type="checkbox"/> - 50ohm Termination | | SUHNER | 154-06-501E0 | Jan. 2000 | 1 Year |
| <input type="checkbox"/> - 50ohm Termination | | SUHNER | 154-06-502E0 | Jan. 2000 | 1 Year |

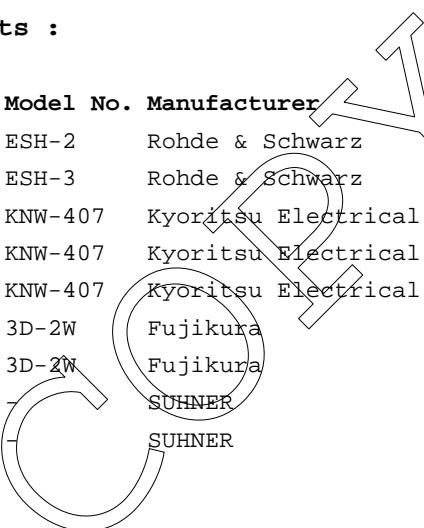

1.3.2 The measurement of the Radiated Emission(30 MHz - 1000 MHz)

x - was performed in the following test site.
 - was not applicable.


Test location :

Safety Testing Center EMC Engineering Dept. Testing Div.
21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

x - Anechoic Chamber No. 2 (3 meters)
 - Anechoic Chamber No. 3 (3 meters)

Validation of Site Attenuation :

1) Last Confirmed Date :March, 2000
2) Interval :1 year

**Used test instruments :**

| Type | Model No. | Manufacturer | Serial No. | Last Cal. | Interval |
|----------------------------------|-----------|---------------------|--------------|-----------|----------|
| <u> </u> - Test Receiver | ESH-2 | Rohde & Schwarz | 880370/016 | Sep. 1999 | 1 Year |
| <u> </u> - Test Receiver | ESV | Rohde & Schwarz | 872148/039 | May 2000 | 1 Year |
| <u> </u> - Test Receiver | ESVS10 | Rohde & Schwarz | 826148/002 | Jun. 1999 | 1 Year |
| <u>x</u> - Test Receiver | ESVP | Rohde & Schwarz | 881487/004 | May 2000 | 1 Year |
| <u> </u> - Test Receiver | ESVR | Rohde & Schwarz | 881487/005 | Dec. 1999 | 1 Year |
| <u>x</u> - Antenna | KBA-511A | Kyoritsu Electrical | 0-170-1 | Nov. 1999 | 1 Year |
| <u> </u> - Antenna | KBA-511A | Kyoritsu Electrical | 0-201-13 | Nov. 1999 | 1 Year |
| <u>x</u> - Antenna | KBA-611 | Kyoritsu Electrical | 0-147-14 | Nov. 1999 | 1 Year |
| <u> </u> - Antenna | KBA-611 | Kyoritsu Electrical | 0-210-5 | Nov. 1999 | 1 Year |
| <u> </u> - Biconical Antenna | BBA9106 | Schwarzbeck | VHA91031150 | May 2000 | 1 Year |
| <u> </u> - Biconical Antenna | BBA9106 | Schwarzbeck | 11905078E0 | May 2000 | 1 Year |
| <u> </u> - Log-Periodic Antenna | UHALP9107 | Schwarzbeck | 11905079E0 | May 2000 | 1 Year |
| <u> </u> - Log-Periodic Antenna | UHALP9107 | Schwarzbeck | 11905110 | May 2000 | 1 Year |
| <u>x</u> - RF Cable | 5D-2W | Fujikura | 155-21-001E0 | Feb. 2000 | 1 Year |
| <u> </u> - RF Cable | 5D-2W | Fujikura | 155-21-002E0 | Feb. 2000 | 1 Year |

1.3.3 The measurement of the Radiated Emission(Above 1000 MHz)

 - was performed in the following test site.
x - was not applicable.

Test location :

Safety Testing Center EMC Engineering Dept. Testing Div.
21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

 - No. 2 site (3 meters)
 - No. 3 site (3 meters)

Validation of Site Attenuation :

1) Last Confirmed Date : N/A
2) Interval : N/A

Used test instruments :

| Type | Model No. | Manufacturer | Serial No. | Last Cal. | Interval |
|--------------------------------------|-------------------|--------------------|--------------|-----------|----------|
| <u> </u> - Spectrum Analyzer | 8563E | Hewlett Packard | 3221A00201 | May 2000 | 1 Year |
| <u> </u> - Spectrum Analyzer | 8560E | Hewlett Packard | 3240A00189 | Sep. 1999 | 1 Year |
| <u> </u> - Spectrum Analyzer | 8566B | Hewlett Packard | 2140A01091 | Apr. 2000 | 1 Year |
| <u> </u> - RF Pre-selector | 85685A | Hewlett Packard | 2648A00522 | Apr. 2000 | 1 Year |
| <u> </u> - Spectrum Analyzer | 8566B | Hewlett Packard | 2747A05855 | May 2000 | 1 Year |
| <u> </u> - RF Pre-selector | 85685A | Hewlett Packard | 2091A00933 | May 2000 | 1 Year |
| <u> </u> - Log-Periodic Antenna | HL 025 | Rohde & Schwarz | 340182/015 | Nov. 1999 | 1 Year |
| <u> </u> - RF Amplifier | DBP-0102N5334272B | DBS Microwave Inc. | 012 | Jun. 1999 | 1 Year |
| <u> </u> - RF Amplifier | WJ-6882-814 | Watkins-Johnson | 0414 | Jun. 1999 | 1 Year |
| <u> </u> - RF Amplifier | WJ-5315-556 | Watkins-Johnson | 106 | Jun. 1999 | 1 Year |
| <u> </u> - RF Amplifier | WJ-5320-307 | Watkins-Johnson | 645 | Jun. 1999 | 1 Year |
| <u> </u> - RF Cable(10m) | S 04272B | Suhner | 155-21-011E0 | May 2000 | 1 Year |
| <u> </u> - RF Cable(2m) | SUCOFLEX 104 | Suhner | 155-21-012E0 | May 2000 | 1 Year |
| <u> </u> - RF Cable(1m) | SUCOFLEX 104 | Suhner | 155-21-013E0 | May 2000 | 1 Year |

1.3.4 The measurement of the Frequency Stability - was performed.x - was not applicable.**Used test instruments :**

| Type | Model No. | Manufacturer | Serial No. | Last Cal. | Interval |
|-------------------------------|-----------|------------------|------------|-----------|----------|
| <u> </u> - Frequency Counter | 53131A | Hewlett Packard | 3546A11807 | May 2000 | 1 Year |
| <u> </u> - Oven | - | Ohnishi Co. Ltd. | - | Aug. 1999 | 1 Year |
| <u> </u> - DC Power Supply | 6628A | Hewlett Packard | 3224A00284 | July 1999 | 1 Year |

1.3.5 The measurement of the Occupied Bandwidthx - was performed. - was not applicable.**Used test instruments :**

| Type | Model No. | Manufacturer | Serial No. | Last Cal. | Interval |
|--------------------------------|-----------|-----------------|------------|-----------|----------|
| <u> </u> - Spectrum Analyzer | 8560E | Hewlett Packard | 3240A00189 | Sep. 1999 | 1 Year |
| <u> </u> - Spectrum Analyzer | 8563E | Hewlett Packard | 3221A00201 | May 2000 | 1 Year |
| <u>x</u> - Spectrum Analyzer | 8566B | Hewlett Packard | 2140A01091 | Apr. 2000 | 1 Year |
| <u> </u> - Spectrum Analyzer | 8566B | Hewlett Packard | 2747A05855 | May 2000 | 1 Year |
| <u> </u> - Function Generator | 3325A | Hewlett Packard | 2512A21776 | May 2000 | 1 Year |
| <u> </u> - FM Linear Detector | MS61A | Anritsu Corp. | M77486 | Sep. 1999 | 1 Year |
| <u> </u> - Level Meter | ML422C | Anritsu Corp. | M87571 | June 1999 | 1 Year |

1.4 EUT MODIFICATION / Deviation from Standard**1.4.1 EUT MODIFICATION**

-No modifications were conducted by JQA to achieve compliance to Class B levels.
 -To achieve compliance to Class B levels, the following changes were made by JQA during the compliance test.

The modifications will be implemented in all production models of this equipment.

Applicant :


Date :


Typed Name :

Position :

1.4.2 Deviation from Standard:

- No deviations from the standard described in clause 1.1.
 - The following deviations were employed from the standard described in clause 1.1:

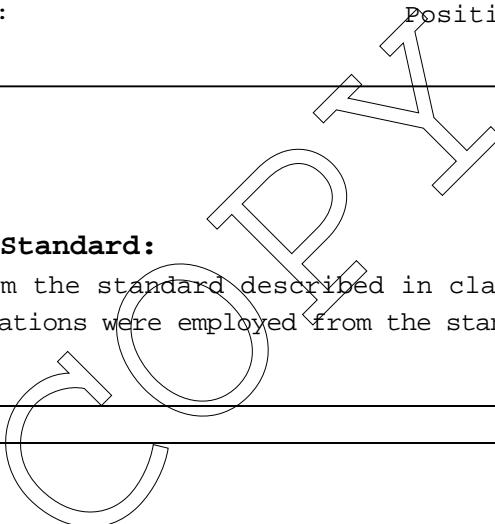

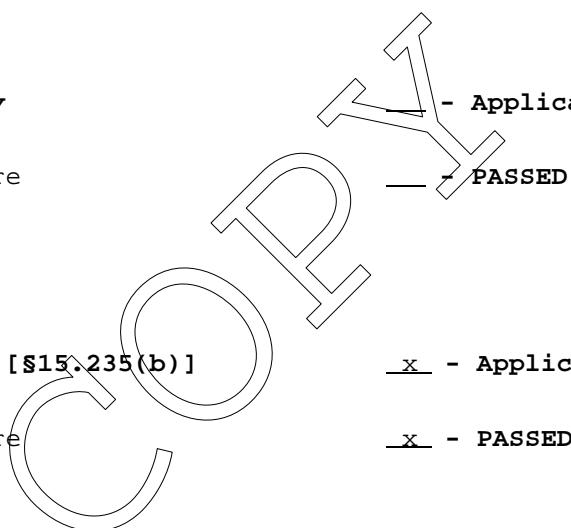1.5 TEST RESULTS**AC Power Line Conducted Emission** - Applicable - NOT ApplicableThe requirements are - PASSED - NOT PASSED**Remarks :****Radiated Emission [§15.235(a)(b)]** - Applicable - NOT ApplicableThe requirements are - PASSED - NOT PASSED**Remarks:****Frequency Stability** - Applicable - NOT ApplicableThe requirements are - PASSED - NOT PASSED**Remarks:****Occupied Bandwidth [§15.235(b)]** - Applicable - NOT ApplicableThe requirements are - PASSED - NOT PASSED**Remarks:**

1.6 SUMMARY**General Remarks :**

The EUT was tested according to the requirements of FCC Rules and Regulations Part 15 Subpart A and C (June 23, 1989) under the test configuration, as shown in clause 1.7 to 1.9.

The conclusion for the test items of which are required by the applied regulation is indicated under the final judgment.

Final Judgment :

The "as received" sample;

- fulfill the test requirements of the regulation mentioned on clause 1.1.
- fulfill the test requirements of the regulation mentioned on clause 1.1, but with certain qualifications.
- doesn't fulfill the test regulation mentioned on clause 1.1.

Begin of testing : June 28, 2000

End of testing : June 29, 2000

- JAPAN QUALITY ASSURANCE ORGANIZATION -

Approved by:

Signatories:

Issued by:

M. Takahashi

Masaaki Takahashi
Manager
JQA EMC Engineering Dept.

Shigeru Osawa

Shigeru Osawa
Assistant Manager
JQA EMC Engineering Dept.


1.7 TEST CONFIGURATION / OPERATION OF EUT**1.7.1 Test Configuration****The equipment under test (EUT) consists of :**

| Item | Manufacturer | Model No. | FCC ID | Serial No. |
|----------------------|---------------------------------|-----------|------------|------------|
| Radio Controlled Toy | NIKKO TEC INTERNATIONAL LTD. | TD3610H | CVTTD3610H | None |

1.7.2 Operating condition

Power supply Voltage : 9.0 VDC(Battery)

The tests have been carried out under the transmitting condition.

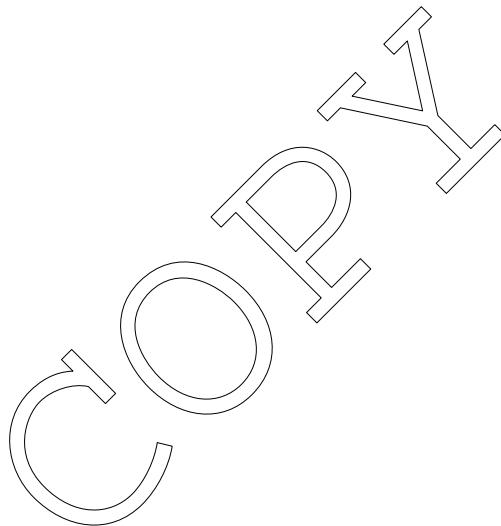

1.8 PRELIMINARY TEST AND TEST-SETUP (DRAWINGS)

1.8.1 AC Power Line Conducted Emission (450 kHz - 30 MHz) :

According to description of ANSI C63.4-1992 sec.13.1.3.1, the AC power line preliminary conducted emissions measurements were carried out.


The preliminary conducted measurements were performed using the spectrum analyzer to observe the emission characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for final AC power line conducted emissions measurements.

Shielded Enclosure

- Side View -


Vertical
Ground
Plane

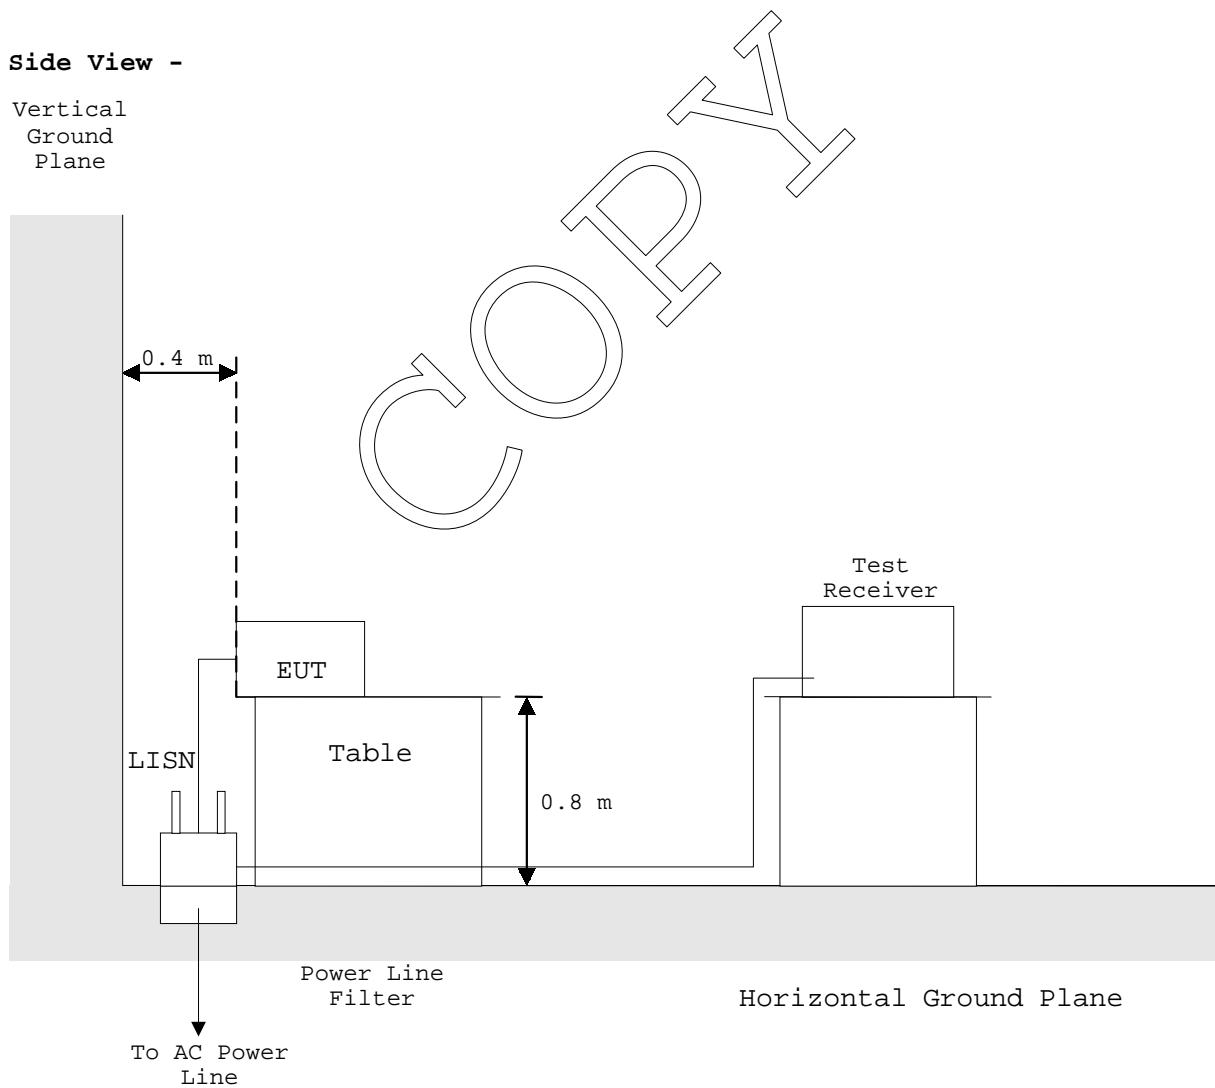

1.8.2 Radiated Emission (30 MHz - 1000 MHz) :

According to description of ANSI C63.4-1992 sec.13.1.4.1, the preliminary radiated emissions measurement were carried out. The preliminary radiated measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.


The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for the final radiated emissions measurements.

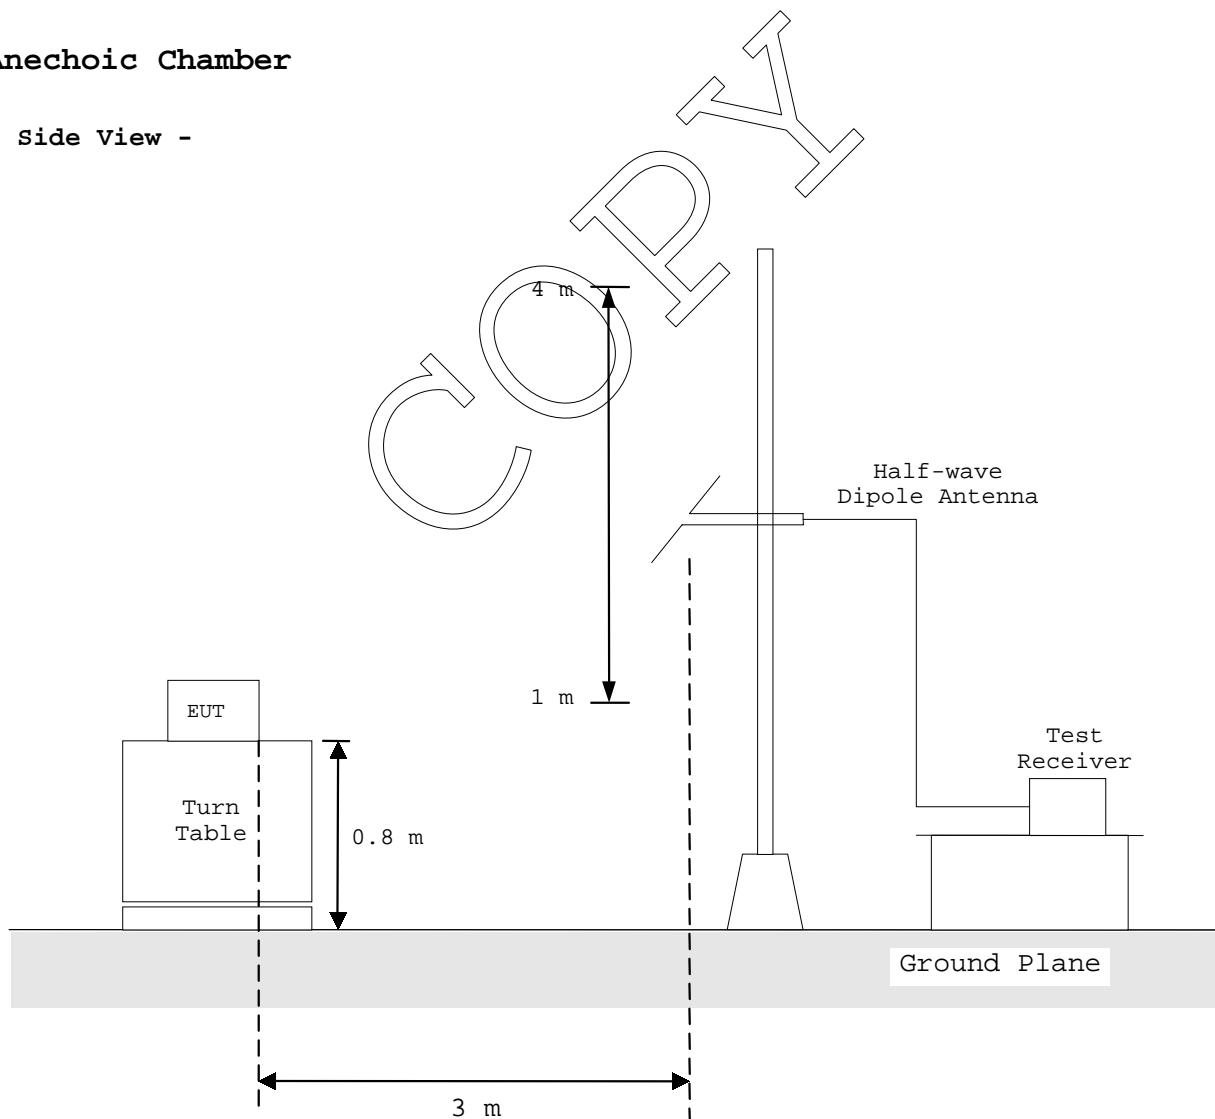Anechoic Chamber**- Side View -**

1.8.3 Radiated Emission (Above 1 GHz) :

According to description of ANSI C63.4-1992 sec.13.1.4.1, the preliminary radiated emissions measurements were carried out. The preliminary radiated measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.


The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for the final radiated emissions measurements.

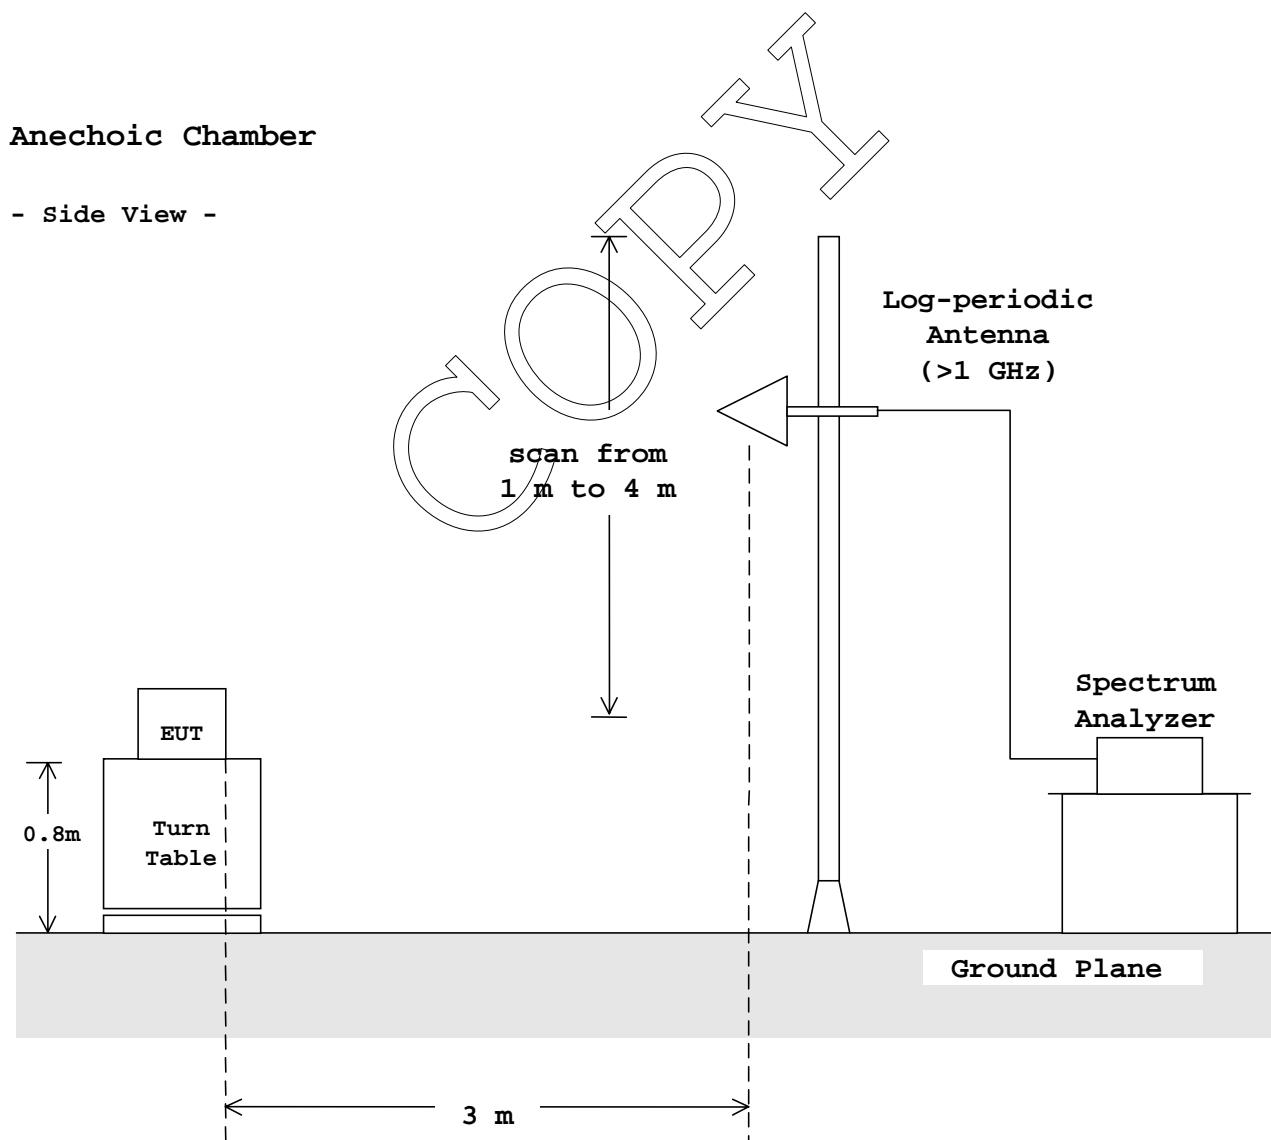

1.8.4 Frequency Stability :

According to description of ANSI C63.4-1992 sec.13.1.5 and sec.13.1.6, the frequency stability measurements were carried out. By using frequency counter with suitable RF amplifier, the carrier frequency of the transmitter under test was measured with a temperature variation of -20°C to $+50^{\circ}\text{C}$ at the normal supply voltage, and if required, with a variation in the primary voltage from 85 % to 115 % the rated supply voltage at the temperature of $+20^{\circ}\text{C}$.


These measurements were carried out after allow sufficient time (approximately 1 hour) for the temperature of the chamber to stabilize.

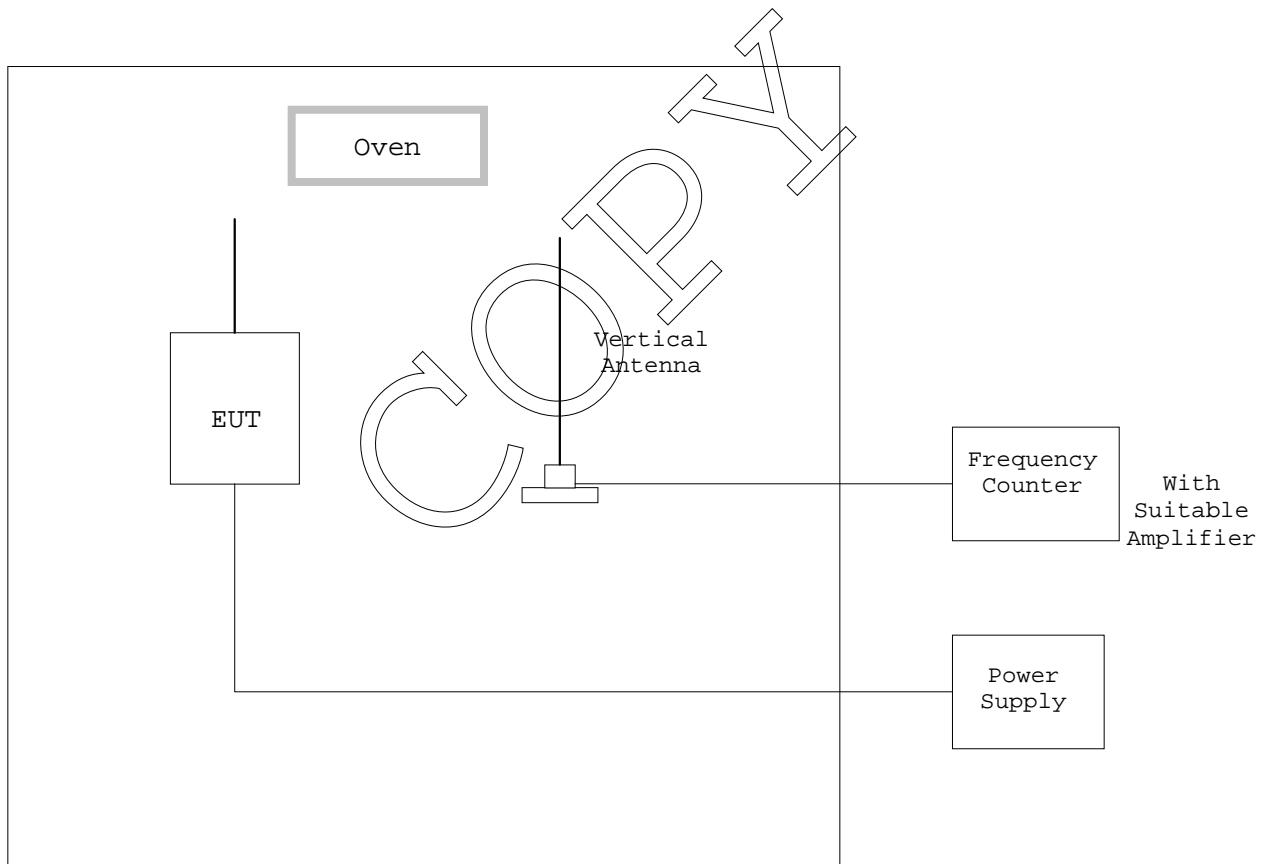

1.8.5 Occupied Bandwidth :

According to description of ANSI C63.4-1992 sec.13.1.7, the occupied bandwidth measurements were carried out. By using a spectrum analyzer with a vertical antenna for picking up the signal, the measurements of the emission were made under the transmitting modes of the EUT.



The resolution bandwidth of spectrum analyzer was set to the value specified in sec.13.1.7.

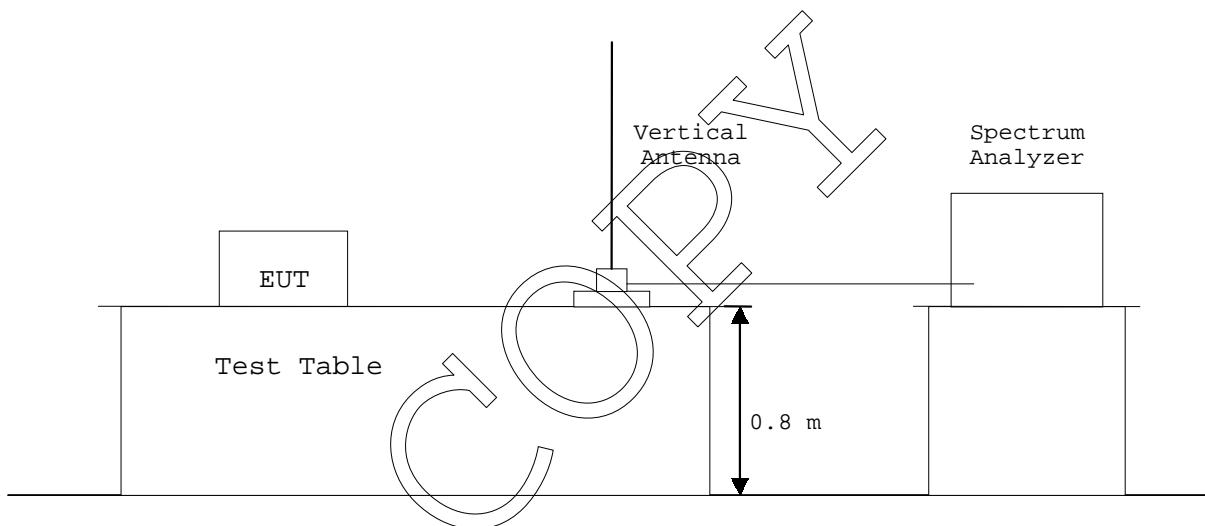

1.9 TEST ARRANGEMENT (PHOTOGRAPHS)

PHOTOGRAPHS OF EUT CONFIGURATION FOR RADIATED EMISSIONS MEASUREMENT

Photograph present configuration with maximum emission

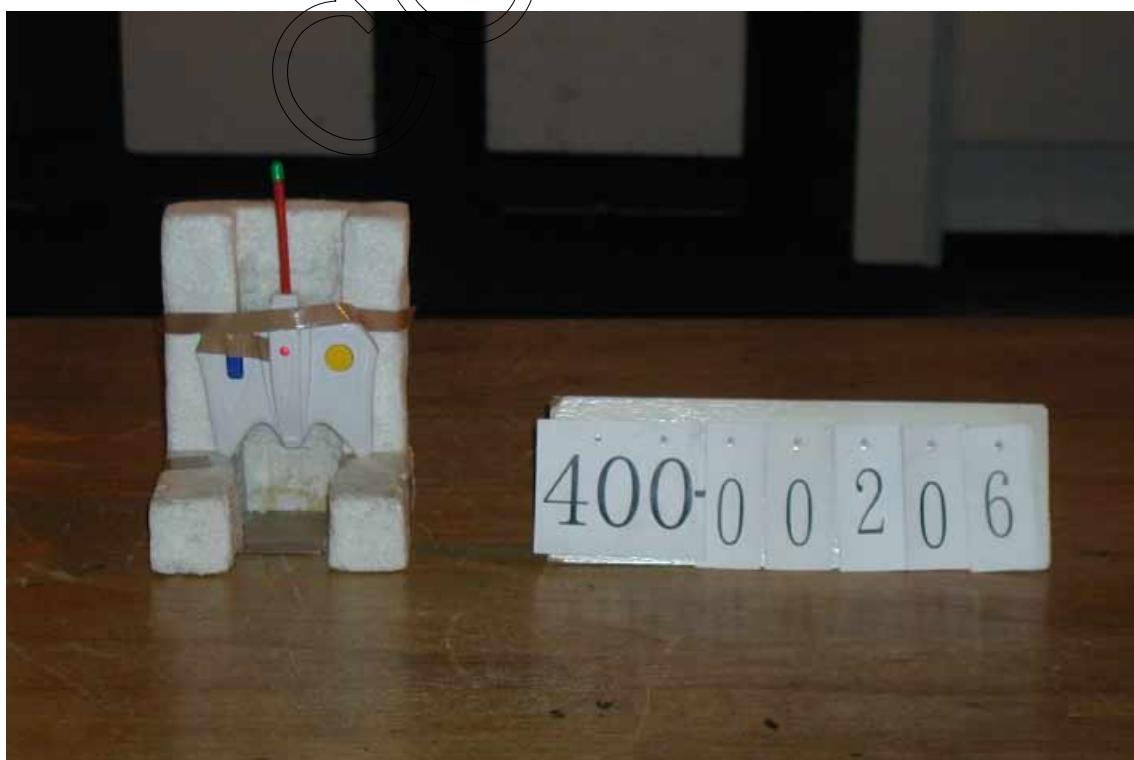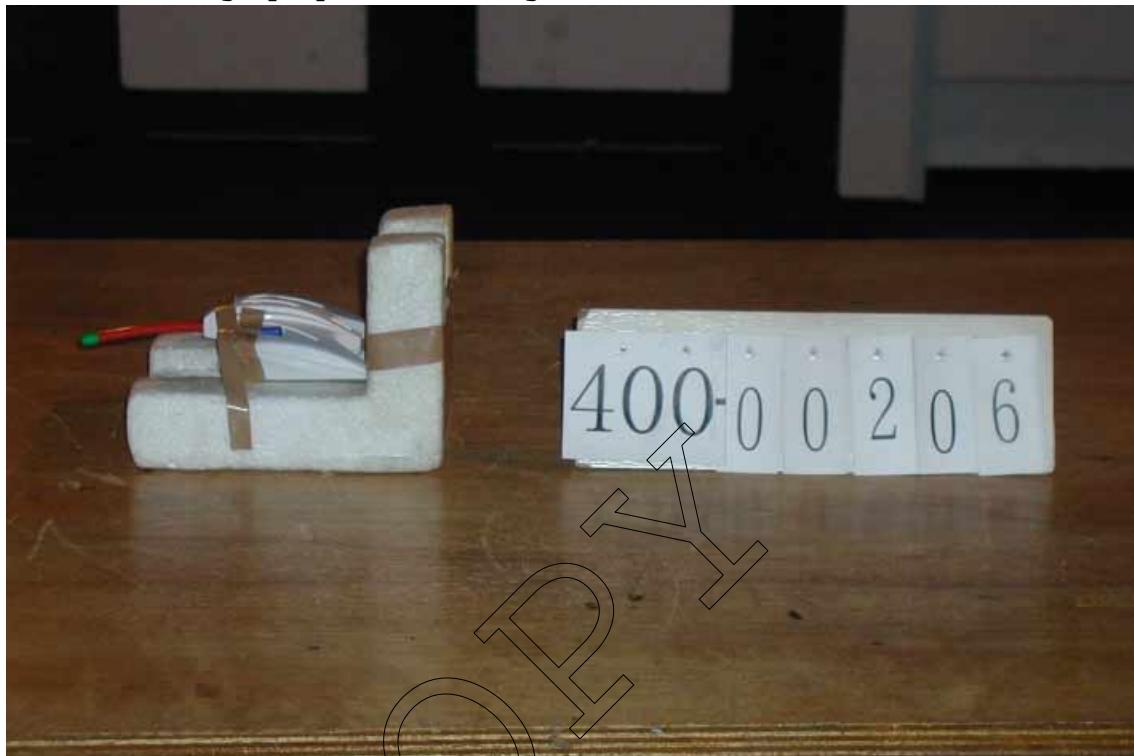

TEST DATA**2.2 Radiated Emissions Measurement**Date : June 29, 2000Temp.: 24 °C Humi.: 86 %

Operating Frequency : 49.860 MHz

Distance of Measurement : 3.0 meters

| Frequency (MHz) | Antenna Factor (dB/m) | Meter Reading | | Limits (dB μ V/m) | Field Strength at 3 m | |
|---|-----------------------------|------------------------|-----------------------|--------------------------|--------------------------|-------------------------|
| | | Horiz. (dB μ V) | Vert. (dB μ V) | | Horiz. (dB μ V/m) | Vert. (dB μ V/m) |
| Fundamental | | | | | | |
| 49.860 | 3.6 | 50.8 | 50.9 | 80.0 | 54.4 | 54.5 (Average) |
| 49.860 | 3.6 | 56.0 | 56.1 | 100.0 | 59.6 | 59.7 (Peak) |
| Harmonics & other Frequency components | | | | | | |
| 99.720 | 9.9 | 14.0 | 12.7 | 43.5 | 23.9 | 22.6 |
| 149.580 | 13.7 | 8.2 | 2.5 | 43.5 | 21.9 | 16.2 |
| 199.440 | 16.4 | 0.2 | < 0.0 | 43.5 | 16.6 | < 16.4 |
| 249.300 | 18.5 | 2.7 | 0.1 | 46.0 | 21.2 | 18.6 |
| 299.160 | 20.3 | < 0.0 | < 0.0 | 46.0 | < 20.3 | < 20.3 |
| 349.020 | 21.8 | < 0.0 | < 0.0 | 46.0 | < 21.8 | < 21.8 |
| 398.880 | 23.1 | < 0.0 | < 0.0 | 46.0 | < 23.1 | < 23.1 |
| 448.740 | 24.3 | < 0.0 | < 0.0 | 46.0 | < 24.3 | < 24.3 |
| 498.600 | 25.4 | < 0.0 | < 0.0 | 46.0 | < 25.4 | < 25.4 |
| 548.460 | 26.3 | < 0.0 | < 0.0 | 46.0 | < 26.3 | < 26.3 |
| 598.320 | 27.2 | < 0.0 | < 0.0 | 46.0 | < 27.2 | < 27.2 |
| 648.180 | 28.1 | < 0.0 | < 0.0 | 46.0 | < 28.1 | < 28.1 |
| 698.040 | 29.0 | < 0.0 | < 0.0 | 46.0 | < 29.0 | < 29.0 |
| 747.900 | 29.8 | < 0.0 | < 0.0 | 46.0 | < 29.8 | < 29.8 |
| 797.760 | 30.6 | < 0.0 | < 0.0 | 46.0 | < 30.6 | < 30.6 |
| 847.620 | 31.4 | < 0.0 | < 0.0 | 46.0 | < 31.4 | < 31.4 |
| 897.480 | 32.2 | < 0.0 | < 0.0 | 46.0 | < 32.2 | < 32.2 |
| 947.340 | 32.9 | < 0.0 | < 0.0 | 46.0 | < 32.9 | < 32.9 |
| 997.200 | 33.6 | < 0.0 | < 0.0 | 54.0 | < 33.6 | < 33.6 |

Note: 1. The spectrum was checked from 30 MHz to 1000 MHz.

All emissions not listed were found to be more than 20 dB below the limits.

2. The symbol of "<" means "or less".

3. The cable loss was included in the antenna factor.

4. Sample calculation :

at 49.860 MHz

$$Af + Mr = 3.6 + 50.9 = 54.5 \text{ dB}\mu\text{V/m}$$

Where,

Af = Antenna Factor including the cable loss.

Mr = Meter Reading

5. Measuring Instrument Setting:

Fundamental

Detector function : Average/Peak

IF Bandwidth : 120 kHz

Harmonics & other Frequency components

Detector function : CISPR quasi-peak

IF Bandwidth : 120 kHz



Tested by :

Shigeru Osawa


Shigeru Osawa
Testing Engineer

Transmitter Fundamental and Spurious Emissions

Model No. : TD3610H


Operating Frequency : 49.86 MHz

Test Condition :

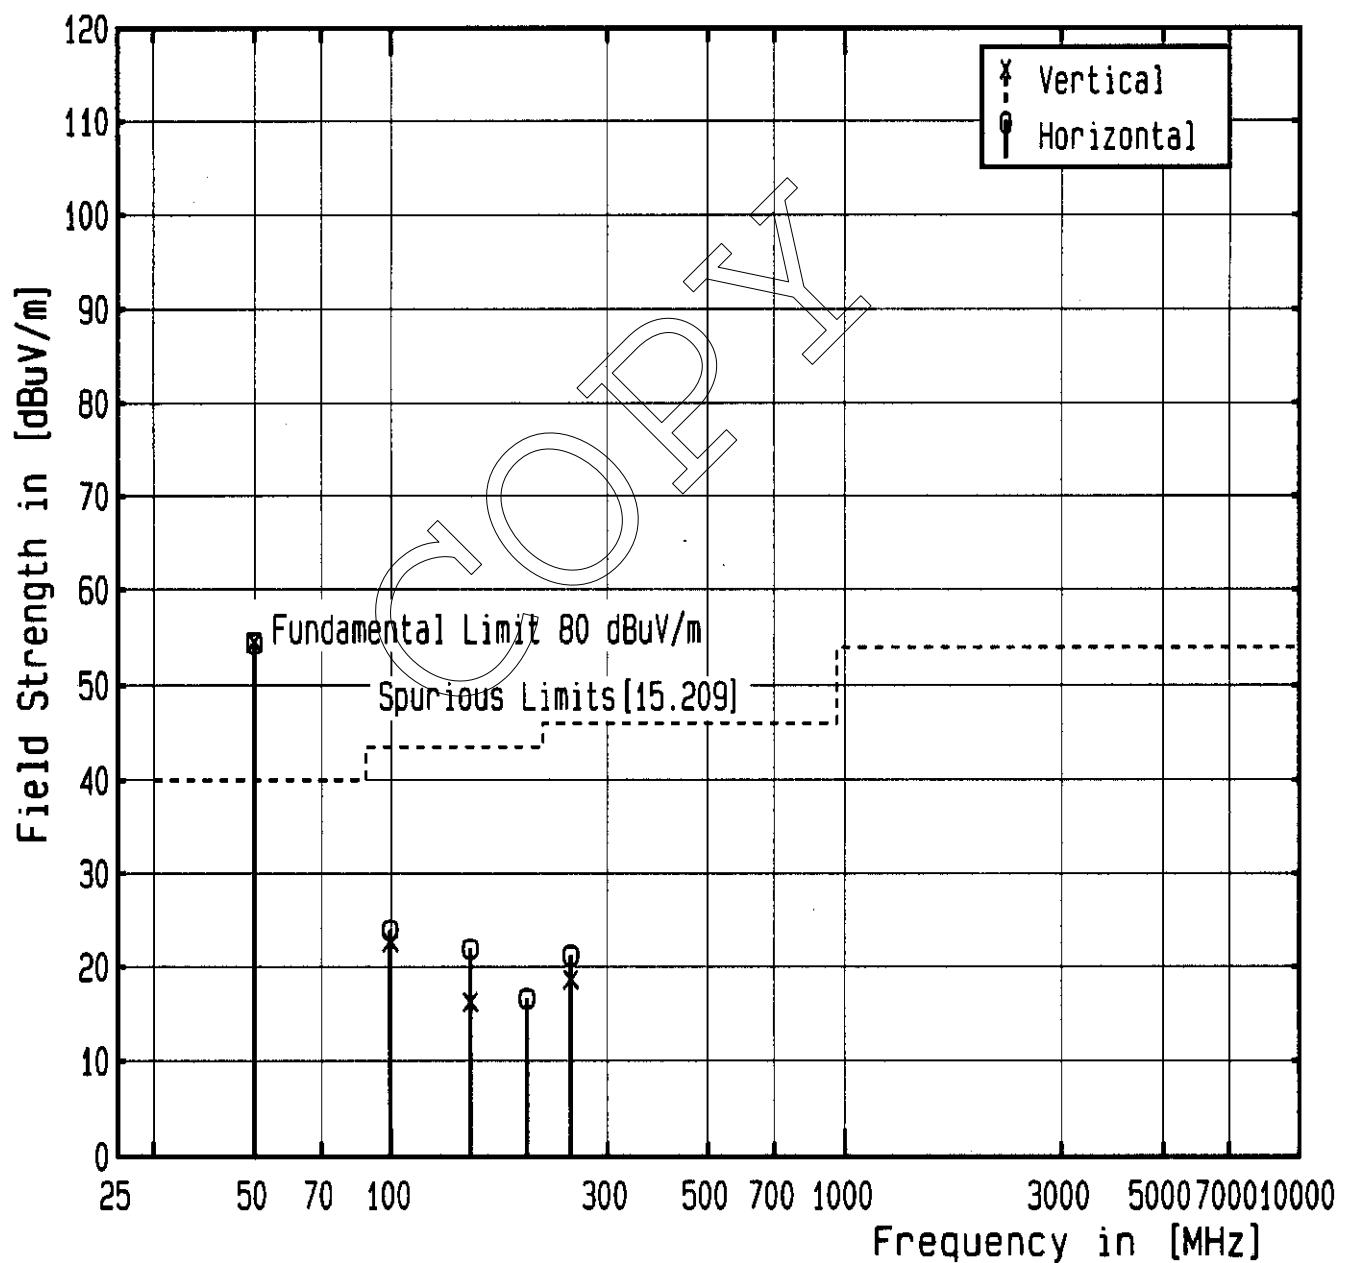

2.4 Occupied Bandwidth MeasurementDate : June 28, 2000Temp.: 24 °C Humi.: 68 %Measurements Results : Refer to the attached graphs.

Tested by : Shigeru Osawa
Shigeru Osawa
Testing Engineer

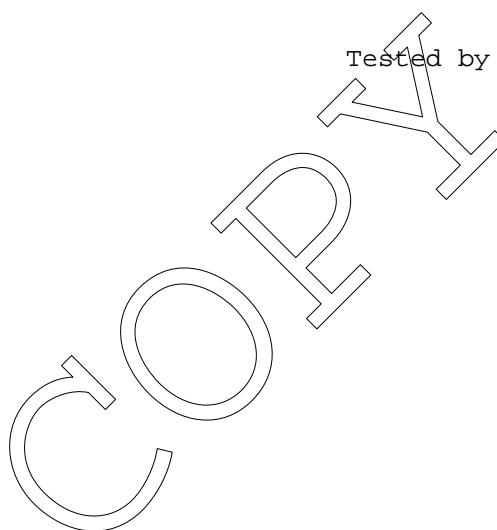


Emission Limitation

FCC ID : CVTTD3610H


Model : TD3610H

Mode of EUT : Forward Button

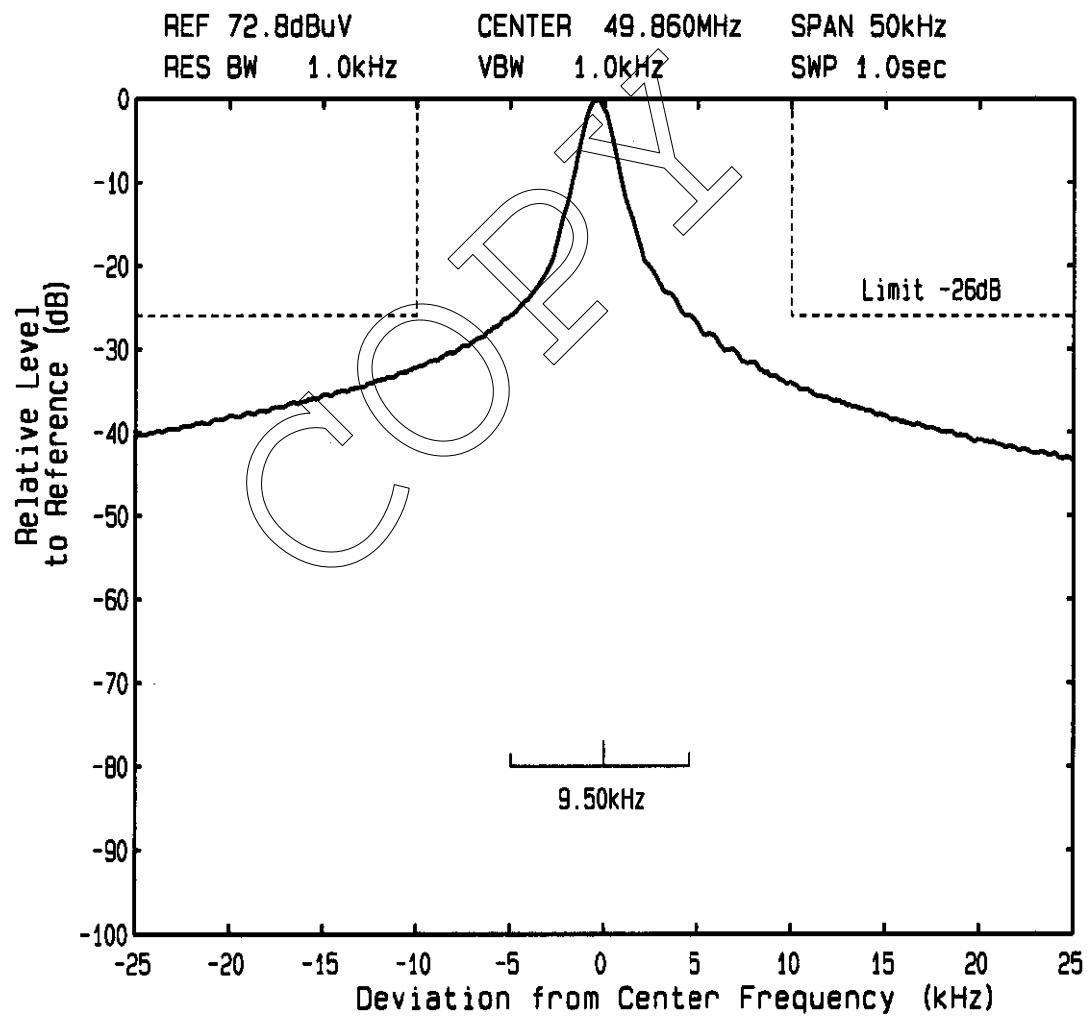

Emission LimitationFCC ID : CVTTD3610H
Model : TD3610H

Mode of EUT : Turn Button

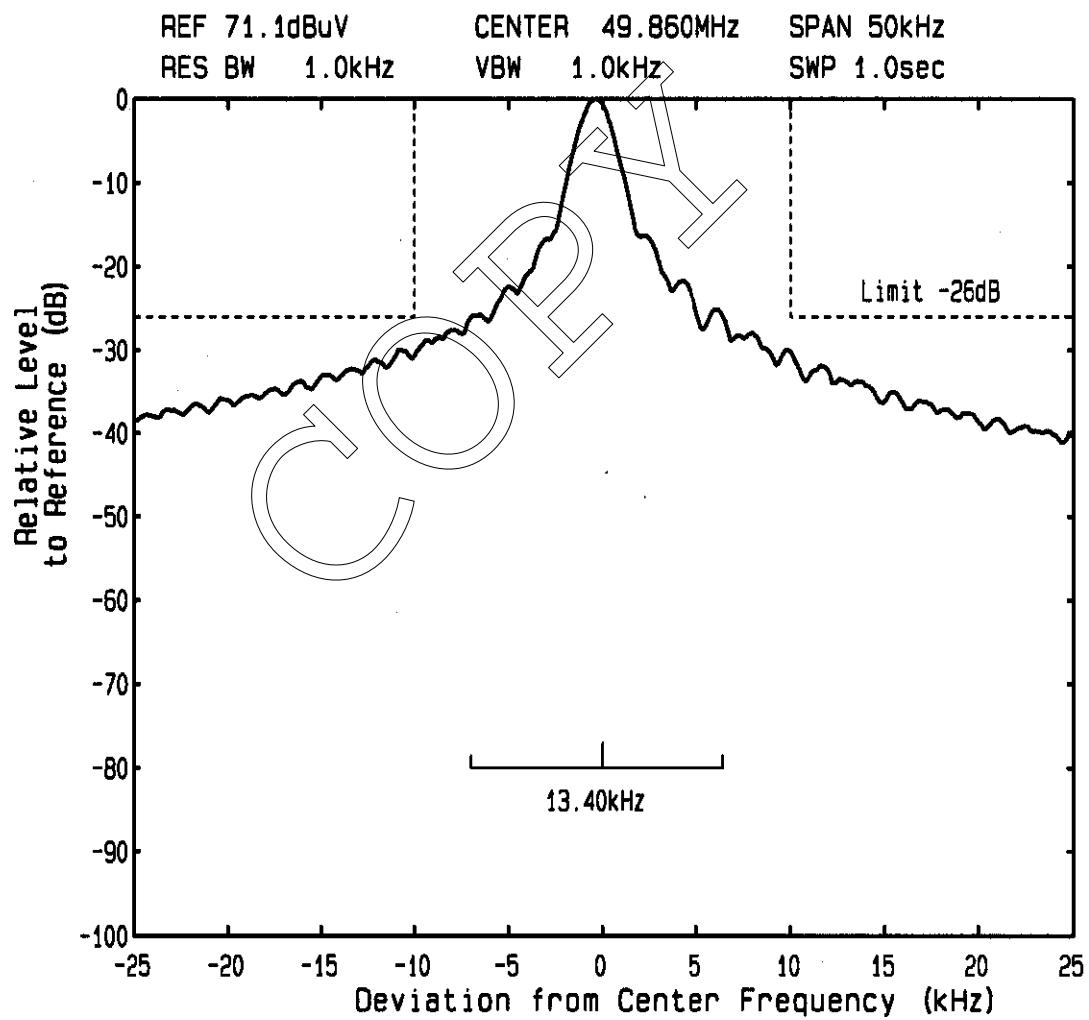


Emission Limitation

FCC ID : CVTTD3610H

Model : TD3610H

Mode of EUT : Sound Button

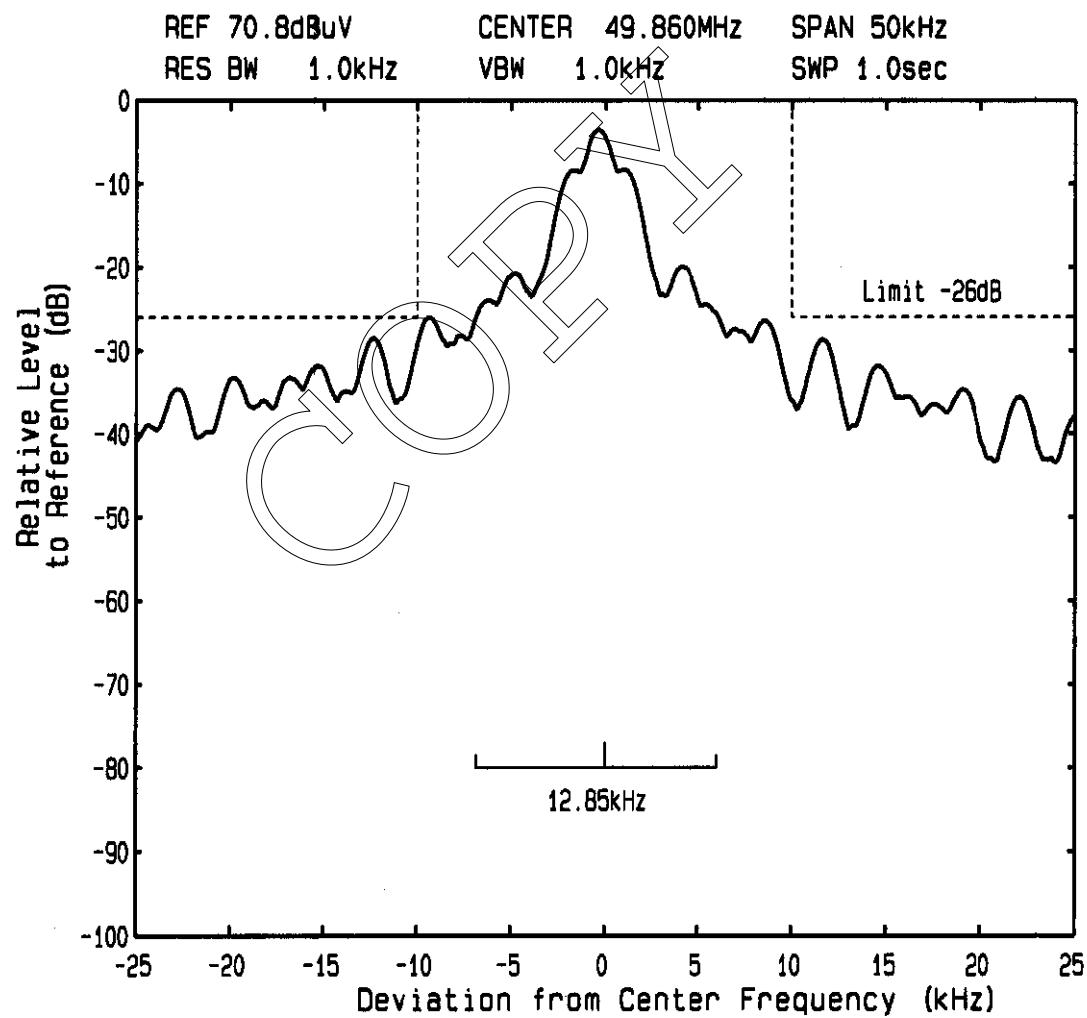

Emission LimitationFCC ID : CVTTD3610H
Model : TD3610H

Mode of EUT : Turn Button

